



FCC TEST REPORT

FCC ID:2BTGC-M9A

Applicant: Shenzhen Moni Technology Co.,LTD
Address: Room 201-301, Factory Building A7, Quanbao Industrial Zone, Shiyan Sub-district, Bao'an District, Shenzhen City, China
Manufacturer: Shenzhen Moni Technology Co.,LTD
Address: Room 201-301, Factory Building A7, Quanbao Industrial Zone, Shiyan Sub-district, Bao'an District, Shenzhen City, China
EUT: Wireless charging
Trade Mark: N/A
Model Number: M9A
Date of Receipt: Jul. 04, 2025
Test Date: Jul. 04, 2025 to Dec. 02, 2025
Date of Report: Dec. 02, 2025
Prepared By: Shenzhen DL Testing Technology Co., Ltd.
Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards: FCC CFR Title 47 Part 15 Subpart C
Test Result: Pass
Report Number: DLE-251209010R

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



TABLE OF CONTENTS

1. VERSION	3
2. TEST SUMMARY	4
2.1 TEST FACILITY	5
2.2 MEASUREMENT UNCERTAINTY	5
3. GENERAL INFORMATION	6
3.1 GENERAL DESCRIPTION OF EUT	6
3.2 TEST MODE	7
3.3 BLOCK DIAGRAM OF EUT CONFIGURATION	9
3.4 TEST CONDITIONS	10
3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)	10
3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	11
4. CONDUCTED EMISSION TEST	12
4.1 CONDUCTED EMISSION MEASUREMENT	12
4.1.1 POWER LINE CONDUCTED EMISSION Limits	12
4.1.2 TEST PROCEDURE	12
4.1.3 DEVIATION FROM TEST STANDARD	12
4.1.4 TEST SETUP	13
4.1.5 EUT OPERATING CONDITIONS	13
4.1.6 TEST RESULT	14
5. RADIATED EMISSION MEASUREMENT	16
5.1 RADIATED EMISSION LIMITS	16
5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM	17
5.3 TEST PROCEDURE	18
5.4 DEVIATION FROM TEST STANDARD	18
5.5 TEST RESULT	18
6. 20DB BANDWIDTH TEST	35
6.1 TEST PROCEDURE	35
6.2 LIMIT	35
6.3 TEST SETUP	35
6.4 DEVIATION FROM STANDARD	35
6.5 TEST RESULT	36
7. ANTENNA REQUIREMENT	38
8. TEST SETUP PHOTO	39
9. EUT CONSTRUCTIONAL DETAILS	39

**1. VERSION**

Report No.	Version	Description	Approved
DLE-251209010R	Rev.01	Initial issue of report	Dec. 02, 2025

**2. TEST SUMMARY**

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report



2.1 TEST FACILITY

Shenzhen DL Testing Technology Co., Ltd.

Add. : 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolon Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB identifier: CN0118

2.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	3m camber Radiated spurious emission (9KHz-30MHz)	U=4.5dB
2	3m camber Radiated spurious emission (30MHz-1GHz)	U=4.8dB
3	3m chamber Radiated spurious emission (1GHz-6GHz)	U=4.9dB
4	3m chamber Radiated spurious emission (6GHz-40GHz)	U=5.0dB
5	Conducted Disturbance	U=3.2dB
6	RF Conducted Spurious Emission	U=2.2dB
7	RF Occupied Bandwidth	U=1.8MHz
8	Humidity Uncertainty	U=5.3%
9	Temperature Uncertainty	U=0.59℃



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Wireless charging
Model No.:	M9A
Serial No.:	N/A
Model Difference:	N/A
Hardware Version:	V 1.0
Software Version:	V 1.1
Operation Frequency:	ANT 1&2: 115kHz ~ 205kHz ANT 3: 300kHz ~ 360kHz
Modulation Type:	ASK
Antenna Type:	ANT 1: Phone ANT 2: Headset ANT 3: watch Loop Coil Antenna
Antenna Gain:	0dBi
Power Supply:	Input: 9V ---2A Phone Output: 15W(MAX) Earphone Output: 5W Watch Output: 2.5W
Transmitting Mode:	Keep the EUT in continuously wireless charging mode



3.2 TEST MODE

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

The tested device is divided into two open modes. Mode a is the non-fold mode, and the tested device can be wirelessly output to the phone, earphone and watch at the same time; Mode b is the fold mode, and the tested device cannot work normally.



a. EUT mode of operation before folding:

Test Modes:	Test Coil:	Description:
Mode 1	ANT 1	AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: <1%)
Mode 2		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: 50%)
Mode 3		AC/DC Adapter (9V/2A) + EUT + Phone (Battery Status: >98%)
Mode 4	ANT 2	AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: <1%)
Mode 5		AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: 50%)
Mode 6		AC/DC Adapter (9V/2A) + EUT + Earphone (Battery Status: >98%)
Mode 7	ANT 3	AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: <1%)
Mode 8		AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: 50%)
Mode 9		AC/DC Adapter (9V/2A) + EUT + Watch (Battery Status: >98%)
Mode 10	ANT 1 + ANT2	AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: <1%)
Mode 11		AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: 50%)
Mode 12		AC/DC Adapter (9V/2A) + EUT + Phone + Earphone (Battery Status: >98%)
Mode 13	ANT 1 + ANT 3	AC/DC Adapter (9V/2A) + EUT + Phone + Watch (Battery Status: <1%)
Mode 14		AC/DC Adapter (9V/2A) + EUT + Phone + Watch (Battery Status: 50%)
Mode 15		AC/DC Adapter (9V/2A) + EUT + Phone + Watch (Battery Status: >98%)
Mode 16	ANT 2 + ANT 3	AC/DC Adapter (9V/2A) + EUT + Earphone + Watch (Battery Status: <1%)
Mode 17		AC/DC Adapter (9V/2A) + EUT + Earphone + Watch (Battery Status: 50%)
Mode 18		AC/DC Adapter (9V/2A) + EUT + Earphone + Watch (Battery Status: >98%)
Mode 19	ANT 1 + ANT 2 + ANT 3	AC/DC Adapter (9V/2A) + EUT + Phone + Earphone + Watch (Battery Status: <1%)
Mode 20		AC/DC Adapter (9V/2A) + EUT + Phone + Earphone + Watch (Battery Status: 50%)
Mode 21		AC/DC Adapter (9V/2A) + EUT + Phone + Earphone + Watch (Battery Status: >98%)

b. EUT mode of operation before folding:


The EUT does not work properly.



3.3 BLOCK DIAGRAM OF EUT CONFIGURATION


Conducted Emission

a. EUT mode of operation before folding:

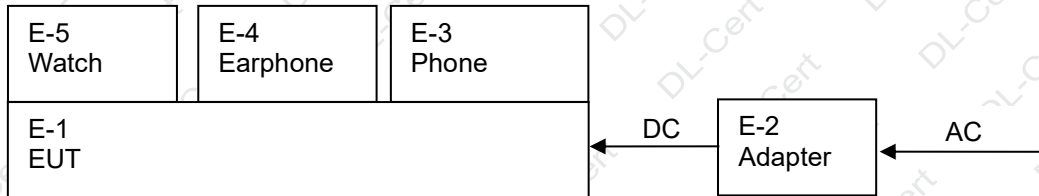

Radiated Emission

a. EUT mode of operation before folding:

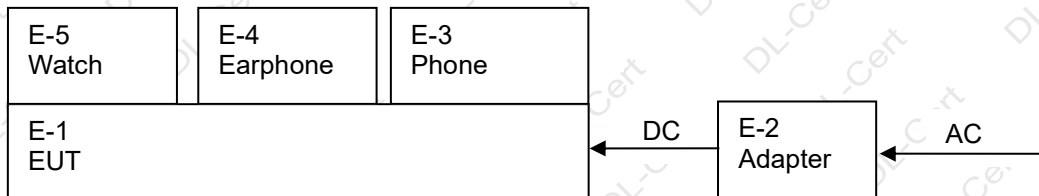



3.4 TEST CONDITIONS

Temperature: 23~26°C

Relative Humidity: 54~63 %

3.5 DESCRIPTION OF SUPPORT UNITS (CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Wireless charging	N/A	M9A	N/A	EUT
E-2	AC/DC Adapter	Intertek	SR-D606U2	N/A	Auxiliary
E-3	Phone	APPLE	iPhone 13 Pro Max	N/A	Auxiliary
E-4	Earphone	ULTRA	WS85	N/A	Auxiliary
E-5	Watch	BASEUS	E3	N/A	Auxiliary

Item	Shielded Type	Ferrite Core	Length	Note
C1	NO	NO	0.8M	DC cable unshielded

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) "YES" is means "shielded" "with core"; "NO" is means "unshielded" "without core".



3.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 27, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 27, 2025	Oct. 26, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 26, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



4. CONDUCTED EMISSION TEST

4.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2013
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

4.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quas-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


4.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.1.3 DEVIATION FROM TEST STANDARD

No deviation

4.1.4 TEST SETUP

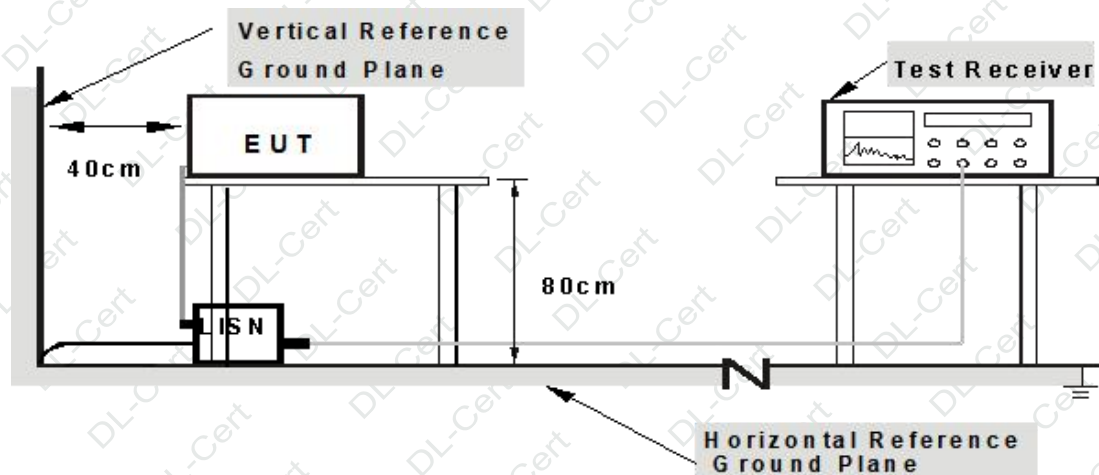

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes


4.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



4.1.6 TEST RESULT

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101kPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 40

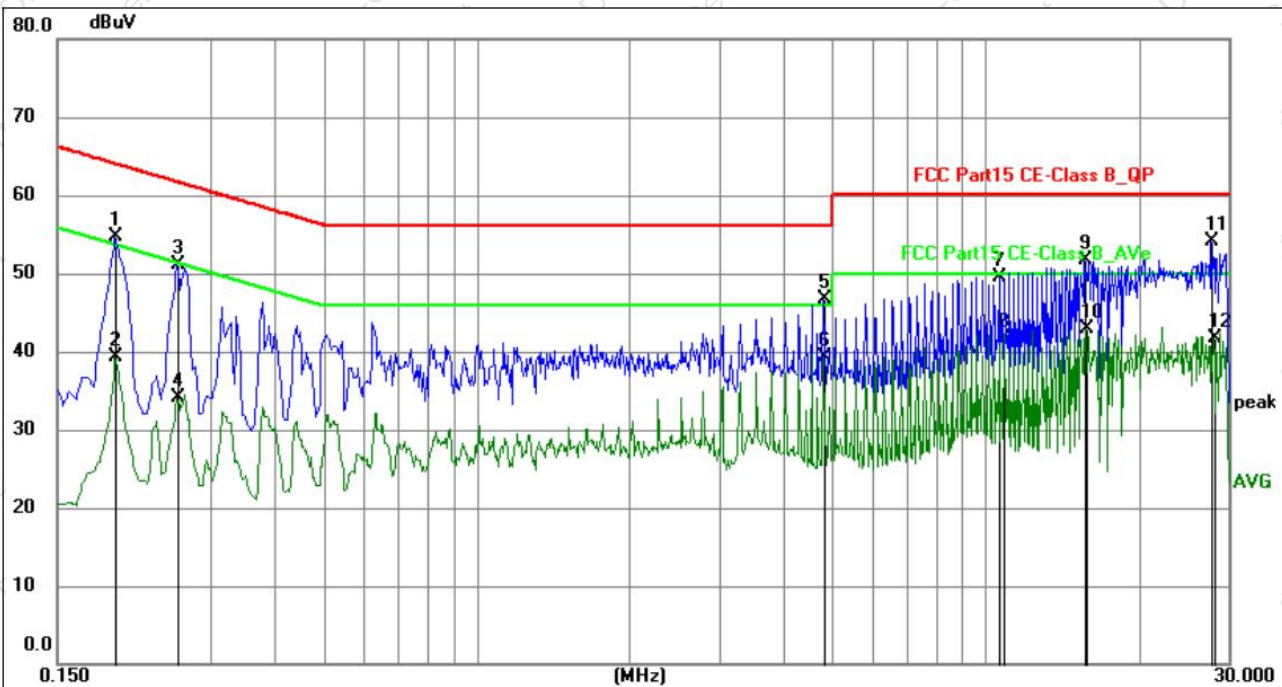


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	34.41	20.36	54.77	63.83	-9.06	QP	P	
2	0.1949	18.99	20.36	39.35	53.83	-14.48	AVG	P	
3	0.2580	30.77	20.36	51.13	61.50	-10.37	QP	P	
4	0.2580	13.73	20.36	34.09	51.50	-17.41	AVG	P	
5	4.8165	26.26	20.36	46.62	56.00	-9.38	QP	P	
6	4.8165	18.90	20.36	39.26	46.00	-6.74	AVG	P	
7	10.6440	29.07	20.46	49.53	60.00	-10.47	QP	P	
8	10.8959	21.26	20.46	41.72	50.00	-8.28	AVG	P	
9	15.7110	31.14	20.49	51.63	60.00	-8.37	QP	P	
10	15.7245	22.45	20.49	42.94	50.00	-7.06	AVG	P	
11	27.7710	33.41	20.70	54.11	60.00	-5.89	QP	P	
12	28.0095	20.92	20.71	41.63	50.00	-8.37	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Lisen factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 40 recorded.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101kPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode :	Mode 40

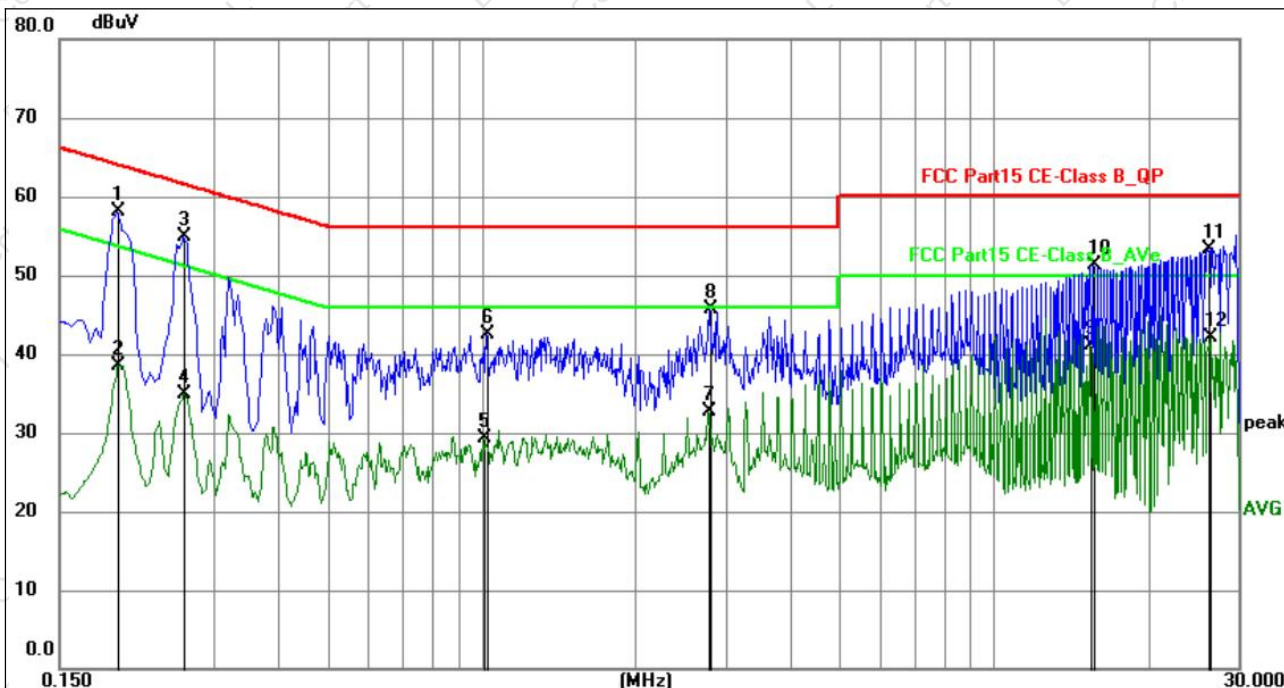

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1949	37.79	20.36	58.15	63.83	-5.68	QP	P	
2	0.1952	18.16	20.36	38.52	53.81	-15.29	AVG	P	
3	0.2625	34.52	20.36	54.88	61.35	-6.47	QP	P	
4	0.2625	14.61	20.36	34.97	51.35	-16.38	AVG	P	
5	1.0094	8.91	20.30	29.21	46.00	-16.79	AVG	P	
6	1.0227	22.16	20.30	42.46	56.00	-13.54	QP	P	
7	2.7734	12.40	20.33	32.73	46.00	-13.27	AVG	P	
8	2.7869	25.44	20.33	45.77	56.00	-10.23	QP	P	
9	15.4094	20.69	20.49	41.18	50.00	-8.82	AVG	P	
10	15.6615	30.89	20.49	51.38	60.00	-8.62	QP	P	
11	26.2635	32.59	20.66	53.25	60.00	-6.75	QP	P	
12	26.5289	21.49	20.67	42.16	50.00	-7.84	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi - Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Liss factor+ Cable loss factor + limiter factor.
5. Margin = Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 40 recorded.

**5. RADIATED EMISSION MEASUREMENT**

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2013				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Quasi-peak
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

5.1 RADIATED EMISSION LIMITS**Limits for frequency below 30MHz**


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Quasi-peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

5.2 ANECHOIC CHAMBER TEST SETUP DIAGRAM

(A) Radiated Emission Test-Up Frequency Below 30MHz

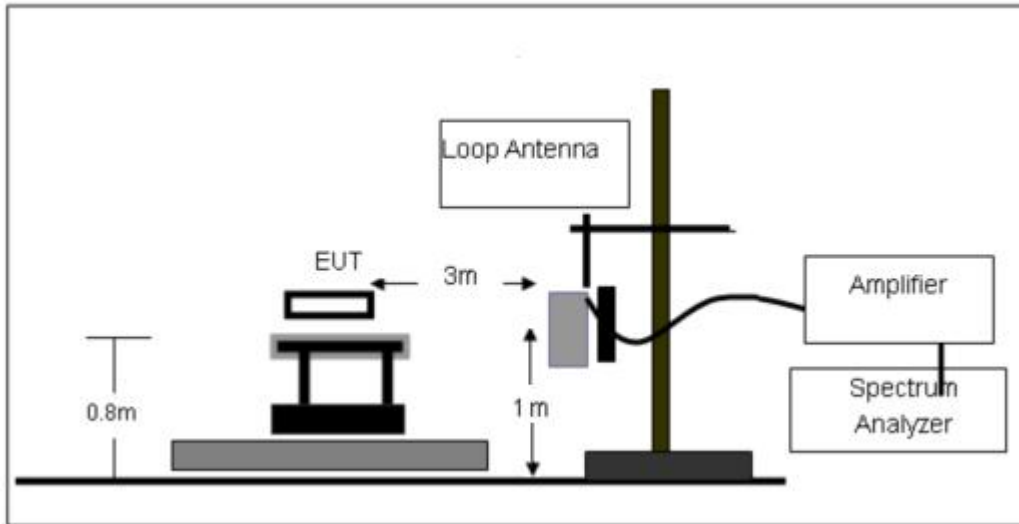

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

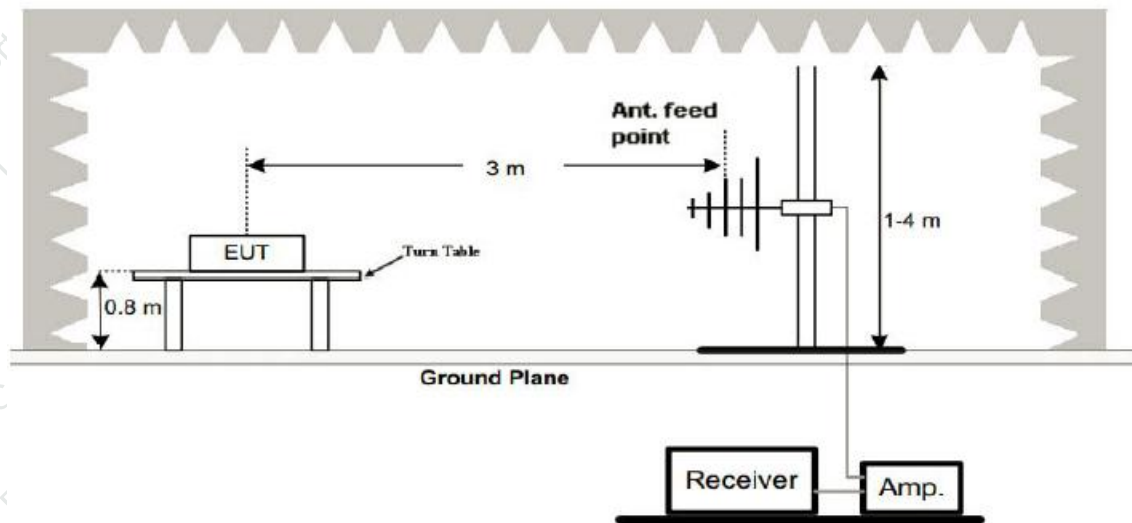

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.205 limits.



5.3 TEST PROCEDURE

Below 30MHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving loop antenna and in the center of a loop antenna, which was mounted on the top of a variable-height antenna tower.
- For each suspected emission, the EUT was arranged to its worst case, the height of interference-receiving loop antenna centre is 1 meter above the ground, and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- Both Coaxial (loop plane perpendicular to the ground plane and to the measurement axis) and coplanar (loop plane perpendicular to the ground plane and coplanar with the measurement axis) polarizations of the antenna are set to make the measurement.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

30MHz-1GHz

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5 TEST RESULT

Measurement data:


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40



ANT-1 - 9 kHz~30 MHz

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coaxial
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 1

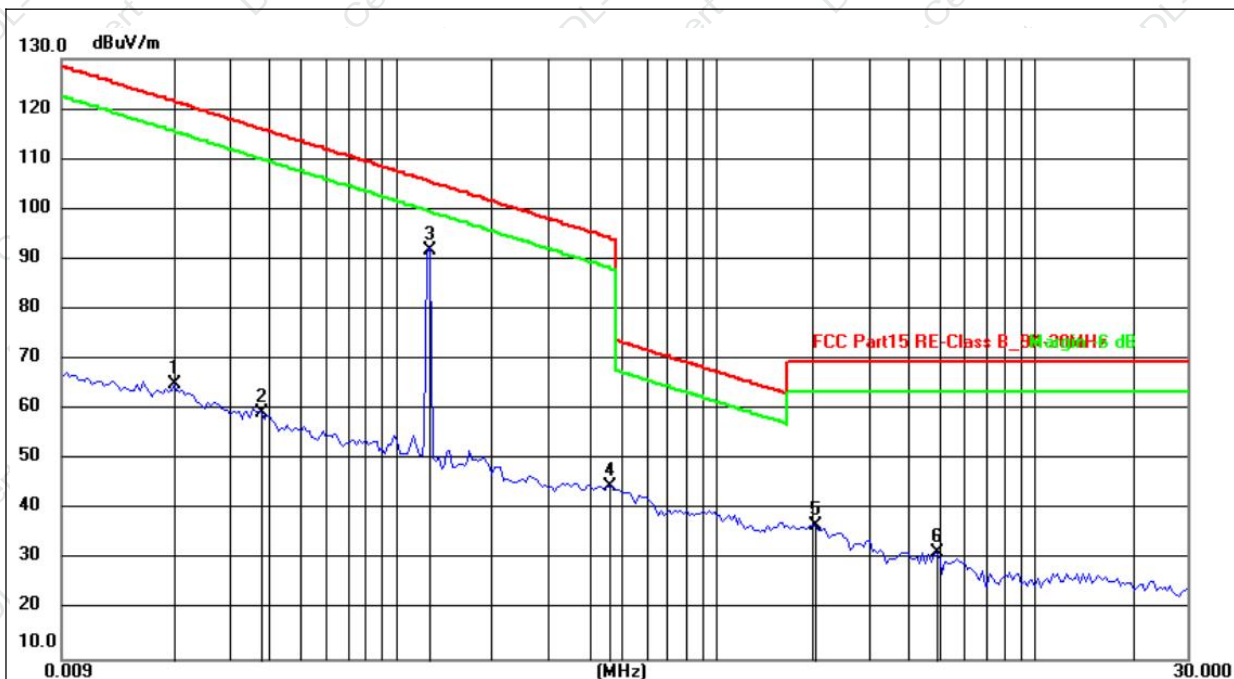


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0200	44.56	20.45	65.01	121.58	-56.57	peak
2	0.0379	39.24	20.03	59.27	116.03	-56.76	peak
3	0.1260	71.81	19.92	91.73	105.60	-13.87	peak
4	0.4692	24.48	20.19	44.67	94.18	-49.51	peak
5	2.0632	17.10	19.79	36.89	69.54	-32.65	peak
6	4.9348	12.09	19.47	31.56	69.54	-37.98	peak

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 1

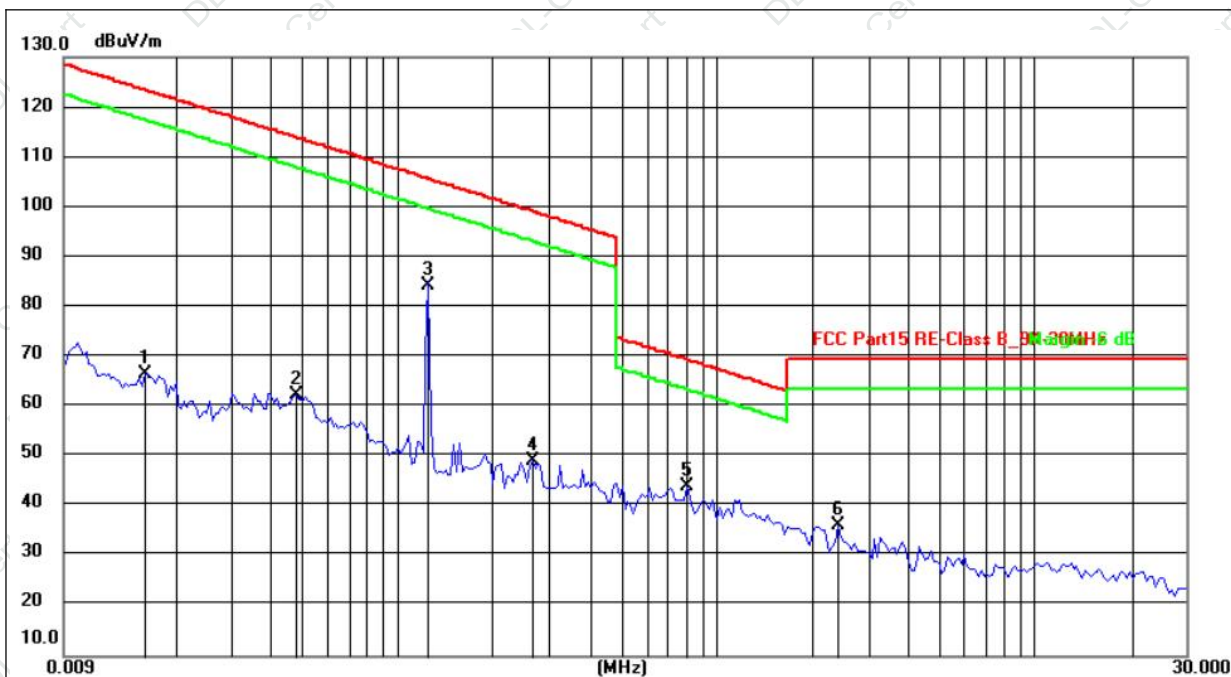

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.0160	46.07	20.49	66.56	123.52	-56.96	peak
2	0.0483	42.43	19.79	62.22	113.93	-51.71	peak
3	0.1260	64.20	19.91	84.11	105.67	-21.56	peak
4	0.2660	28.92	20.11	49.03	99.11	-50.08	peak
5	0.8114	23.63	20.31	43.94	69.42	-25.48	peak
6	2.4266	16.52	19.73	36.25	69.54	-33.29	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.



ANT-1 - 30MHz-1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 1

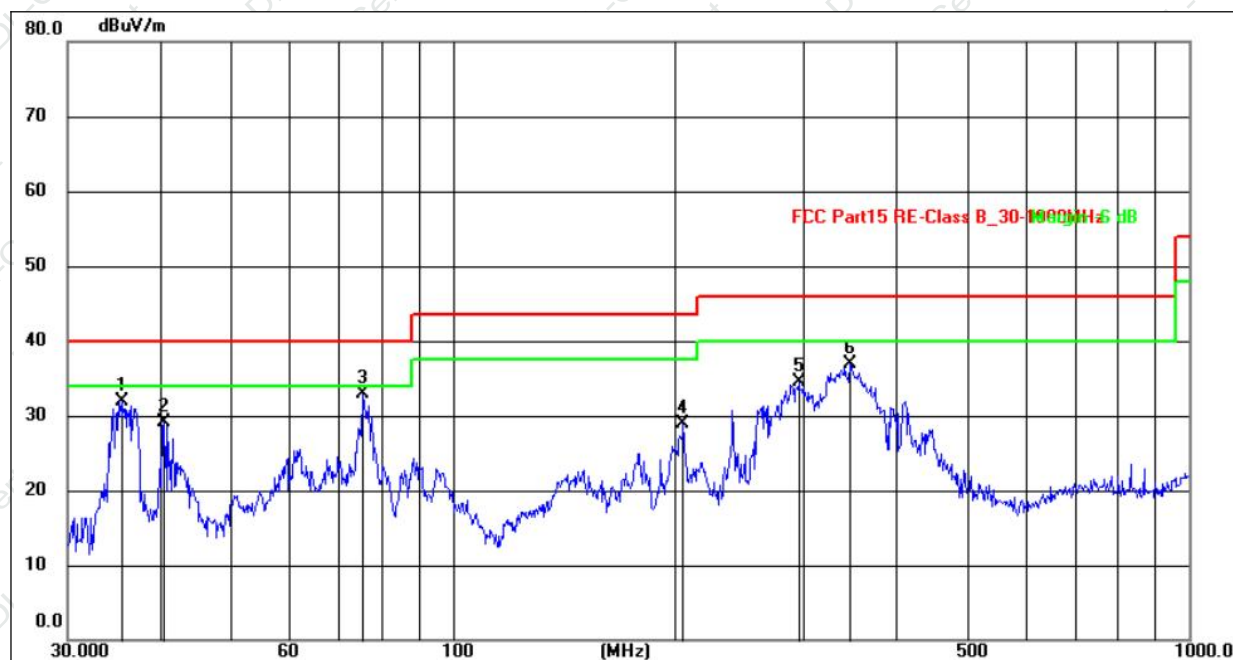


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.4992	46.76	-14.85	31.91	40.00	-8.09	QP
2	40.5591	43.08	-14.03	29.05	40.00	-10.95	QP
3	75.4462	51.17	-18.18	32.99	40.00	-7.01	QP
4	205.6750	47.10	-18.20	28.90	43.50	-14.60	QP
5	295.1467	50.45	-15.91	34.54	46.00	-11.46	QP
6	346.8091	53.17	-16.32	36.85	46.00	-9.15	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 1 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 1

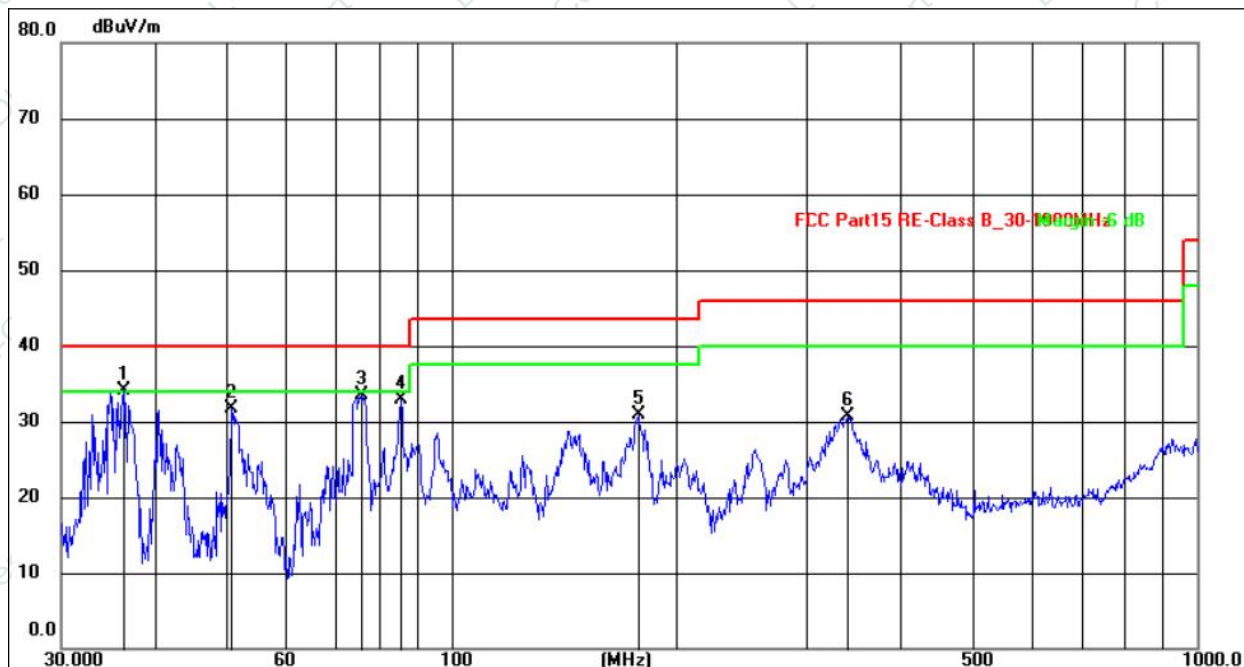

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3813	51.47	-17.30	34.17	40.00	-5.83	QP
2	50.7635	49.01	-17.26	31.75	40.00	-8.25	QP
3	75.9770	54.30	-20.73	33.57	40.00	-6.43	QP
4	85.5973	54.35	-21.54	32.81	40.00	-7.19	QP
5	178.1323	50.59	-19.62	30.97	43.50	-12.53	QP
6	340.7816	47.30	-16.53	30.77	46.00	-15.23	QP


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 1 recorded.



ANT-2 - 9 kHz~30 MHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coaxial
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 4

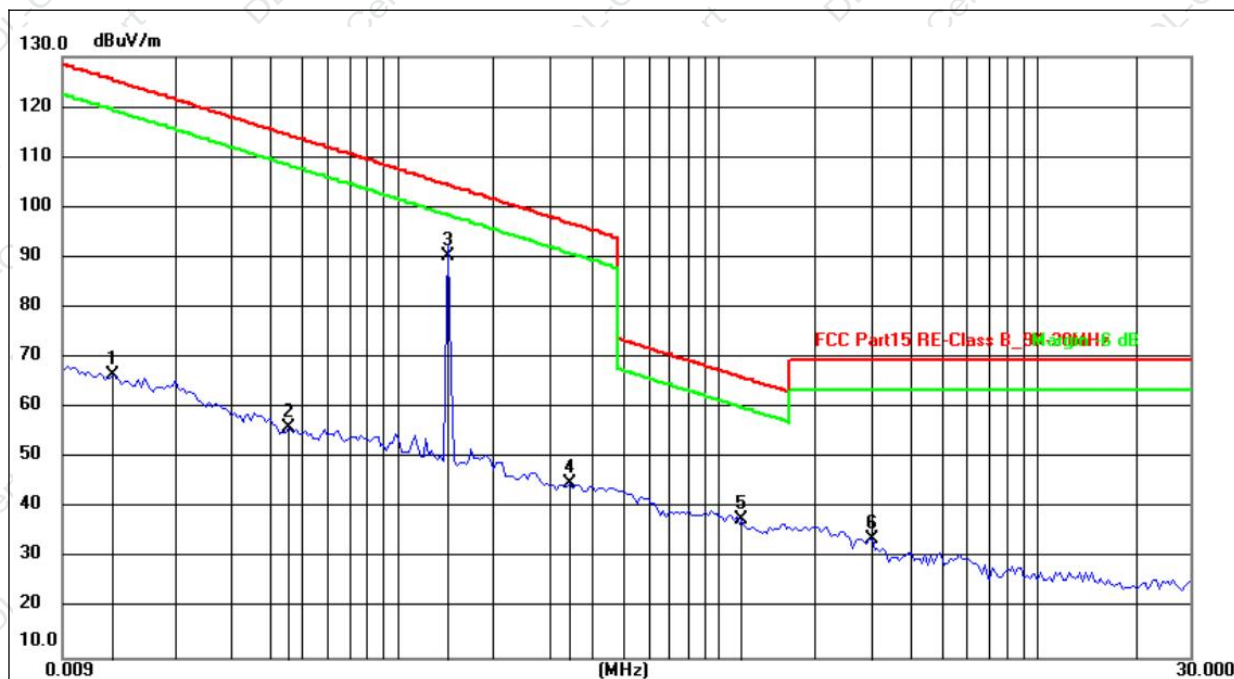


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0129	46.07	20.52	66.59	125.39	-58.80	peak
2	0.0454	36.05	19.86	55.91	114.46	-58.55	peak
3	0.1430	70.29	20.02	90.31	104.50	-14.19	peak
4	0.3462	24.70	20.14	44.84	96.82	-51.98	peak
5	1.1933	17.86	19.92	37.78	66.07	-28.29	peak
6	3.0331	14.35	19.64	33.99	69.54	-35.55	peak

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 4 recorded.



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 4

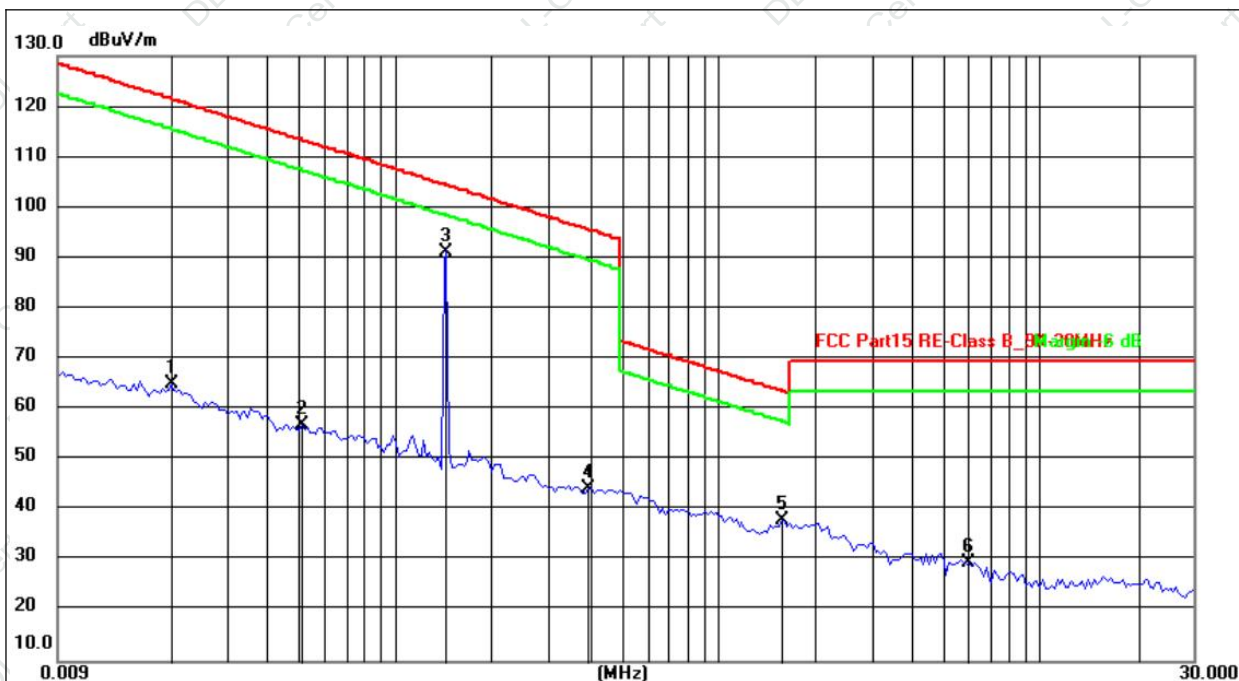

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.0200	44.56	20.45	65.01	121.58	-56.57	peak
2	0.0514	37.32	19.76	57.08	113.39	-56.31	peak
3	0.1430	71.19	20.02	91.21	104.50	-13.29	peak
4	0.3991	24.19	20.16	44.35	95.58	-51.23	peak
5	1.5846	18.06	19.86	37.92	63.61	-25.69	peak
6	6.0442	10.20	19.37	29.57	69.54	-39.97	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss factor - Amplifier factor.
5. Margin = Measurement Level - Limit.
6. All test modes were tested, with only the worst Mode 4 recorded.



ANT-2 - 30MHz-1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 4

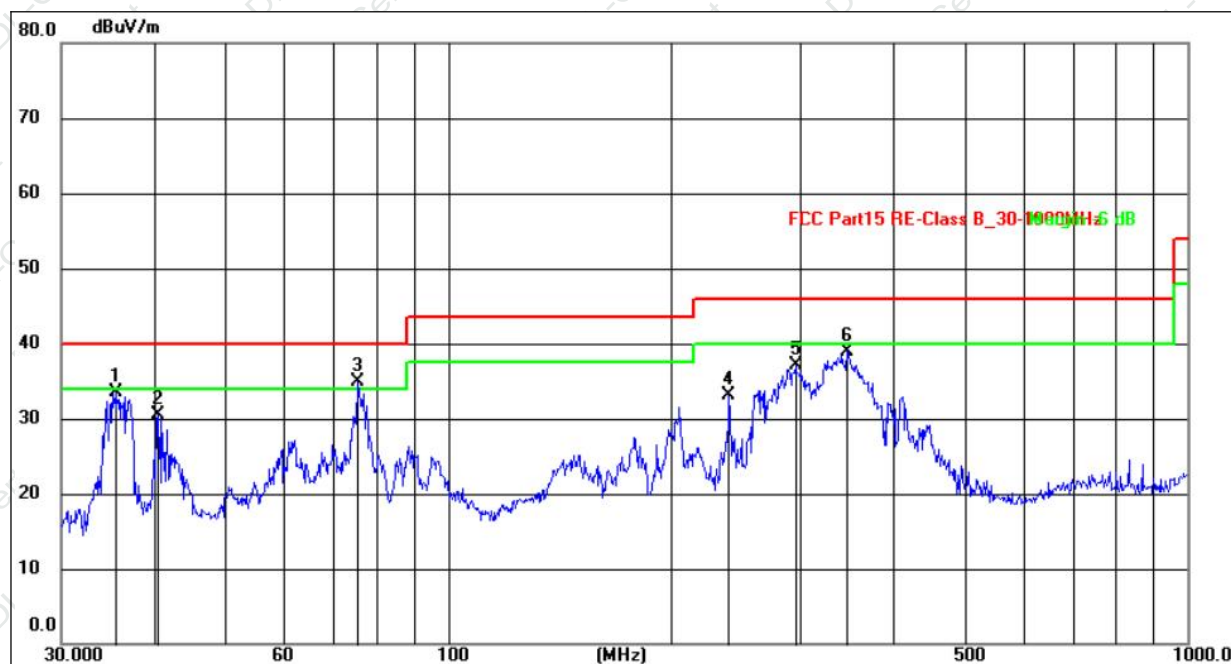


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.4992	48.26	-14.85	33.41	40.00	-6.59	QP
2	40.5591	44.58	-14.03	30.55	40.00	-9.45	QP
3	75.4462	53.17	-18.18	34.99	40.00	-5.01	QP
4	239.9873	49.02	-15.92	33.10	46.00	-12.90	QP
5	295.1467	52.95	-15.91	37.04	46.00	-8.96	QP
6	346.8091	55.17	-16.32	38.85	46.00	-7.15	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 4 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 4

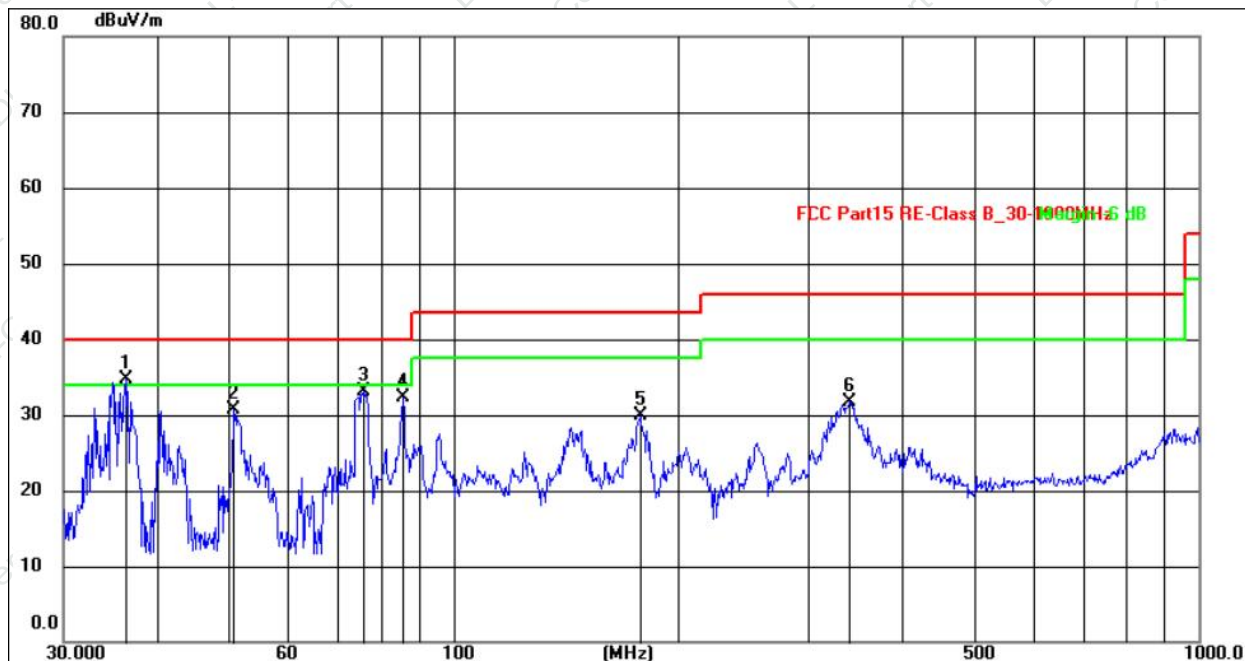

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3813	51.97	-17.30	34.67	40.00	-5.33	QP
2	50.7635	48.01	-17.26	30.75	40.00	-9.25	QP
3	75.9770	53.80	-20.73	33.07	40.00	-6.93	QP
4	85.5973	53.85	-21.54	32.31	40.00	-7.69	QP
5	178.1322	49.59	-19.62	29.97	43.50	-13.53	QP
6	340.7816	48.30	-16.53	31.77	46.00	-14.23	QP


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 4 recorded.



ANT3 - 9 kHz~30 MHz

Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coaxial
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 7

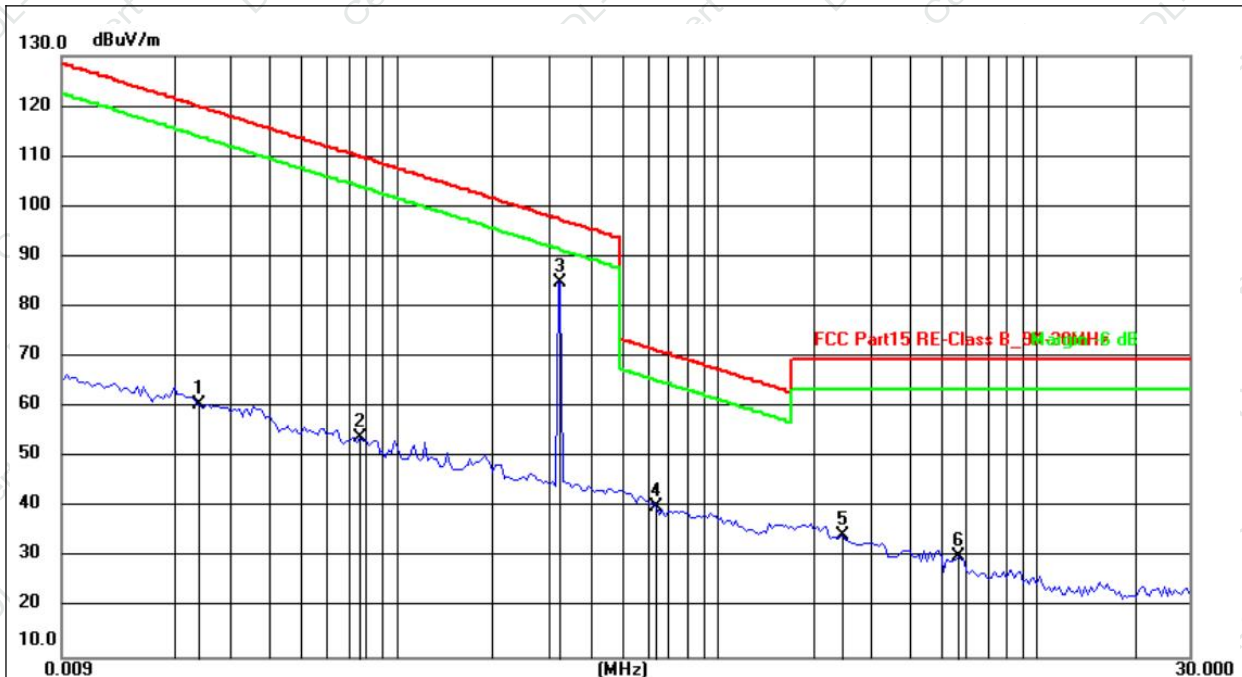


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0240	40.22	20.36	60.58	120.00	-59.42	peak
2	0.0772	34.13	19.85	53.98	109.85	-55.87	peak
3	0.3250	64.66	20.13	84.79	97.37	-12.58	peak
4	0.6491	19.70	20.33	40.03	71.36	-31.33	peak
5	2.4763	14.69	19.73	34.42	69.54	-35.12	peak
6	5.6875	10.92	19.41	30.33	69.54	-39.21	peak

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 7 recorded.



Temperature :	26℃	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 7

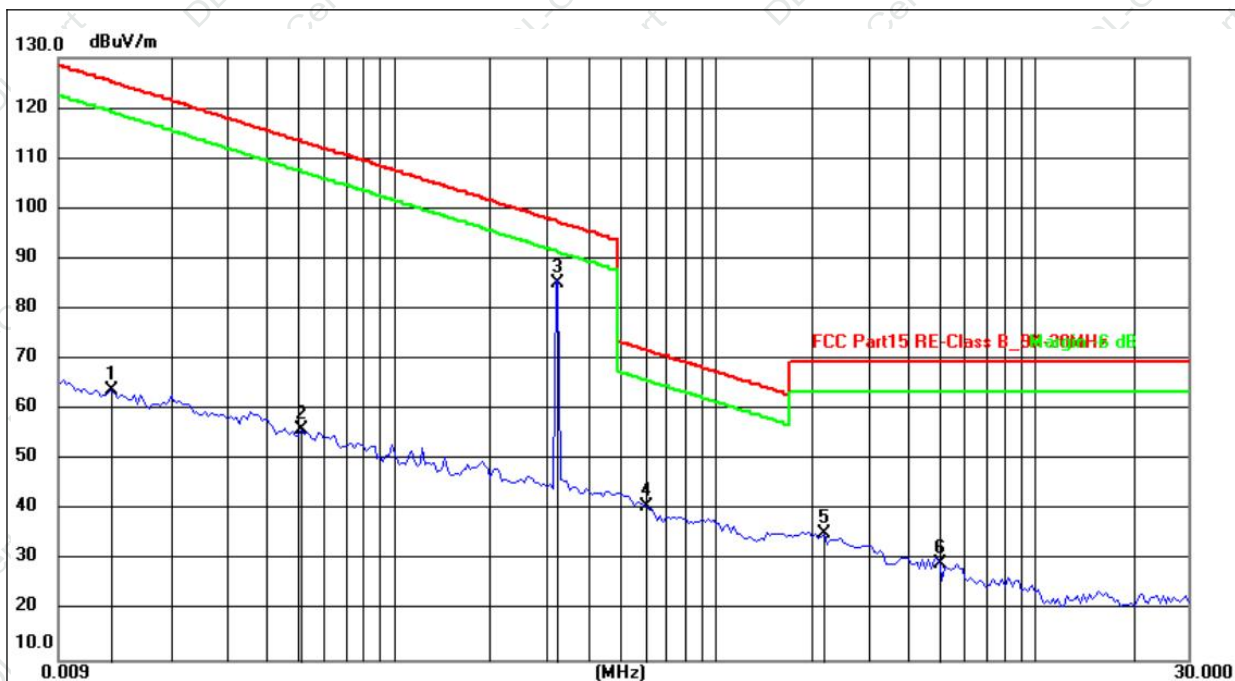

No.	Frequency (MHz)	Reading (dBUV)	Factor (dB/m)	Level (dBUV/m)	Limit (dBUV/m)	Margin (dB)	Detector
1	0.0131	43.34	20.52	63.86	125.26	-61.40	peak
2	0.0514	36.32	19.76	56.08	113.39	-57.31	peak
3	0.3250	65.13	20.13	85.26	97.37	-12.11	peak
4	0.6108	20.37	20.30	40.67	71.89	-31.22	peak
5	2.1926	15.57	19.77	35.34	69.54	-34.20	peak
6	5.0357	9.86	19.47	29.33	69.54	-40.21	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor + Cable loss factor - Amplifier factor.
5. Margin = Measurement Level - Limit.
6. All test modes were tested, with only the worst Mode 7 recorded.



ANT-3 - 30MHz-1GHz

Temperature:	26℃	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 7

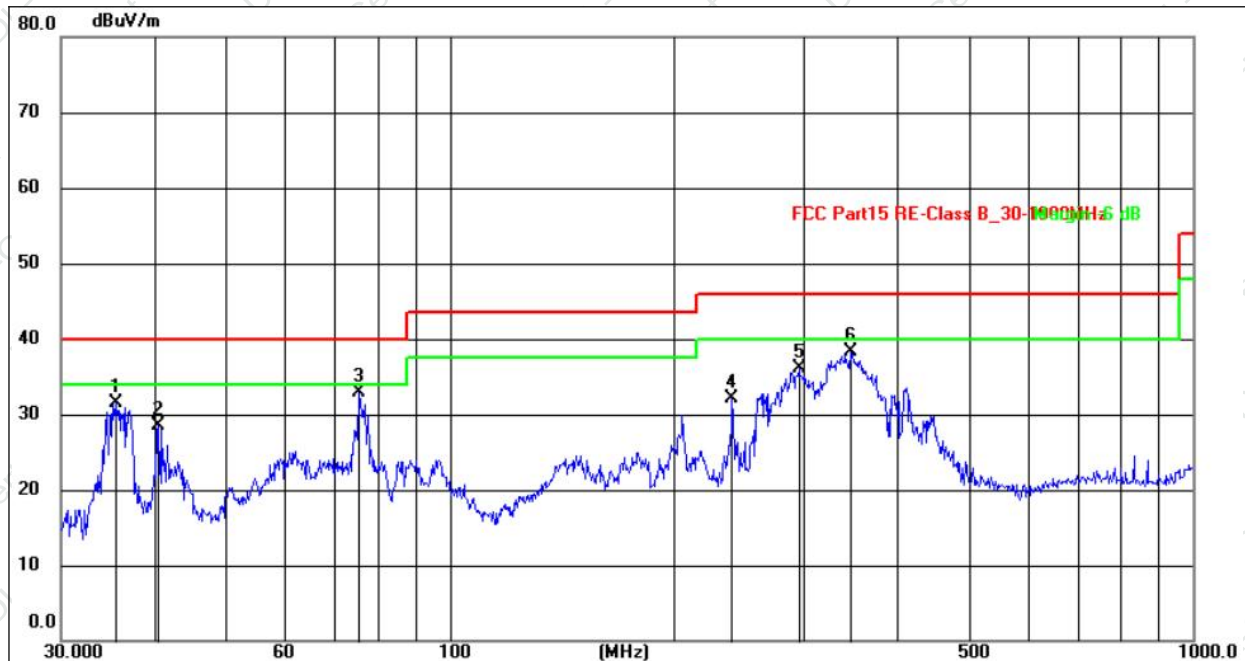

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	35.4992	46.26	-14.85	31.41	40.00	-8.59	QP
2	40.5591	42.58	-14.03	28.55	40.00	-11.45	QP
3	75.4462	51.17	-18.18	32.99	40.00	-7.01	QP
4	239.9873	48.02	-15.92	32.10	46.00	-13.90	QP
5	295.1467	51.95	-15.91	36.04	46.00	-9.96	QP
6	346.8091	54.67	-16.32	38.35	46.00	-7.65	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 7 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 7



No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3813	52.47	-17.30	35.17	40.00	-4.83	QP
2	50.7635	50.51	-17.26	33.25	40.00	-6.75	QP
3	75.1821	55.03	-20.54	34.49	40.00	-5.51	QP
4	85.5973	55.85	-21.54	34.31	40.00	-5.69	QP
5	178.1322	52.09	-19.62	32.47	43.50	-11.03	QP
6	339.5887	48.06	-16.56	31.50	46.00	-14.50	QP


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 7 recorded.



ANT1+2+3 - 9 kHz~30 MHz

Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coaxial
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 40

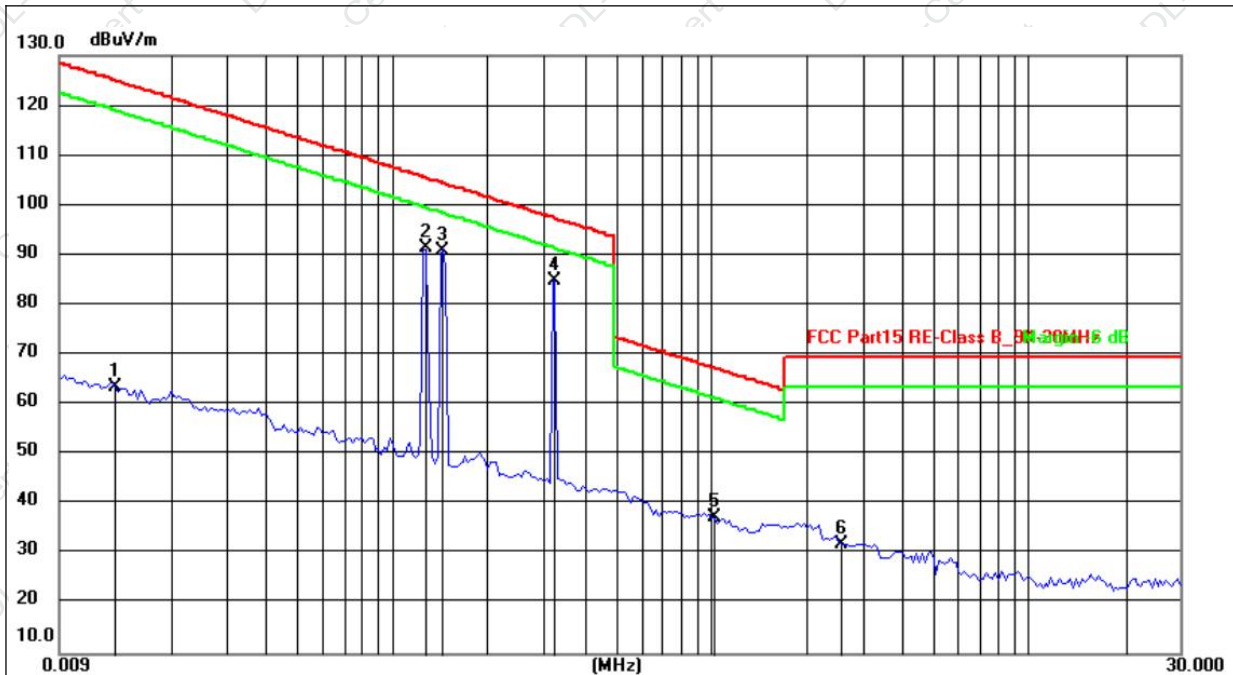


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0134	43.14	20.52	63.66	125.06	-61.40	peak
2	0.1260	71.45	19.92	91.37	105.60	-14.23	peak
3	0.1430	70.74	20.02	90.76	104.50	-13.74	peak
4	0.3250	64.66	20.13	84.79	97.37	-12.58	peak
5	1.0354	17.51	19.94	37.45	67.30	-29.85	peak
6	2.5788	12.43	19.71	32.14	69.54	-37.40	peak

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 40 recorded.



Temperature :	26°C	Relative Humidity :	54%
Pressure :	101 kPa	Polarization :	Coplanar
Test Voltage :	DC 9V From Adapter AC 120V/60Hz	Test Mode :	Mode 40

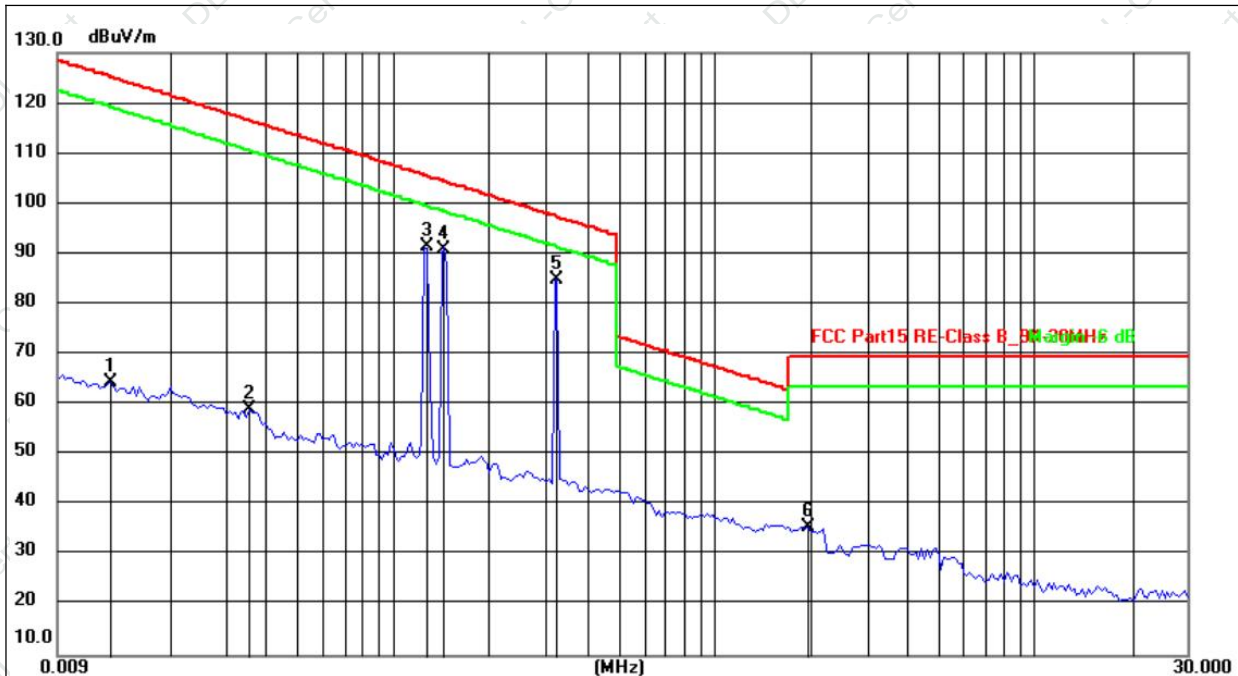

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	0.0131	43.84	20.52	64.36	125.26	-60.90	peak
2	0.0357	39.11	20.08	59.19	116.55	-57.36	peak
3	0.1260	71.55	19.92	91.47	105.60	-14.13	peak
4	0.1430	70.84	20.02	90.86	104.50	-13.64	peak
5	0.3250	64.76	20.13	84.89	97.37	-12.48	peak
6	1.9813	15.95	19.80	35.75	69.54	-33.79	peak


Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 40 recorded.



ANT1+2+3 - 30MHz-1GHz

Temperature:	26°C	Relative Humidity:	54%
Pressure:	101 kPa	Polarization:	Horizontal
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 40

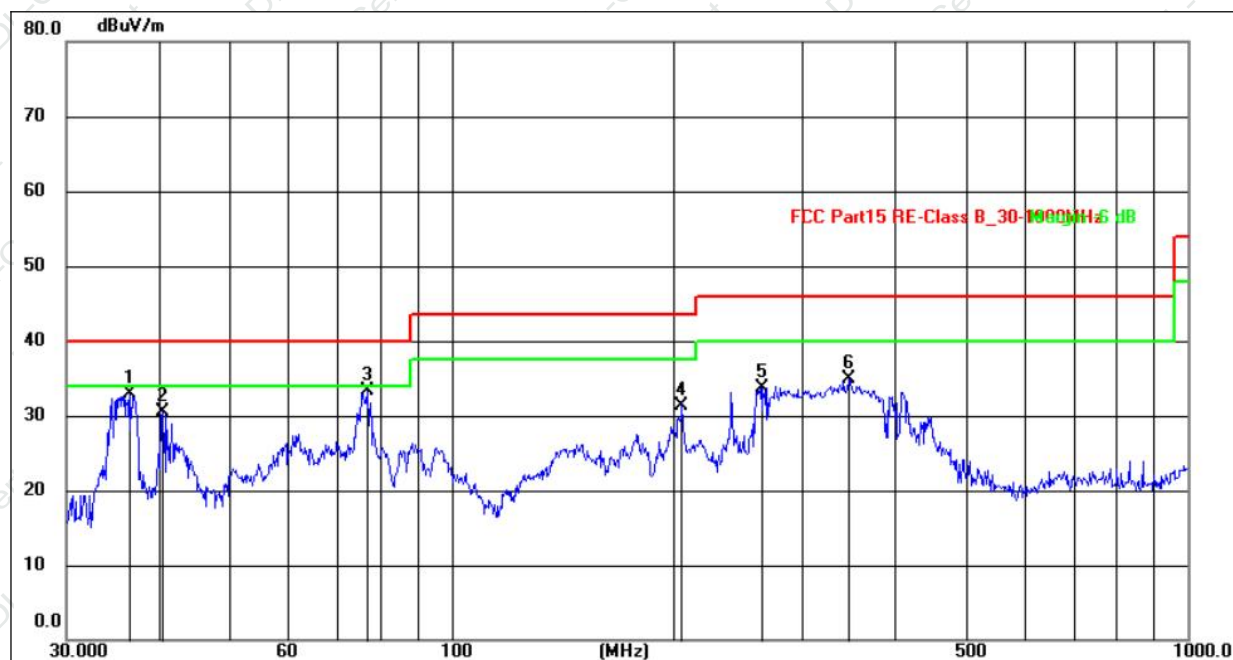


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.6372	47.47	-14.64	32.83	40.00	-7.17	QP
2	40.5591	44.58	-14.03	30.55	40.00	-9.45	QP
3	76.7806	51.81	-18.53	33.28	40.00	-6.72	QP
4	205.6750	49.60	-18.20	31.40	43.50	-12.10	QP
5	264.7456	48.60	-14.89	33.71	46.00	-12.29	QP
6	346.8091	51.17	-16.32	34.85	46.00	-11.15	QP

Remarks:

- 1.An initial pre-scan was performed on the peak detector.
- 2.Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
- 3.Final Level = Reading level + Correct Factor.
- 4.Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
- 5.Margin= Measurement Level-Limit.
- 6.All test modes were tested, with only the worst Mode 40 recorded.



Temperature:	26°C	Relative Humidity:	54%
Pressure:	101kPa	Polarization:	Vertical
Test Voltage:	DC 9V From Adapter AC 120V/60Hz	Test Mode:	Mode 40

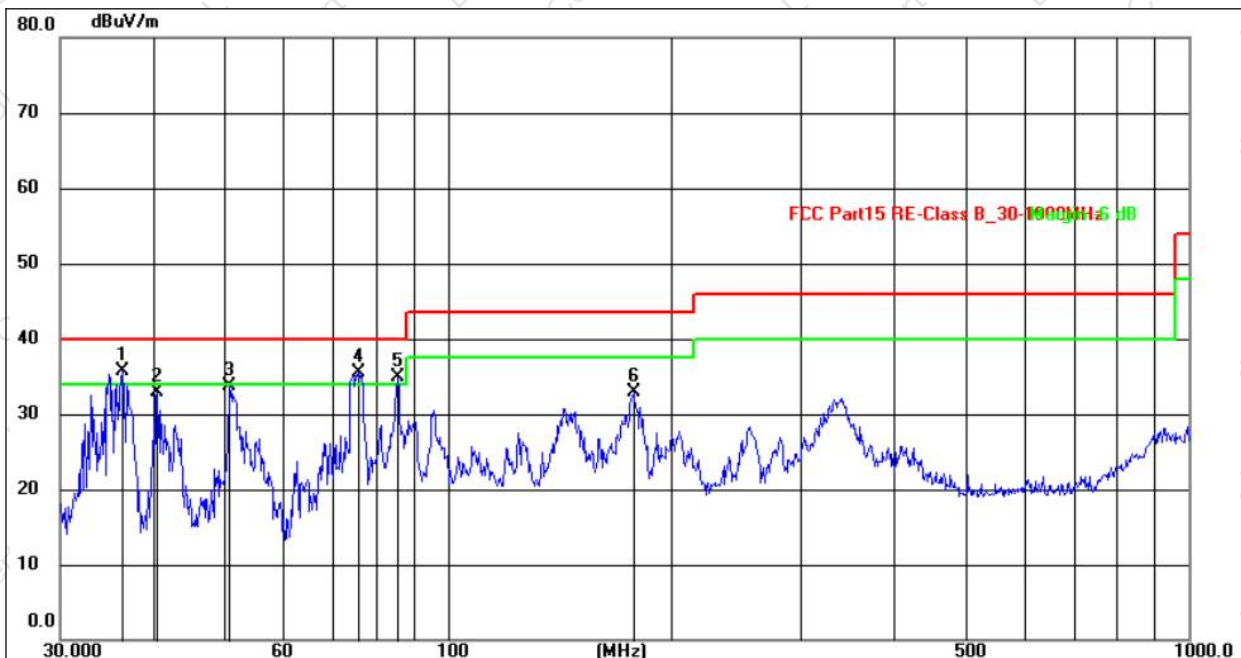

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	36.3813	52.97	-17.30	35.67	40.00	-4.33	QP
2	40.5591	49.71	-16.79	32.92	40.00	-7.08	QP
3	50.7635	51.01	-17.26	33.75	40.00	-6.25	QP
4	75.9770	56.30	-20.73	35.57	40.00	-4.43	QP
5	85.5973	56.35	-21.54	34.81	40.00	-5.19	QP
6	178.1322	52.59	-19.62	32.97	43.50	-10.53	QP

Remarks:

1. An initial pre-scan was performed on the peak detector.
2. Quasi-Peak measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Reading level + Correct Factor.
4. Correct Factor = Antenna factor+ Cable loss factor - Amplifier factor.
5. Margin= Measurement Level-Limit.
6. All test modes were tested, with only the worst Mode 40 recorded.



6. 20DB BANDWIDTH TEST

6.1 TEST PROCEDURE

1. Se span = 1.5 ~ 5 times OBW.
2. Set RBW = 1%~5% OBW.
3. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
4. Detector = peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

6.2 LIMIT

N/A

6.3 TEST SETUP



6.4 DEVIATION FROM STANDARD

No deviation.



6.5 TEST RESULT

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	101kPa	Test Voltage:	DC 9V From Adapter AC 120V/60Hz

Test Coil	Frequency (kHz)	20dB Bandwidth (kHz)	Result
ANT 1	126.00	2.520	Pass
ANT 2	143.00	2.521	Pass
ANT 3	325.00	2.589	Pass

ANT1:




ANT2:





ANT3:

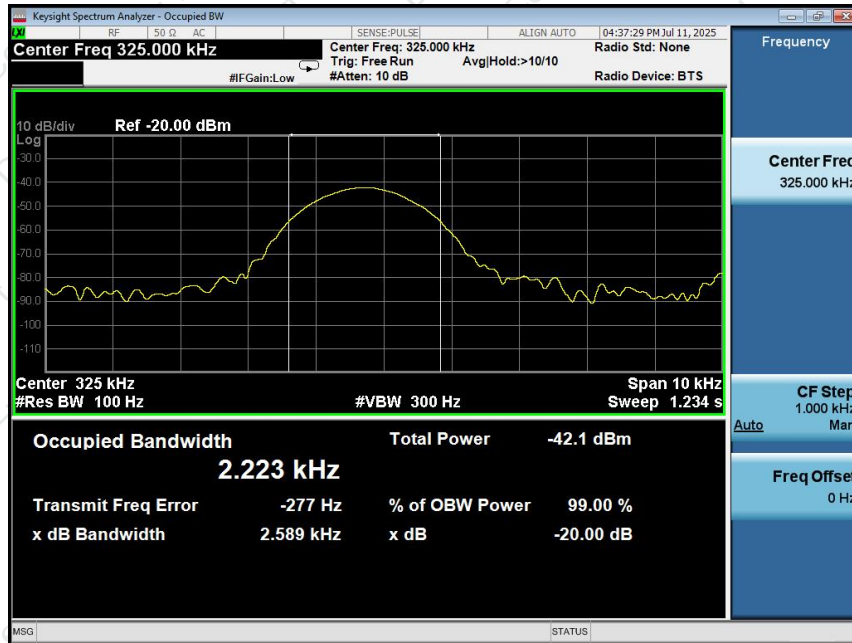



7. ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Loop Coil antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details.	



8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

***** END OF REPORT *****