

封面

Pointcinco

Active Noise Cancelling
Bluetooth headphones



User Manual

If there is any issue with your order,
please contact below email to ask for warranty
Email: service@pointcinco.com



Congratulations

Thank you for purchasing our new M7 Noise Cancelling Headphones. This user manual will provide you with all the information you need to get started using the headphones. If you have any problems setting up or using our M7 Noise Cancelling Headphones, please contact us by email at:
service@pointcinco.com
Please read this manual carefully before using the product and keep it properly.

Table of Contents

Package Contents.....01

Product Overview.....01

Product Specifications.....02

How to Use.....03


FAQs.....10

FCC Statement.....12

Register for Lifetime Warranty.....13

Package Contents

Product Overview

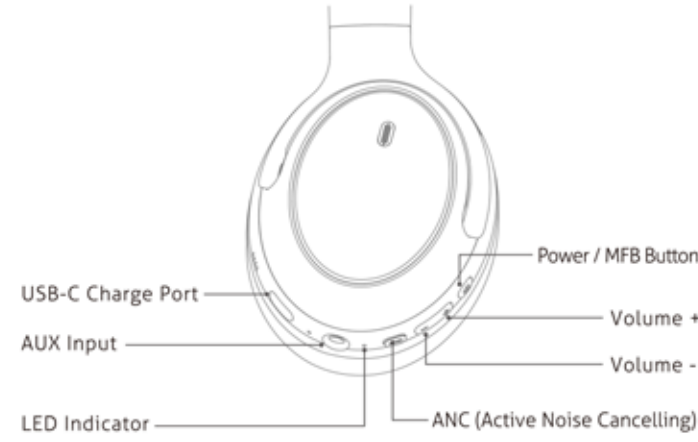

01

Product Specifications

Bluetooth Version	V6.0
Operation Range	49ft (15m)
Battery Capacity	1000 mAh
Charging Time	3 Hours
CODEC Code	SBC, AAC
Bluetooth Protocols	HSP,HFP,AVRCP,A2DP
Play Time (Bluetooth with ANC mode on)	50 Hours
Play Time (Bluetooth with ANC mode off)	120 Hours
Headphones Net Weight	236 g
Headphones Dimensions	188*185*81mm

* Some parameters may vary depending on the environment and the music played.

How to Use

A. Turn On / Off

Turn on the headphones

Long press the Power / MFB Button for 3 seconds until the LED indicator flashes blue.

Turn off the headphones

Long press the Power / MFB Button for 3 seconds until the LED indicator flashes red.




03

B. Pairing

1. Start with M7 turned off.

2. Press and hold the Power / MFB Button for 3 seconds until the LED indicator flash red and blue, with the voice guidance say "Pairing".

3. Open your device's Bluetooth settings and select "M7", with the voice guidance say "Connected".

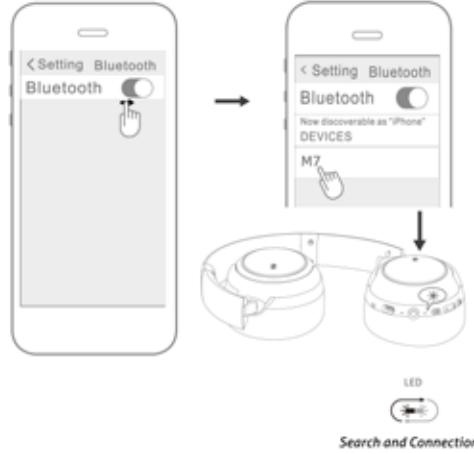

04


C. Operation Instruction

Button	Function	Operation Instruction
	Play / pause music	Click once
	Answer call	Click once
	End call	Click once
	Activate voice assistant	Press and hold for 2 second
	Next Song	Press and hold for 2 second
	Mute on / off	Press and hold 2 second during a call
	Previous Song	Press and hold for 2 second
	Active noise cancelling activation	Short press ANC button will rotate between ANC and transparent mode.
	Active noise cancelling deactivation	
	Transparent mode activation	

* Active Noise Cancelling mode (ANC) blocks the noise from surrounding environment while wearing M7.

05

D. AUX-in

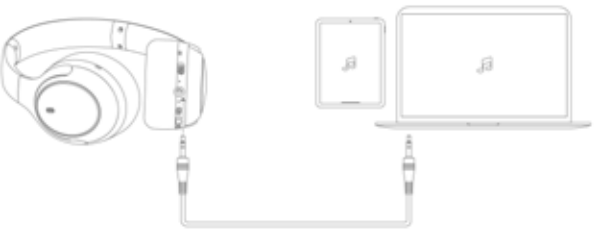

06

E. Charging Your Headphones




07

	Charging	LED indicator steady red
	Full Charged	LED indicator steady blue
	Low battery	Voice prompt: low battery, please charge
		Red Led flashes


F. Dual Connection

1. Power on the headphones, pairing and connected the first device then switched off the bluetooth.

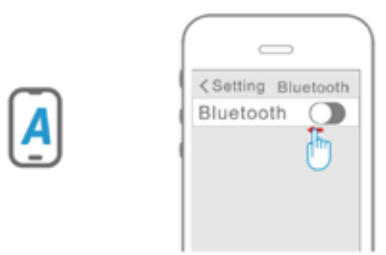

08

2. While powered on, pairing and connected the second device then switch on the first device.

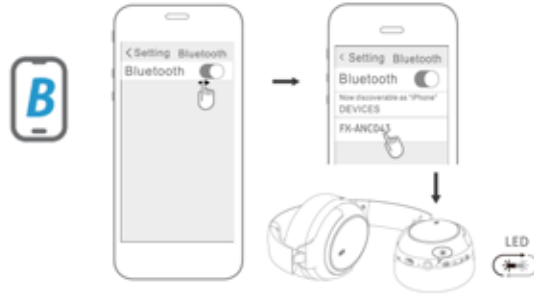

09

3. Once connected, you can freely switch music and make /receive phone calls between the two devices.

G. Reconnect

1. The headphones has matching records.

2. When the device is powered off, press and hold the power button for 3 seconds to turn it on. The blue indicator light will flash, and the earphones will then automatically search for and reconnect to the last paired device. Other devices will require manual connection.

H. Over-distance Disconnect

1. When your headphones exceeds the effective distance of your connected device (usually straight-line distance without obstacles is 49ft/15m), the Bluetooth headphones will prompt "Disconnected".

2. When you're back in range within 30 minutes, your headphones connects to your last device and prompt "Connected".

I. Simplified Steps to Factory Reset Your Headphones.

1. Remove the headphones from your device's Bluetooth settings.

2. Press and hold the "MFB button" and the "Volume-" button simultaneously for at least 5 seconds.

3. The reset is complete when the purple indicator light flashes once.

Note:

After resetting, you'll need to re-pair the headphones with your devices.

FAQs

Q: How do I initiate pairing mode again to pair with other devices?

A: With the headset powered off, press and hold the Power button for 7 seconds. The LED light will flash red and blue, and you'll hear the voice prompt "Pairing". Your M7 is now ready to pair with other devices.

Q: How do I switch between ANC and Transparency Mode?

A: Double tap the ANC button to cycle through Transparency Mode. The M7 will toggle back and forth between Active Noise Cancellation and Transparency Mode.

Q: What's the battery life of this headset?

A: The M7 delivers up to 120 hours of playback with ANC disabled at 10% volume, and up to 50 hours of playback when ANC is turned on at 10% volume.

Q: Does this headset support wired audio connection?

A: The M7 headphones can be connected to standard audio devices via the included 3.5mm audio cable. In wired mode, music playback is supported, but calls cannot be answered or ended.

Q: Can I use the headset while charging?

A: For extended use, the headphones can be used while plugged into a power source.

Note:

Low battery or an unstable power supply may cause audible static or noise. Frequent use while charging is not recommended, as it may also shorten battery lifespan.

Q: In what scenarios will the headphones power off automatically?

A: The headphones will shut down automatically in two cases: No device is connected for over 10 minutes; The battery is critically low, with its voltage dropping below 3.1V.

Q: How do I fix connection issues or unexpected crashes?

A: To resolve the fault: Press and hold the multi-function button for 10 seconds to power the headphones off and perform a reset. You will hear the voice prompt "Power on" once the restart completes.

Q: What can I do if the headphone volume is too low?

A: Turn up the volume on both your paired device and the headphones at the same time. Check whether M7 audio is chosen in your phone's call interface. Call audio defaulting to other modes may lead to inaudible sound from the other party. If so, manually switch to M7 audio for calls. Should the issue persist, please do not hesitate to reach out to our support team via email at service@pointcinco.com.

Q: How can I check the headphones' remaining battery level?

A: For Android devices: The remaining battery charge will show as numerical figures or graphics on your phone when connected via Bluetooth.
For iOS (Apple) devices: Battery level display is not supported. When the battery is low, the headphones will play a voice prompt saying "Low battery, please charge."

10

11

FCC STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
-- Reorient or relocate the receiving antenna.
-- Increase the separation between the equipment and receiver.
-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
-- Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.
Changes or modifications not expressly approved by the party responsible for comp liance could void the user's authority to operate the equipment

* RF warning for Portable device:
The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

FCCID: 2BTM9-M7

Activate Your Lifetime
Extended Warranty



How can I get lifetime warranty coverage for my product?

This product comes with a standard 12-month manufacturer's warranty. To upgrade to our lifetime extended warranty, please send us an email with your order number within 3 months of the purchase date.
Our customer service email: service@pointcinco.com

12

13

封底

SIZE: 100X130MM

材质: 128g 双铜 单色印刷 双面印刷 过油 骑马钉