


BOX-1213

Mini PC/NUC/Mini Computer/Micro Host



Click on the icon to watch the video for this product

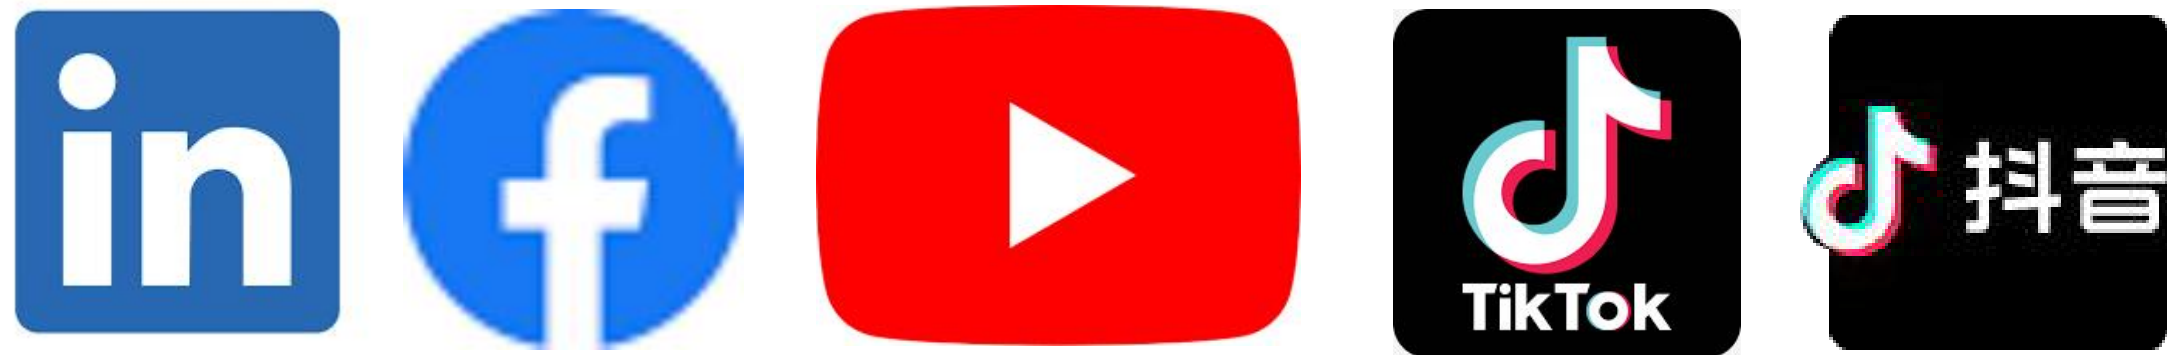

Features:

- Support Intel Alder/Raptor Lake U/P/H Processor
- Support dual-channel SO-DIMM, DDR4 3200MHz
- Support 1*HDMI+1*DP+1*Thunderbolt+1*Type-C display output, support four-display synchronous and asynchronous
- Optional 2*RTL8111H Gigabit network card
- Support 2*USB3.2 Gen2 (10Gbps), 1*Type-C, 2*USB2.0;
- Support 1*MicroSD card slot;
- 1*M.2 M Key, support SATA/NVME adaptive;
- 1*M.2 E Key, support Wifi/Bluetooth module expansion;
- DC19V power supply



Specs	
CPU	Intel Alder/Raptor Lake U/P/H Processor Processor
Chipset	SOC
Display chip	Intel Iris Xe Graphics
Display output	1*HDMI+1*DP+1*Thunderbolt+1*Type-C
Display	Four display synchronous and asynchronous
USB	2*USB3.2 Gen2 (10Gbps) ; 2*USB2.0
Memory	2*SO-DIMM DDR4 3200MHz Max64GB
Sound effects	Onboard ALC897 audio decoding controller;
Network card	Onboard 2*Realtek RTL8111H Gigabit LAN
Storage	1*M.2 M Key, support SATA/NVME adaptive
Expansion slot	1*M.2 E Key, supports Wifi6/Bluetooth module expansion;
I/O chip	IT8613E
BIOS	AMI BIOS
Power supply	DC 19V
Cooling System	Turbine radiator
Environment	Operating: -10~50°C; Storage: -20°C~75°C 0% ~ 95% relative humidity, non-condensing
Size	127*127*44mm

Specs	
Rear I/O interface	1*DC_IN port 1*Thunderbolt4 port 1*HDMI+DP port 2*LAN port 2*USB2.0 port
Front I/O interface	1*PWRBTN button with indicator light 1*Reset&C_CMOS button 1*MicroSD card slot 1*Type-C port 2*USB3.2 Gen2 (10Gbps) port 1*Line out&Mic in two-in-one port
I/O	

FCC Requirement

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

