



PORTABLE PA SYSTEM

USER MANUAL

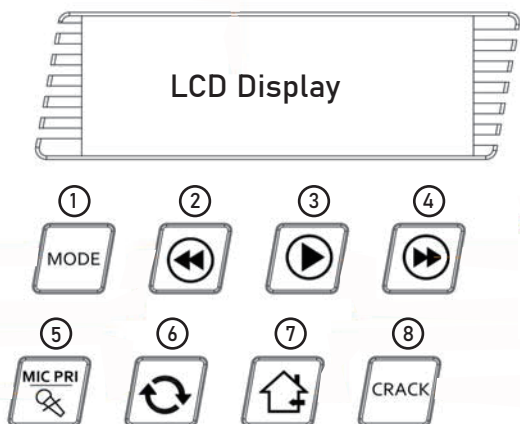

Aries CP2

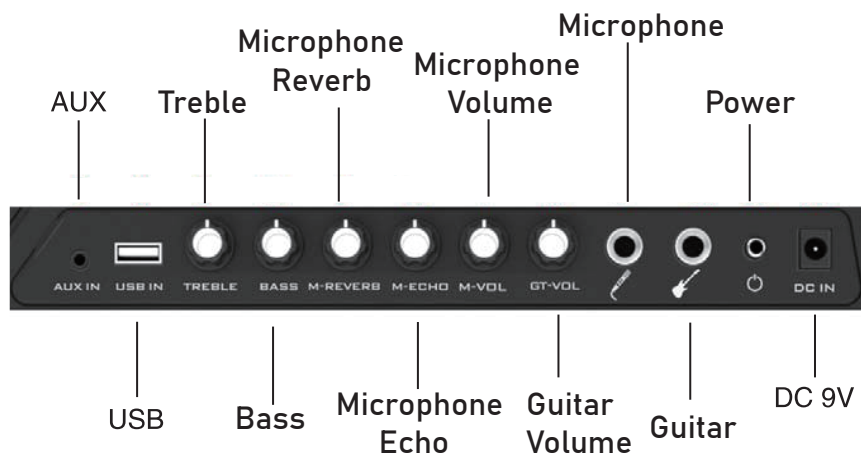


Master Volume

- ① Press one time to switch modes among Bluetooth,FM and USB drive play.
- ② Previous
- ③ Pause/Resume
- ④ Next
- ⑤ Eliminate the singer's voice in the music,allowing you to sing freely.
- ⑥ Paly Mode: All/Repeat one/Random/Repeat folder.
- ⑦ Switch the sound mode,outdoor or indoor.
- ⑧ Improve audio quality, making the sound clearer and purer.

WARNING



1.DO NOT place objects on top of the device,as objects may scratch the device.



2.DO NOT expose the device to dirty or dusty environments.



3.DO NOT insert any foreign objects into the device.



4.DO NOT expose the device to strong magnetic or electrical field.



5.DO NOT use the device in the rain..



6.Please check with your local Authority or retailer for proper disposal of electronic products.



7.DO NOT disassemble the device.Only a certified service technician should perform repair.



8.The device has apertures to disperse. DO NOT block the device entilation ,the device may become hot and malfunction as a result.

TROUBLESHOOTING


Fault	Possible Cause	Solution
No sound	1. No input sound source. 2. Volume is too low.	1. Use a better music signal. 2. Adjust volume.
Distortion of sound	1. Volume too high. 2. Speaker may be damaged	1. Turn down the volume. 2. If speaker is damaged, repair or replace it.
Karaoke does not work	1. Microphone plug is not fully inserted. 2. Microphone switch is not on. 3. Microphone volume knob is at the lowest position.	1. Plug microphone properly into the socket. 2. Turn on microphone switch. 3. Adjust microphone volume properly.
MP3 does not play	1. The audio format in the U disc. is incorrect. 2. improper operation has caused a process disorder. 3. USB disc is disconnected.	1. Convert audio format into MP3. format. 2. Reboot the machine. 3. Insert USB disc properly.

BUILT-IN WIRELESS BT STREAMING FUNCTION

- Press“MODE” button to choose the input signal source as BT channel when starting the machine.
- Please ensure the BT devices you want to connect is open.Then scan the “NBVOICE”and connect the speaker with the device .When the connection is successful,”tick” tone will prompt .If the speaker can’t be connected,please restart the speaker or the device and try again.
- After the mobile phone and the BT are successfully connected,you can play music. To ensure continuous stability of the music signal, try to keep the BT and the mobile phone facing one another
- This unit support ipad,iphone,Samsung,HTC,Nokia and other BT mobile devices wirelessly transmitting audio.
- The BT of the unit can be used up to 8 meters if there are no barriers.

HOW TO PALY FM


- ① Click **M** to switch to FM mode with a screen shows like **106.9** , and there will be voice prompts: FM Mode



- ② Long press **▶||** for about 3s to start automatic channel search
The search will last about 1 min, just leave it before it's done.
There will be several or dozens of channels. (The amount depends on the area.)
- ③ Each channel is given a sequence number (in ascending order of frequency)
For example, **106.9** = Channel 3
- ④ Click **◀▶** to play previous/next channel;

MUSIC PALY

SUPPORTS



two wireless microphones



guitar



bluetooth



USB



3.5mm audio cable

REFER TO MODE

ARIES CP2
Portable PA Speaker & Microphone System
Portable PA Loudspeaker with Built-in Rechargeable Battery,
MP3/USB/FM Radio (8" Subwoofer, 600 Watt MAX)

Features:

- Portable Speaker System
- High-Powered PA Loud Speaker Style
- Bluetooth Wireless Music Streaming Ability
- Built-in Rechargeable Battery
- FM Radio with Digital LCD Display
- Connect & Stream Audio from External Devices
- Aux (3.5mm) Input Connector Jack
- USB Flash Memory Reader
- 1/4" Microphone input
- Battery Level LED Indicator Lights
- Rugged & Durable Molded Cabinet Design
- Convenient Rolling Wheels & Extendable Carry Handle
- Used for Public Gatherings, Crowd Control, Karaoke
- For Indoor / Outdoor Use

Bluetooth Wireless Streaming:

- Built-in Bluetooth for Wireless Music Streaming
- Simple & Hassle-Free Pairing
- Works with All of Today's Latest Devices
- Smartphones, Tablets, Laptops, Computers, etc.
- Bluetooth Version: 5.0
- Bluetooth Network Name: 'NBVOICE'

What's in the Box:

PA Speaker System

Remote Control

Power Adapter

Two wireless microphones

Technical Specs:

- Power Output: 600 Watt MAX
- Sound System: 8" -inch Subwoofer
- Impedance: 10 Ohm
- Frequency Response: 50-12000Hz
- S/N Ratio: 79dB +/-3dB
- SPL: 96dB (1W/M)
- T.H.D.: <1%
- USB Interface Type: 2.0
- Digital Audio File Support: MP3
- Maximum USB Flash Support: 32GB
- Battery Life: Up to 3 Hours (Charge Time: Approx. 4 Hours)
- Remote Control Battery: (1) x 'CR-2025' Button Cell, Included
- Rechargeable Battery: 12.8V Lead Acid, 5000mAh 65x65x86mm
- Power Supply: 110V, Switchable
- Dimensions (L x W x H): 15.6" x 13.53" x 11.69" -inches

FCC Warning

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:-- Reorient or relocate the receiving antenna.

-- Increase the separation between the equipment and receiver.

-- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

-- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator and your body.