

Antenna specification

Shenzhen Zhitenghui Technology Co., Ltd
555G, 5/F, Building 522, Bagua 3rd Rd, Bagualing Ind Zone, Hualin Comm,
Yuanling Subdist, Futian Dist, Shenzhen City, Guangdong Province, China

Table of contents

1. antenna parameters


2. Antenna appearance and dimensions

3. Detailed information about antenna parameters

1. antenna parameters

Frequency	2402~2480MHZ
Effi AVG	40.22%
PK Gain	-1.17dBi
SWR	<3
Antenna Type	On board copper
Antenna polarization	Linear polarization
PART NO	B01
Antenna size	L11.8*W0.5mm

2. Antenna appearance and dimensions

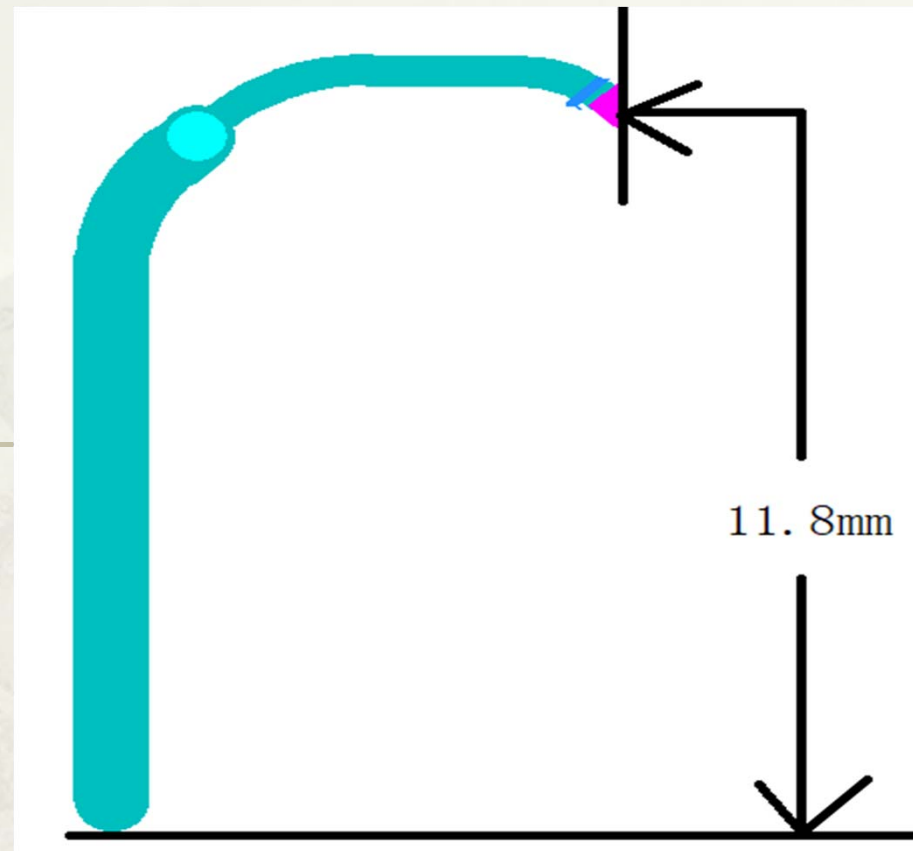


Antenna No.: B01; Antenna size : L11.8*W0.5mm

3. Detailed information about antenna parameters


Antenna Efficiency


Free space			
Frequency (MHz)	Efficiency (%)	Efficiency (dBi)	Gain (dBi)
2400	39.6	-5.02	-1.17
2410	40.36	-4.94	-1.29
2420	40.48	-4.93	-1.31
2430	41.32	-4.84	-1.22
2440	41.63	-4.81	-1.29
2450	40.93	-4.88	-1.33
2460	40.08	-4.97	-1.25
2470	39.19	-5.07	-1.29
2480	38.37	-5.16	-1.83
AVG	40.22	-4.96	-1.33

S11 Parameters

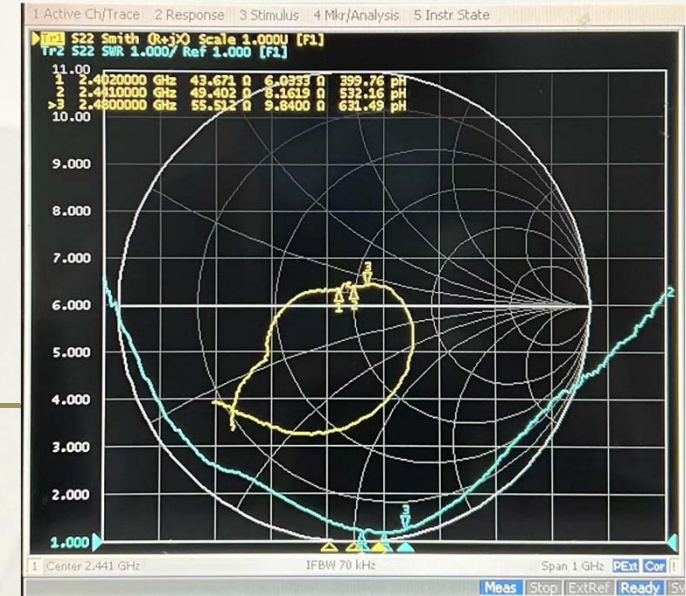

Antenna Pattern:

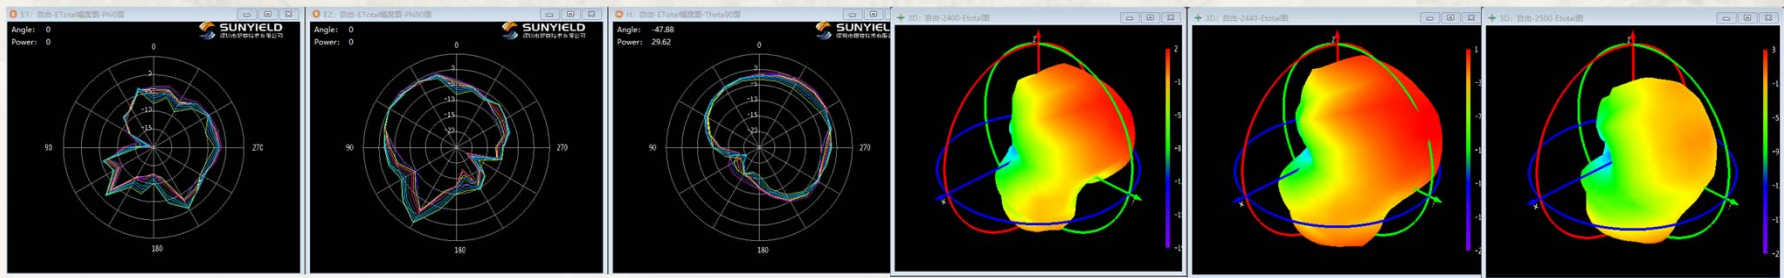

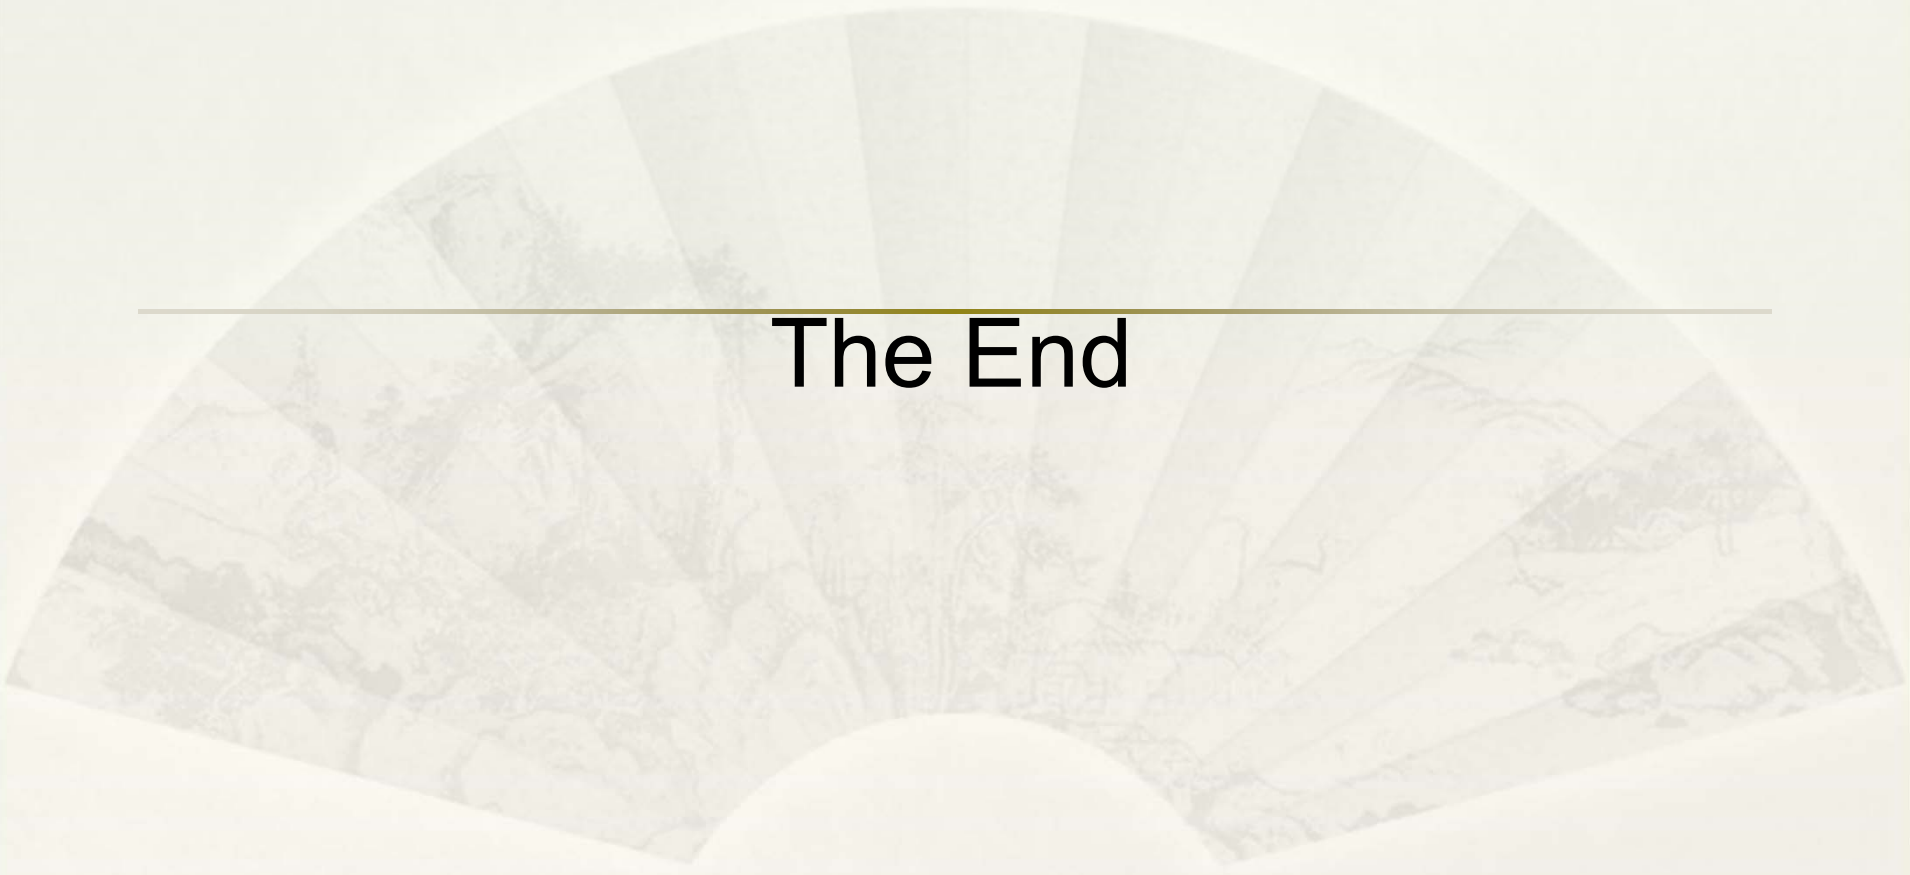

The End