

Vintage 3



SOUNDQUIP High-Quality Desktop Powered Speakers



Bluetooth



LDAC™
Hi-Res Bluetooth



Qualcomm®
aptX™ HD

USER MANUAL

Welcome to the SOUNDQUIP family, and congratulations on your purchase of the SOUNDQUIP Vintage 3 desktop powered speakers.

The SOUNDQUIP team is committed to providing a high-quality listening experience. Like all SOUNDQUIP products, Vintage 3 is thoughtfully engineered in every detail and remains easy to use.

We also thank our loyal customers, distributors, and dealers for their support. You give us the confidence to design and build better SOUNDQUIP products.

Package Contents

- Vintage 3 powered speaker (left)
- Vintage 3 passive speaker (right)
- Speaker wire (2 m /approx. 6.5 ft)
- Power adapter
- Power cord
- 3.5 mm audio cable (1.5 m /approx. 5 ft)
- USB cable (1.5 m /approx. 5 ft)
- Speaker bag (cloth)
- Cable bag (cloth)
- Power adapter bag (cloth)
- User manual

Features

- Built-in analog amplifier
- Bluetooth aptX HD, extended range, and 32-bit DAC
- Computer USB audio input
- High-quality headphone amplifier
- Multiple analog inputs and preamp output
- Hand-built cabinets and high-quality connectors
- Custom aramid fiber woofers and silk dome tweeters

Quick Setup

1. Connect the left and right speakers with the speaker wire, observing the terminal colors.
2. Turn the volume knob counterclockwise and confirm that it is in the OFF position.
3. Connect the power adapter to the speaker rear panel.
4. Connect the power adapter to a power outlet. The adapter indicator should light.

Wireless Connection

1. Turn the volume knob to power on. Vintage 3 automatically enters pairing mode and the pairing indicator flashes.
2. Enable Bluetooth on your device and open its settings.
3. Select Vintage 3 to pair. The Vintage 3 pairing indicator remains lit.
4. Play music and adjust the volume.

To add another device, press and hold the pairing button to return Vintage 3 to pairing mode; the indicator will flash again. Vintage 3 can connect to one device at a time, but it remembers up to six devices.

Wired Connection

1. Connect your device to the speaker rear panel with an audio cable.
2. Play music and adjust the volume.

USB Audio Connection

1. Connect the computer to the speaker rear panel with a USB cable.
2. Windows recognizes Vintage 3 automatically. On a Mac, select Vintage 3 under System Settings > Sound > Output.

Vintage 3 has a built-in amplifier. Do not connect it directly to the output of another amplifier.

Input and Volume Settings

Multiple sources may remain connected to the speakers, and all inputs stay active. No manual input switching is required.

For volume control, we recommend setting Vintage 3 to a fixed level and controlling volume from the source device. There is no single correct method, so try different approaches and choose the one that works best for you.

Other Features

Variable Preamp Output



Vintage 3 includes a full-range variable preamp output for a subwoofer, other SOUNDQUIP powered speakers, or a SOUNDQUIP wireless transmitter feeding another music system. The output level is controlled by the Vintage 3 front volume knob.

Break-In Period

Vintage 3 sounds good out of the box and improves with use. We recommend 40 to 50 hours of break-in before evaluating its full performance.

Cleaning

Do not use cleaning agents on SOUNDQUIP speakers. Wipe them with a soft, dry cloth.

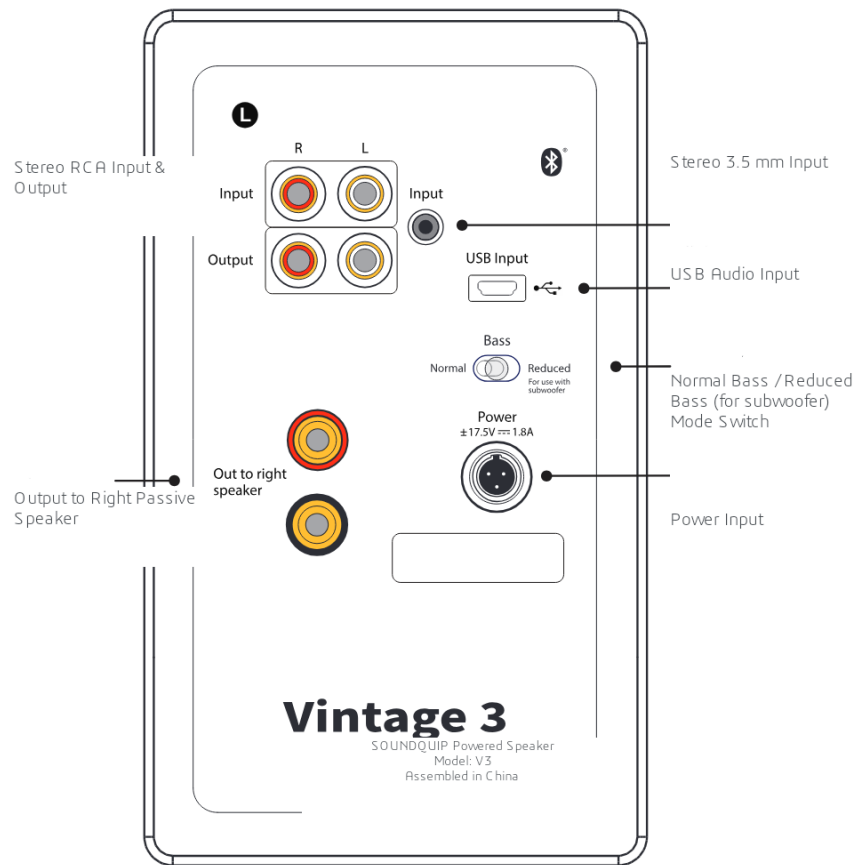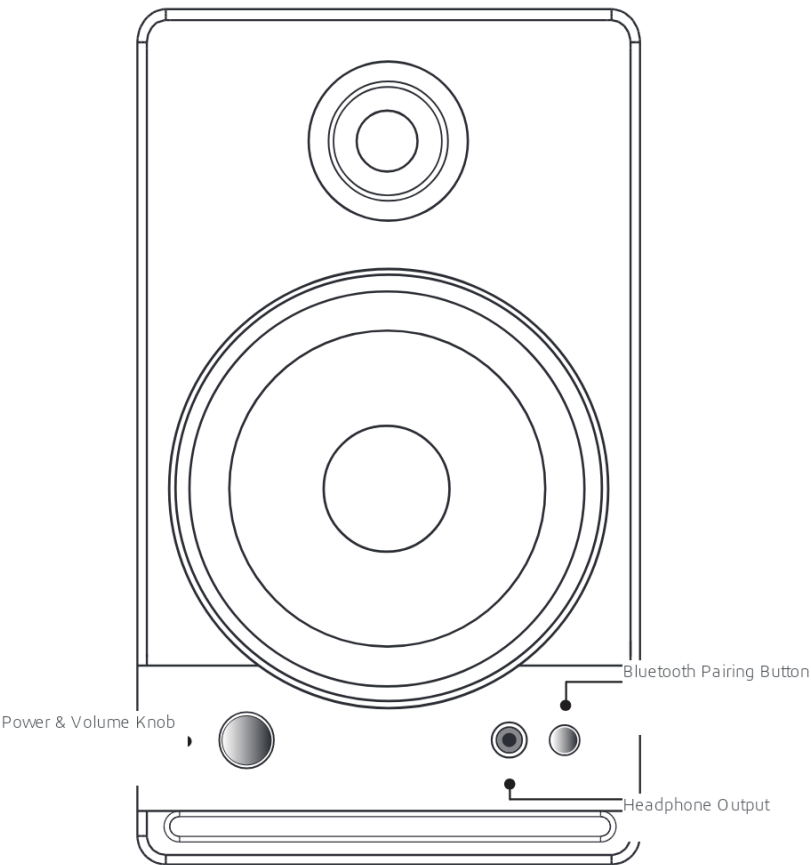

Warranty Information

All SOUNDQUIP products carry a one-year limited warranty from the date of purchase. This warranty applies only to SOUNDQUIP products purchased through officially authorized sales channels in mainland China. The warranty is automatic; no registration is required. For warranty coverage in other regions, contact your SOUNDQUIP retailer, dealer, or distributor.

Warranty Coverage

Defects in parts or workmanship.

Not Covered

The SOUNDQUIP warranty does not cover damage caused by accident, misuse, abuse, neglect, moisture, lightning, power surges, other natural events, unauthorized product modification or repair, or failure to follow the instructions in this installation guide.

What We Will Do

We will repair or replace defective parts after sufficient inspection confirms that the product is within the warranty period. Repairs are provided at no charge. After inspection, we will return the product at no charge.

What You Must Do

You are responsible for shipping costs to the service center. We recommend keeping the original shipping materials, as proper packaging reduces shipping damage. SOUNDQUIP is not responsible for loss or damage caused by inadequate packaging, so carefully pack the product before returning it.

About SOUNDQUIP

SOUNDQUIP designs and manufactures innovative audio products for the music you love. Full sound, simple and elegant design, and high-quality materials are principles we consistently uphold. We sincerely hope our products bring users a higher-quality listening experience.

Basic Safety Instructions

1. Read these instructions before using this product.
2. Keep these instructions for future reference.
3. Heed all warnings on the enclosure and in this manual.
4. Follow all instructions.
5. Do not use this product near water or in damp locations. Do not use it in a bathroom, damp basement, near a swimming pool, or anywhere water may enter the speakers.
6. Clean only with a dry cloth. Disconnect power before cleaning.
7. Do not block any ventilation openings. Install in accordance with the installation instructions.
8. Do not install near heat sources such as radiators, high-power heat-producing appliances, or ovens.
9. Do not short-circuit or reverse-connect the power cord.
10. Route the power cord properly to prevent tripping or causing the product to fall.
11. Use only accessories and stands specified by the manufacturer.
12. Do not exceed the rated load of any stand, floor stand, support, table, or cart. When using a cart, follow its instructions to prevent tip-over injury.
13. Unplug this product during lightning storms or when unused for long periods.
14. Refer all servicing to qualified service personnel. Service is required if the product is damaged, including a damaged or exposed power cord, liquid spills, exposure to moisture, abnormal operation, or a fall. Do not attempt repairs yourself.

FCC Caution:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.