

Amiapaw

Cat Air Purifier

Z2 SERIES

EN · DE · FR · ES · IT

USER MANUAL


Amiapaw



Get the app



Read all instructions before using this appliance.
Save these instructions for future reference.

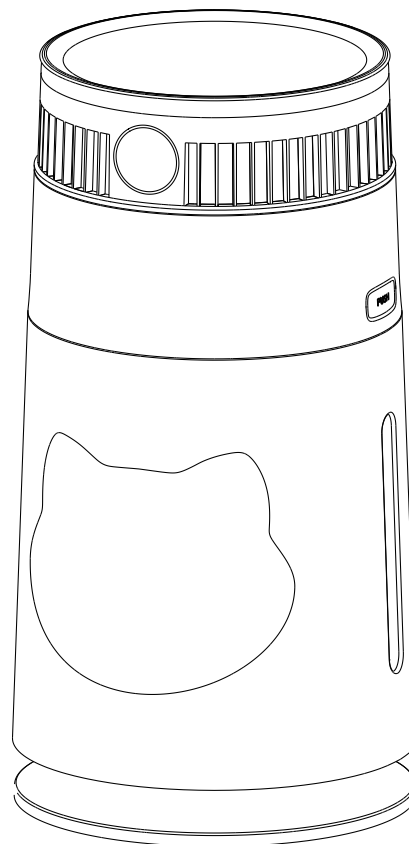

Model: WP-Z2

CONTENTS

01	Safety Warnings	1
02	What's in the Box	2
03	Product Overview	3
04	Installation Instructions	5
05	Display Overview	6
06	APP Connection	8
07	Replacing the Filters	9
08	Cleaning	10
09	Troubleshooting	11
10	Specifications	12
11	Warranty & Service	13


01/

Safety Warnings


Warnings

- Before installing, maintaining or repairing the equipment, the power supply must be disconnected!
- If the power cord and the plug are damaged or the plug is too loose after insertion, please do not use it, otherwise it may cause electric shock, short circuit, fire and other accidents.
- Please do not damage, break, excessively bend, stretch, twist, tie, overload, or crush the power cord, otherwise it may cause electric shock, short circuit, fire and other accidents
- If the power cord is damaged, it must be replaced by a technical service center or repair personnel to avoid danger.
- Only single-phase AC power can be used, otherwise it may cause fire, electric shock and other accidents.
- Do not modify, disassemble or repair by non-repair personnel, otherwise it may cause fire, electric shock, injury. Please contact the technical service center for repair.
- When replacing the filter, moving or cleaning the machine, be sure to turn off the power and unplug the power cord plug.
- Do not unplug the power cord plug with wet hands, otherwise it may cause electric shock and injury.
- When pulling the plug, be sure to grip the plug and not pull the power cord hard, otherwise it may cause electric shock, short circuit, fire and other accidents.
- If it is not used for a long time, the power plug must be unplugged, otherwise the insulation performance may decrease, which can cause electric shock, leakage, fire and other accidents.
- Children should operate air purifiers under adult supervision.


02/ What's in the Box

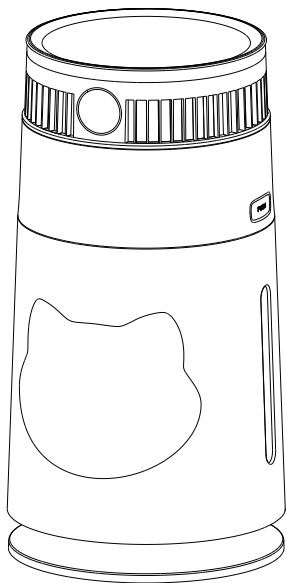


Cat Air Purifier x1



Z2 Combination Filter x1



Power Adapter x1




Z2 Pre-Filter x1



User Manual x1

03/ Product Overview

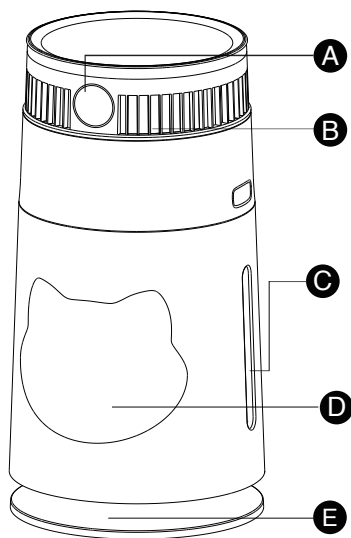


A Operation Panel: Side touch panel to prevent cats from accidentally touching it.

B Air Outlet: Backward-curved centrifugal turbine design, 360-degree gentle air discharge.

C Side Intake Air Vent: Intakes air from the opposite side, increasing the intake area and enabling better adsorption of floating cat hair in the air.

D Transparent Window: Enables real-time observation of the hair-suction effect and monitoring of the filter usage status.

E Downward Air Inlet: 360-degree circular air intake, enhancing suction power and better adsorbing floating cat hair.

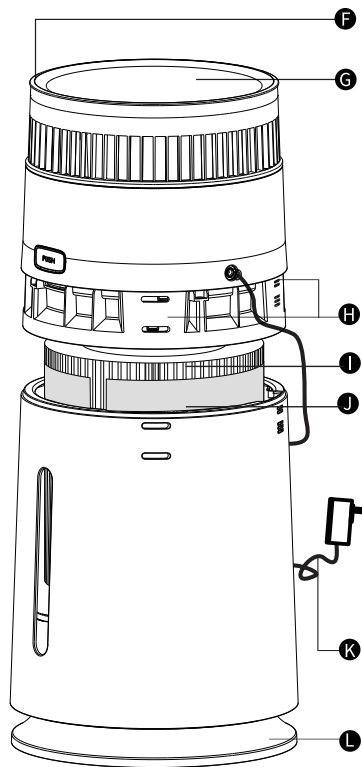


- F Air Quality Indicator:** The circular light ring displays real-time air quality. Blue indicates good; Orange indicates fair; Red indicates poor.
- G Machine Top:** The top is concave, in line with cat ergonomics design, making it more comfortable for the cat to sleep and rest lazily.
- H Air Quality Sensors:** PM2.5 / TVOC real-time monitoring.
- I High-efficiency Combination Filter:**
HEPA + Activated Carbon Combination Filter material, effectively removing PM2.5 and formaldehyde.
- J Pre-Filter:** 360-degree circular surrounding design, effectively adhering to floating cat hair and fibers.
- K Power Cord:** Bite-proof split power cord design, without bitter-tasting agent.
- L Machine Base:** High-stability rubber foot pads.

04/ Installation Instructions

Important

Be sure to remove the PE bag from the combination filter before use.


1

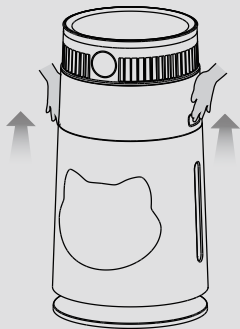

Open the Filter Compartment

Press both PUSH grooves, lift top to open.


2

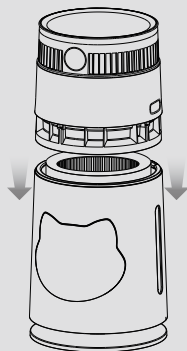

Install the Filter

Remove PE bag from filter, insert into compartment.


3

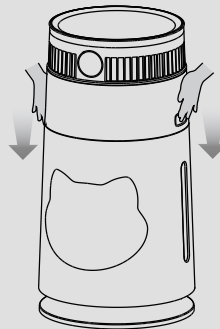

Close the Filter Compartment

Align and snap closed.


4

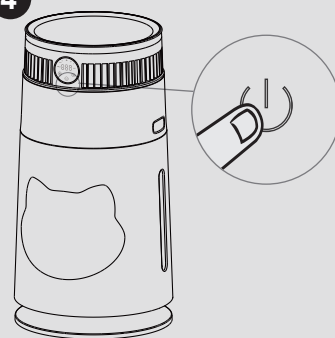

Start the Unit

Plug in, tap Power button.

05/ Display Overview

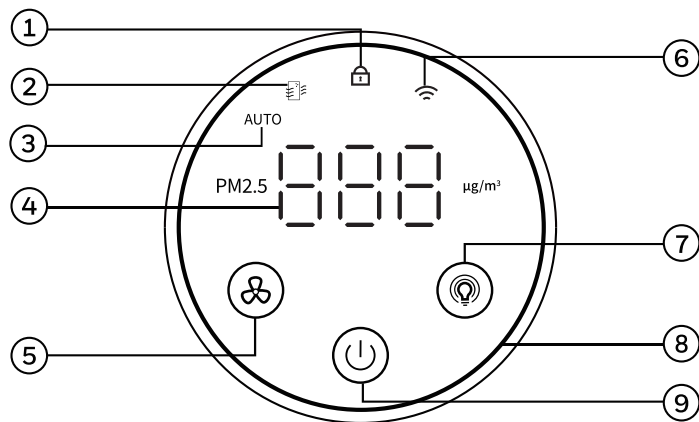

1. Child Lock Icon – When locked, the control panel becomes inoperable (app control only).
2. Filter Life Reminder – Red light flashes when filter needs replacement.
3. Auto Mode Icon – Automatically detects air quality and adjusts fan speed accordingly.
4. PM2.5 Value – Displays real-time air quality reading.
5. Fan Speed Button – Manually adjust 4 fan speeds and auto mode.
6. Wi-Fi Icon – Lights up when connected to network.
7. Ambient Light Button – Cycles through three settings: White, Blue, and Off.
8. Air Quality Indicator Light –
 - Blue: Good air quality
 - Orange: Fair air quality
 - Red: Poor air quality
 - (Turns off when the screen is in sleep/standby mode)
9. Power Button – Turns the unit on or off.



Power Button

Tap to turn on (starts in AUTO mode). AQI light bar glows orange, sensor warms up for 40s, then shows PM2.5.
Tap again to turn off.



Ambient Light Button

Tap to cycle: White - Blue - Off - White.
1st: White (filter light on).

2nd: Blue (check pet hair on filter).

3rd: Off.

Hold 3s: Display and AQI light bar turn off. Tap any button to wake.



Fan Speed Button

Tap to cycle: 1 → 2 → 3 → 4 → AUTO → 1.

- Auto: display shows AU.

- Speed 1–4: display shows number.

- After 5s inactivity: returns to PM2.5.



Schedule Setting (App)

1. Go to Schedule → Add Schedule.

2. Set: On/off time, repeat cycle, fan speed/mode.

3. Tap Save.

Max 5 schedules. Long press to delete.



Wi-Fi Icon

- First power-on: Icon blinks, ready to pair via app. Stops blinking after 10 min if not connected.
- To re-pair: Hold Fan Speed Button + Ambient Light Button for 3s → icon blinks.
- Connected: Icon stays on.



Child Lock Icon (App)

- Turn on/off in app.
- When on: Icon lit. Press any button → icon blinks (buttons locked).
- When off in app: Icon off, buttons work.



Combination Filter Icon (App)

- Red blinking: Life almost over – prepare replacement.
- Red solid: Expired – replace immediately.
- After replacement: Reset in app → red icon turns off.



Sleep Mode (App)

Enable: Lights off, ambient light button at 50%, fan speed = Level 1.

Exit: tap sleep again or any button on the screen.

06/ App Connection


Quick Notes

1. Turn on Bluetooth.
2. Hold Fan Speed Button + Ambient Light Button for 3s to start pairing (Wi-Fi icon blinks).
3. Connect to a 2.4GHz network (5GHz not supported).


1 Download the App




2 App registration and login

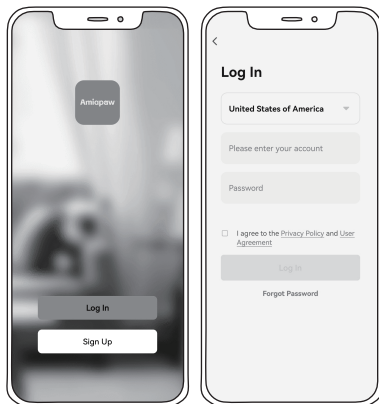


3 Add Device in the app

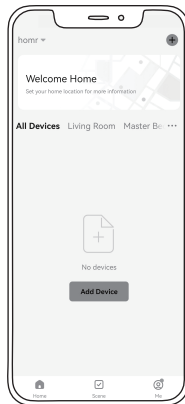


4 Discover and connect the device

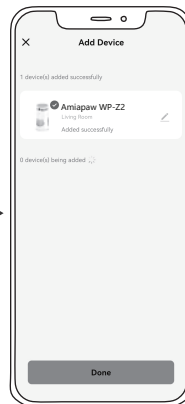

5 Select your Wi-Fi and inputting password.

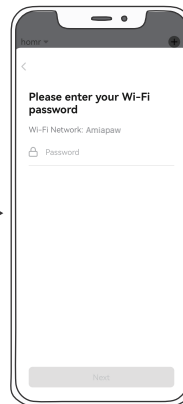

6 Installation completed

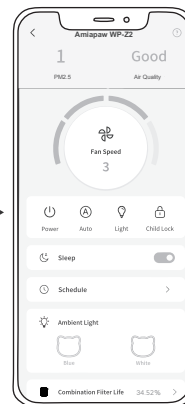


07/ Replacing the Filters

Important

Always unplug the unit before replacing the filter or performing maintenance.

1. When to replace

Red flashing "Filter Icon" on display → combination filter needs replacement.

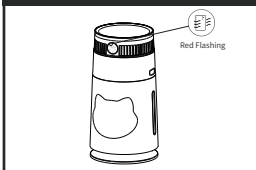


2. How to replace

Unplug → open the unit → remove old filter → install new filter.




3. After replacement

Open app → tap "Filter Reset" → confirm. Red light will turn off.

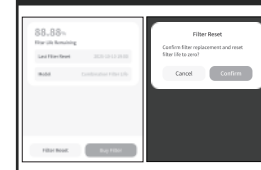

Note

Actual lifespan may vary depending on usage environment and air quality.

Replacement Filter	Filter Model	Function	Material	Fits Model(s)	Lifespan
 Pre-Filter	WP-Z2-1	Captures large particles such as pet hair, dust bunnies, lint, and human hair. Extends the life of the combination filter.	PP	WP-Z2	Replace every 1–2 months depending on usage.
 Combination Filter	WP-Z2-2	Removes 95% of fine particles (PM2.5, pollen, pet dander) + absorbs odors (ammonia, smoke)	HEPA + Activated Carbon	WP-Z2	Replace every 4–8 months depending on usage.

08/


Cleaning

Caution

Always unplug the unit before cleaning.


1. Remove the top section of the unit (do not wash the top section). Then take out all filters from inside the unit.
2. The lower section is not electrified. You can detach it and rinse away pet hair and dirt directly under running water.
3. After cleaning, allow the lower section to dry completely before reassembling it in the original way.

1

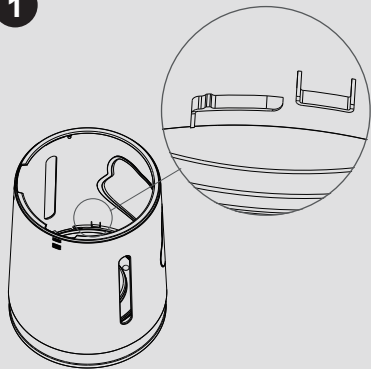


Locate the clips on the base and hold the base steady.

2

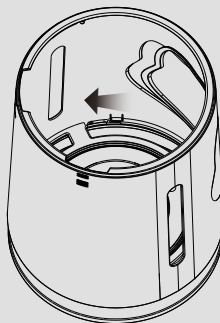

Rotate the filter compartment counterclockwise until the clips are fully released.

3

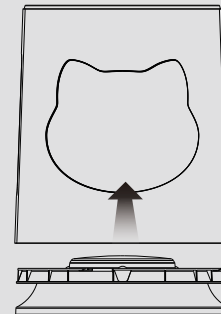

Lift the unit upward to separate the base from the filter compartment.

09/ Troubleshooting

Problem	Cause	Solution
The control panel is unresponsive	Power supply issues or the product's filter compartment is not securely fastened	Check the power connection and confirm that the filter compartment is securely closed
The product generates excessive operating noise	The device is not placed on a level surface or the filter is not properly in place	Place the product on a level surface and re-confirm the filter assembly position and sequence
The product operates normally, but the air volume is significantly reduced	The air outlet is blocked by foreign objects or the filter is not replaced in time	Please rearrange the placement to ensure optimal space utilization and verify if the prompt instructs you to replace the filter
The AQI indicator ring is flashing red, indicating a malfunction	Motor or sensor malfunction	Please contact our helpful customer support team
The product can't be registered or the device can't be connected to the network	Network malfunction or the cloud service platform is in maintenance mode	Please verify the local network connection, ensure internet access is normal, or wait for the cloud service platform maintenance to finish
The filter warning light is constantly on	The filter has reached its expiration	Please replace the filter and reset in app

10/

Specifications

Parameter	Specification
Model	WP-Z2
Series	Z2 SERIES
Color	White
Rated Voltage	DC 24V $\approx$ 2.0A
Rated Power	32W
Noise Level	<66 dB(A)
Pollen CADR	217 CFM
Dust CADR	185 CFM
Smoke CADR	183 CFM
Filter System	Pre-Filter + Combination Filter
Child / Pet Lock	Yes (To prevent accidental touch)
Safety Features	Tip-over Auto Shut-off, Anti-bite Cord
Wireless Connectivity	Wi-Fi 2.4GHz
Net Weight	5.7 kg
Product Size	300 × 300 × 586 mm

11/

Warranty & Service



Need Help?

If you have any problems with the product, please feel free to contact us for quick response and professional technical support.



Official Website
www.amiapaw.com



Tech Support
support@amiapaw.com

Amiapaw Warranty Statement

Thank you for choosing amiapaw. To protect your legal rights, this product is covered by a warranty period of **two (2) years** from the date of purchase (the "Warranty Period"). During this period, if a product experiences quality issues related to materials or workmanship under normal use conditions, we will provide warranty service in accordance with this statement.

This Warranty Does Not Apply In The Following Circumstances:

1. Products out of the warranty period;
2. Lack of valid proof of purchase;
3. Damage caused by failure to follow the user manual;
4. Unauthorized repair or disassembly;
5. Accidental damage or misuse;
6. Consumable parts (e.g., filters, packaging, manuals);
7. Natural disasters (fire, flood, lightning, earthquake, etc.).

This warranty applies to the original purchaser only. For warranty service, please contact the place of purchase or amiapaw customer support with valid proof of purchase.

How to Obtain Warranty Service:

To request warranty service, please contact the place of purchase or amiapaw official customer support with valid proof of purchase. This warranty gives you specific legal rights, and you may also have other rights that vary by jurisdiction.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

Reorient or relocate the receiving antenna.

Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

RF Warning Statement:

The device has been evaluated to meet general RF exposure requirement.

The device can be used in portable exposure condition without restriction.

Amiapaw

EC	REP
----	-----

JUN E-COMMERCE

Add: 6 RUE D ARMAILLE, 75017, PARIS FR

E-mail: junecommerce2024@gmail.com

UK	REP
----	-----

JunBright Ltd

Add: 51 Chalton Street, London NW1 1HY

E-mail: junbrigh2024@gmail.com

Manufacturer: Shenzhen Paisika Technology Co., Ltd

Address: Room 2308, South China Development Center,
Phase 2, South China International Leather & Leather
Products Raw/Auxiliary Materials Logistics Area, Hehua
Community, Pinghu Sub-district, Longgang District, Shenzhen
City, China

Email: support@amiapaw.com

CE FCC DOE



UK
CA



EMBALLAGES A SEPARER
ET A DEPOSER DANS LE
BAC DE TRI

