

ANT Gain

L1


HealthAI HK Limited

Suite 6503, 65/F, Central Plaza, 18 Harbour Road,
Wan Chai, Hong Kong, China


- Bluetooth ANT

Max ANT Gain=2.84dBi for 2400-2483.5MHz



H Theta=90

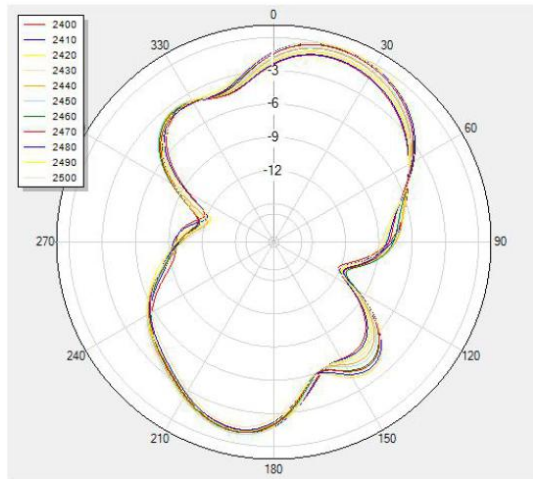

V Phi=90

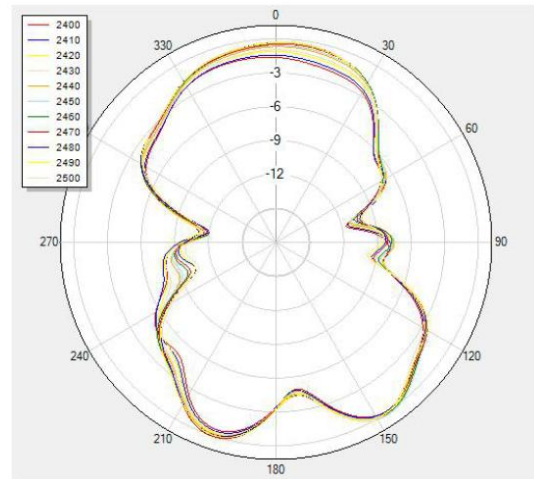

V Phi=0

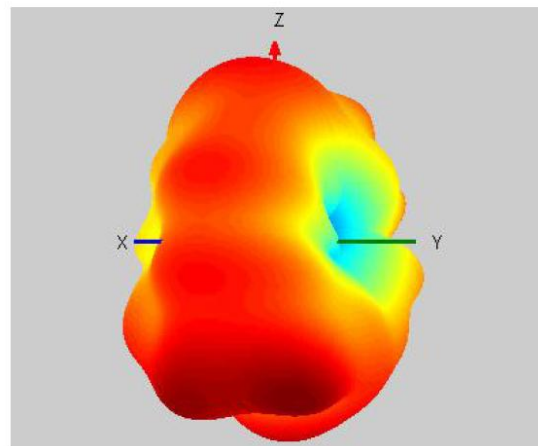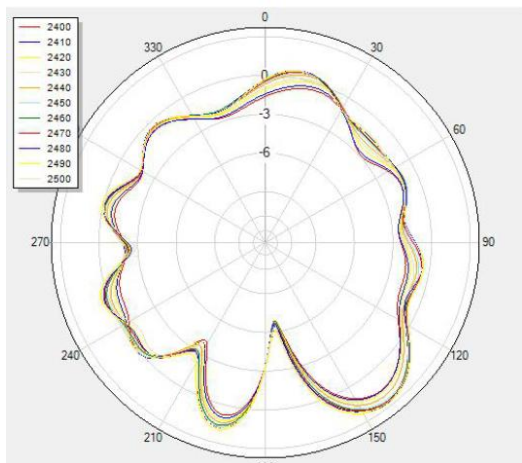


- WIFI ANT

Name	<u>2.4G & 5G WLAN Antenna</u>
Model Type	PCB Print Antenna
ELECTRICAL SPECTFICATIONS	
Frenquency Range	2400-2500MHz/5000-6000MHz
Band Width	100MHz/1000MHz
Impedance	50 Ω
VSWR	< 3.0
Max Gain	2.4GHz: 0.43dBi 5GHz: 2.94dBi
Polarization	Vertical
Radiation	Omnidirectional

Freq/MHz	2400	2410	2420	2430	2440	2450	2460	2470	2480	2490	2500
Gain/dBi	-0.06	-0.16	0.35	0.43	0.35	-0.07	0.12	-0.24	-0.19	-0.72	-0.66
Effi/%	33.15	31.34	32.98	31.90	31.35	27.31	27.98	27.13	29.92	26.05	25.29

Freq/MHz	5000	5100	5200	5300	5400	5500	5600	5700	5800	5900	6000
Gain/dBi	-1.99	0.31	-0.43	0.26	1.54	2.94	2.22	1.57	1.98	1.04	2.80
Effi/%	22.28	28.75	28.59	28.59	37.79	47.92	46.50	37.16	44.72	37.24	44.52

2. 4GHz

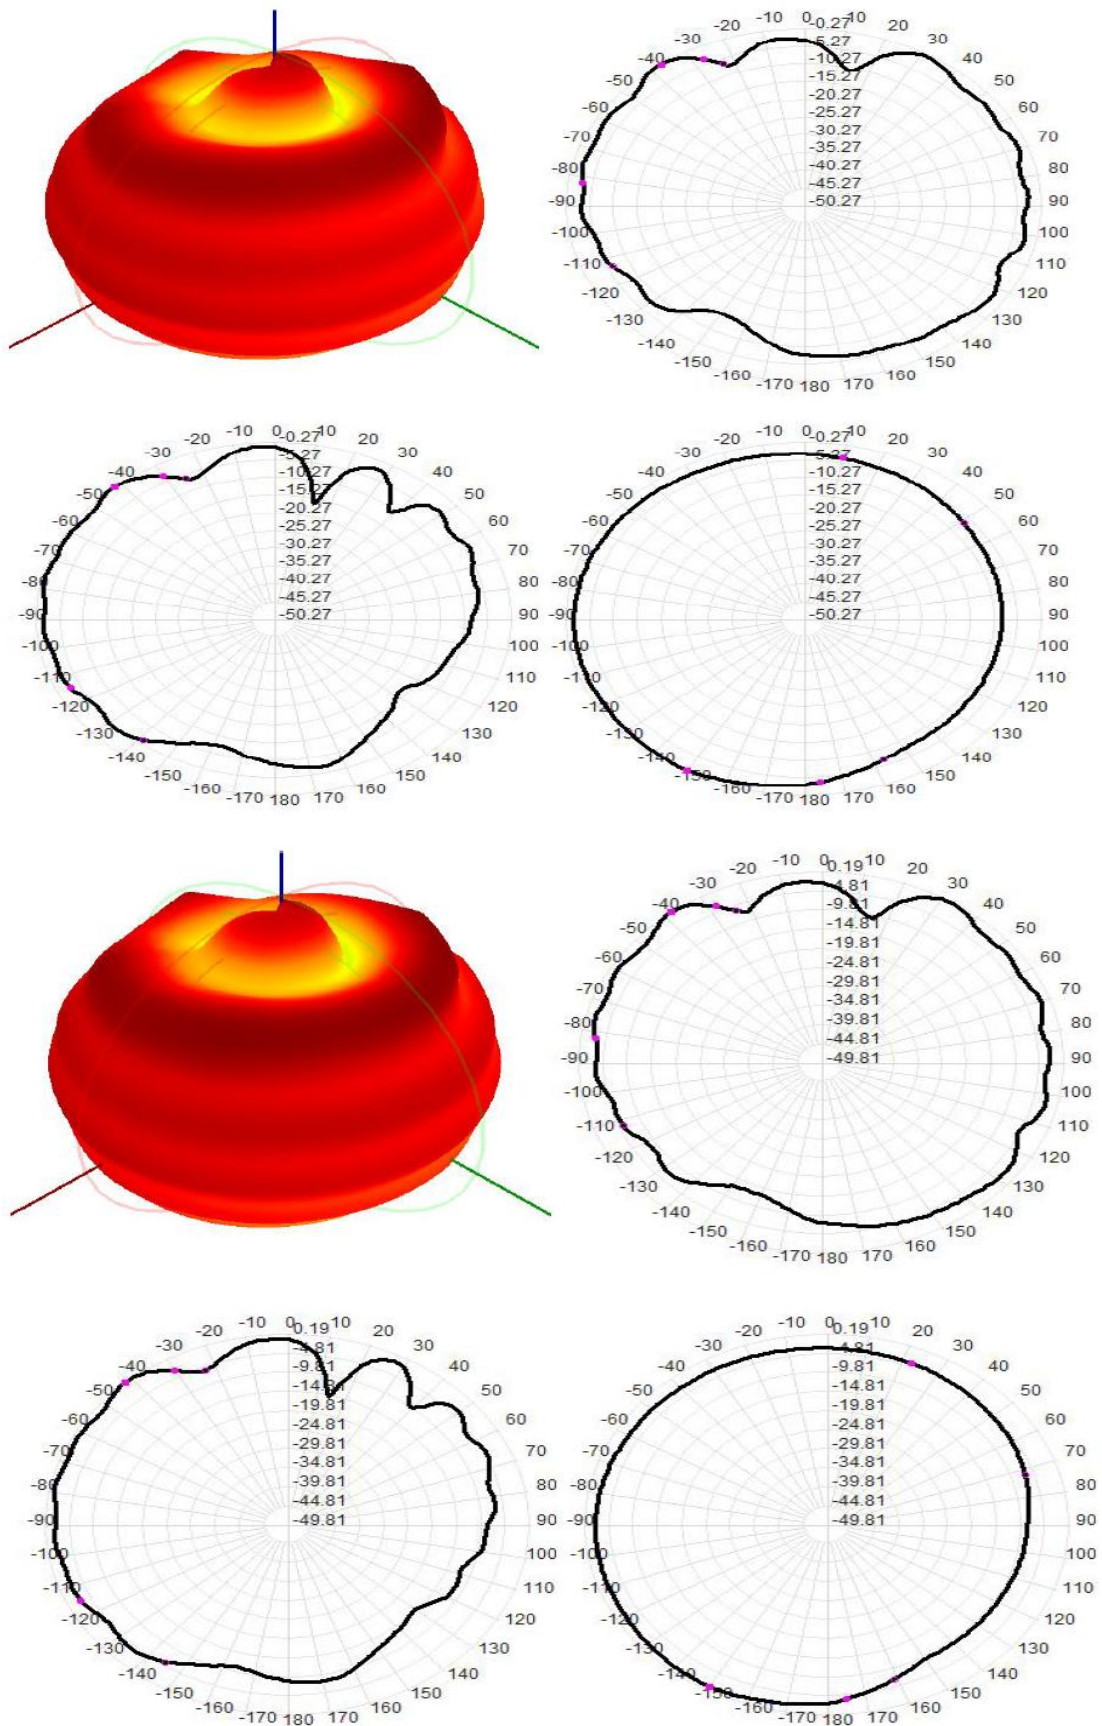

5GHz

