

Software Description

Contents

Contents.....	1
Summary.....	1
Use the software tutorial.....	3
1.02 FAQ.....	31

Summary

Controlling your smart LED lights has never been easier. Choose from 16 million colors, including cool white, warm white, or shades in between. Customize your preferred color, adjust brightness, save favorite scenes, or select from preset modes.

Room & Scenes

Controlling a single bulb or all bulbs at the same time can create a different atmosphere for different rooms, and you can change it with a touch of your finger.

Anti-theft lighting

Away from home? Set your smart LED lights to turn on and off at the right time so no one knows you're not home. Set the time for weekdays, weekends, or special days.

Sunrise/Sunset Mode

Set your smart LED light to slowly turn on in the morning and slowly reduce the brightness at night, perfectly opening and ending the day.

Party Helper

Want to throw a party? Set your device to mic mode to let the lights change color and rhythm to the beat of the music around you. Want the lights to match the room color? Use the camera in the app to detect the surrounding color and automatically update the lights.

Share

Have you set up a perfect scenario? Do you have multiple users at home? No

problem, share the scenario with your email account and other family members to share the device.

Compatible devices :

Bluetooth car screens

Use the software tutorial


(A) Start software



click on the icon“ AI LIGHTING ”Start the software.


(B) Register an account

Click the "Register" button to enter the registration page. Enter your email address and click "Get Verification Code". Check your email and return to the app to enter the code and complete the registration process. This will save your data to the cloud.

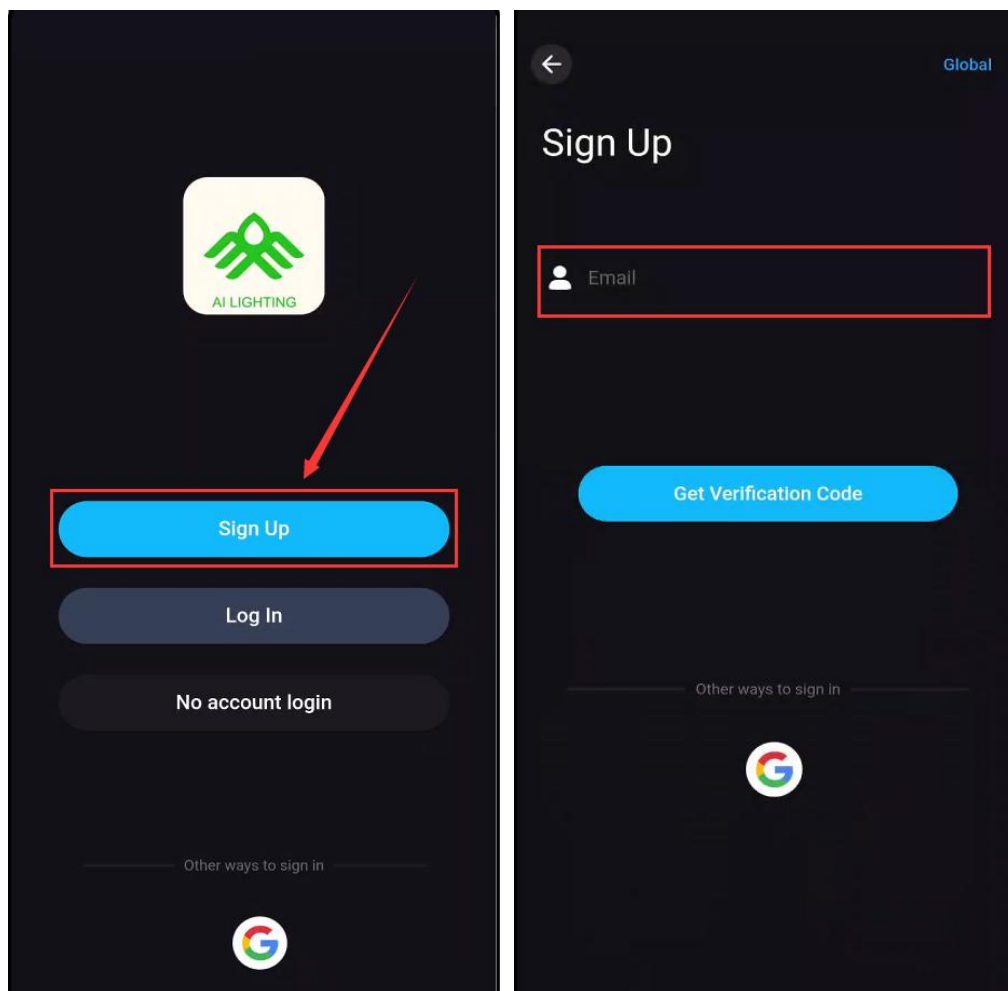

(C) Sign in


Click the "Login" button, enter your registered account and password, and log in.

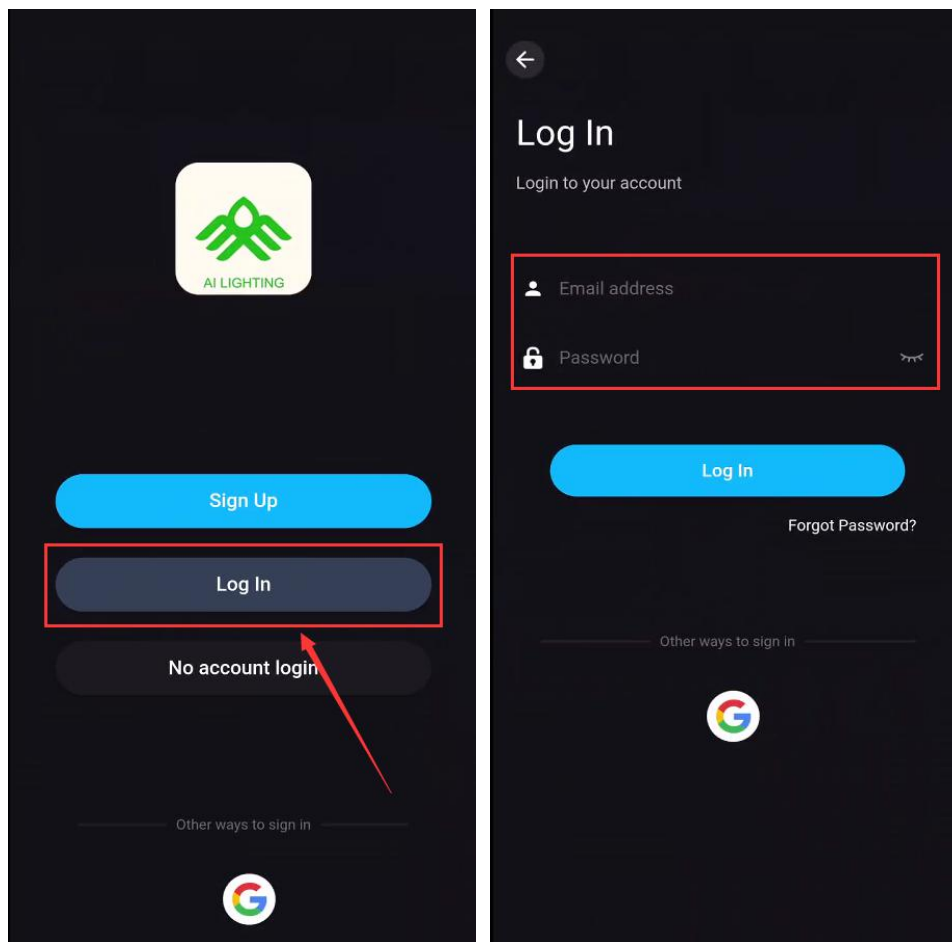

(D) Add device

After logging in, ensure your phone has location permissions and Bluetooth turned on, and that the device is powered on. Go to the app's main page, tap "Add Device" or the "+" button in the top-left corner to enter the "Add Device" screen. Select the device you want to add, choose the room for the device, and tap "Complete". The device will then appear

on your app's home screen.

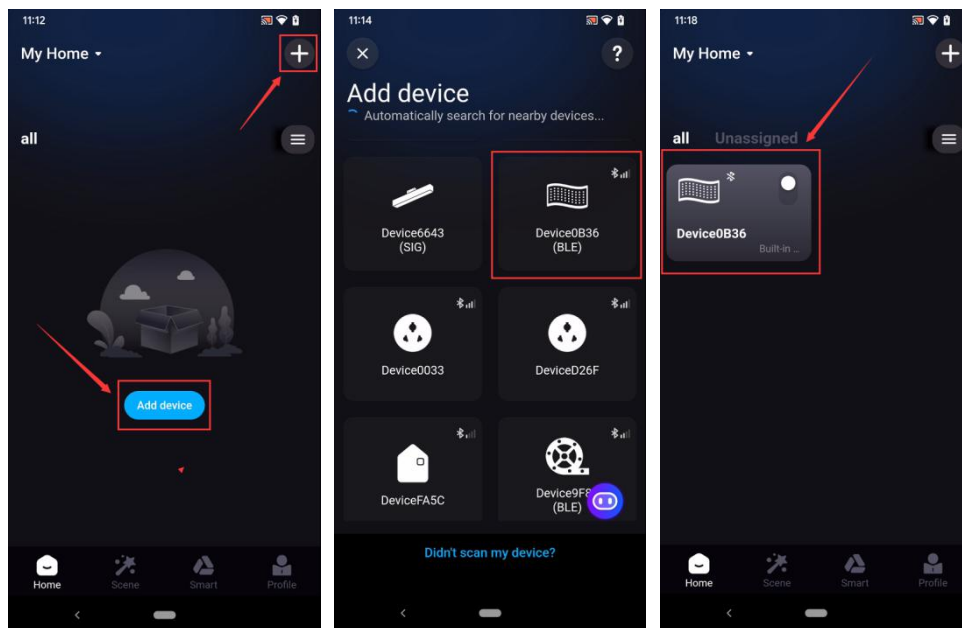


(E) Control device

Tap the device on the APP home page to enter the device control interface, where you can turn the device on/off and select different effects and brightness.




Tap the bottom " " to enter animation mode. Select different animations for your device, and the corresponding animation effects will be displayed.

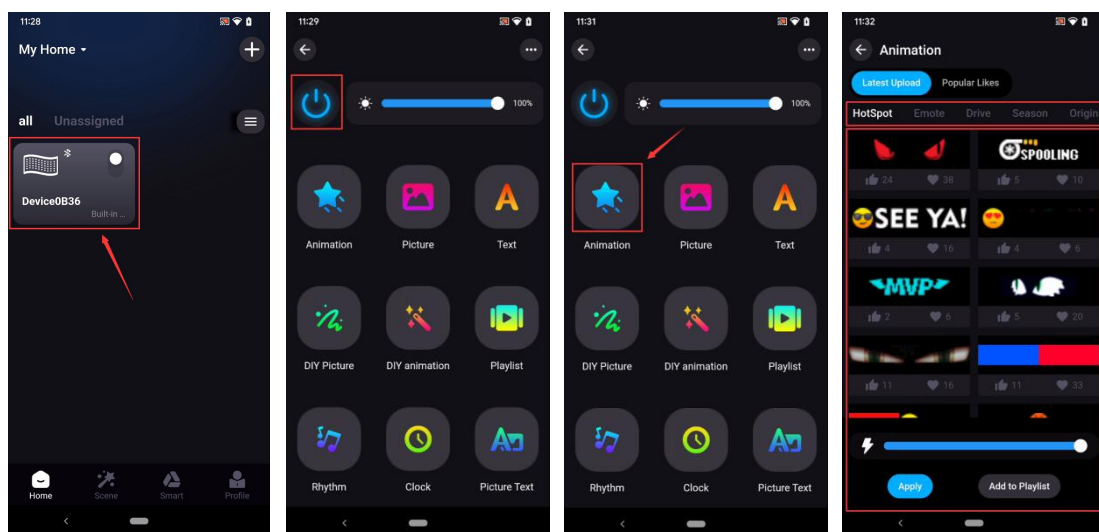

Tap the device on the APP home page to enter the device control interface. Tap the




bottom " " to enter the image mode. You can select different images for the device, and the corresponding image display effect will be shown.

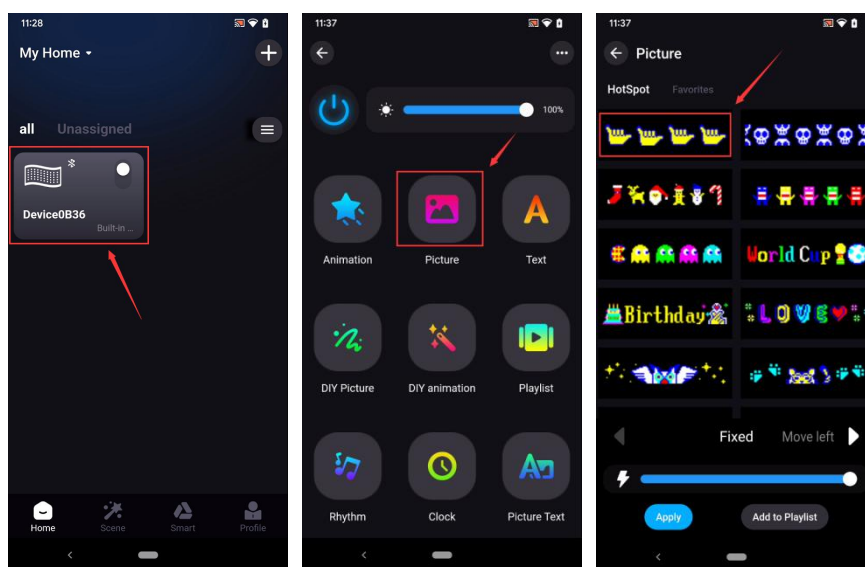

Tap the device on the APP home page to enter the device control interface. Tap the




bottom " " to enter text mode. You can create text by tapping "+", and combine different colors and directions to display the effect.

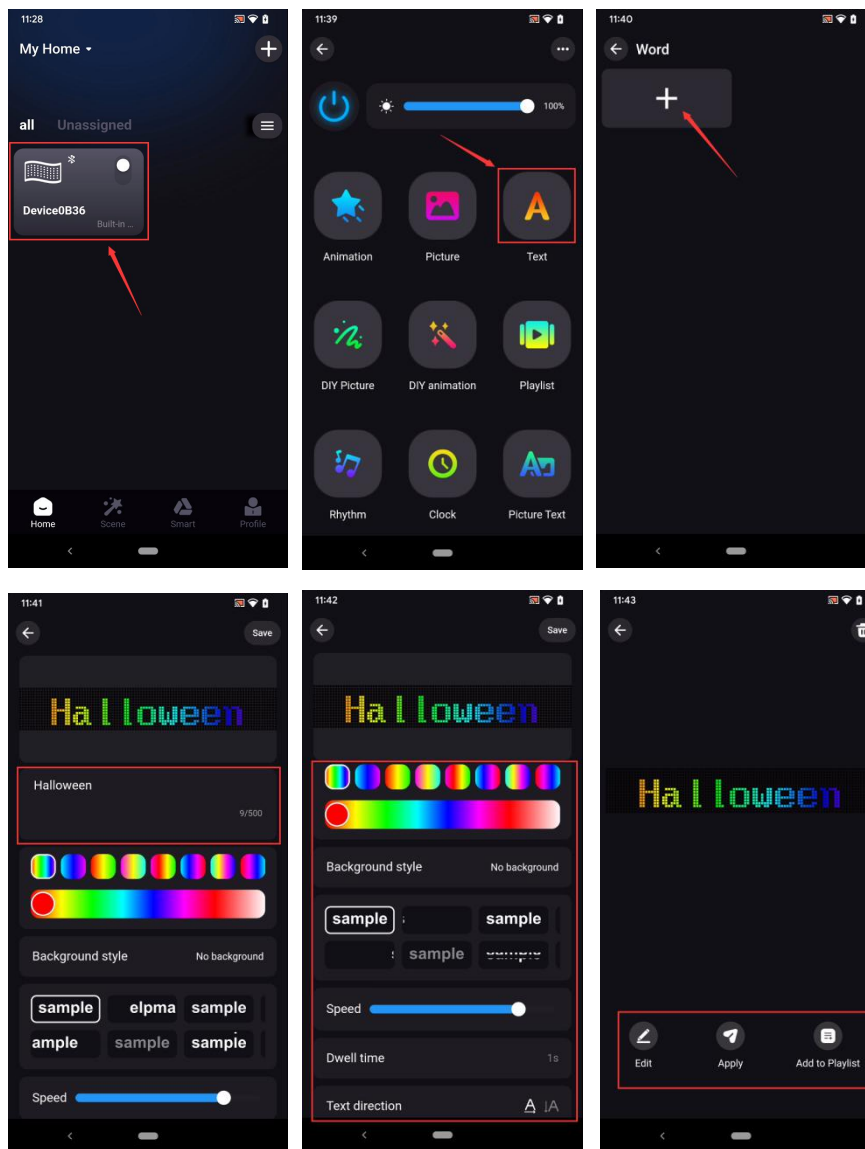


Tap the device on the APP home page to enter the device control interface. Tap the




bottom "+" to enter the graffiti mode. You can create graffiti by tapping "+", and combine different color drawing tools to display the graffiti effect.

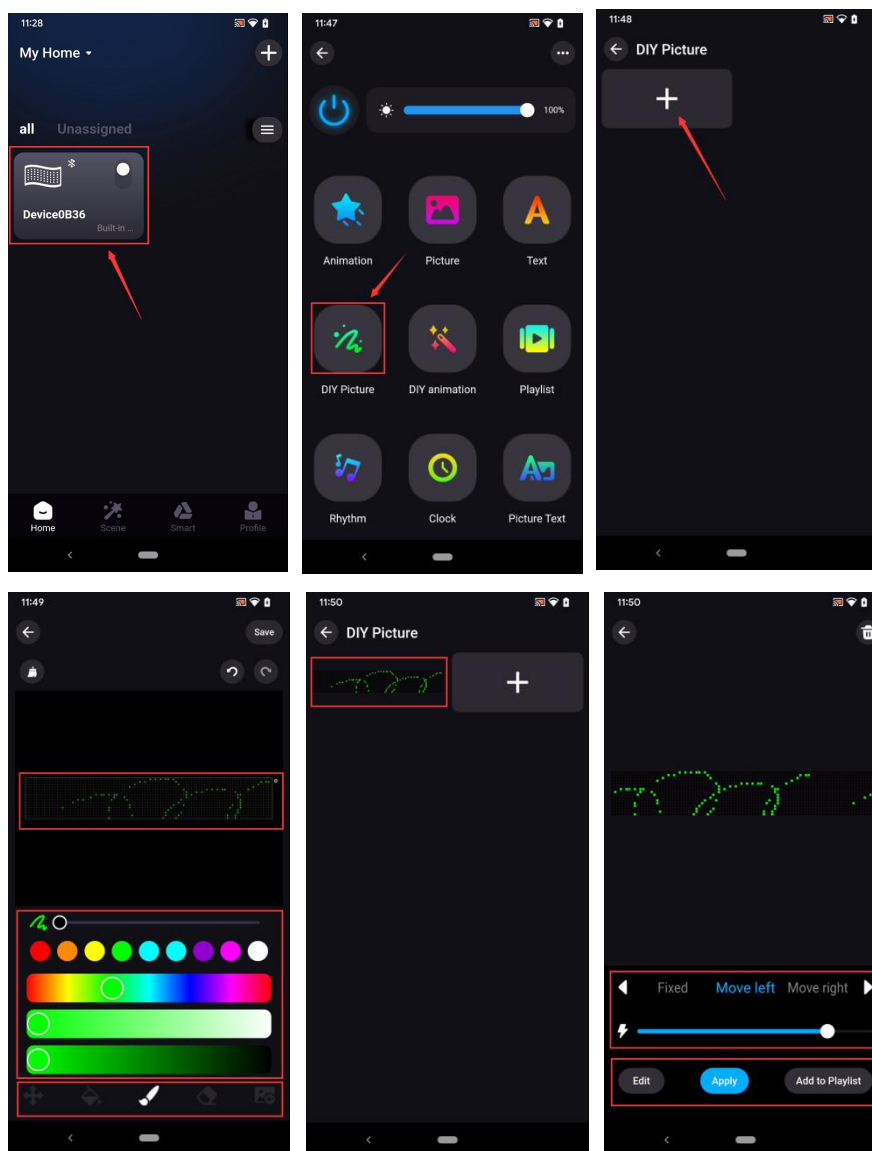

Tap the device on the APP home page to enter the device control interface. Tap the bottom "" to enter the creative animation mode. You can create creative animations by tapping "+". There are "DIY" and "Import" functions. Use videos, GIFs, and shoot-and-edit combinations to create different creative and fun animations.

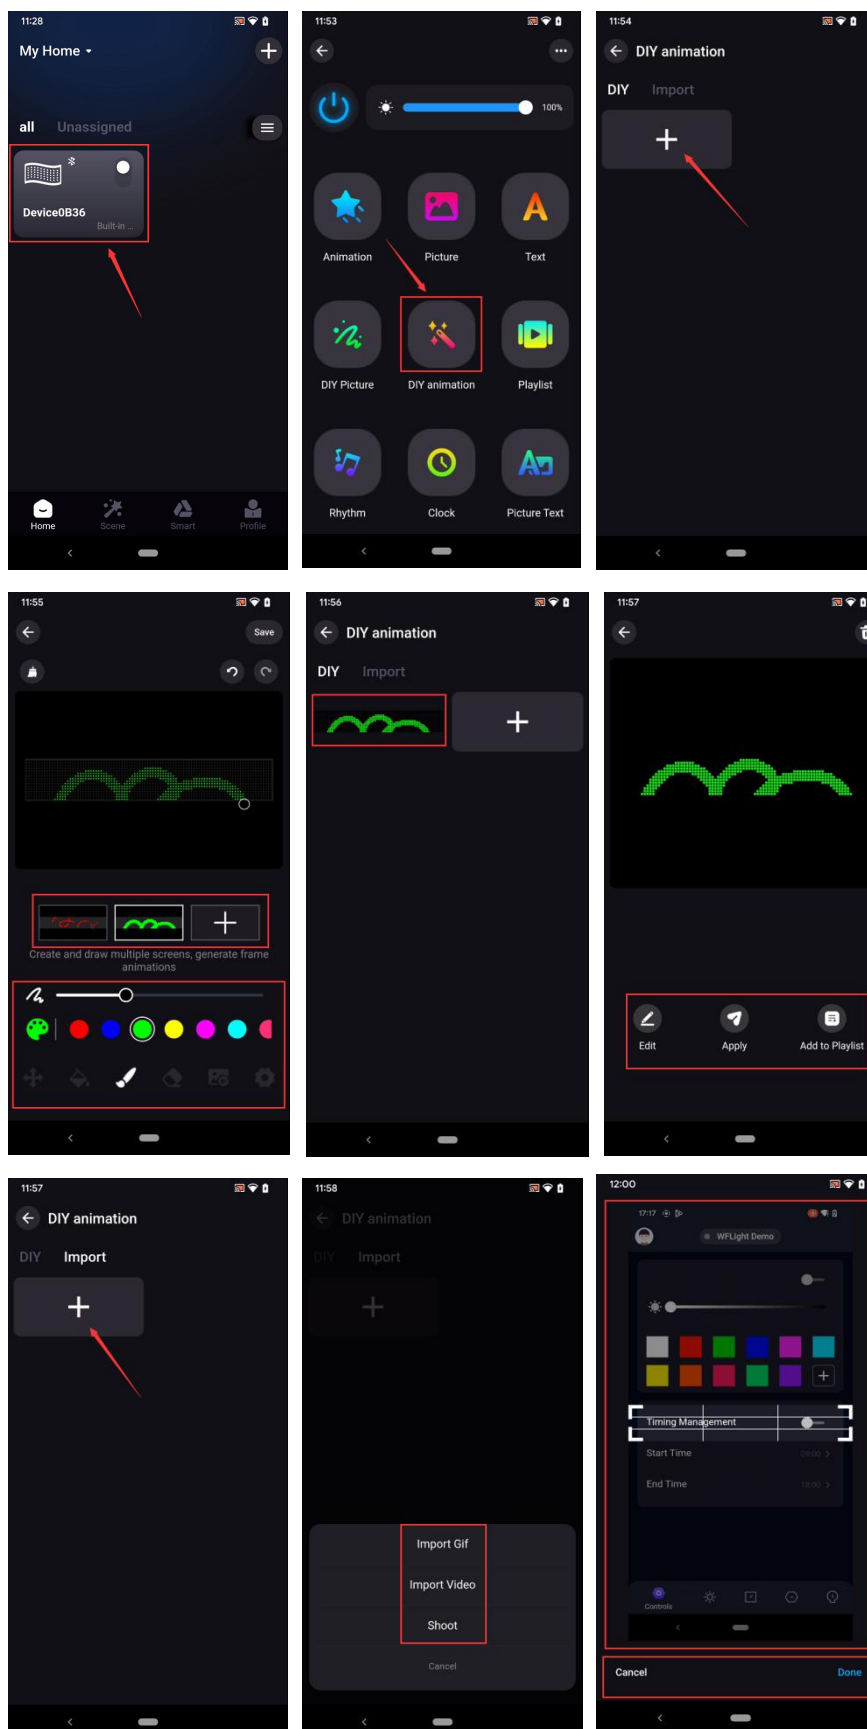


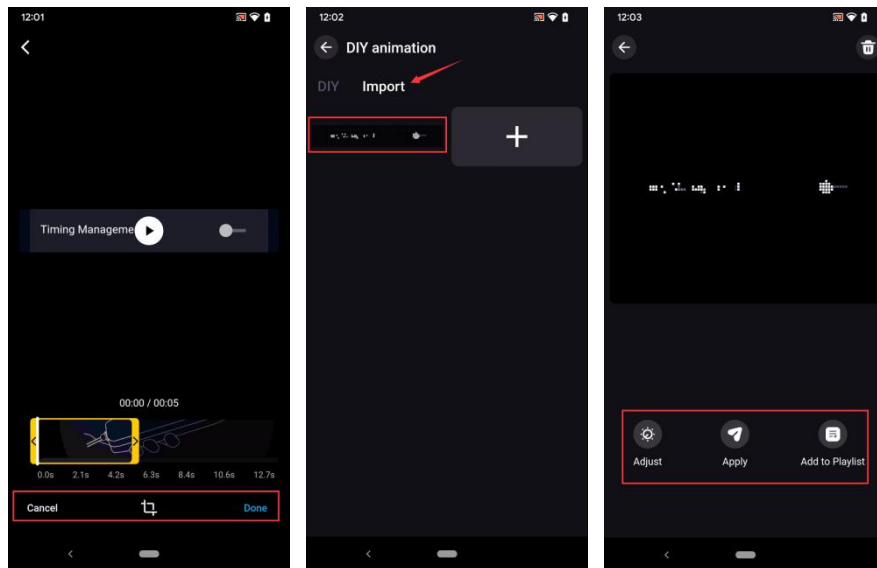


Tap the device on the APP home page to enter the device control interface. Tap the




bottom " " to enter the carousel mode. You can click the carousel to view and save the carousel list. You can edit, play, and delete the carousel. The carousel can play the playlist content in sequence and at the set time.


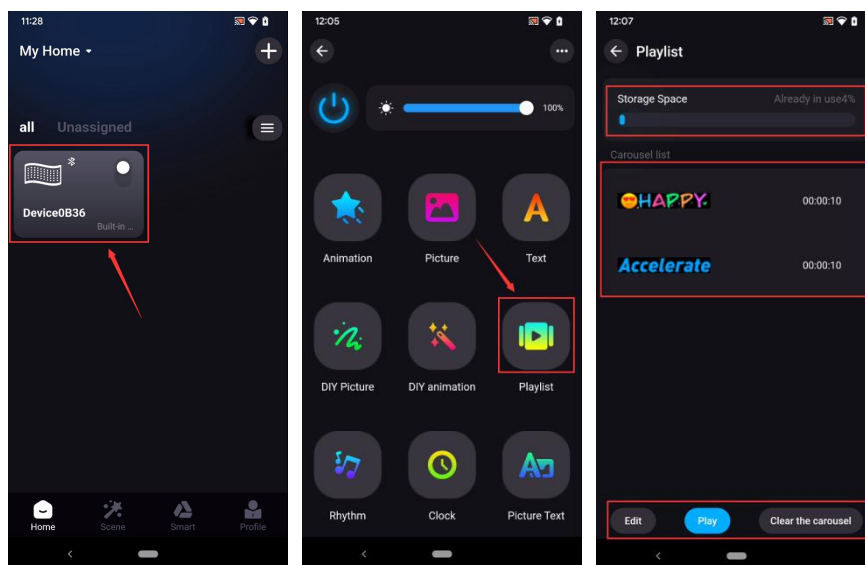


Tap the device on the APP home page to enter the device control interface. Tap the




bottom " " to enter the music mode. You can select different scenarios and display effects for the device so that the lights can follow the rhythm of the music.

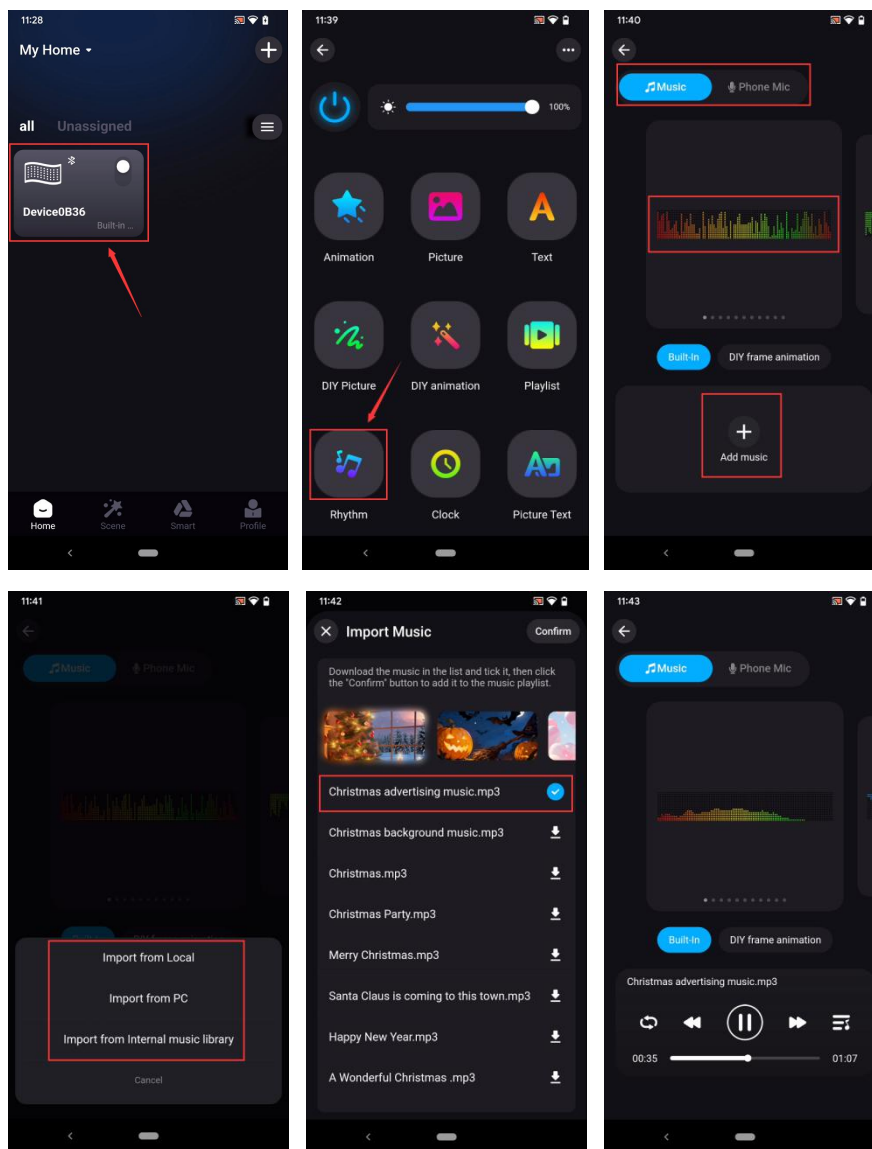

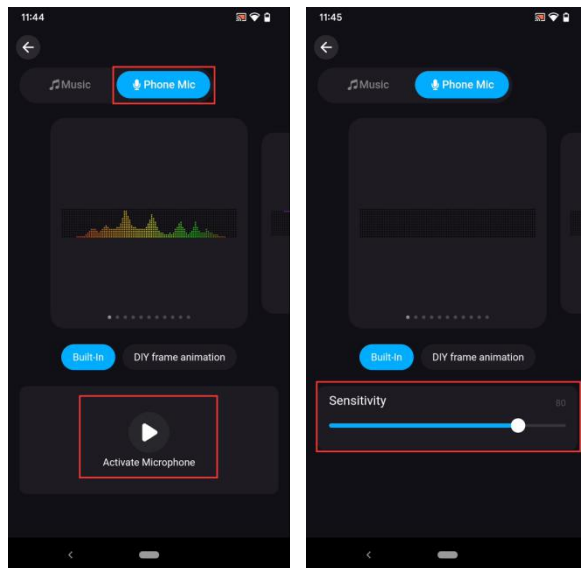


Tap the device on the APP home page to enter the device control interface. Tap " to access the device's clock function. Select one of the clock effects, and the lighting will respond synchronously.

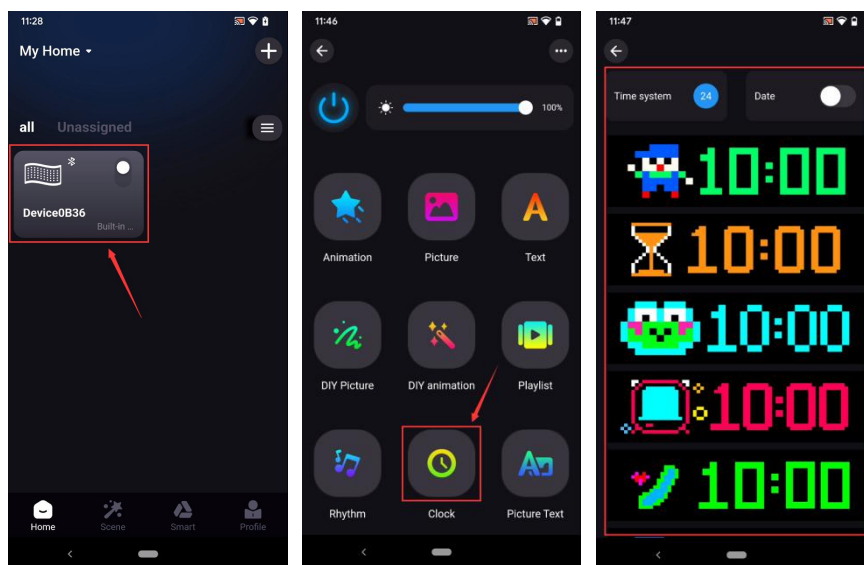


Tap the device on the APP home page to enter the device control interface. Tap the



bottom "+" to enter the text and image mode. You can add text and animation by clicking "+", and combine different text and image display effects.

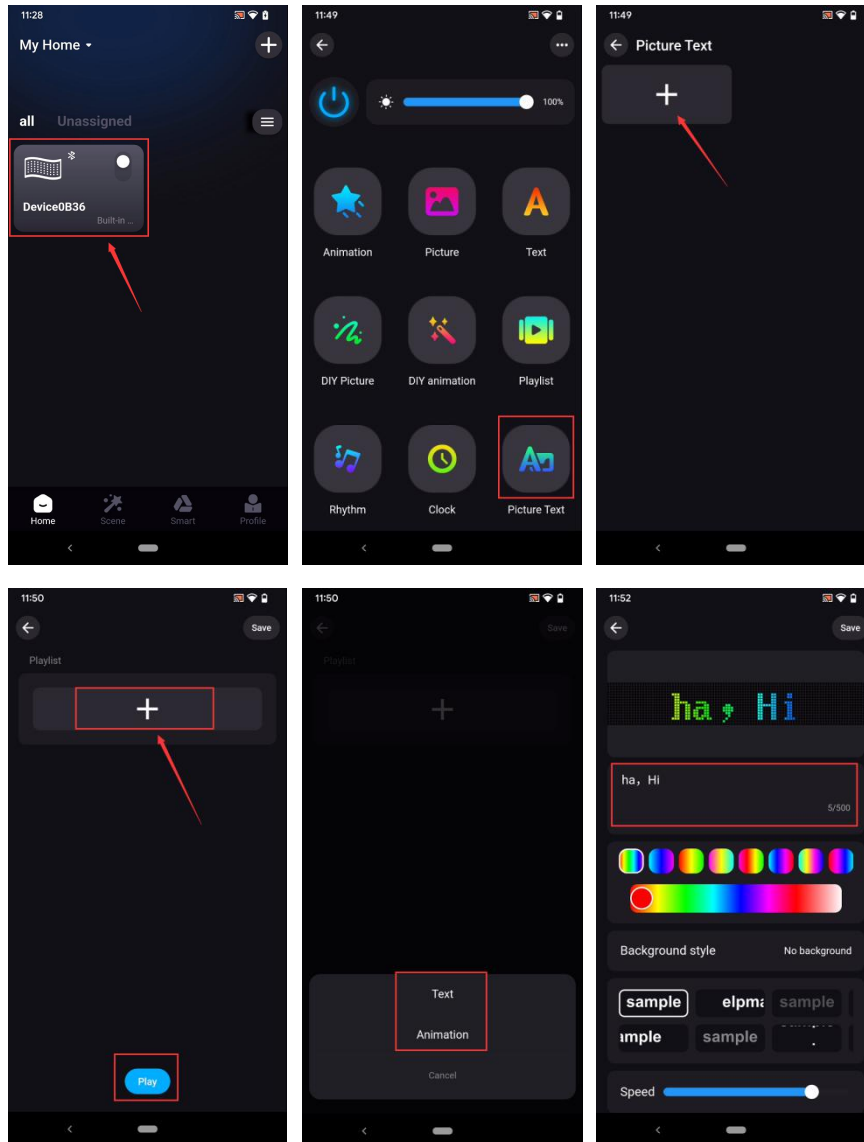


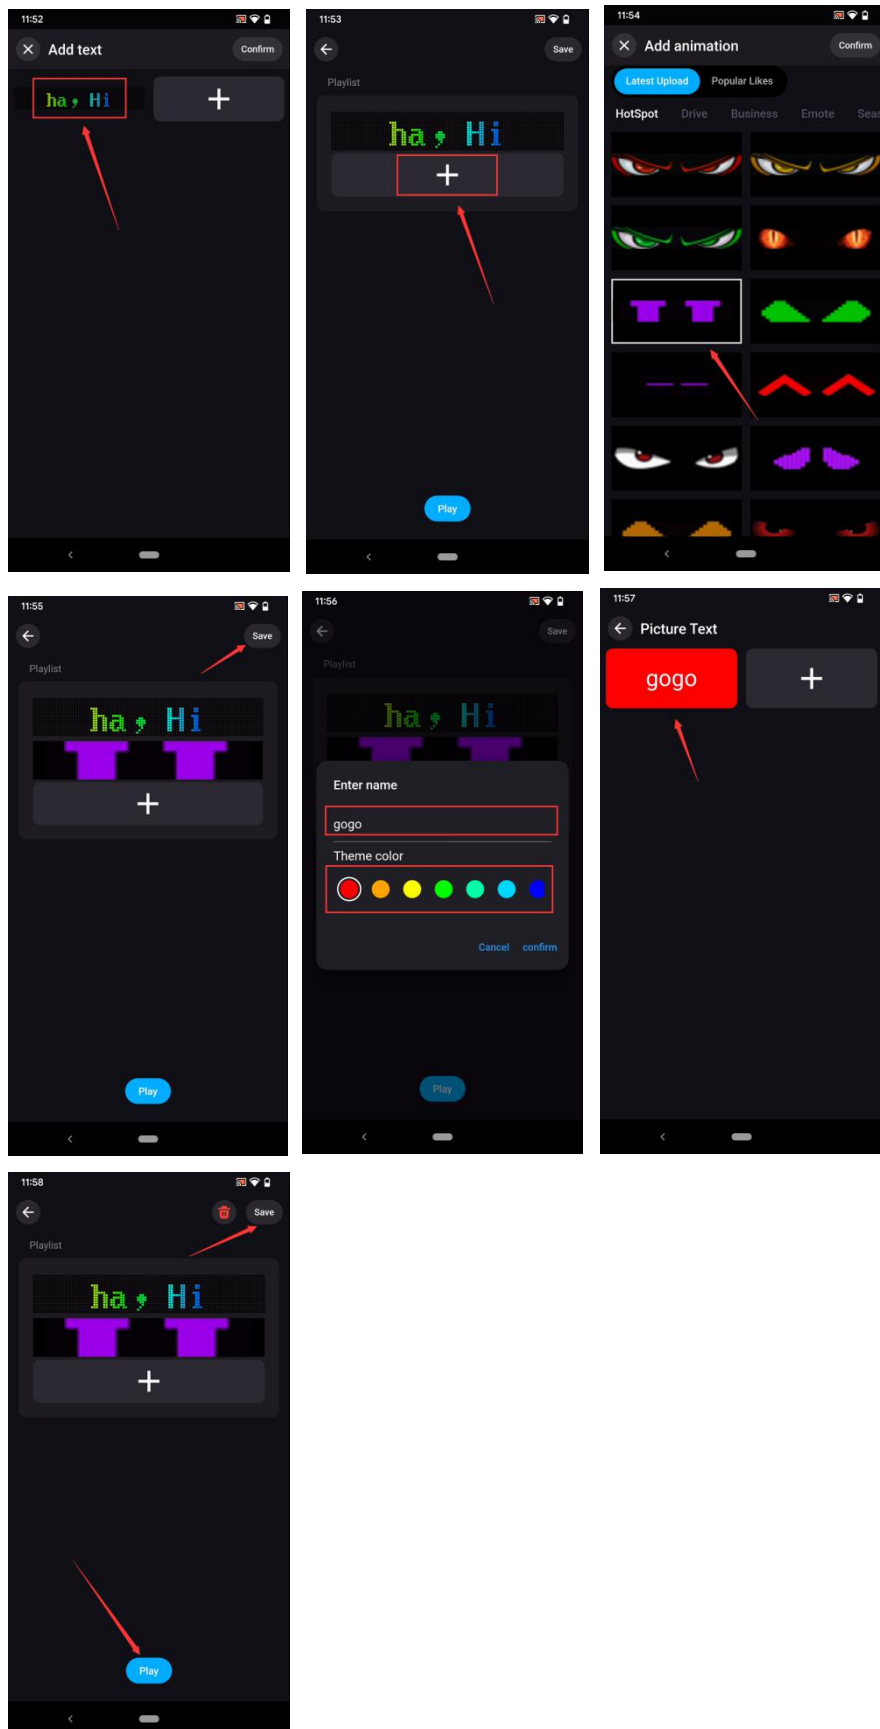

Tap the device on the APP home page to enter the device control interface. Tap the




bottom " " to enter the smart assistant. Use the voice wake word to wake up the smart assistant and display text and animation.

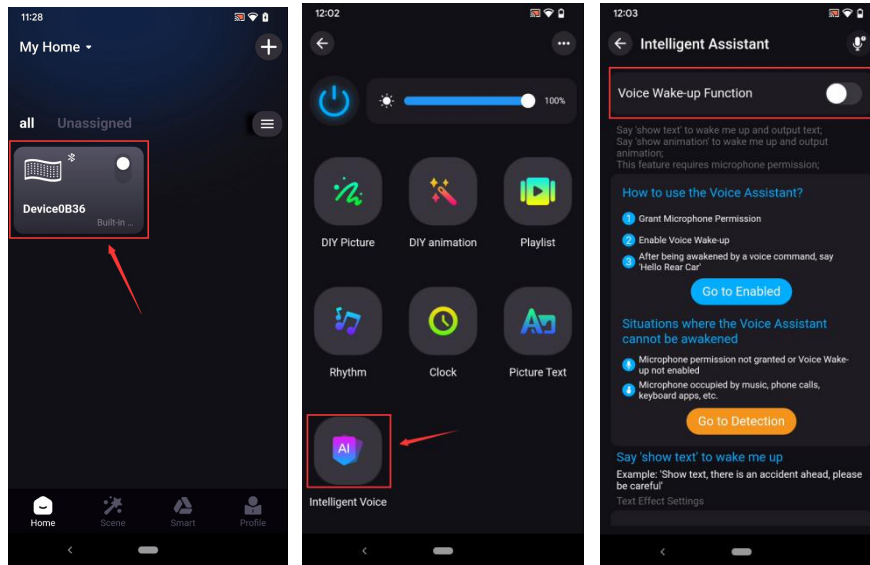

(F) Group management (currently using other devices for presentation)

Create group:

Long press the device on the APP home page, select two or more devices, then click "Create Group" at the bottom of the APP to enter the group creation interface. Select a room and modify its name. The group will be displayed on the APP home page after successful creation.

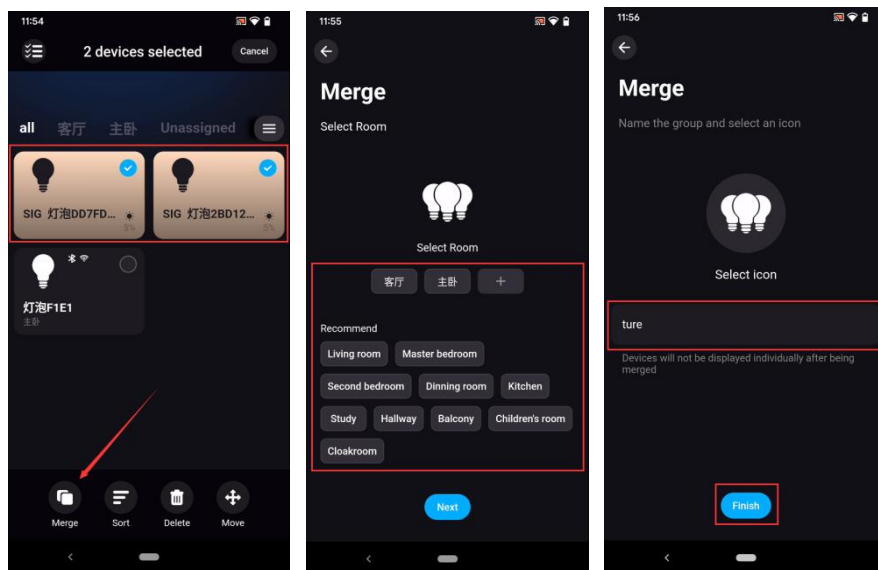


Group Control :

Tap the APP home group device to enter the control page. You can switch the light and select different colors and brightness for the device.




Tap the bottom "Y" to access the device's built-in scene features. Select one of the mode effects, and the lighting will respond accordingly.

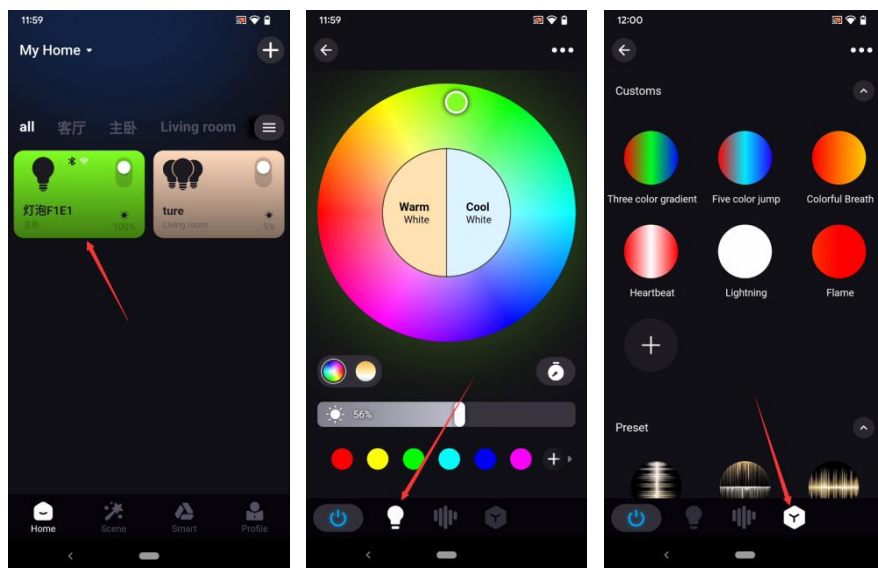



Tap the bottom " " to enter music mode, then click the "Add Music" button to access the music addition interface. There are three ways to sync music to the APP. Click the play button to start playing, then select different scenarios and display effects for the device so the lights dance to the rhythm of the music.

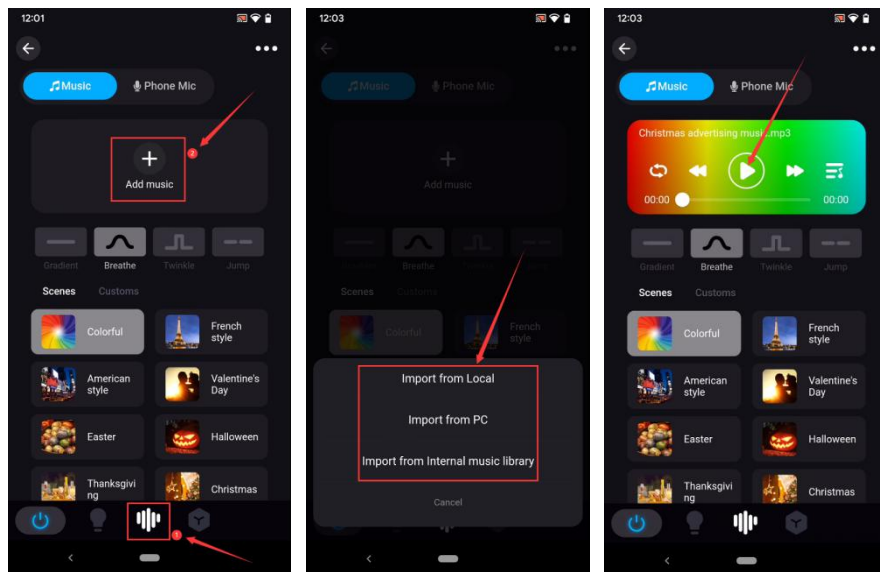


Remove group device:



Click the upper-right corner " " -> "Group Info" -> "Group Management" -> Click



" " to remove the device from the group.

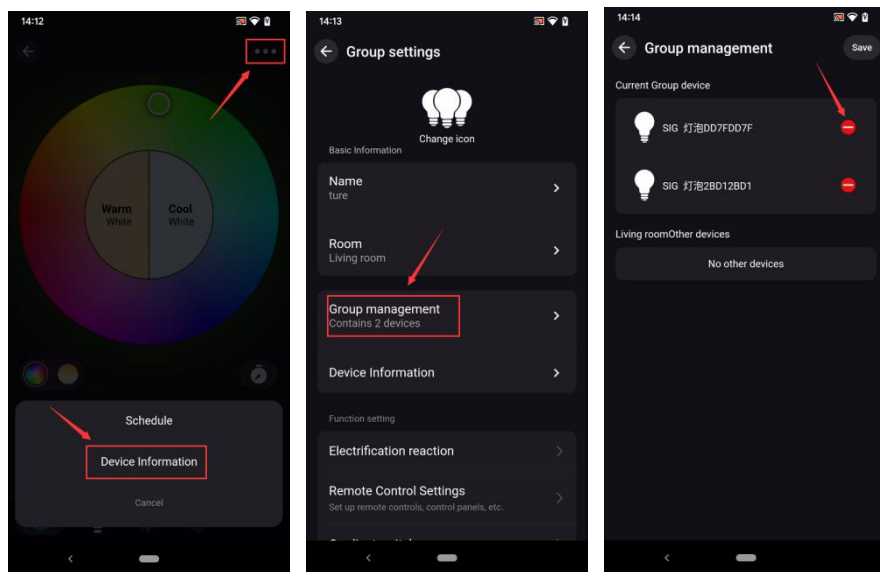



(G) Scene features (currently displayed on another device)

Add scene method 1 :




Tap the "Scene" at the bottom of the app-> "+", create a scene-> select the room where the device is located-> select the corresponding device-> choose the effect and check "Apply to other similar devices". All similar devices in the room will be set simultaneously-> name the scene and set the scene image.

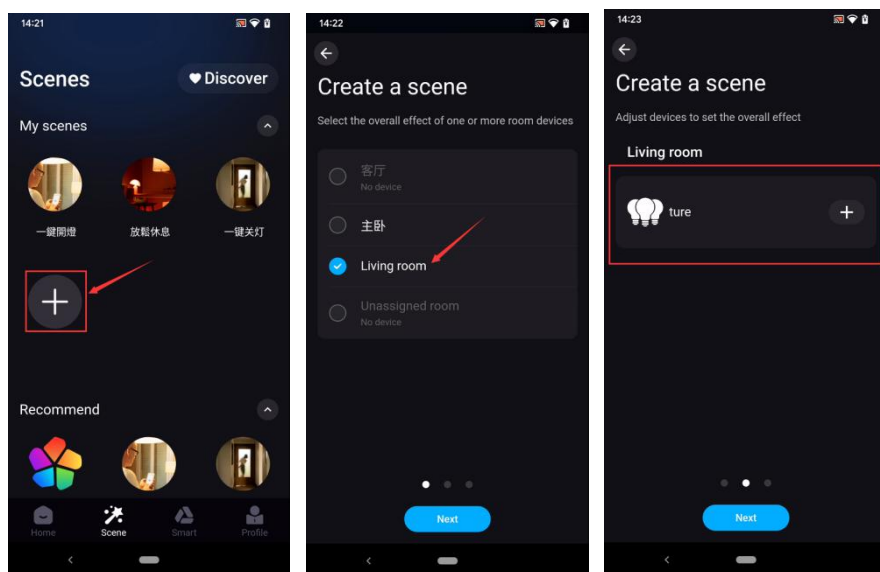


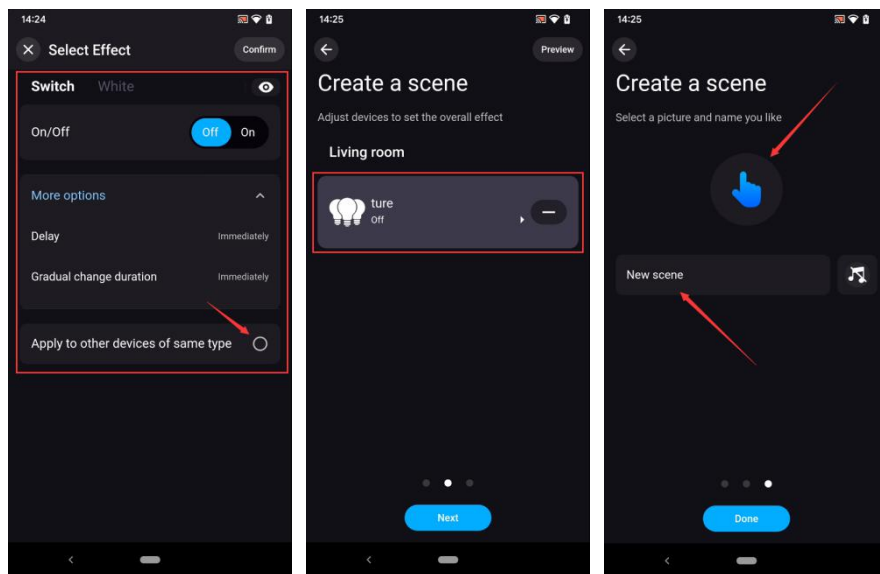

Add scene method 2 :

Click "Recommended Scenes" -> Select one scene-> Click "Apply" -> Choose your device-> The scene is created. Click the newly created scene to see the prompt "√", and the light will execute this scene.

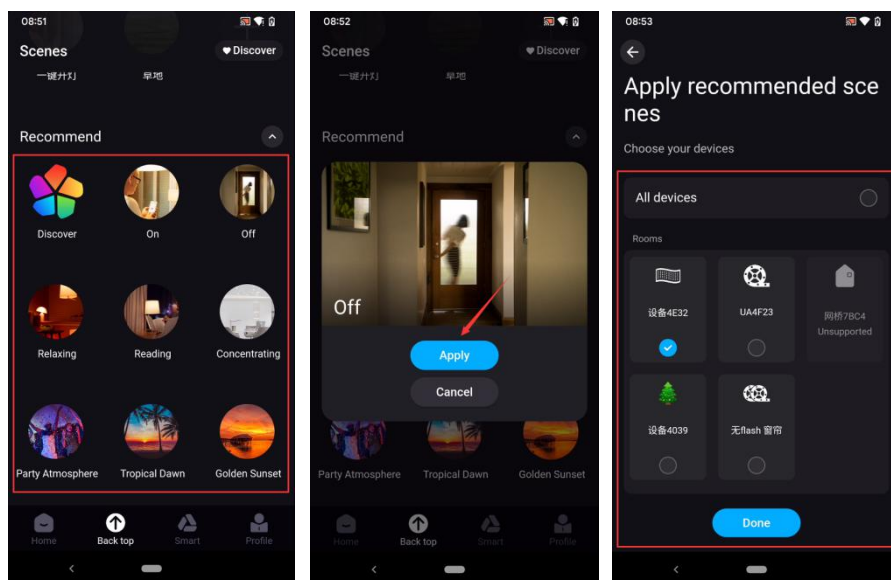

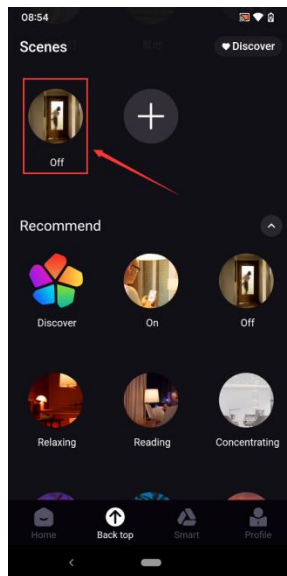


(H) Smart features (Bluetooth car screen does not have this feature)

Set six personalized features for your device: wake/sleep, home/away, sunrise/sunset, and custom schedules


wake up & fall asleep :


Tap "Smart" at the bottom of the app-> Create Smart or "+", then Wake/Sleep-> Set Time-> Select your room-> Select your device-> Choose effects for the device. The settings will appear in the Smart list after completion.

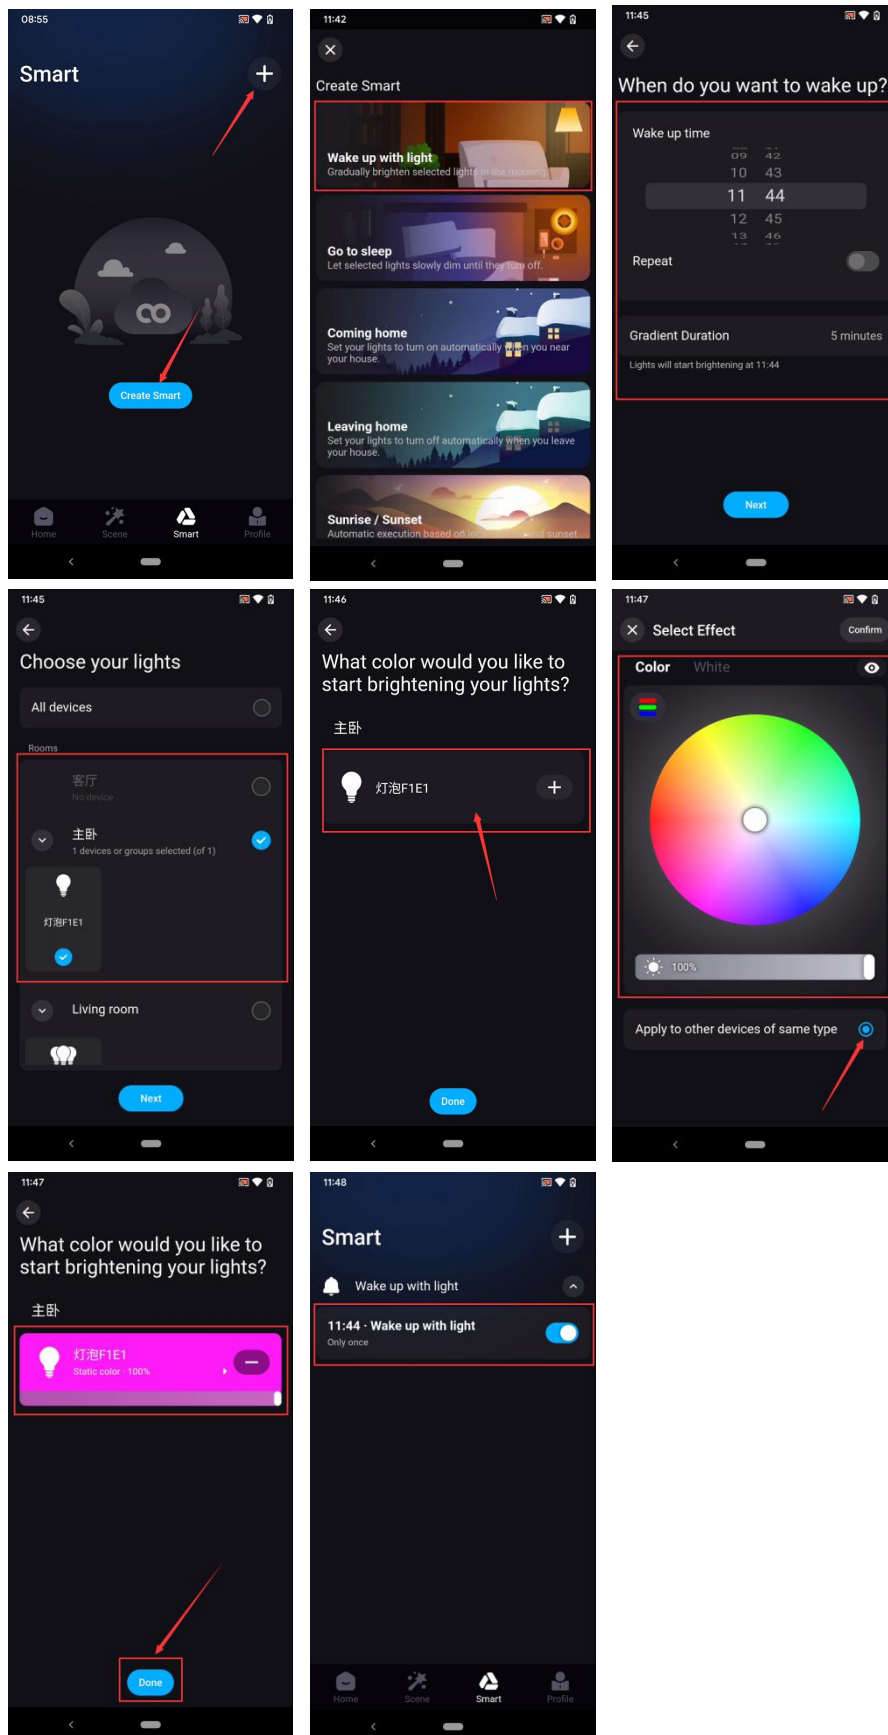

Sunrise and sunset :

Tap "Smart" at the bottom of the app-> "+", then "Sunrise/Sunset". Select "Sunrise" or "Sunset" for your device. Set the schedule for your device. The settings will appear in the Smart List after completion.

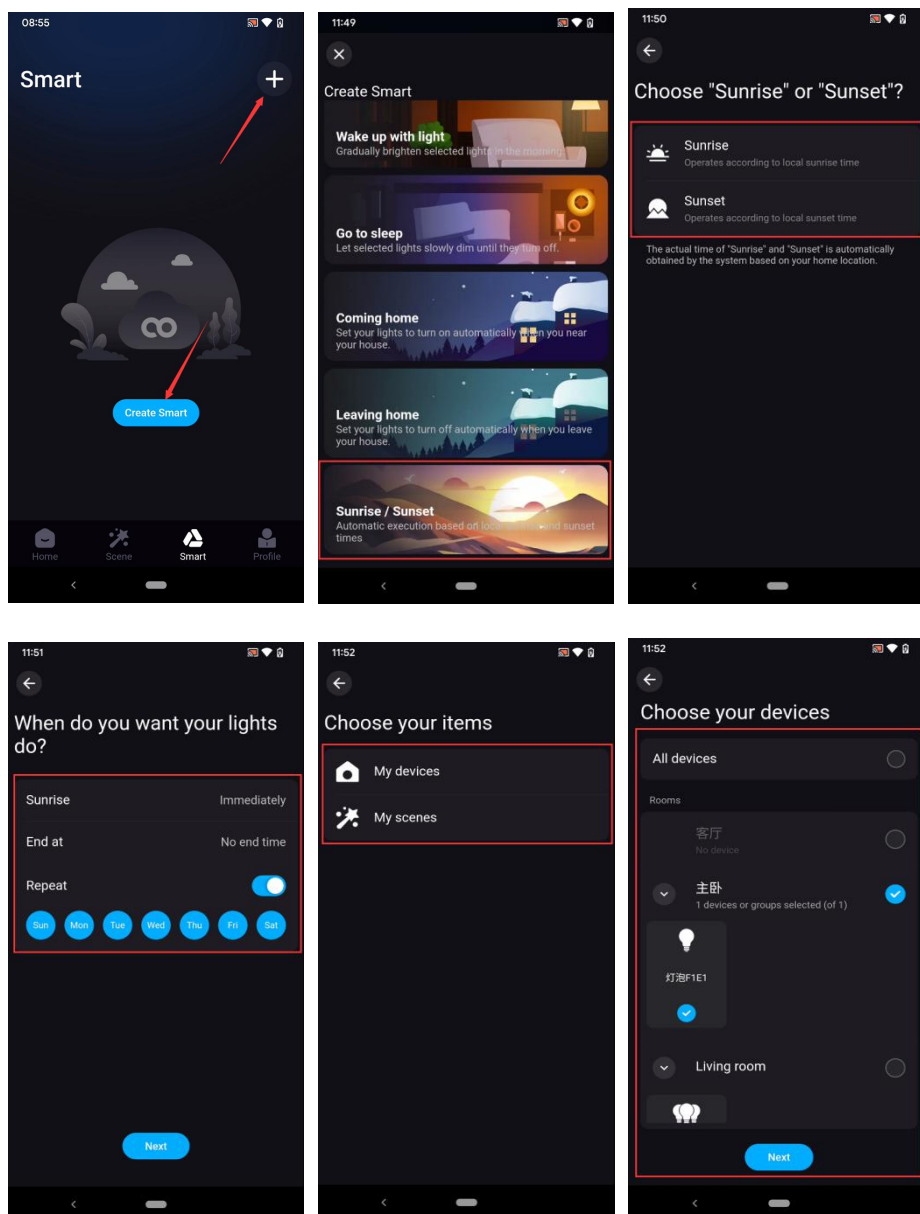


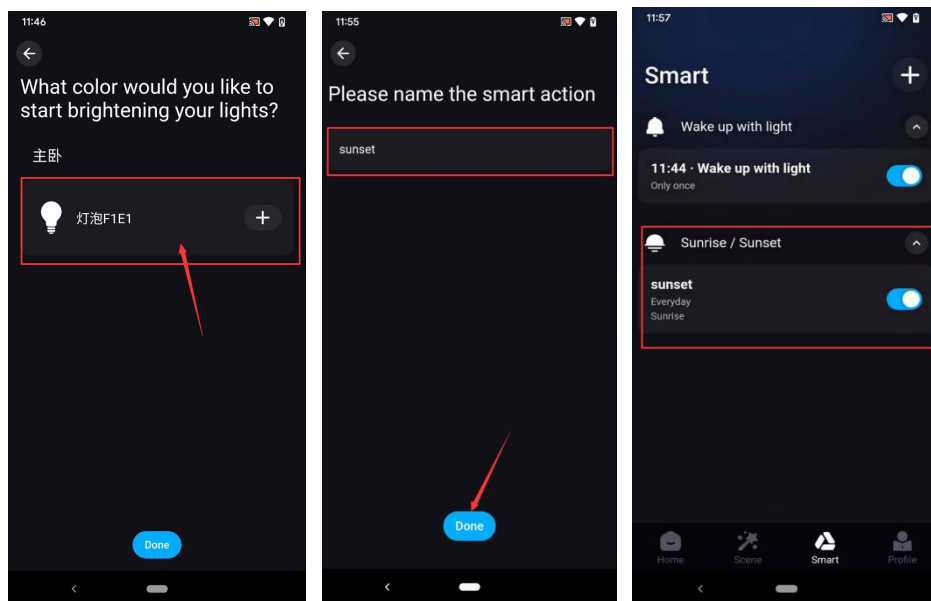


Customize Plan :

Tap "Smart" at the bottom of the app-> Custom Plan-> Set when to run for your device->

Select the device or scenario to run-> Choose your device-> Select effects for your device-> After setup, it will appear in the Smart list.

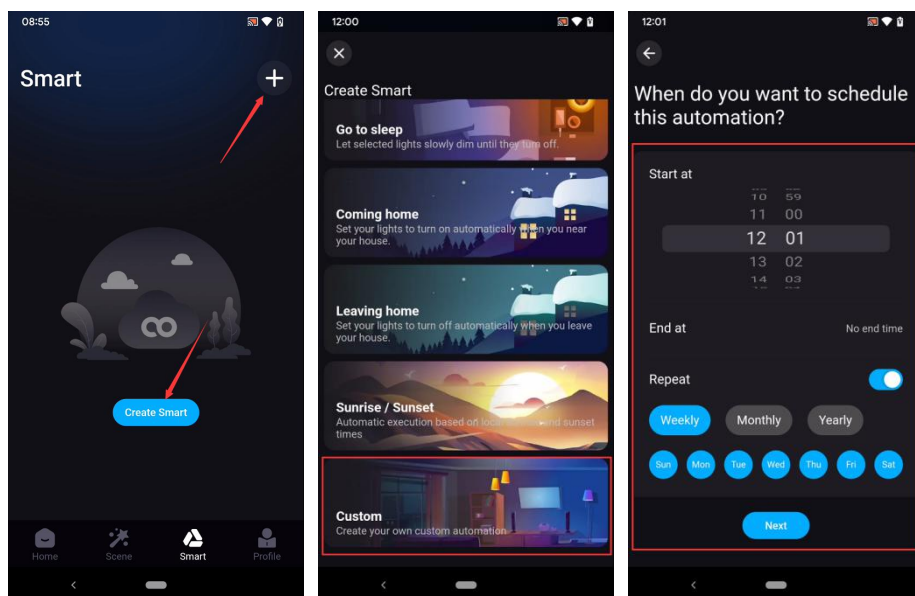


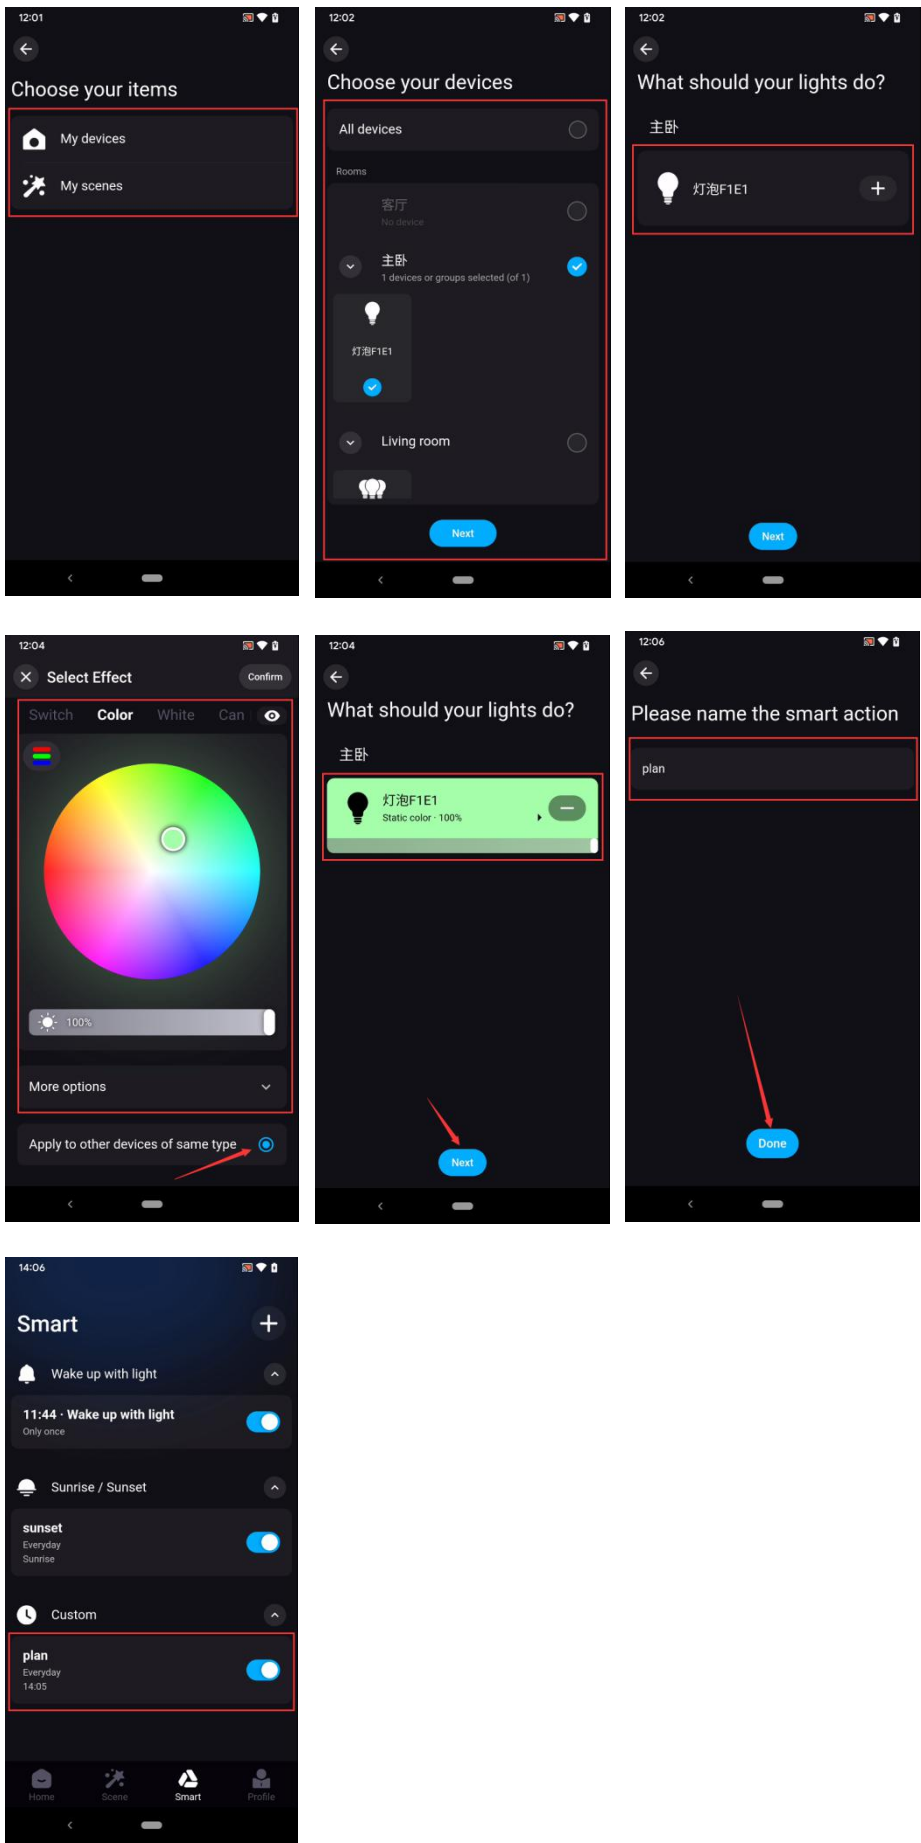


(I) Family Management

Add members :


Tap My Home in the top-right corner of the app's main page, then go to Family Management, My Home, and Add Member. You can choose Generate Invitation QR Code or Account Invitation. Enter the recipient's email address to add them. After successful addition, the recipient will appear in the My Home settings interface.

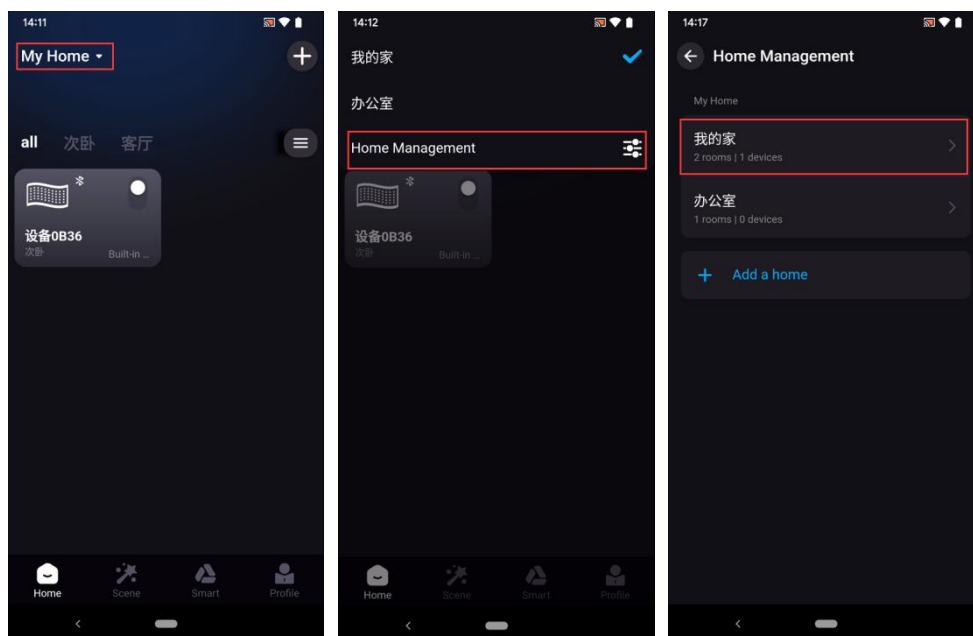

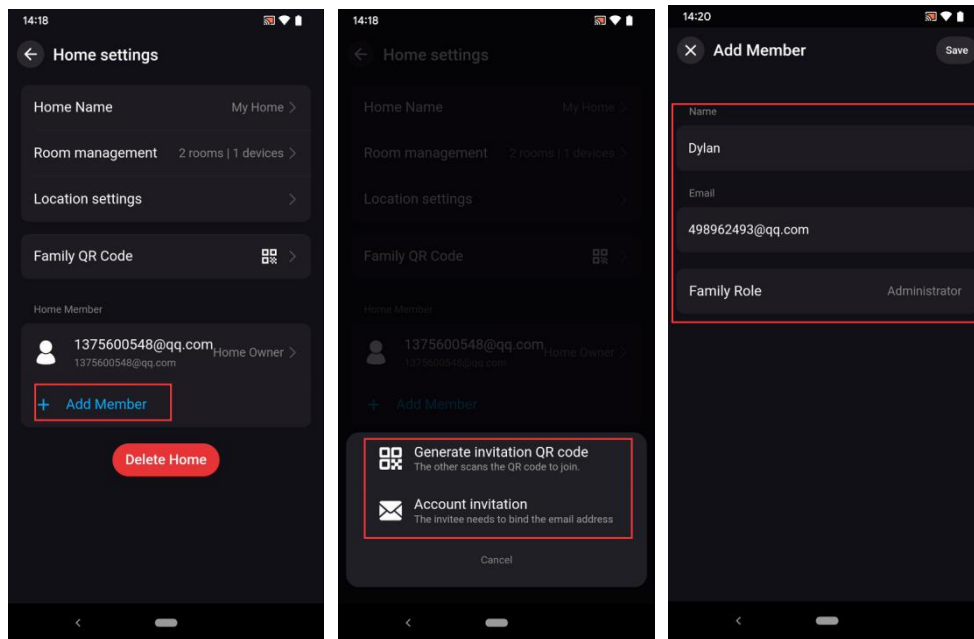

Remove members

Go back to My Family, click Regular Member-> Remove Member. After removing the member, go back to the previous level and the member will no longer appear in the family list.

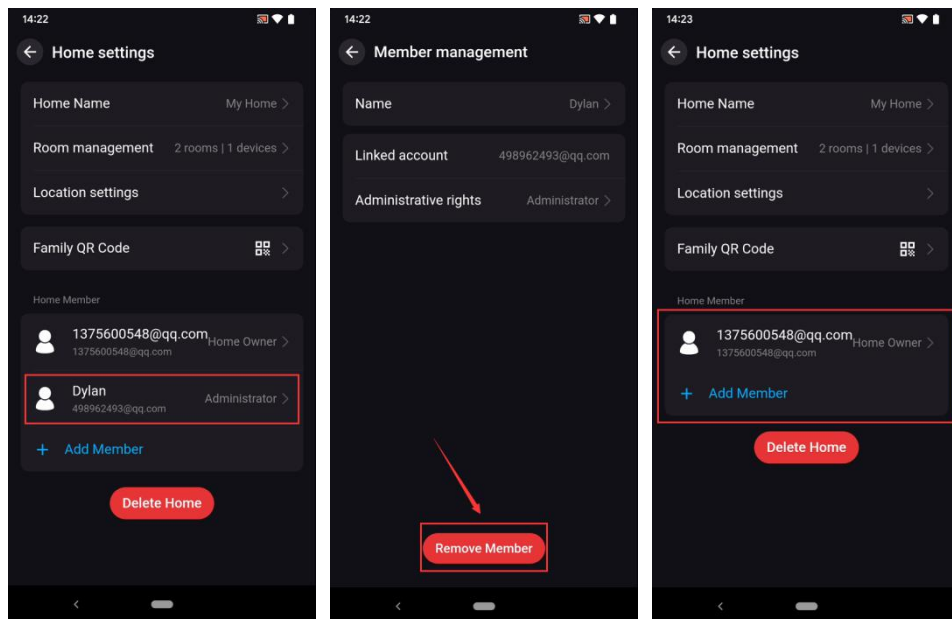

(J) Room Management


Add or remove rooms for your family, sort rooms, and assign devices


Add room :



Tap the app's home page “ ” ->Room Management->Add room->Select a room


recommended by the app or enter a custom room name.

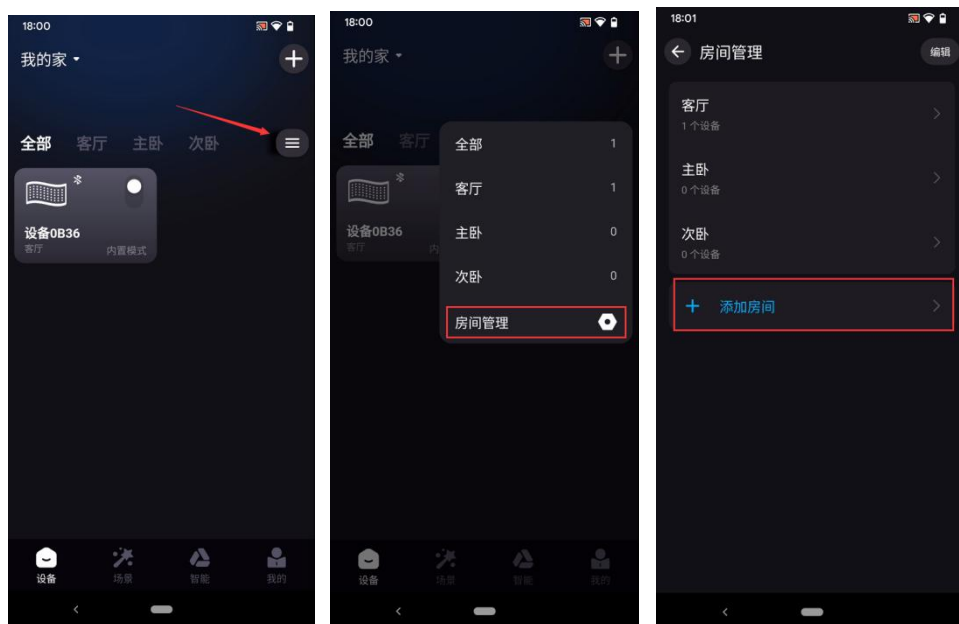

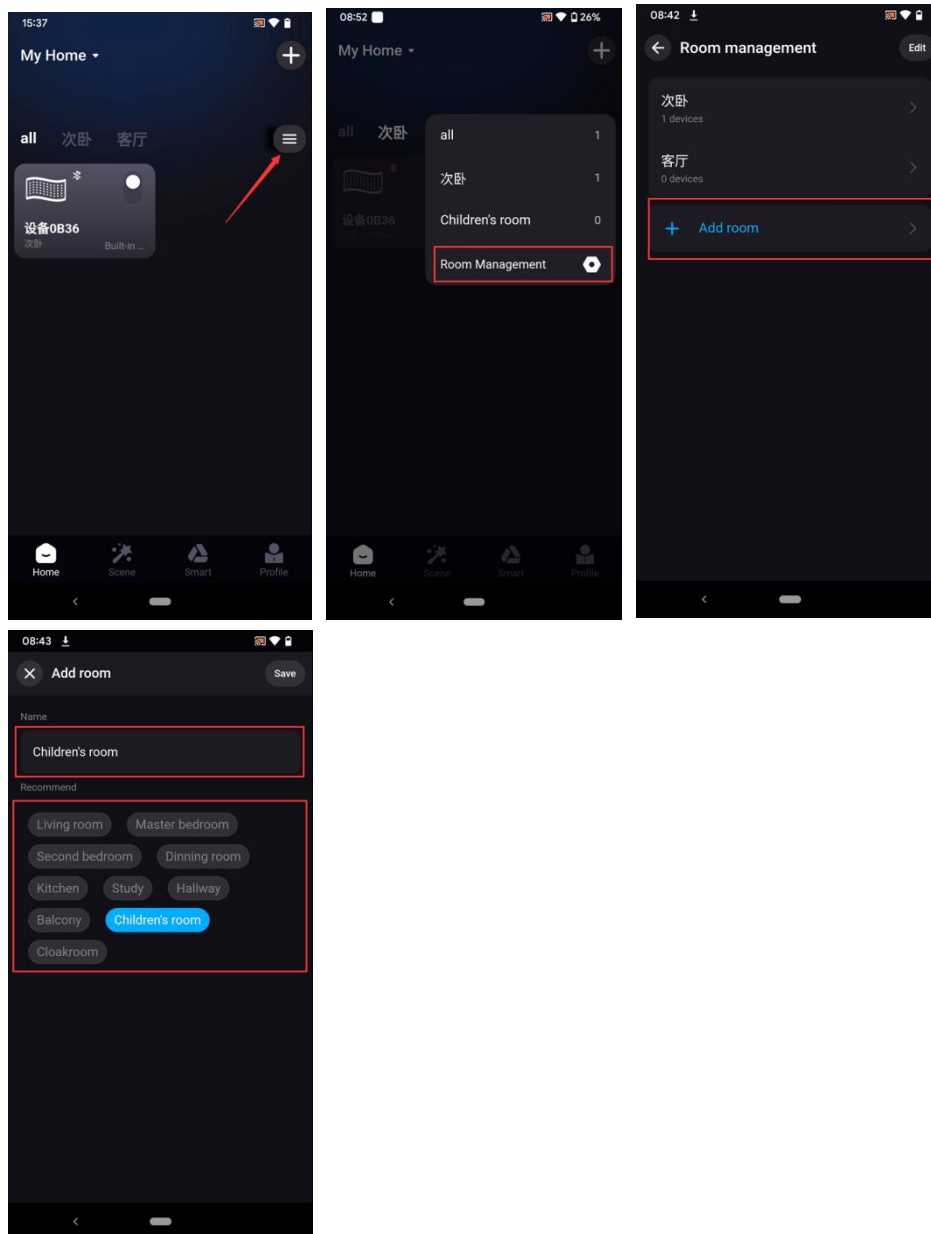

Room sorting :


Go to Room Management-> Edit-> Press and hold one room and move it-> The room list will show the sorted order.

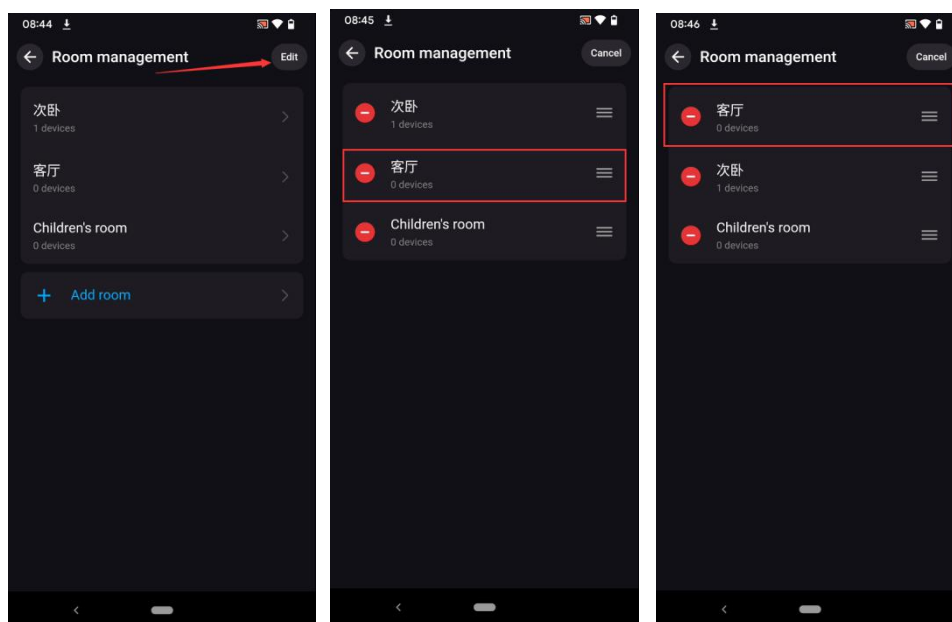


Delete room :




Go to Room Management-> Edit-> Click “” Delete Room. The deleted room will appear in the room list.

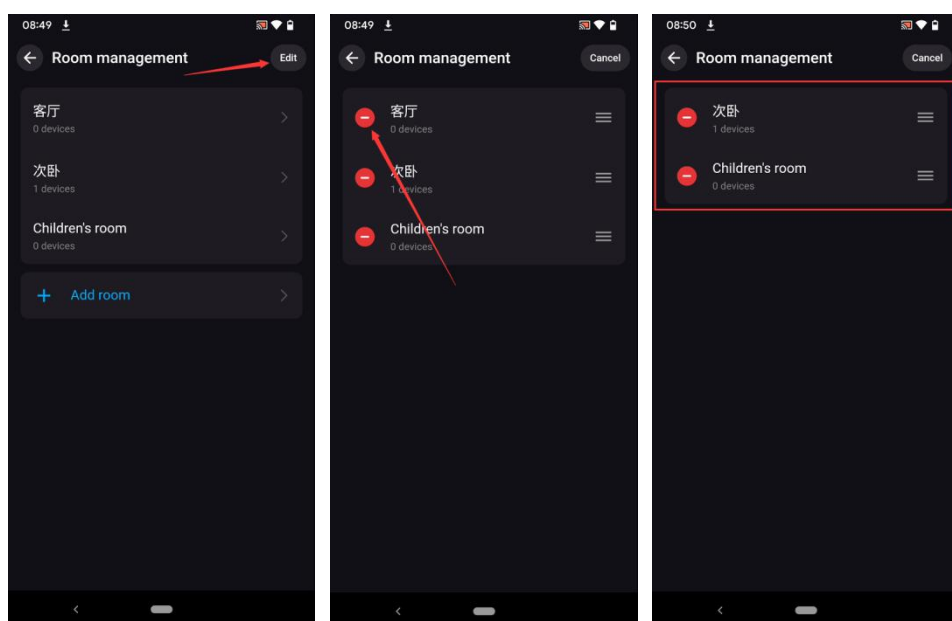


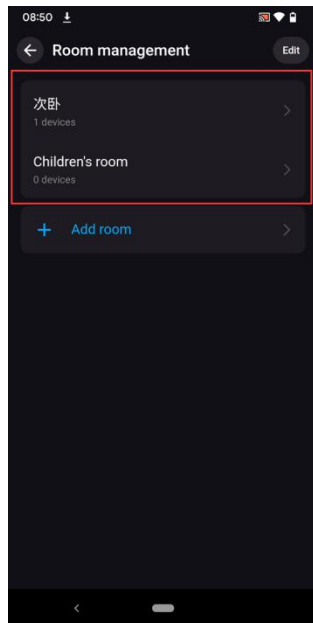

Device Allocation Room :

Long press the device in a room on the APP home page-> Select "Move" from the pop-up menu-> Move to another room-> The home page will show the device has been moved.

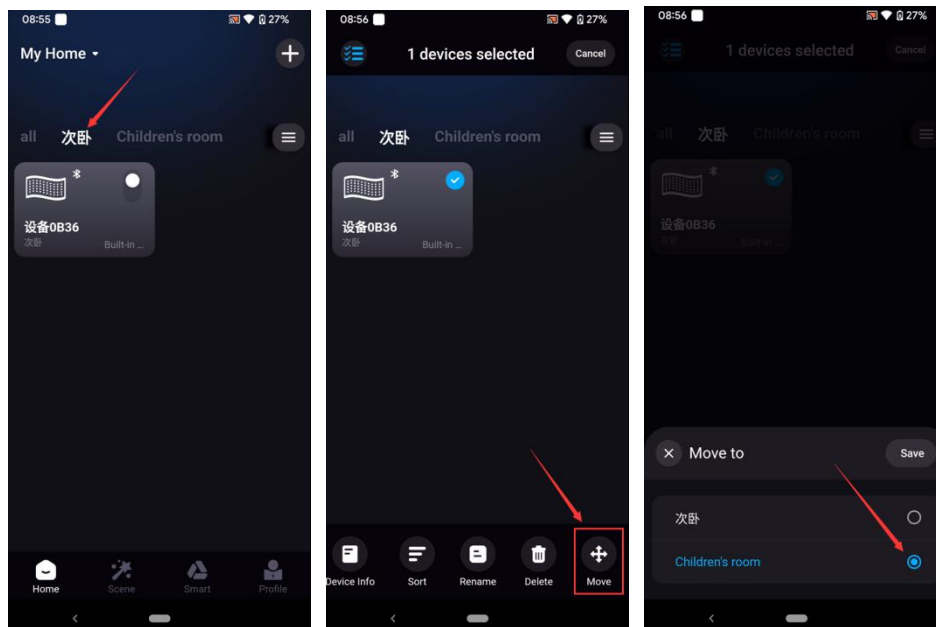

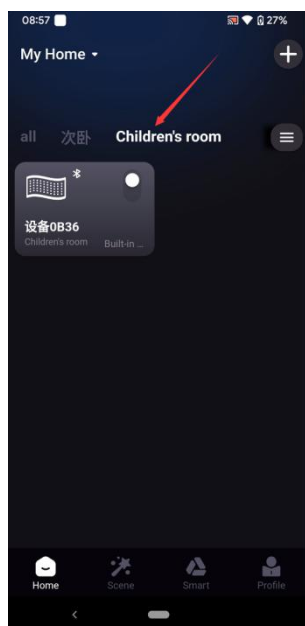

1.02 FAQ

(A) Cannot connect device to router?

Try the following :

1. Ensure the smart device is powered on.
2. Ensure that the equipment, mobile phone, and router are close to each other.
3. Ensure the smooth flow of road equipment and mobile phone network.
4. Ensure the input router password is correct.
5. Ensure you use the 2.4G band to add devices.
6. Ensure the wireless device's encryption mode is WPA2-PSK and authentication type is AES, or both are set to automatic. The wireless mode must not be 11n only.
7. If the router has enabled MAC address filtering, try removing the device from the MAC filter list to ensure it can connect to the network.

(B) The device is offline. What should I do?

Try the following :

1. Check if the device is powered on.
2. Check if the device has been restored to factory settings.
3. Check your network cables and status to ensure the front-end router can access the internet and other devices in the network are functioning properly. Also, confirm if any changes to your router's network settings have caused the smart device to lose wireless connection (you can check this through the router's "Wireless Client List" or DHCP list). Finally, restart the smart device to restore the wireless connection.


(C) Failed to enable remote access. How to handle it?

1. Try restarting your smart device and wait 2 minutes before retrying.
2. Restart your router and wait 3 minutes before retrying.
3. If the issue persists, ensure your front-end router has internet access. Disable the firewall or set up a DMZ for the smart device to check if the router blocks the communication port.
4. If the issue persists, verify whether the router requires a MAC address to connect to the internet.

(D) How to create a TOPAUTO App cloud account?


1. Open the app, tap "Register", and enter a valid email address to receive the

registration verification code.

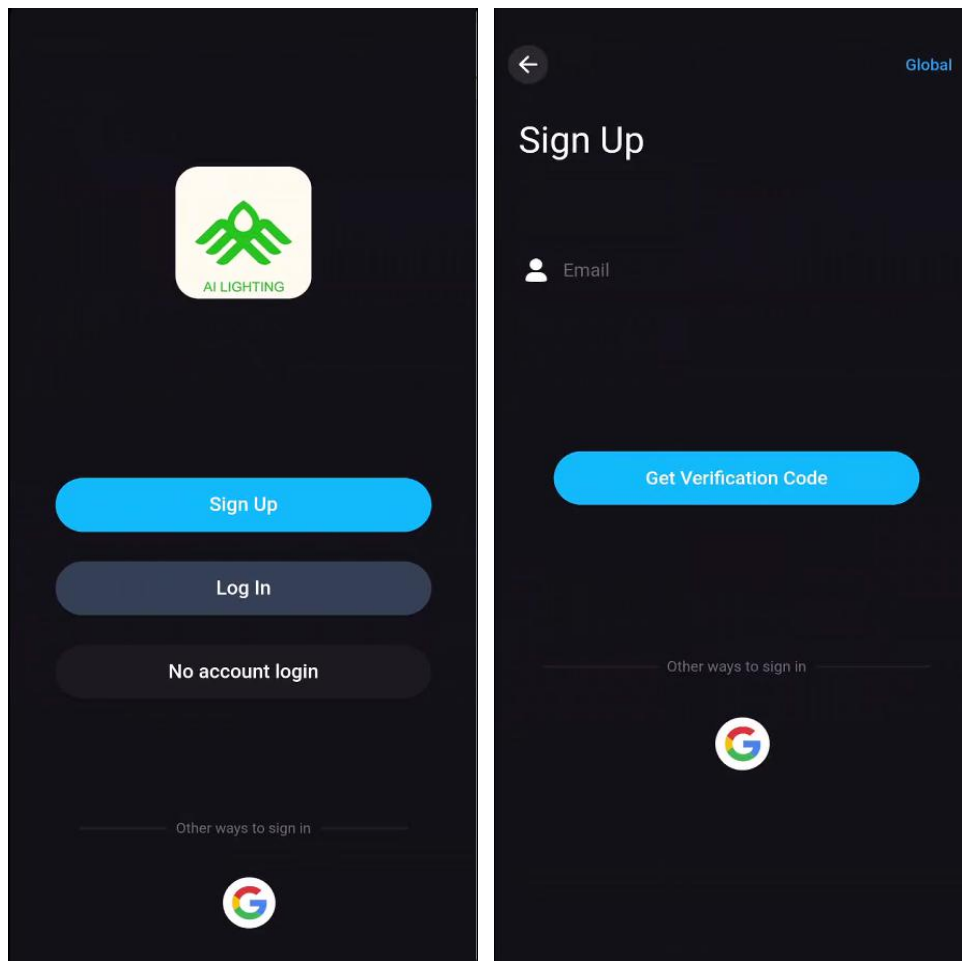


(E) **Check if remote (cloud) access is enabled?**

1. Enter the device control interface, click the "☰" in the upper right corner to open the pop-up menu, go to "Device Information", and check the cloud status.

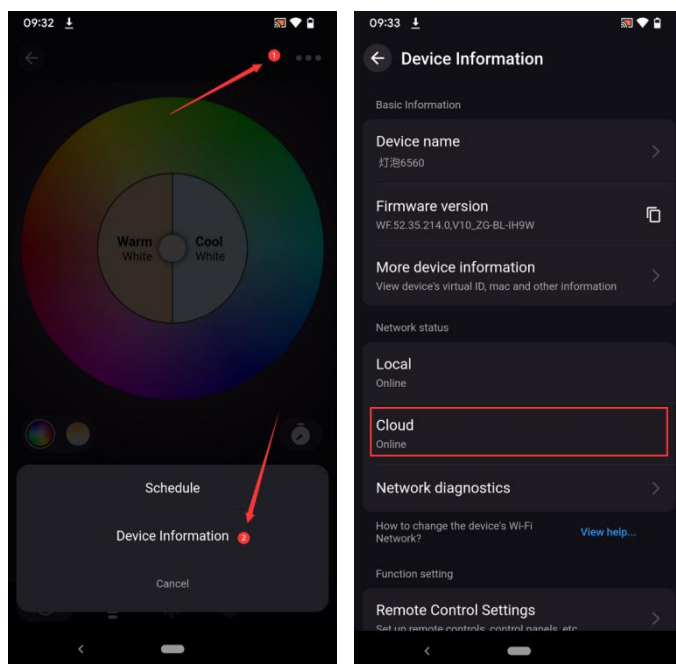


(F) How to change your password?

Go to “My”, click Account, then Account and Security to change your password.

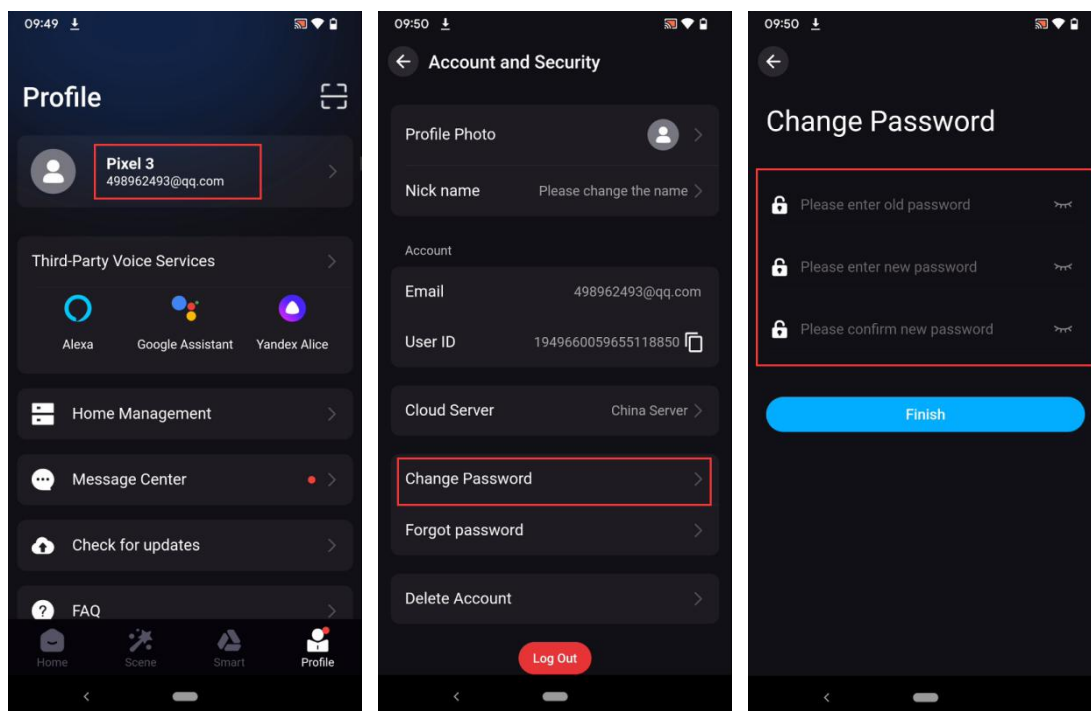

(G) Forgot your password?


Go to “My”, click Account, then Account and Security. Click "Forgot Password" to get a verification code. Check your email and enter the code to reset your password.

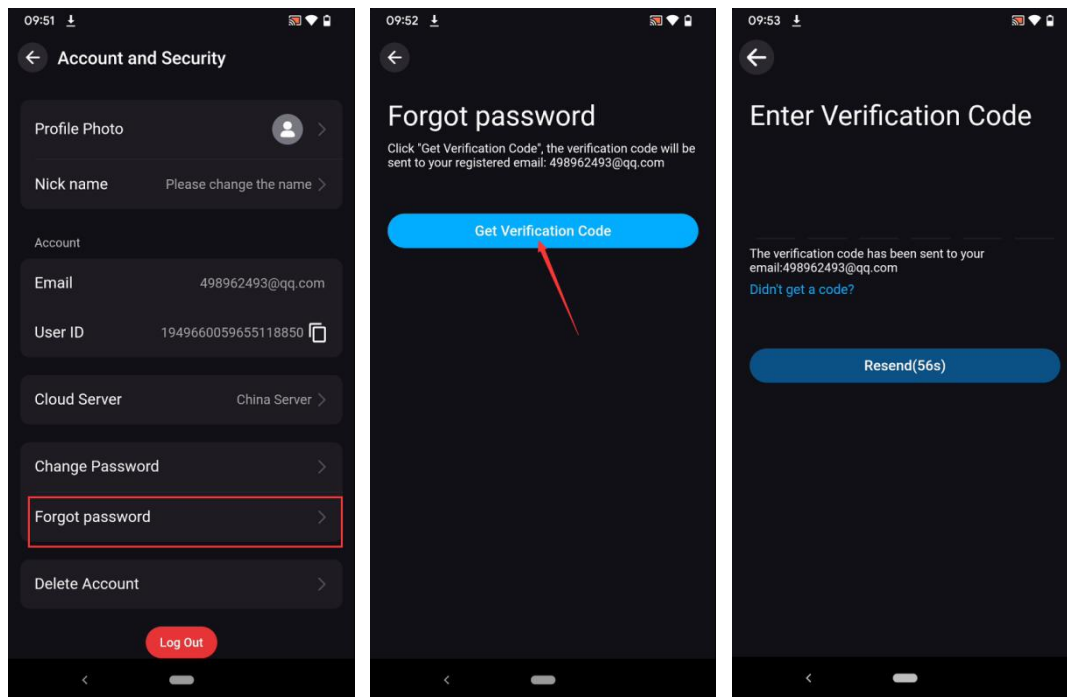

Installation and Use Instructions for LED Lamp

1、For lighting installation, the optimal arrangement is a spider web pattern. Users should configure the fixtures according to the actual space requirements. Multi-point layouts are recommended over linear configurations whenever possible.

- 2、 When installing the lamp, ensure it is positioned at least 30cm above the ground. The higher the lamp is placed, the better the Bluetooth signal transmission.
- 3、 The distance between lamps should be within 10 meters. The shorter the spacing, the better the Bluetooth signal transmission.
- 4、 If Bluetooth signal transmission is poor during lamp usage, a Bluetooth signal amplifier can be employed. The spacing between signal amplifiers should be within 20 meters. Placing more than two signal amplifiers at the center of the lamp installation range yields optimal signal transmission performance.
- 5、 To control a lamp remotely, use a bridge, which should be installed at the center of the lamp's range.
- 6、 After installing and powering on all lighting fixtures, a brief waiting period is required for data signal transmission and forwarding between them. Users can then adjust brightness and color settings through the app's dimming interface. The waiting duration depends on the number of fixtures and their spacing: fewer fixtures and shorter distances result in shorter waiting times, while more fixtures or greater distances lead to longer waiting periods.
- 7、 You can freely select various lighting fixtures to form different groups. For optimal performance, limit the number of devices in each group to 100 or fewer.
- 8、 The figure below shows an ideal layout diagram of lighting fixtures.

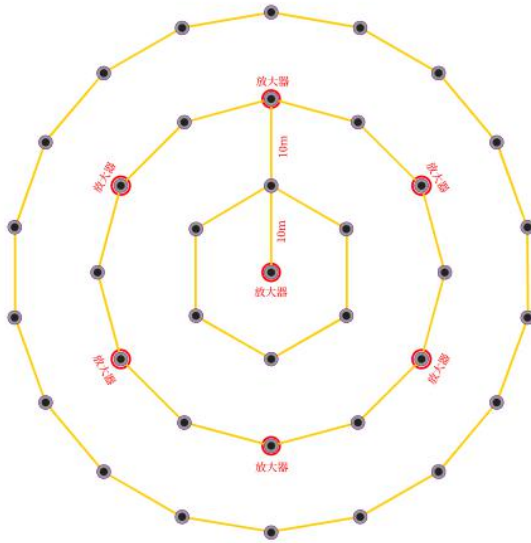**FCC Caution:**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.

Brass Landscape Lighting Inc

<https://brasslandscapelighting.com/>