
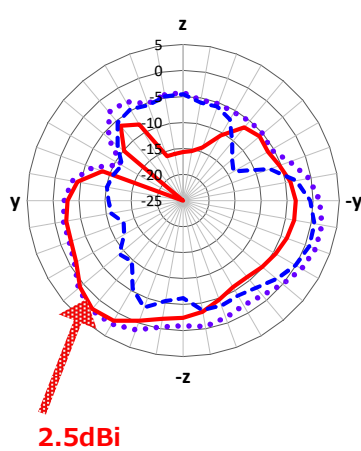
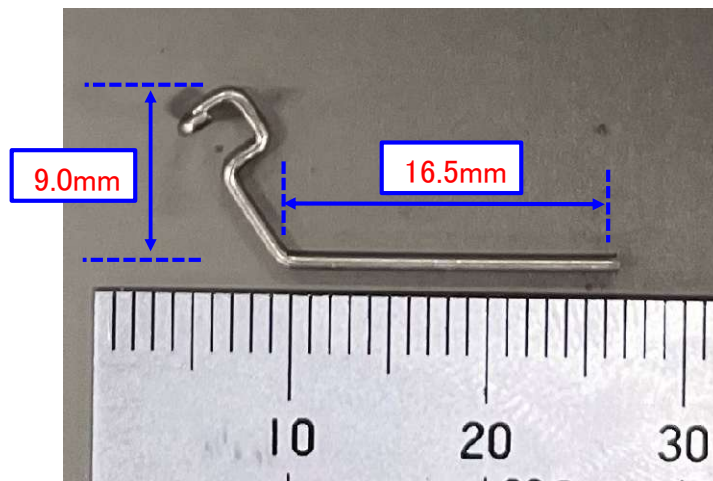


EAH-A1000 : Antenna specifications

Max Gain : +2.5dBi


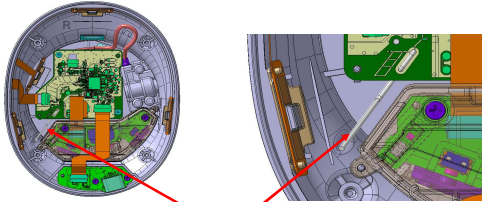

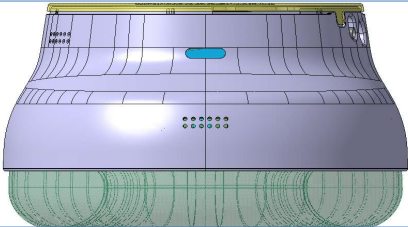
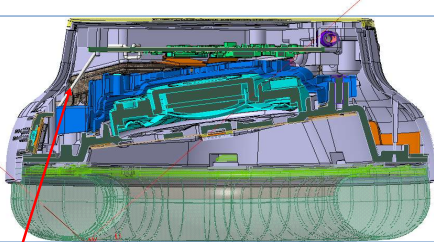
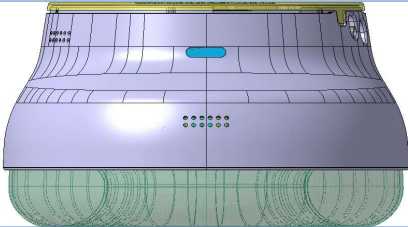

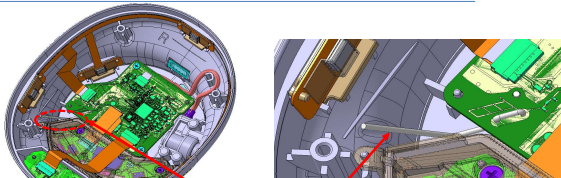


EAH-A1000 : Antenna specifications

Bluetooth

Antenna Type		Wire Antenna
antenna manufacturer	name	MIZUHO PRECISION ENGINEERING (M) SDN. BHD.
	address	No.15, JALAN FIRMA 2, KAWASAN PERINDUSTRIAN TEBRAU 1, 81100, JOHOR BAHRU, JOHOR, MALAYSIA.
Model number of antenna		Inverted-F Antenna
Maximum gain of the antenna		2.5dBi
Frequency band of operation		2400-2483.5MHz

Below is the antenna position for the right Hausing.

	The top of the headphone is semi-transparent	The top of the earphone is removed	Dimension of earphone
Top view		 The Part of white color is Antenna wire.	
Side view		 The Part of white color is Antenna wire.	
Diagonal view		 The Part of white color is Antenna wire.	