






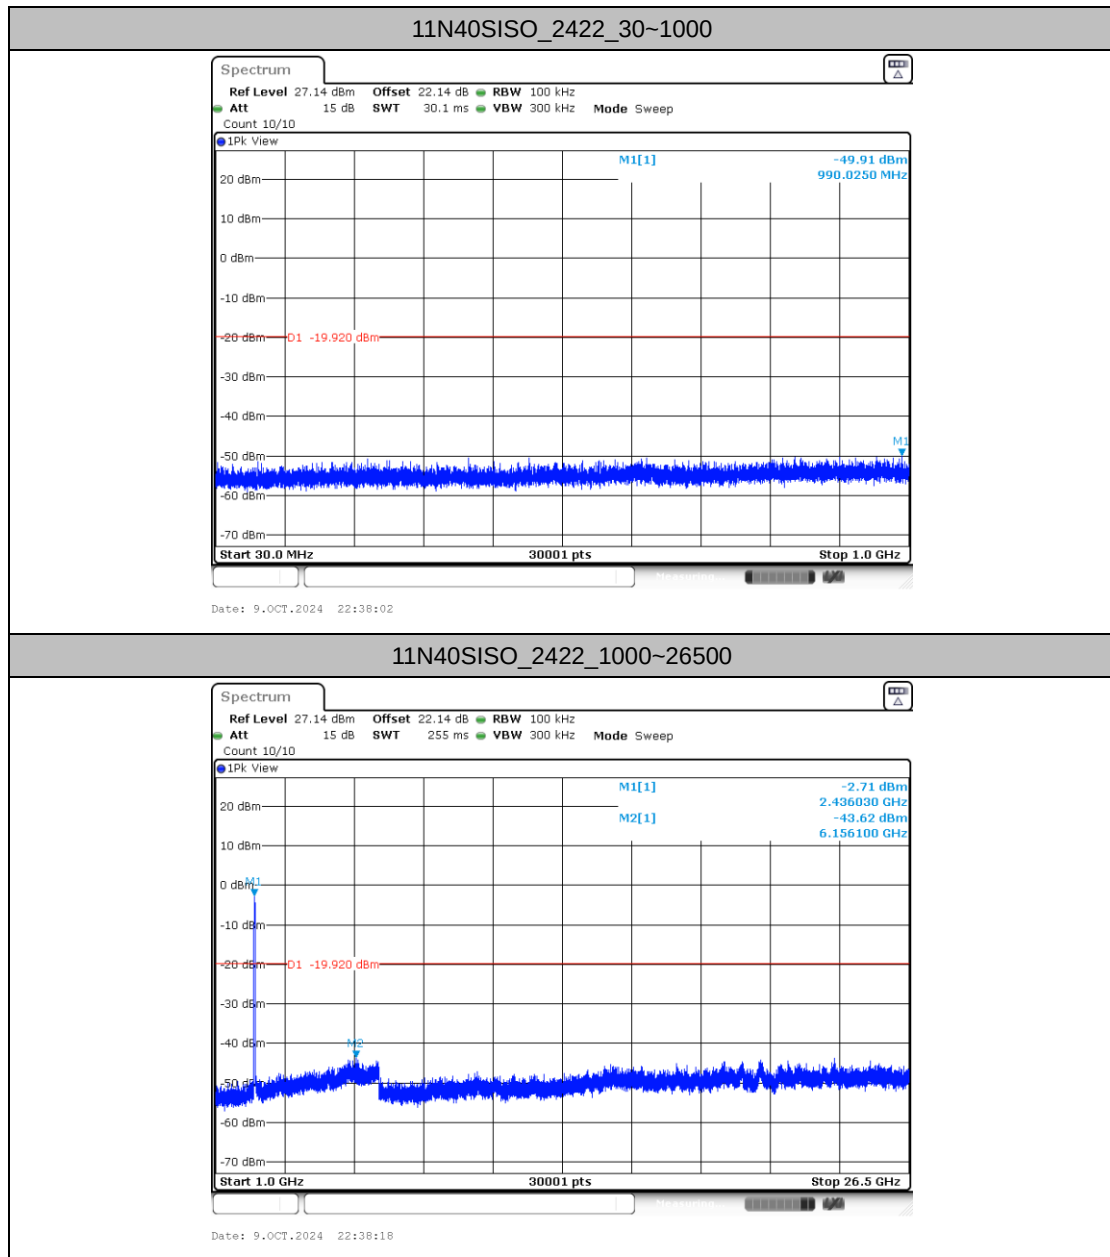


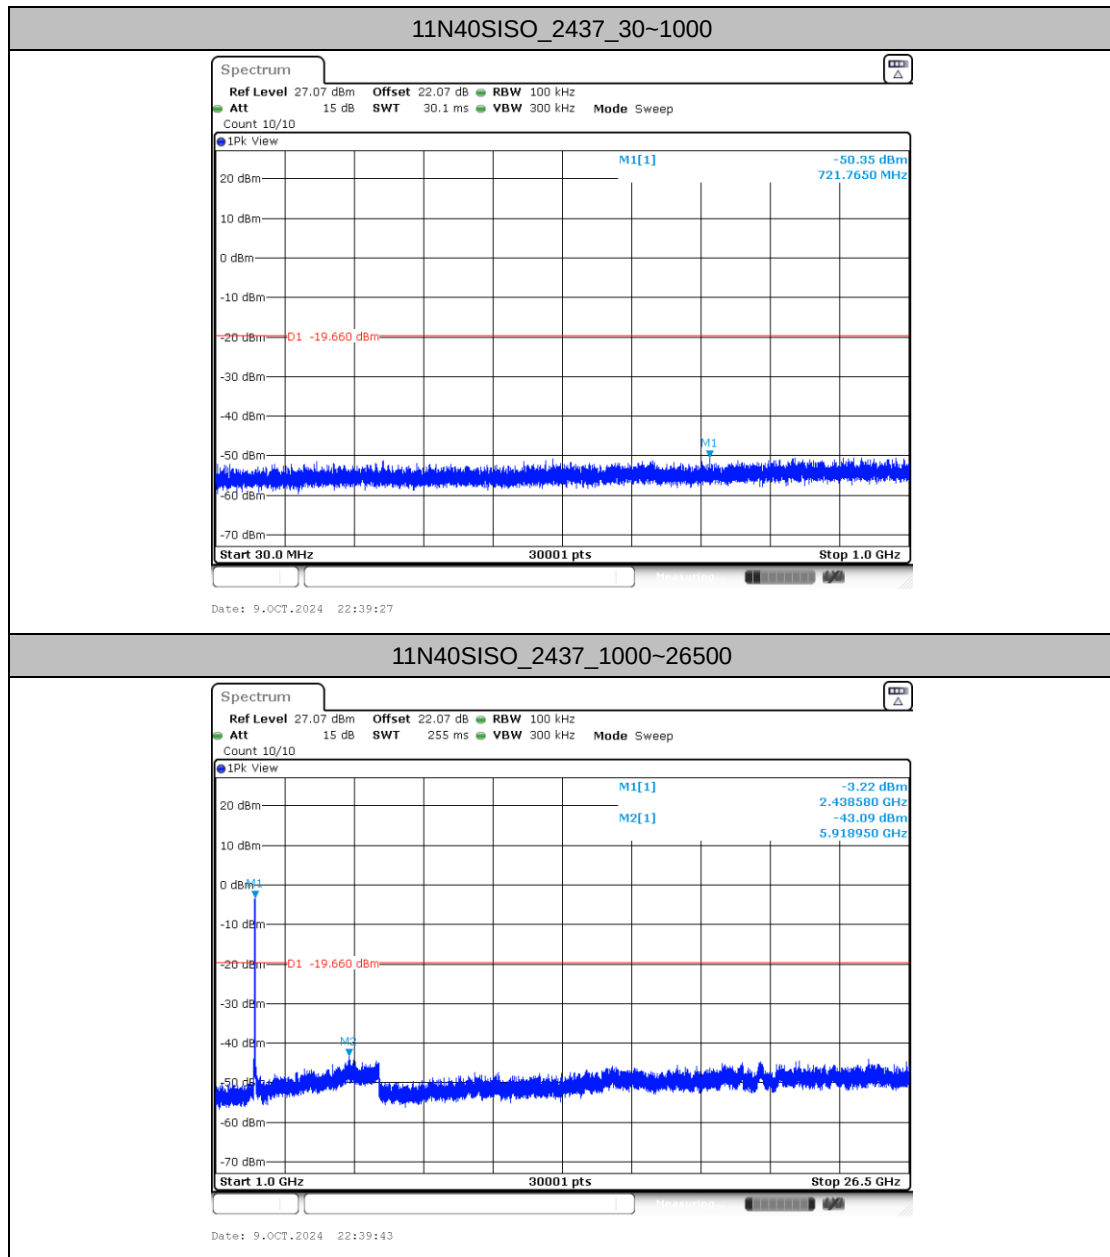

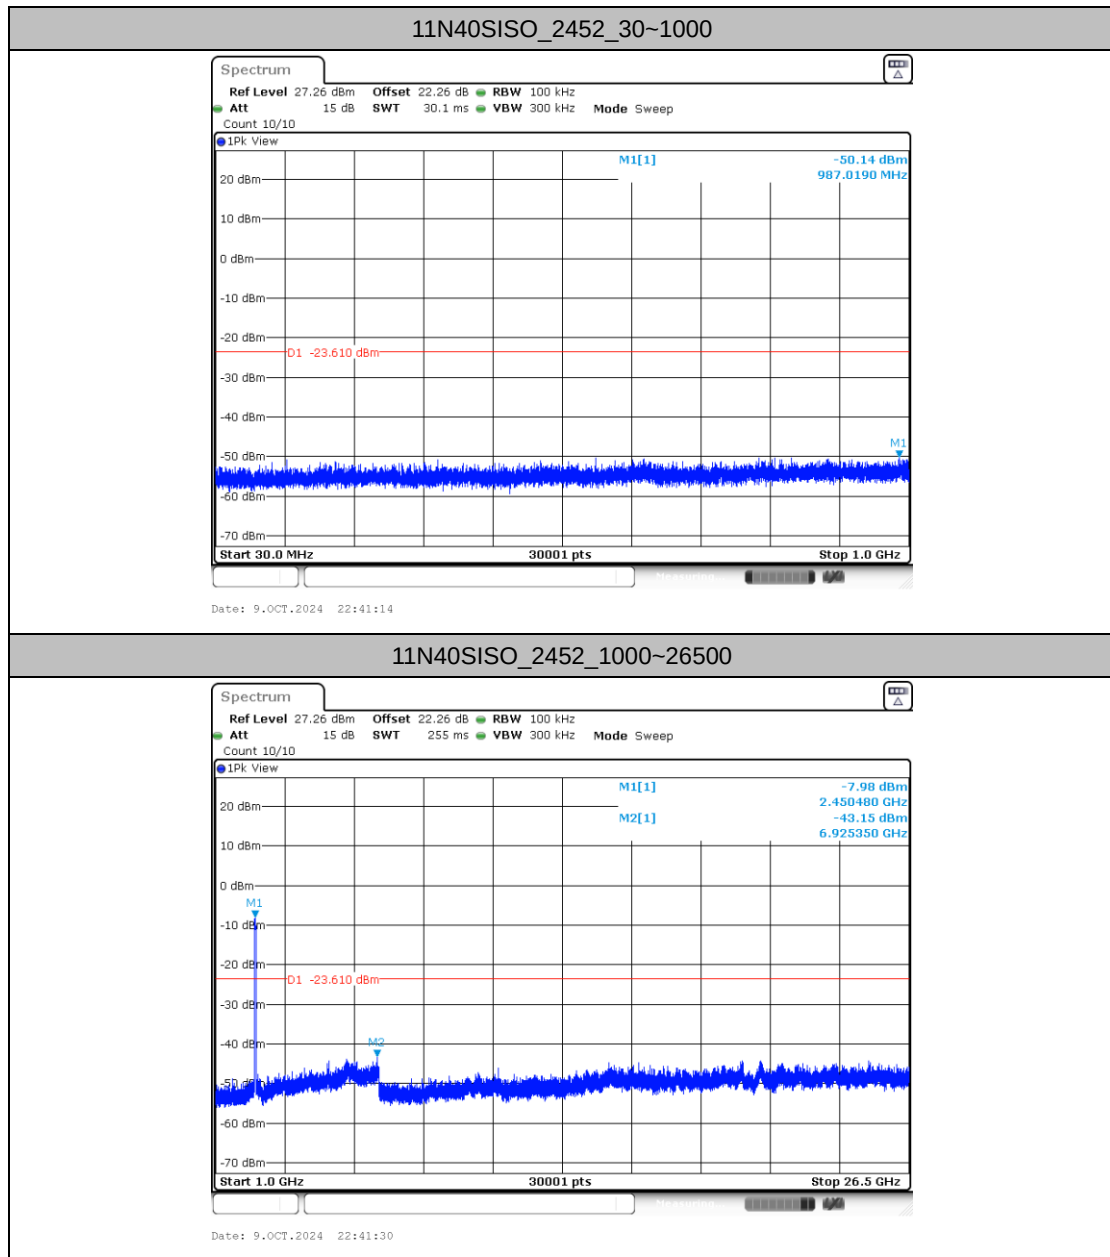

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	24.2~25.6℃
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

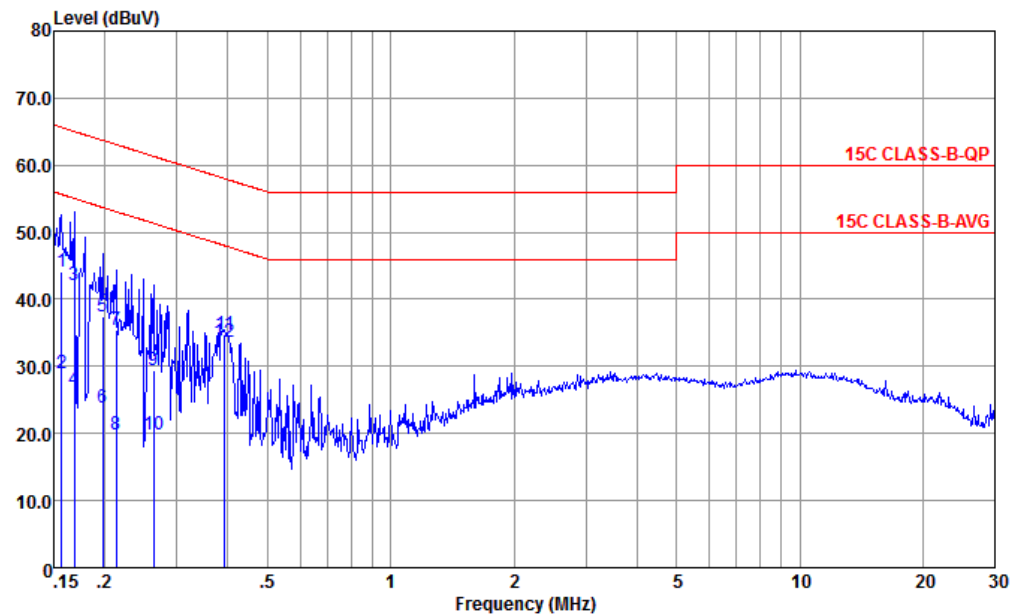


Site : CO01-KS
Condition : 15C CLASS-B-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	44.17	-21.48	65.65	33.61	0.11	10.45	QP
2	0.156	29.07	-26.58	55.65	18.51	0.11	10.45	Average
3	0.169	42.06	-22.97	65.03	31.51	0.10	10.45	QP
4	0.169	26.46	-28.57	55.03	15.91	0.10	10.45	Average
5	0.198	37.44	-26.27	63.71	26.90	0.08	10.46	QP
6	0.198	23.84	-29.87	53.71	13.30	0.08	10.46	Average
7	0.213	35.34	-27.76	63.10	24.80	0.08	10.46	QP
8	0.213	19.84	-33.26	53.10	9.30	0.08	10.46	Average
9	0.263	29.36	-31.98	61.34	18.80	0.09	10.47	QP
10	0.263	19.86	-31.48	51.34	9.30	0.09	10.47	Average
11	0.393	34.67	-23.32	57.99	24.20	-0.02	10.49	QP
12 *	0.393	33.57	-14.42	47.99	23.10	-0.02	10.49	Average



Test Engineer :	Amos Zhang	Temperature :	24.2~25.6°C
		Relative Humidity :	37~39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

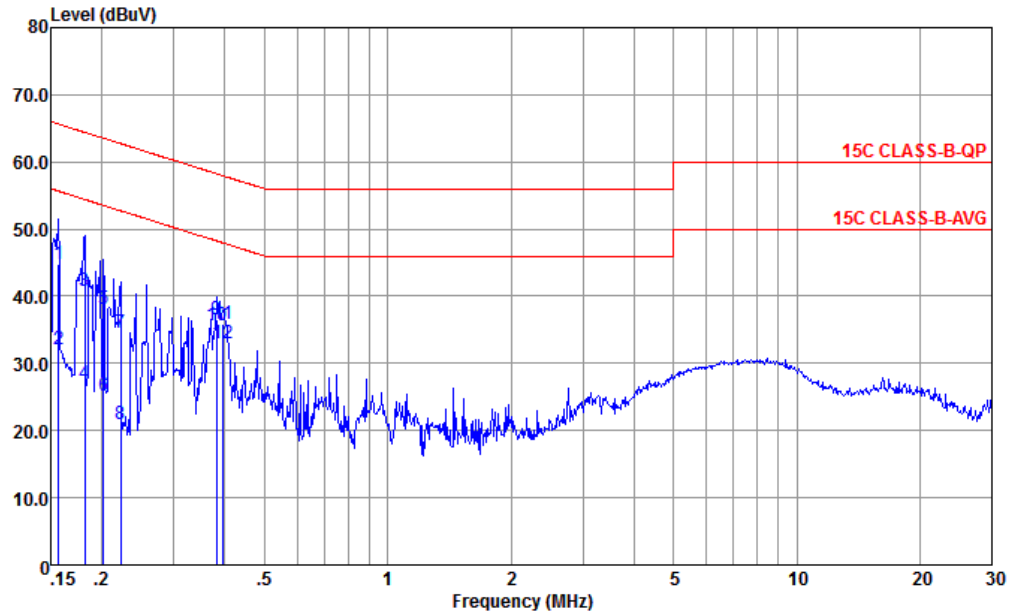

Site : CO01-KS
Condition : 15C CLASS-B-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.156	44.77	-20.88	65.65	34.20	0.12	10.45	QP
2	0.156	32.07	-23.58	55.65	21.50	0.12	10.45	Average
3	0.182	40.78	-23.64	64.42	30.19	0.13	10.46	QP
4	0.182	26.88	-27.54	54.42	16.29	0.13	10.46	Average
5	0.202	38.09	-25.45	63.54	27.51	0.12	10.46	QP
6	0.202	25.19	-28.35	53.54	14.61	0.12	10.46	Average
7	0.222	34.43	-28.31	62.74	23.91	0.06	10.46	QP
8	0.222	21.03	-31.71	52.74	10.51	0.06	10.46	Average
9	0.381	36.55	-21.70	58.25	26.19	-0.13	10.49	QP
10 *	0.381	35.55	-12.60	48.25	25.29	-0.13	10.49	Average
11	0.396	35.85	-22.10	57.95	25.50	-0.14	10.49	QP
12	0.396	32.95	-15.00	47.95	22.60	-0.14	10.49	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Xu	Relative Humidity :	41~42%
		Temperature :	22~23°C

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 10	2400-2483.5	802.11b	01	2412	1Mbps	-	-
Mode 11	2400-2483.5	802.11b	06	2437	1Mbps	-	-
Mode 12	2400-2483.5	802.11b	11	2462	1Mbps	-	-
Mode 13	2400-2483.5	802.11g	01	2412	6Mbps	-	-
Mode 14	2400-2483.5	802.11g	06	2437	6Mbps	-	-
Mode 15	2400-2483.5	802.11g	11	2462	6Mbps	-	-
Mode 16	2400-2483.5	802.11n HT20	01	2412	MCS0	-	-
Mode 17	2400-2483.5	802.11n HT20	06	2437	MCS0	-	-
Mode 18	2400-2483.5	802.11n HT20	11	2462	MCS0	-	-
Mode 19	2400-2483.5	802.11n HT40	3	2422	MCS0	-	-
Mode 20	2400-2483.5	802.11n HT40	6	2437	MCS0	-	-
Mode 21	2400-2483.5	802.11n HT40	9	2452	MCS0	-	-
Mode 22	2400-2483.5	802.11n HT20	2	2417	MCS0	-	-







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
10	802.11b	01	2386.70	44.29	54.00	-9.71	V	AVERAGE	Pass	Band Edge
10	802.11b	01	4824.00	42.57	74.00	-31.43	V	PEAK	Pass	Harmonic
11	802.11b	06	-	-	-	-	-	-	-	Band Edge
11	802.11b	06	7311.00	44.01	74.00	-29.99	H	PEAK	Pass	Harmonic
12	802.11b	11	2488.66	47.57	54.00	-6.43	V	AVERAGE	Pass	Band Edge
12	802.11b	11	7386.00	44.30	74.00	-29.70	H	PEAK	Pass	Harmonic
13	802.11g	01	2389.95	50.87	54.00	-3.13	V	AVERAGE	Pass	Band Edge
13	802.11g	01	4824.00	41.99	74.00	-32.01	V	PEAK	Pass	Harmonic
14	802.11g	06	-	-	-	-	-	-	-	Band Edge
14	802.11g	06	7311.00	45.45	74.00	-28.55	H	PEAK	Pass	Harmonic
15	802.11g	11	2483.50	50.01	54.00	-3.99	V	AVERAGE	Pass	Band Edge
15	802.11g	11	7386.00	43.34	74.00	-30.66	H	PEAK	Pass	Harmonic
16	802.11n HT20	01	2389.95	50.23	54.00	-3.77	V	AVERAGE	Pass	Band Edge
16	802.11n HT20	01	4824.00	42.12	74.00	-31.88	H	PEAK	Pass	Harmonic
17	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	06	7311.00	44.71	74.00	-29.29	V	PEAK	Pass	Harmonic
18	802.11n HT20	11	2483.86	50.34	54.00	-3.66	V	AVERAGE	Pass	Band Edge
18	802.11n HT20	11	7386.00	43.07	74.00	-30.93	H	PEAK	Pass	Harmonic
19	802.11n HT40	3	2389.82	50.78	54.00	-3.22	V	AVERAGE	Pass	Band Edge
19	802.11n HT40	3	7266.00	43.95	74.00	-30.05	V	PEAK	Pass	Harmonic
20	802.11n HT40	6	2483.68	49.92	54.00	-4.08	V	AVERAGE	Pass	Band Edge
20	802.11n HT40	6	7311.00	43.65	74.00	-30.35	H	PEAK	Pass	Harmonic
21	802.11n HT40	9	2484.52	50.04	54.00	-3.96	V	AVERAGE	Pass	Band Edge
21	802.11n HT40	9	7356.00	43.49	74.00	-30.51	V	PEAK	Pass	Harmonic
22	802.11n HT20	2	2389.69	48.19	54.00	-5.81	V	AVERAGE	Pass	Band Edge
22	802.11n HT20	2	7251.00	43.62	74.00	-30.38	V	PEAK	Pass	Harmonic

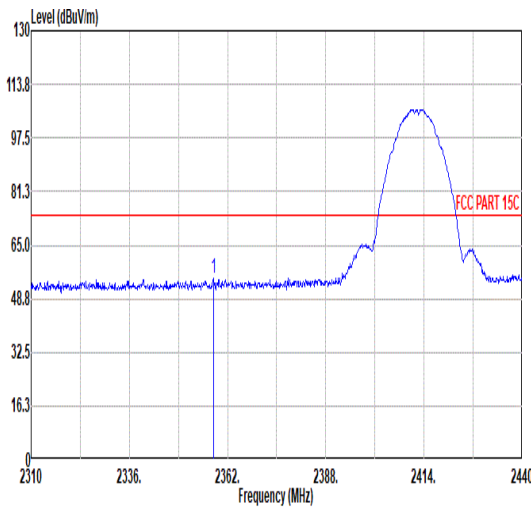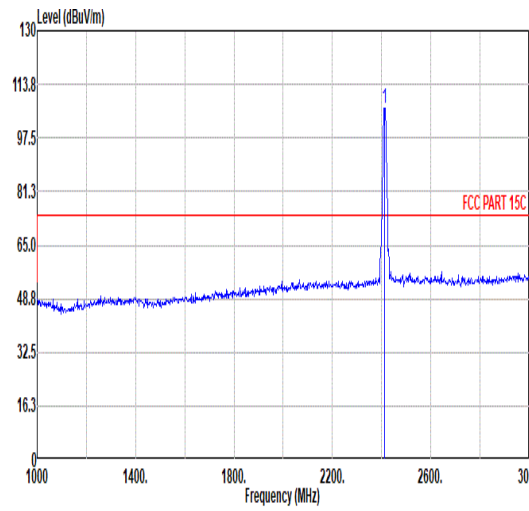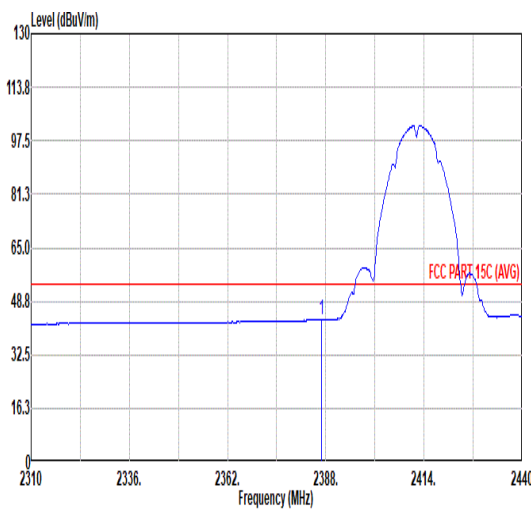
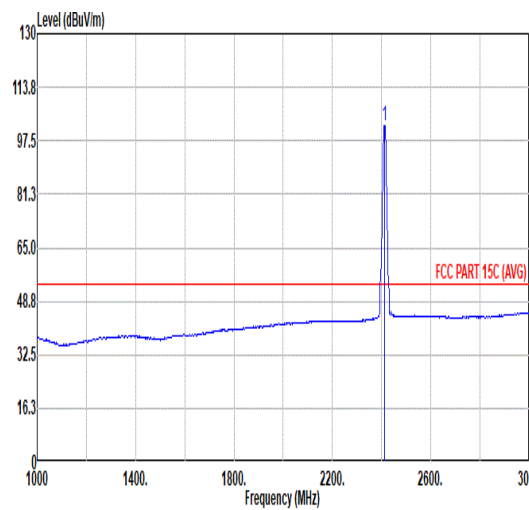


Mode	10																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2358.23</td><td>54.81</td><td>74.00</td><td>-19.19</td><td>42.35</td><td>32.10</td><td>6.55</td><td>32.19</td><td>6.00</td><td>300</td><td>80 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2358.23	54.81	74.00	-19.19	42.35	32.10	6.55	32.19	6.00	300	80 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>106.66</td><td>-----</td><td>-----</td><td>93.67</td><td>32.55</td><td>6.63</td><td>32.19</td><td>6.00</td><td>300</td><td>80 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2412.00	106.66	-----	-----	93.67	32.55	6.63	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2358.23	54.81	74.00	-19.19	42.35	32.10	6.55	32.19	6.00	300	80 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2412.00	106.66	-----	-----	93.67	32.55	6.63	32.19	6.00	300	80 PEAK																																																																																								
Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.83</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>30.51</td><td>32.44</td><td>6.60</td><td>32.18</td><td>6.00</td><td>300</td><td>80 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2386.83	43.37	54.00	-10.63	30.51	32.44	6.60	32.18	6.00	300	80 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2412.00</td><td>102.23</td><td>-----</td><td>-----</td><td>89.24</td><td>32.55</td><td>6.63</td><td>32.19</td><td>6.00</td><td>300</td><td>80 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2412.00	102.23	-----	-----	89.24	32.55	6.63	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2386.83	43.37	54.00	-10.63	30.51	32.44	6.60	32.18	6.00	300	80 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2412.00	102.23	-----	-----	89.24	32.55	6.63	32.19	6.00	300	80 AVERAGE																																																																																								

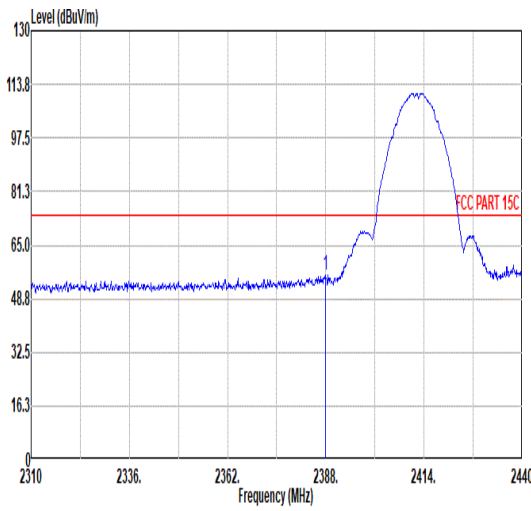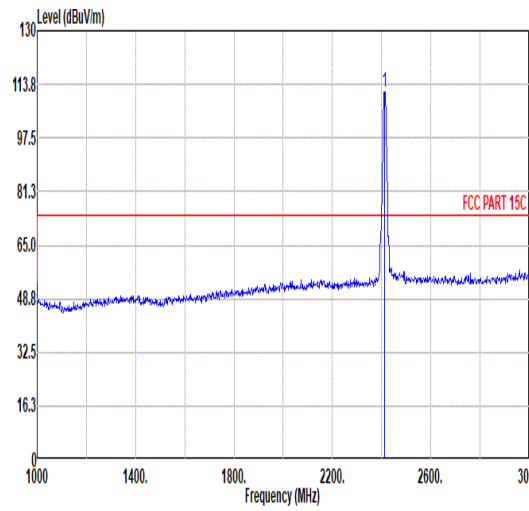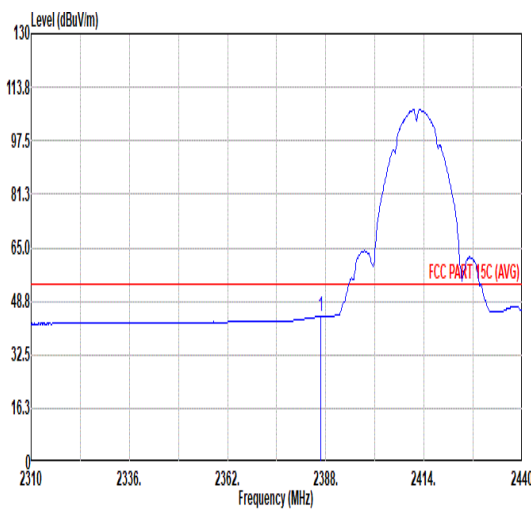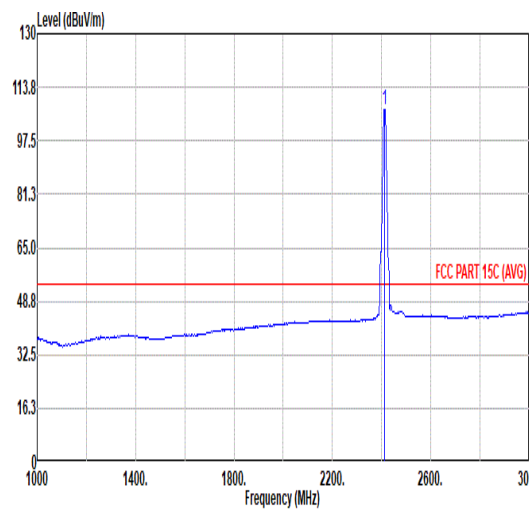

Mode	10																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																																															
Pol.	Vertical					Fundamental																																																																																										
Peak																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.87</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>43.12</td><td>32.45</td><td>6.60</td><td>32.18</td><td>6.00</td><td>325 308 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	55.99	74.00	-18.01	43.12	32.45	6.60	32.18	6.00	325 308 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>111.51</td><td>-----</td><td>98.52</td><td>32.55</td><td>6.63</td><td>32.19</td><td>6.00</td><td>325 308 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	111.51	-----	98.52	32.55	6.63	32.19	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2387.87	55.99	74.00	-18.01	43.12	32.45	6.60	32.18	6.00	325 308 PEAK																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2412.00	111.51	-----	98.52	32.55	6.63	32.19	6.00	325 308 PEAK																																																																																							
Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.70</td><td>44.29</td><td>54.00</td><td>-9.71</td><td>31.43</td><td>32.44</td><td>6.60</td><td>32.18</td><td>6.00</td><td>325 308 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	44.29	54.00	-9.71	31.43	32.44	6.60	32.18	6.00	325 308 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>107.02</td><td>-----</td><td>94.03</td><td>32.55</td><td>6.63</td><td>32.19</td><td>6.00</td><td>325 308 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.02	-----	94.03	32.55	6.63	32.19	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2386.70	44.29	54.00	-9.71	31.43	32.44	6.60	32.18	6.00	325 308 AVERAGE																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2412.00	107.02	-----	94.03	32.55	6.63	32.19	6.00	325 308 AVERAGE																																																																																							



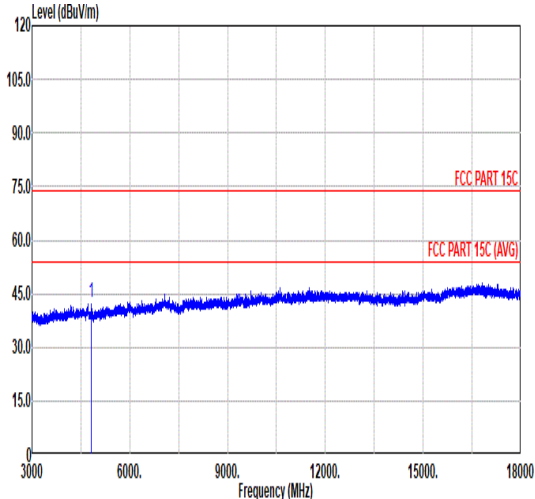
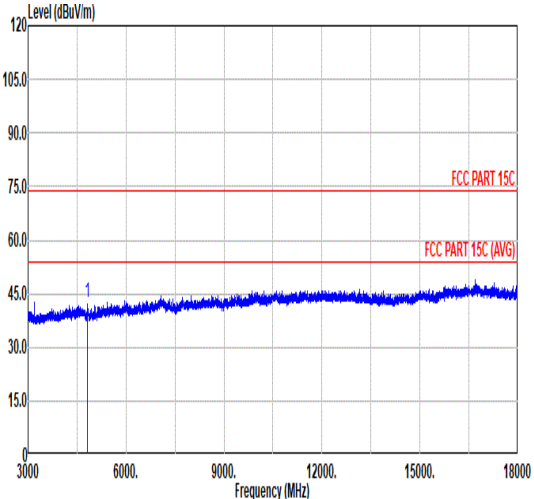


Mode	10																																																																																																								
	Harmonic																																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																								
Pol.	Horizontal						Vertical																																																																																																		
Peak Avg																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.38</td><td>74.00</td><td>-31.62</td><td>59.98</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	42.38	74.00	-31.62	59.98	34.20	9.47	61.27	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>60.17</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	42.57	74.00	-31.43	60.17	34.20	9.47	61.27	0.00	---	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4824.00	42.38	74.00	-31.62	59.98	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																														
1	4824.00	42.57	74.00	-31.43	60.17	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																													







Mode	11																																																																																																																												
	Harmonic																																																																																																																												
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																												
Pol.	Horizontal										Vertical																																																																																																																		
Peak Avg	Horizontal Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two blue vertical lines mark frequencies 1 (4874.00 MHz) and 2 (7311.00 MHz). The blue signal line is below the 15C limit but above the 15C (AVG) limit. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>59.07</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>44.01</td><td>74.00</td><td>-29.99</td><td>57.35</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.51	74.00	-32.49	59.07	34.15	9.52	61.23	0.00	---	--- PEAK	2	7311.00	44.01	74.00	-29.99	57.35	35.70	11.69	60.73	0.00	---	--- PEAK	Vertical Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two blue vertical lines mark frequencies 1 (4874.00 MHz) and 2 (7311.00 MHz). The blue signal line is below the 15C limit but above the 15C (AVG) limit. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>40.58</td><td>74.00</td><td>-33.42</td><td>58.14</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>57.17</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.58	74.00	-33.42	58.14	34.15	9.52	61.23	0.00	---	--- PEAK	2	7311.00	43.83	74.00	-30.17	57.17	35.70	11.69	60.73	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4874.00	41.51	74.00	-32.49	59.07	34.15	9.52	61.23	0.00	---	--- PEAK																																																																																																																		
2	7311.00	44.01	74.00	-29.99	57.35	35.70	11.69	60.73	0.00	---	--- PEAK																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																			
1	4874.00	40.58	74.00	-33.42	58.14	34.15	9.52	61.23	0.00	---	--- PEAK																																																																																																																		
2	7311.00	43.83	74.00	-30.17	57.17	35.70	11.69	60.73	0.00	---	--- PEAK																																																																																																																		

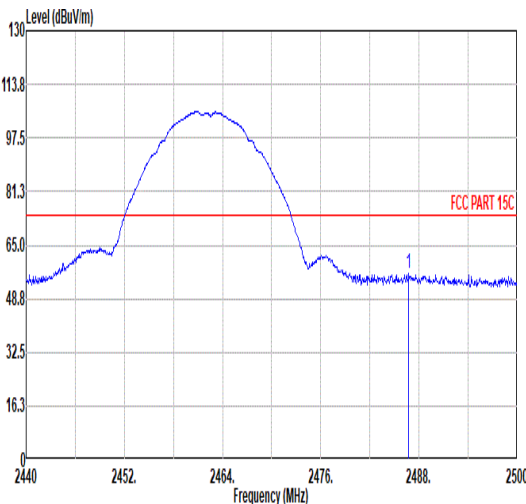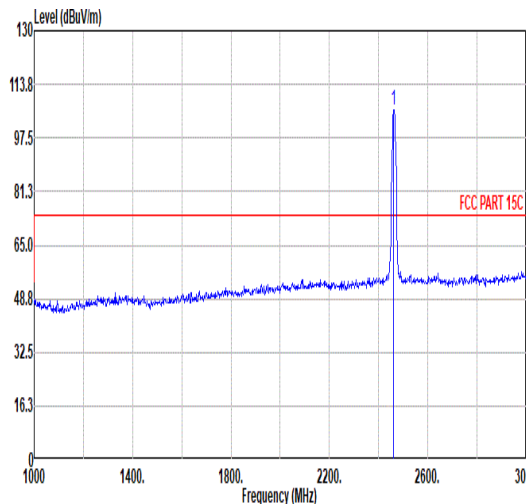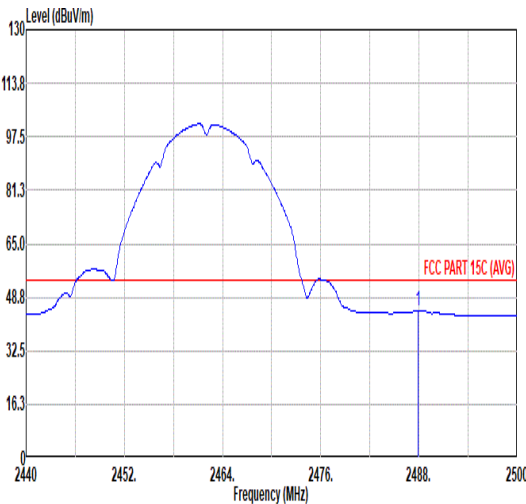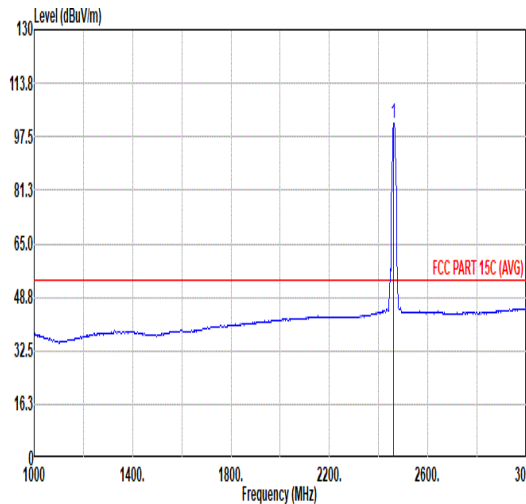

Mode	12																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.74</td><td>56.21</td><td>74.00</td><td>-17.79</td><td>43.09</td><td>32.62</td><td>6.74</td><td>32.24</td><td>6.00</td><td>300 347 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.74	56.21	74.00	-17.79	43.09	32.62	6.74	32.24	6.00	300 347 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2486.74	56.21	74.00	-17.79	43.09	32.62	6.74	32.24	6.00	300 347 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.02</td><td>-----</td><td>93.07</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>300</td><td>347 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.02	-----	93.07	32.47	6.70	32.22	6.00	300	347 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	106.02	-----	93.07	32.47	6.70	32.22	6.00	300	347 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.88</td><td>44.56</td><td>54.00</td><td>-9.44</td><td>31.43</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>300 347 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.88	44.56	54.00	-9.44	31.43	32.63	6.74	32.24	6.00	300 347 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2487.88	44.56	54.00	-9.44	31.43	32.63	6.74	32.24	6.00	300 347 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>101.50</td><td>-----</td><td>88.55</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>300</td><td>347 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.50	-----	88.55	32.47	6.70	32.22	6.00	300	347 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	101.50	-----	88.55	32.47	6.70	32.22	6.00	300	347 AVERAGE																																													

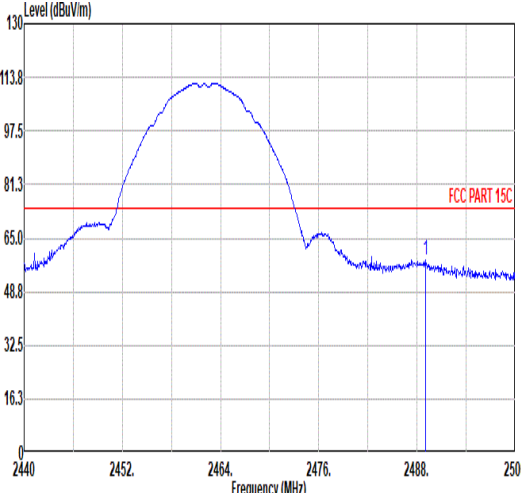
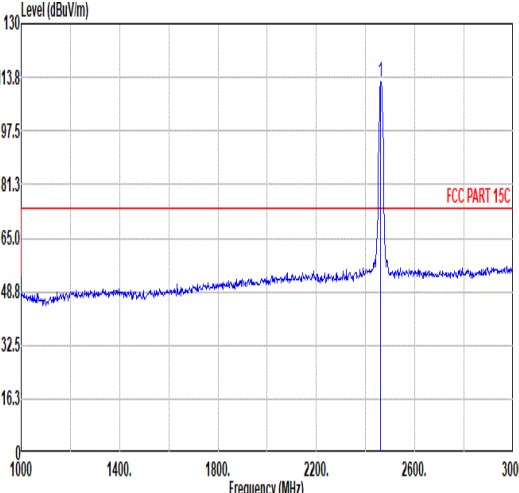
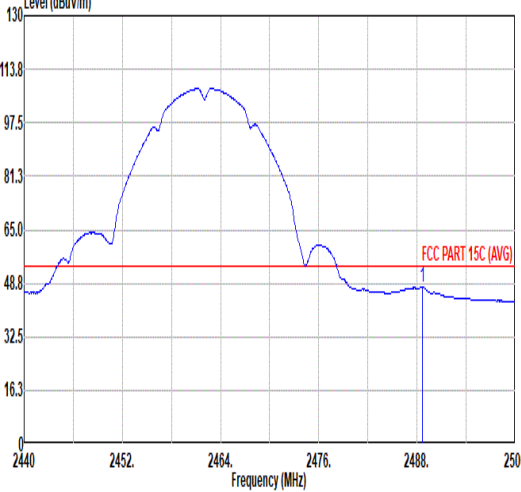
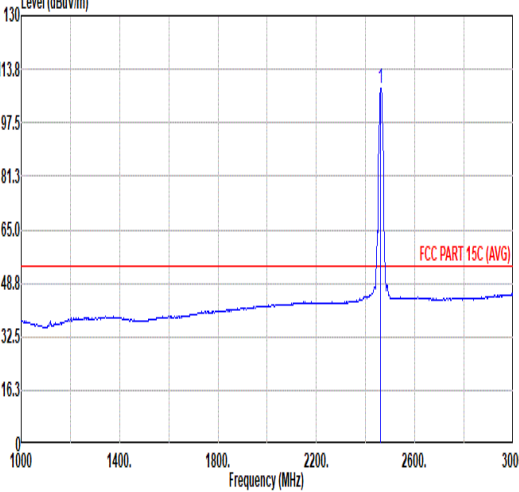


Mode	12																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																
Pol.	Vertical										Fundamental																																																																																						
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2489.02</td><td>58.49</td><td>74.00</td><td>-15.51</td><td>45.36</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>307 333 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.02	58.49	74.00	-15.51	45.36	32.63	6.74	32.24	6.00	307 333 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>112.58</td><td>-----</td><td>99.63</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>307 333 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	112.58	-----	99.63	32.47	6.70	32.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2489.02	58.49	74.00	-15.51	45.36	32.63	6.74	32.24	6.00	307 333 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	112.58	-----	99.63	32.47	6.70	32.22	6.00	307 333 PEAK																																																																																								
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.66</td><td>47.57</td><td>54.00</td><td>-6.43</td><td>34.44</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>307 333 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.66	47.57	54.00	-6.43	34.44	32.63	6.74	32.24	6.00	307 333 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.03</td><td>-----</td><td>95.08</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>307 333 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.03	-----	95.08	32.47	6.70	32.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2488.66	47.57	54.00	-6.43	34.44	32.63	6.74	32.24	6.00	307 333 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	108.03	-----	95.08	32.47	6.70	32.22	6.00	307 333 AVERAGE																																																																																								



Mode	12																								
	Harmonic																								
	2400-2483.5_802.11b_CH11_2462MHz																								
Pol.	Horizontal											Vertical													
Peak Avg																									
	Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Factor Remark											Limit Over Read Ant Cable Preamp Aux APos TPos Freq Level Line Limit Level Factor Loss Factor Factor Factor Remark													
	MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB cm deg											MHz dBuV/m dBuV/m dB dBuV dB/m dB dB dB dB dB cm deg													
1	4924.00	41.63	74.00	-32.37	59.20	34.05	9.57	61.19	0.00	---	---	PEAK	1	4924.00	41.58	74.00	-32.42	59.15	34.05	9.57	61.19	0.00	---	---	PEAK
2	7386.00	44.30	74.00	-29.70	57.77	35.70	11.72	60.89	0.00	---	---	PEAK	2	7386.00	44.07	74.00	-29.93	57.54	35.70	11.72	60.89	0.00	---	---	PEAK

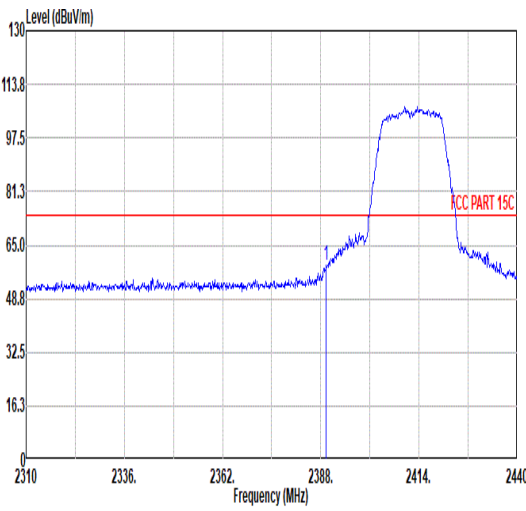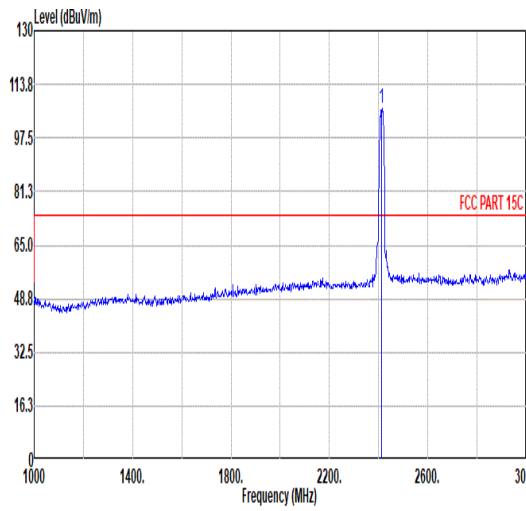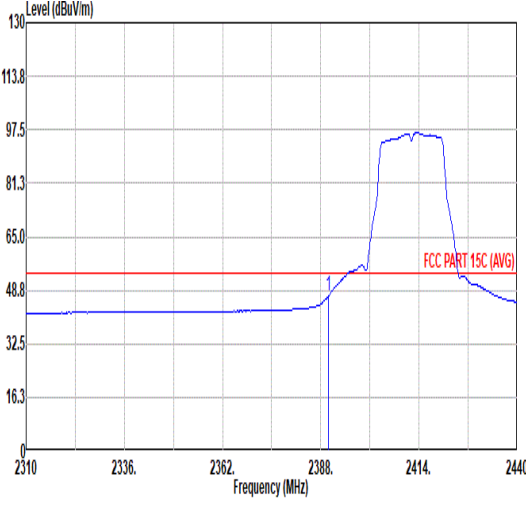
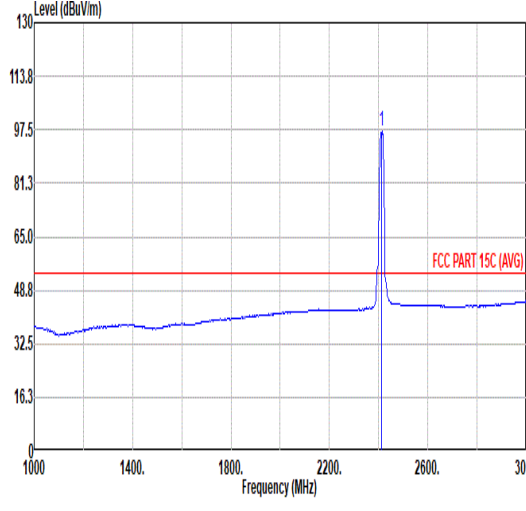


Mode	13																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>58.94</td><td>74.00</td><td>-15.06</td><td>46.05</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>300</td><td>75 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.43	58.94	74.00	-15.06	46.05	32.47	6.60	32.18	6.00	300	75 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>106.25</td><td>-----</td><td>-----</td><td>93.26</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>300</td><td>75 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	106.25	-----	-----	93.26	32.54	6.64	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2389.43	58.94	74.00	-15.06	46.05	32.47	6.60	32.18	6.00	300	75 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2412.00	106.25	-----	-----	93.26	32.54	6.64	32.19	6.00	300	75 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.91</td><td>54.00</td><td>-7.09</td><td>34.01</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>300</td><td>75 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	46.91	54.00	-7.09	34.01	32.48	6.60	32.18	6.00	300	75 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.91</td><td>-----</td><td>-----</td><td>83.92</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>300</td><td>75 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	96.91	-----	-----	83.92	32.54	6.64	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2389.95	46.91	54.00	-7.09	34.01	32.48	6.60	32.18	6.00	300	75 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	2412.00	96.91	-----	-----	83.92	32.54	6.64	32.19	6.00	300	75 AVERAGE																																																																																										





Mode	13																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>63.69</td><td>74.00</td><td>-10.31</td><td>50.79</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>355 306 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	63.69	74.00	-10.31	50.79	32.48	6.60	32.18	6.00	355 306 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	63.69	74.00	-10.31	50.79	32.48	6.60	32.18	6.00	355 306 PEAK																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>110.76</td><td>-----</td><td>97.77</td><td>32.55</td><td>6.63</td><td>32.19</td><td>6.00</td><td>355</td><td>306 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.76	-----	97.77	32.55	6.63	32.19	6.00	355	306 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	110.76	-----	97.77	32.55	6.63	32.19	6.00	355	306 PEAK																																													
Avg																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.87</td><td>54.00</td><td>-3.13</td><td>37.97</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>355 306 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.87	54.00	-3.13	37.97	32.48	6.60	32.18	6.00	355 306 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	50.87	54.00	-3.13	37.97	32.48	6.60	32.18	6.00	355 306 AVERAGE																																													
Fundamental																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>101.34</td><td>-----</td><td>88.35</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>355</td><td>306 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.34	-----	88.35	32.54	6.64	32.19	6.00	355	306 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	101.34	-----	88.35	32.54	6.64	32.19	6.00	355	306 AVERAGE																																													



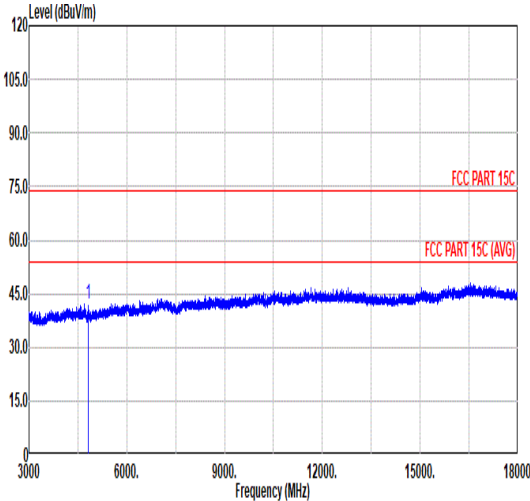
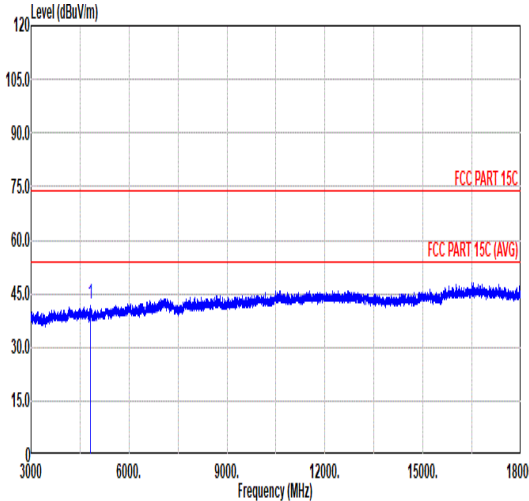


Mode	13																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.99</td><td>74.00</td><td>-32.01</td><td>59.59</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.99	74.00	-32.01	59.59	34.20	9.47	61.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.99</td><td>74.00</td><td>-32.01</td><td>59.59</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.99	74.00	-32.01	59.59	34.20	9.47	61.27	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	4824.00	41.99	74.00	-32.01	59.59	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	4824.00	41.99	74.00	-32.01	59.59	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																														



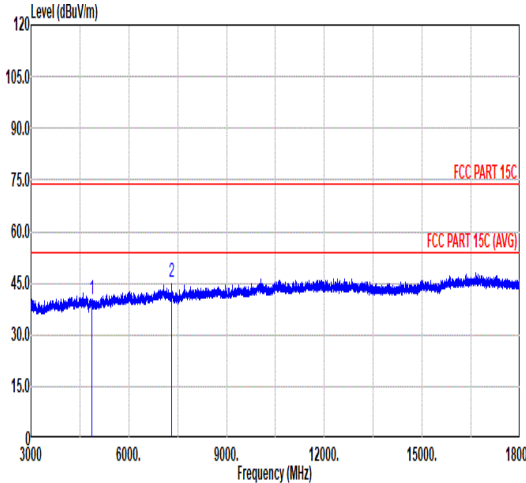
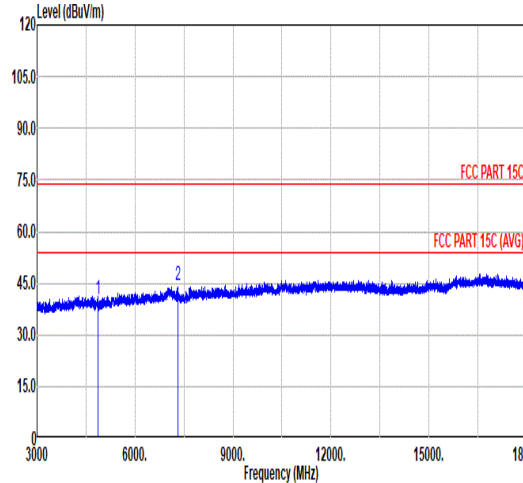


Mode	14																																																																																																																																															
	Harmonic																																																																																																																																															
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																															
Pol.	Horizontal											Vertical																																																																																																																																				
Peak Avg																																																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.30</td><td>74.00</td><td>-33.70</td><td>57.86</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>45.45</td><td>74.00</td><td>-28.55</td><td>58.79</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	40.30	74.00	-33.70	57.86	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	45.45	74.00	-28.55	58.79	35.70	11.69	60.73	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.51</td><td>74.00</td><td>-33.49</td><td>58.07</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>44.35</td><td>74.00</td><td>-29.65</td><td>57.69</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	40.51	74.00	-33.49	58.07	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	44.35	74.00	-29.65	57.69	35.70	11.69	60.73	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4874.00	40.30	74.00	-33.70	57.86	34.15	9.52	61.23	0.00	---	---	PEAK																																																																																																																																				
2	7311.00	45.45	74.00	-28.55	58.79	35.70	11.69	60.73	0.00	---	---	PEAK																																																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4874.00	40.51	74.00	-33.49	58.07	34.15	9.52	61.23	0.00	---	---	PEAK																																																																																																																																				
2	7311.00	44.35	74.00	-29.65	57.69	35.70	11.69	60.73	0.00	---	---	PEAK																																																																																																																																				

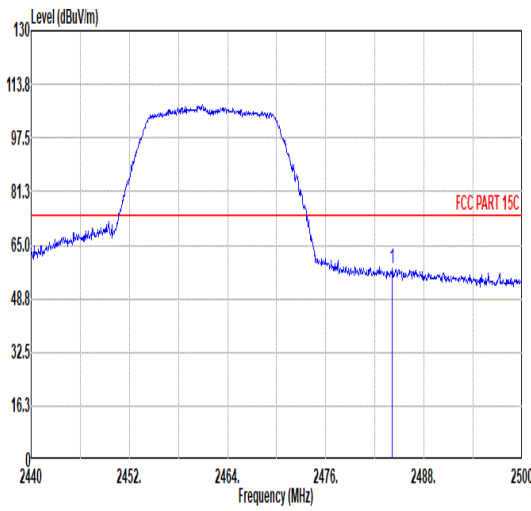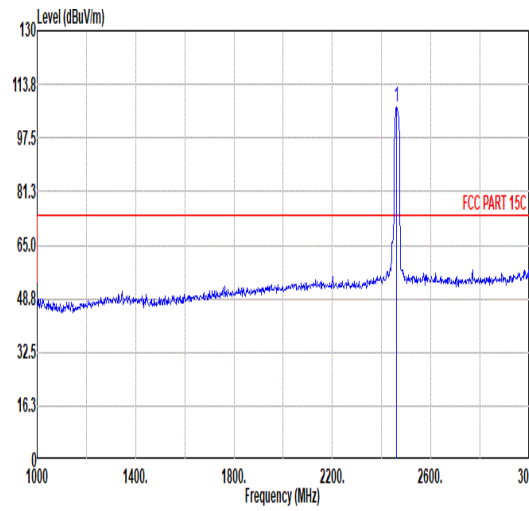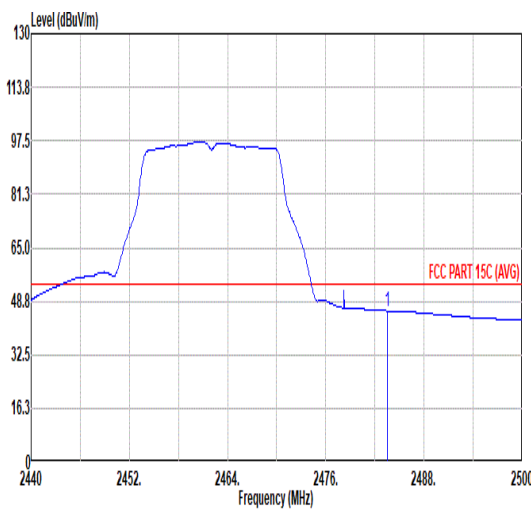
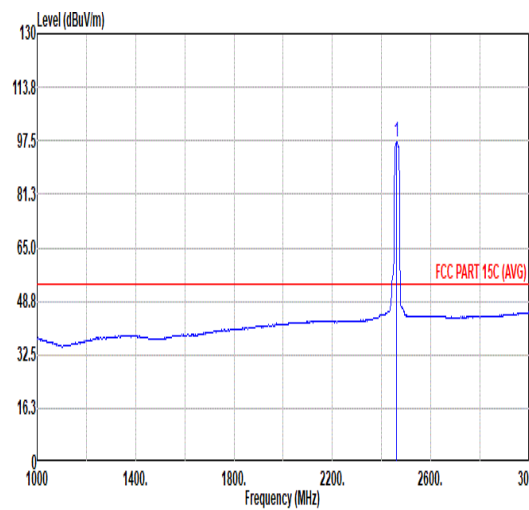


Mode	15																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
Pol.	Horizontal										Fundamental																																																																																							
Peak																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.10</td><td>58.03</td><td>74.00</td><td>-15.97</td><td>44.93</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>338 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.10	58.03	74.00	-15.97	44.93	32.60	6.73	32.23	6.00	338 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>106.85</td><td>-----</td><td>93.91</td><td>32.46</td><td>6.70</td><td>32.22</td><td>6.00</td><td>300</td><td>338 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.85	-----	93.91	32.46	6.70	32.22	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2484.10	58.03	74.00	-15.97	44.93	32.60	6.73	32.23	6.00	338 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	106.85	-----	93.91	32.46	6.70	32.22	6.00	300	338 PEAK																																																																																								
Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>45.84</td><td>54.00</td><td>-8.16</td><td>32.74</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>338 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	45.84	54.00	-8.16	32.74	32.60	6.73	32.23	6.00	338 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>97.35</td><td>-----</td><td>84.41</td><td>32.46</td><td>6.70</td><td>32.22</td><td>6.00</td><td>300</td><td>338 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.35	-----	84.41	32.46	6.70	32.22	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.56	45.84	54.00	-8.16	32.74	32.60	6.73	32.23	6.00	338 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	97.35	-----	84.41	32.46	6.70	32.22	6.00	300	338 AVERAGE																																																																																								

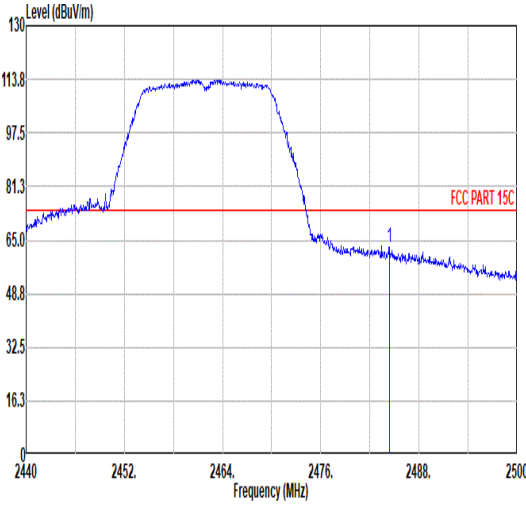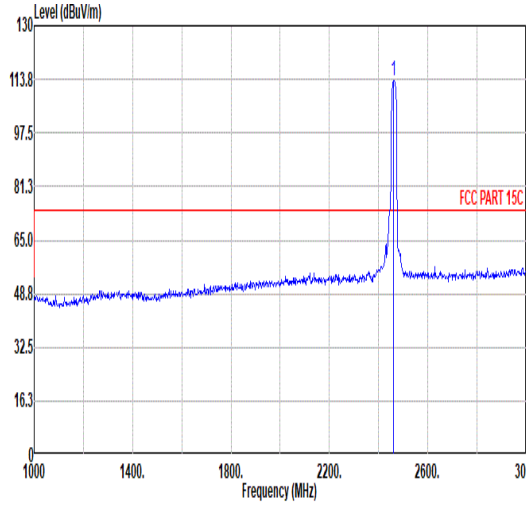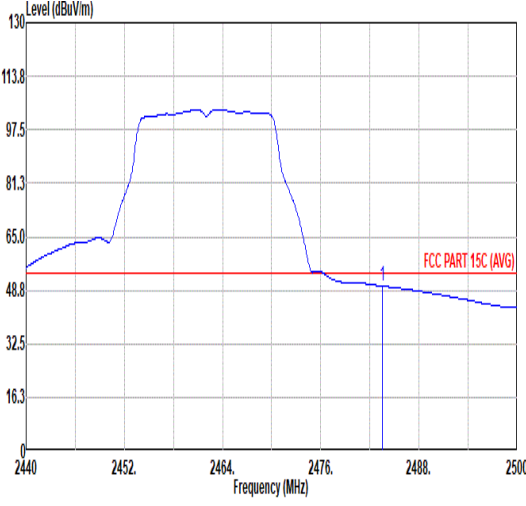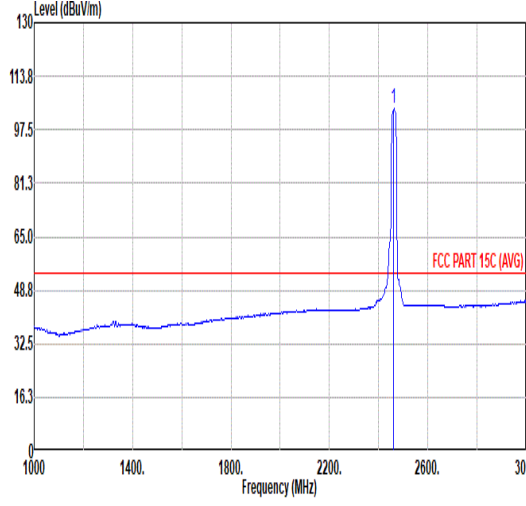

Mode	15																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2484.40</td><td>62.82</td><td>74.00</td><td>-11.18</td><td>49.71</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>337</td><td>309 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2484.40	62.82	74.00	-11.18	49.71	32.61	6.73	32.23	6.00	337	309 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>113.43</td><td>-----</td><td>-----</td><td>100.46</td><td>32.48</td><td>6.71</td><td>32.22</td><td>6.00</td><td>337</td><td>309 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	113.43	-----	-----	100.46	32.48	6.71	32.22	6.00	337
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2484.40	62.82	74.00	-11.18	49.71	32.61	6.73	32.23	6.00	337	309 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2462.00	113.43	-----	-----	100.46	32.48	6.71	32.22	6.00	337	309 PEAK																																																																																								
Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2483.50</td><td>50.01</td><td>54.00</td><td>-3.99</td><td>36.91</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>337</td><td>309 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2483.50	50.01	54.00	-3.99	36.91	32.60	6.73	32.23	6.00	337	309 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>103.93</td><td>-----</td><td>-----</td><td>90.96</td><td>32.48</td><td>6.71</td><td>32.22</td><td>6.00</td><td>337</td><td>309 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	103.93	-----	-----	90.96	32.48	6.71	32.22	6.00	337
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2483.50	50.01	54.00	-3.99	36.91	32.60	6.73	32.23	6.00	337	309 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1 2462.00	103.93	-----	-----	90.96	32.48	6.71	32.22	6.00	337	309 AVERAGE																																																																																								



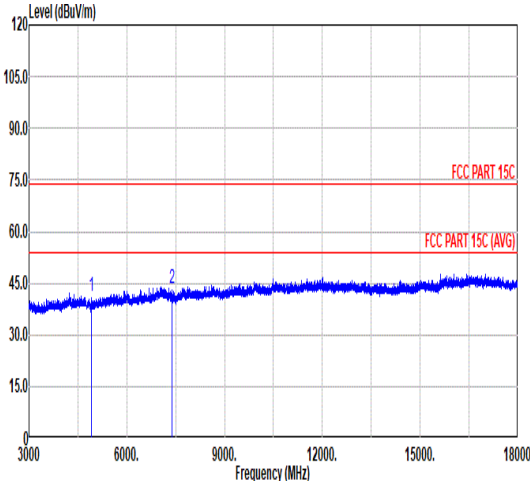
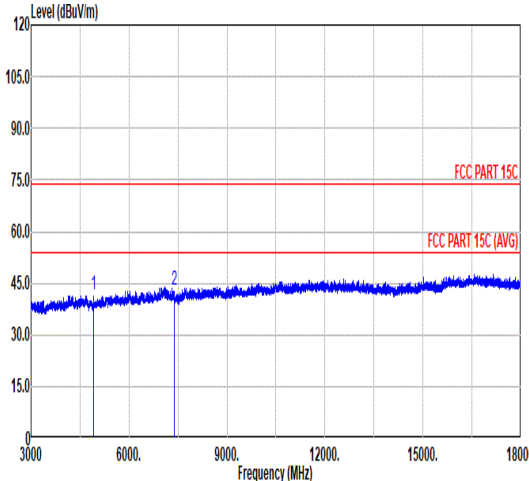


Mode	15																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																									
Pol.	Horizontal										Vertical																																																																																																															
Peak Avg	 Horizontal Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two peaks are marked with vertical lines and labeled 1 and 2. Peak 1 is at 4924.00 MHz and Peak 2 is at 7386.00 MHz. The measured levels are 41.26 dBuV/m and 43.34 dBuV/m respectively, both well below the limits. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>41.26</td><td>74.00</td><td>-32.74</td><td>58.83</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.34</td><td>74.00</td><td>-30.66</td><td>56.81</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>--- PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.26	74.00	-32.74	58.83	34.05	9.57	61.19	0.00	--- PEAK	2	7386.00	43.34	74.00	-30.66	56.81	35.70	11.72	60.89	0.00	--- PEAK	 Vertical Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two peaks are marked with vertical lines and labeled 1 and 2. Peak 1 is at 4924.00 MHz and Peak 2 is at 7386.00 MHz. The measured levels are 41.61 dBuV/m and 43.01 dBuV/m respectively, both well below the limits. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>41.61</td><td>74.00</td><td>-32.39</td><td>59.18</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>--- PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.01</td><td>74.00</td><td>-30.99</td><td>56.48</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>--- PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.61	74.00	-32.39	59.18	34.05	9.57	61.19	0.00	--- PEAK	2	7386.00	43.01	74.00	-30.99	56.48	35.70	11.72	60.89	0.00	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	41.26	74.00	-32.74	58.83	34.05	9.57	61.19	0.00	--- PEAK																																																																																																																
2	7386.00	43.34	74.00	-30.66	56.81	35.70	11.72	60.89	0.00	--- PEAK																																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	41.61	74.00	-32.39	59.18	34.05	9.57	61.19	0.00	--- PEAK																																																																																																																
2	7386.00	43.01	74.00	-30.99	56.48	35.70	11.72	60.89	0.00	--- PEAK																																																																																																																





Mode	16																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>2389.82</td><td>55.61</td><td>74.00</td><td>-18.39</td><td>42.71</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>204</td><td>0</td><td>PEAK</td></tr></table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	2389.82	55.61	74.00	-18.39	42.71	32.48	6.60	32.18	6.00	204	0	PEAK	Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2412.00</td><td>103.92</td><td>-----</td><td>-----</td><td>90.93</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>204</td><td>0</td><td>PEAK</td></tr></table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	103.92	-----	-----	90.93	32.54	6.64	32.19	6.00	204	0	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																										
1	2389.82	55.61	74.00	-18.39	42.71	32.48	6.60	32.18	6.00	204	0	PEAK																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2412.00	103.92	-----	-----	90.93	32.54	6.64	32.19	6.00	204	0	PEAK																																																																						
Avg	Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2389.95</td><td>45.36</td><td>54.00</td><td>-8.64</td><td>32.46</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>204</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2389.95	45.36	54.00	-8.64	32.46	32.48	6.60	32.18	6.00	204	0	AVERAGE	Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>2412.00</td><td>94.94</td><td>-----</td><td>-----</td><td>81.95</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>204</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	2412.00	94.94	-----	-----	81.95	32.54	6.64	32.19	6.00	204	0	AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2389.95	45.36	54.00	-8.64	32.46	32.48	6.60	32.18	6.00	204	0	AVERAGE																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	2412.00	94.94	-----	-----	81.95	32.54	6.64	32.19	6.00	204	0	AVERAGE																																																																						

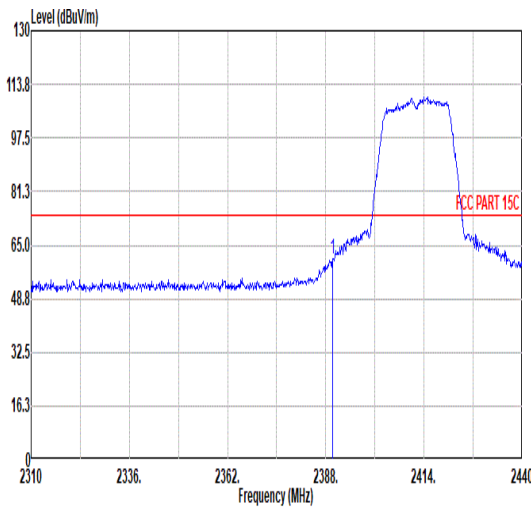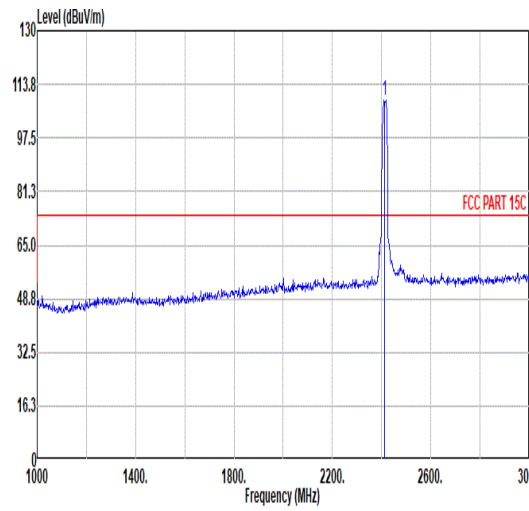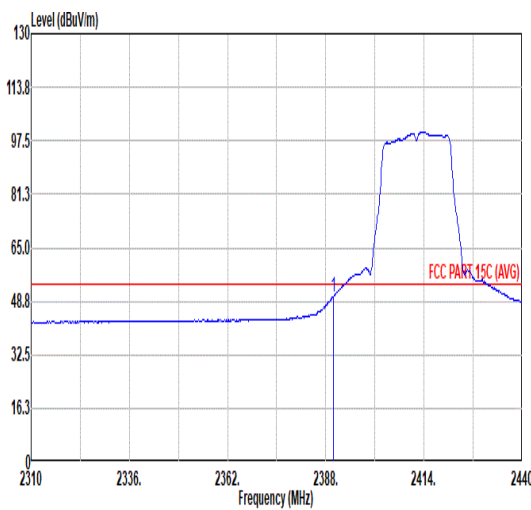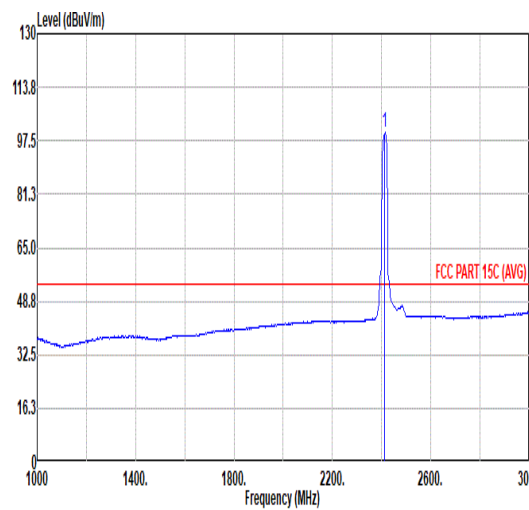

Mode	16																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																	
Pol.	Vertical										Fundamental																																																																																							
Peak																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>61.02</td><td>74.00</td><td>-12.98</td><td>48.12</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>329 330 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	61.02	74.00	-12.98	48.12	32.48	6.60	32.18	6.00	329 330 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.11</td><td>-----</td><td>96.13</td><td>32.53</td><td>6.64</td><td>32.19</td><td>6.00</td><td>329</td><td>330 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.11	-----	96.13	32.53	6.64	32.19	6.00	329
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.82	61.02	74.00	-12.98	48.12	32.48	6.60	32.18	6.00	329 330 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	109.11	-----	96.13	32.53	6.64	32.19	6.00	329	330 PEAK																																																																																								
Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>37.33</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>329 330 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.23	54.00	-3.77	37.33	32.48	6.60	32.18	6.00	329 330 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>99.87</td><td>-----</td><td>86.88</td><td>32.54</td><td>6.64</td><td>32.19</td><td>6.00</td><td>329</td><td>330 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.87	-----	86.88	32.54	6.64	32.19	6.00	329
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	50.23	54.00	-3.77	37.33	32.48	6.60	32.18	6.00	329 330 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2412.00	99.87	-----	86.88	32.54	6.64	32.19	6.00	329	330 AVERAGE																																																																																								



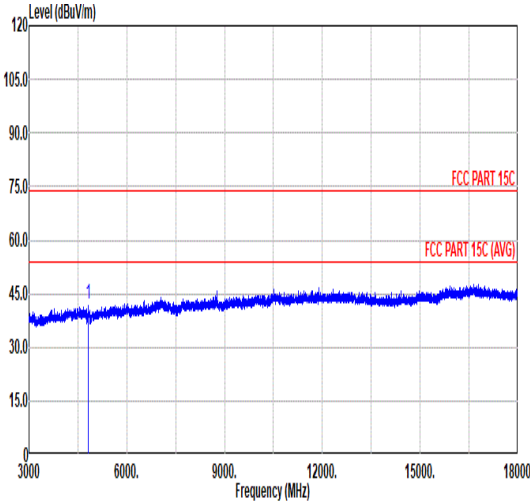
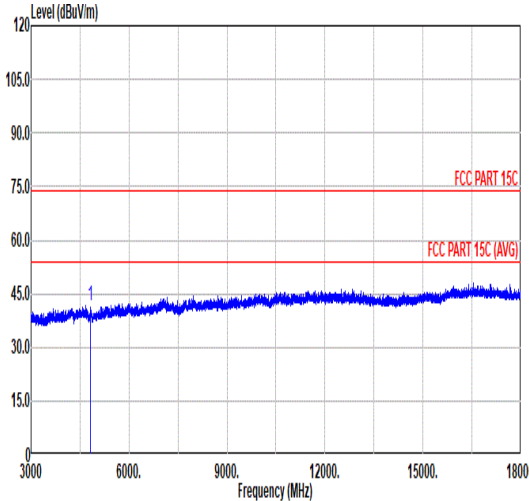


Mode	16																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.12</td><td>74.00</td><td>-31.88</td><td>59.72</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	42.12	74.00	-31.88	59.72	34.20	9.47	61.27	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.78</td><td>74.00</td><td>-32.22</td><td>59.38</td><td>34.20</td><td>9.47</td><td>61.27</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.78	74.00	-32.22	59.38	34.20	9.47	61.27	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	4824.00	42.12	74.00	-31.88	59.72	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																															
1	4824.00	41.78	74.00	-32.22	59.38	34.20	9.47	61.27	0.00	---	---	PEAK																																																																																														



Mode	17																																																																								
	Harmonic																																																																								
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																								
Pol.	Horizontal											Vertical																																																													
Peak Avg	Horizontal Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two peaks are marked with blue vertical lines and numbered 1 and 2. Peak 1 is at 4874.00 MHz and Peak 2 is at 7311.00 MHz. The measured signal is a blue line fluctuating around 45 dBuV/m. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.30</td><td>74.00</td><td>-32.70</td><td>58.86</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.53</td><td>74.00</td><td>-30.47</td><td>56.87</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.30	74.00	-32.70	58.86	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	43.53	74.00	-30.47	56.87	35.70	11.69	60.73	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1	4874.00	41.30	74.00	-32.70	58.86	34.15	9.52	61.23	0.00	---	---	PEAK																																																													
2	7311.00	43.53	74.00	-30.47	56.87	35.70	11.69	60.73	0.00	---	---	PEAK																																																													
Vertical Peak Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot includes two red limit lines: FCC PART 15C at 75.0 dBuV/m and FCC PART 15C (AVG) at 55.0 dBuV/m. Two peaks are marked with blue vertical lines and numbered 1 and 2. Peak 1 is at 4874.00 MHz and Peak 2 is at 7311.00 MHz. The measured signal is a blue line fluctuating around 45 dBuV/m. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>41.27</td><td>74.00</td><td>-32.73</td><td>58.83</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>44.71</td><td>74.00</td><td>-29.29</td><td>58.05</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.27	74.00	-32.73	58.83	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	44.71	74.00	-29.29	58.05	35.70	11.69	60.73	0.00	---	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1	4874.00	41.27	74.00	-32.73	58.83	34.15	9.52	61.23	0.00	---	---	PEAK																																																													
2	7311.00	44.71	74.00	-29.29	58.05	35.70	11.69	60.73	0.00	---	---	PEAK																																																													

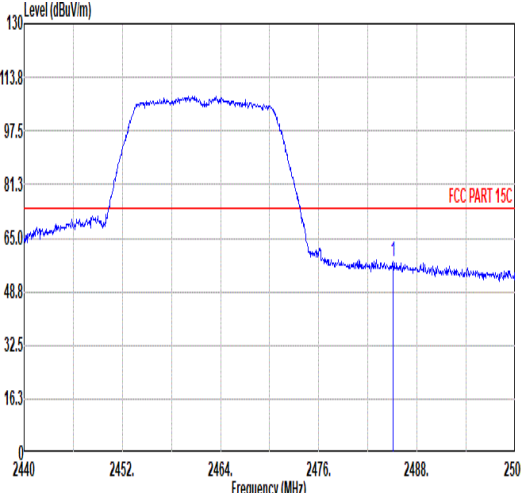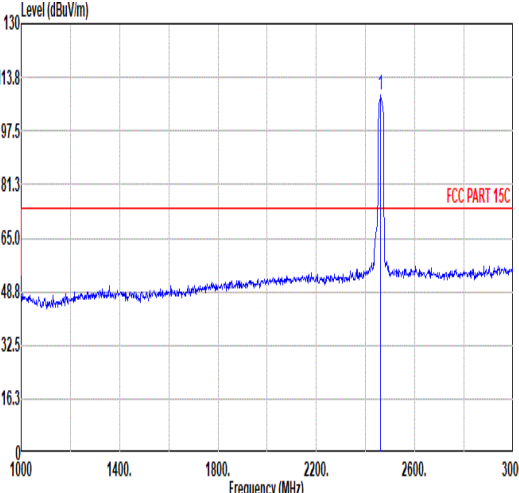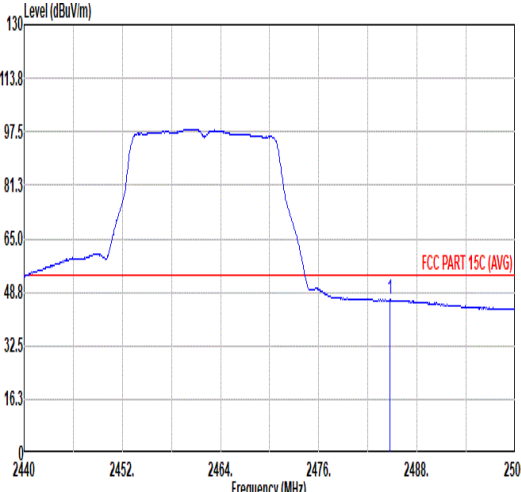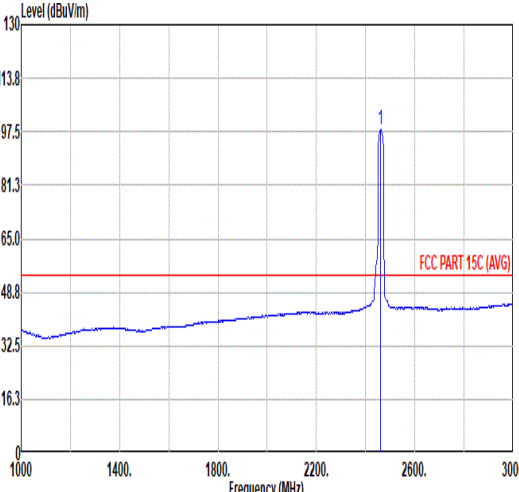

Mode	18																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2485.12</td><td>57.83</td><td>74.00</td><td>-16.17</td><td>44.71</td><td>32.61</td><td>6.74</td><td>32.23</td><td>6.00</td><td>304</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.12	57.83	74.00	-16.17	44.71	32.61	6.74	32.23	6.00	304	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>108.23</td><td>-----</td><td>95.28</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>304</td><td>0 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.23	-----	95.28	32.47	6.70	32.22	6.00	304
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2485.12	57.83	74.00	-16.17	44.71	32.61	6.74	32.23	6.00	304	0 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	108.23	-----	95.28	32.47	6.70	32.22	6.00	304	0 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.70</td><td>46.56</td><td>54.00</td><td>-7.44</td><td>33.45</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>304</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.70	46.56	54.00	-7.44	33.45	32.61	6.73	32.23	6.00	304	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.08</td><td>-----</td><td>85.14</td><td>32.46</td><td>6.70</td><td>32.22</td><td>6.00</td><td>304</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.08	-----	85.14	32.46	6.70	32.22	6.00	304
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.70	46.56	54.00	-7.44	33.45	32.61	6.73	32.23	6.00	304	0 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	98.08	-----	85.14	32.46	6.70	32.22	6.00	304	0 AVERAGE																																																																																									







Mode	18																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.34</td><td>61.09</td><td>74.00</td><td>-12.91</td><td>47.98</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>306 315 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.34	61.09	74.00	-12.91	47.98	32.61	6.73	32.23	6.00	306 315 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>111.92</td><td>-----</td><td>98.97</td><td>32.47</td><td>6.70</td><td>32.22</td><td>6.00</td><td>306</td><td>315 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.92	-----	98.97	32.47	6.70	32.22	6.00	306
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2484.34	61.09	74.00	-12.91	47.98	32.61	6.73	32.23	6.00	306 315 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	111.92	-----	98.97	32.47	6.70	32.22	6.00	306	315 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>50.34</td><td>54.00</td><td>-3.66</td><td>37.24</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>306 315 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	50.34	54.00	-3.66	37.24	32.60	6.73	32.23	6.00	306 315 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.68</td><td>-----</td><td>89.71</td><td>32.48</td><td>6.71</td><td>32.22</td><td>6.00</td><td>306</td><td>315 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.68	-----	89.71	32.48	6.71	32.22	6.00	306
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.86	50.34	54.00	-3.66	37.24	32.60	6.73	32.23	6.00	306 315 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	102.68	-----	89.71	32.48	6.71	32.22	6.00	306	315 AVERAGE																																																																																									





Mode	18																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																			
Pol.	Horizontal																																																																			
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.37</td><td>74.00</td><td>-32.63</td><td>58.94</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.07</td><td>74.00</td><td>-30.93</td><td>56.54</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.37	74.00	-32.63	58.94	34.05	9.57	61.19	0.00	---	PEAK	2	7386.00	43.07	74.00	-30.93	56.54	35.70	11.72	60.89	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4924.00	41.37	74.00	-32.63	58.94	34.05	9.57	61.19	0.00	---	PEAK																																																									
2	7386.00	43.07	74.00	-30.93	56.54	35.70	11.72	60.89	0.00	---	PEAK																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.37</td><td>74.00</td><td>-32.63</td><td>58.94</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.07</td><td>74.00</td><td>-30.93</td><td>56.54</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.37	74.00	-32.63	58.94	34.05	9.57	61.19	0.00	---	PEAK	2	7386.00	43.07	74.00	-30.93	56.54	35.70	11.72	60.89	0.00	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4924.00	41.37	74.00	-32.63	58.94	34.05	9.57	61.19	0.00	---	PEAK																																																									
2	7386.00	43.07	74.00	-30.93	56.54	35.70	11.72	60.89	0.00	---	PEAK																																																									
	Vertical																																																																			
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.28</td><td>74.00</td><td>-32.72</td><td>58.85</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>56.44</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.28	74.00	-32.72	58.85	34.05	9.57	61.19	0.00	---	PEAK	2	7386.00	42.97	74.00	-31.03	56.44	35.70	11.72	60.89	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4924.00	41.28	74.00	-32.72	58.85	34.05	9.57	61.19	0.00	---	PEAK																																																									
2	7386.00	42.97	74.00	-31.03	56.44	35.70	11.72	60.89	0.00	---	PEAK																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>41.28</td><td>74.00</td><td>-32.72</td><td>58.85</td><td>34.05</td><td>9.57</td><td>61.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.97</td><td>74.00</td><td>-31.03</td><td>56.44</td><td>35.70</td><td>11.72</td><td>60.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.28	74.00	-32.72	58.85	34.05	9.57	61.19	0.00	---	PEAK	2	7386.00	42.97	74.00	-31.03	56.44	35.70	11.72	60.89	0.00	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4924.00	41.28	74.00	-32.72	58.85	34.05	9.57	61.19	0.00	---	PEAK																																																									
2	7386.00	42.97	74.00	-31.03	56.44	35.70	11.72	60.89	0.00	---	PEAK																																																									

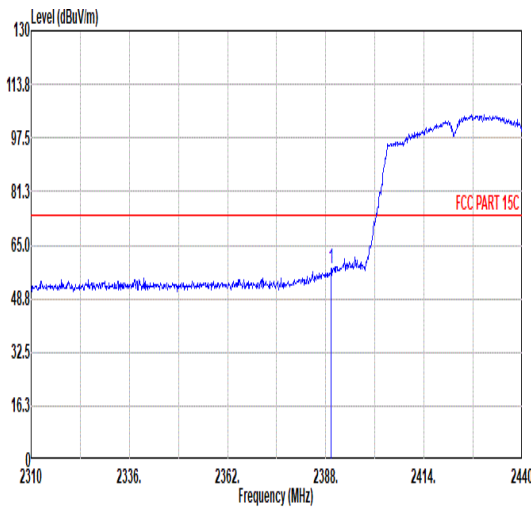
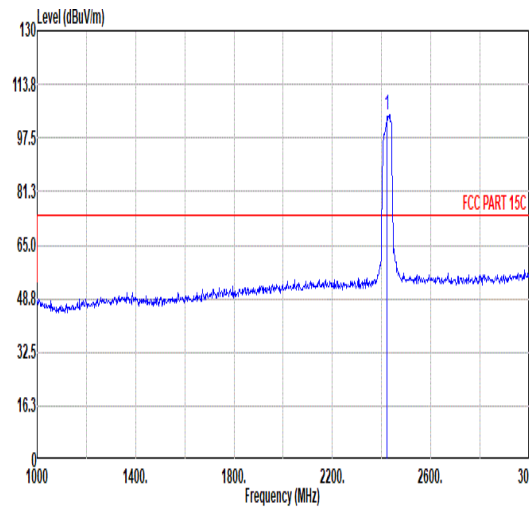
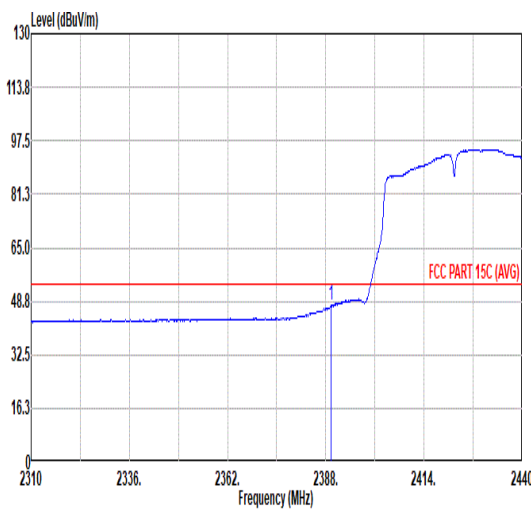
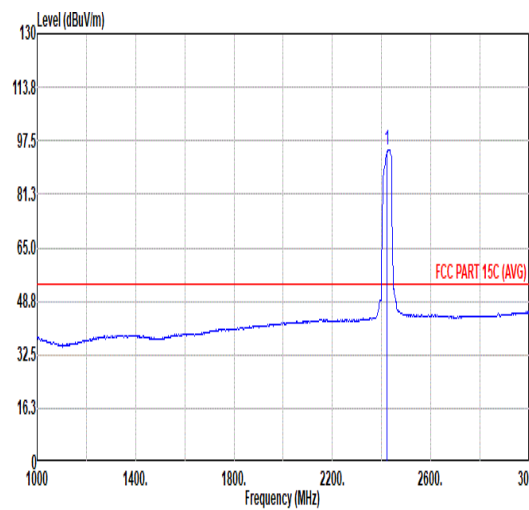


Mode	19																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>58.08</td><td>74.00</td><td>-15.92</td><td>45.19</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>311</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	58.08	74.00	-15.92	45.19	32.47	6.60	32.18	6.00	311	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>104.36</td><td>-----</td><td>91.44</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>311</td><td>0 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	104.36	-----	91.44	32.46	6.66	32.20	6.00	311
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.43	58.08	74.00	-15.92	45.19	32.47	6.60	32.18	6.00	311	0 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	104.36	-----	91.44	32.46	6.66	32.20	6.00	311	0 PEAK																																																																																									
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>47.48</td><td>54.00</td><td>-6.52</td><td>34.59</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>311</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	47.48	54.00	-6.52	34.59	32.47	6.60	32.18	6.00	311	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>94.79</td><td>-----</td><td>81.86</td><td>32.47</td><td>6.66</td><td>32.20</td><td>6.00</td><td>311</td><td>0 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	94.79	-----	81.86	32.47	6.66	32.20	6.00	311
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.43	47.48	54.00	-6.52	34.59	32.47	6.60	32.18	6.00	311	0 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	94.79	-----	81.86	32.47	6.66	32.20	6.00	311	0 AVERAGE																																																																																									

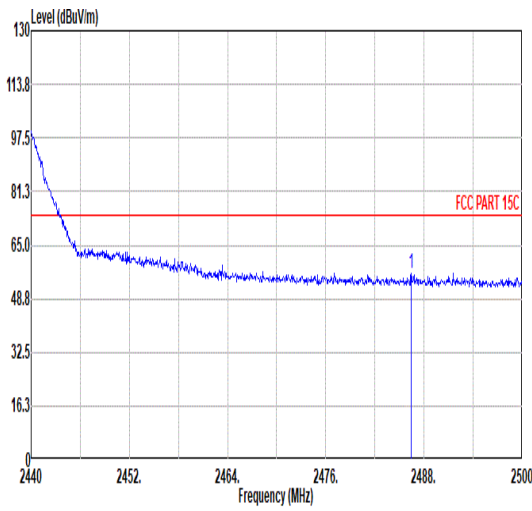
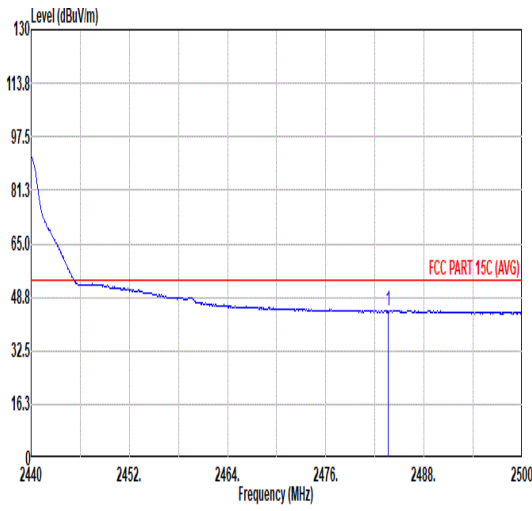


Mode	19																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.44</td><td>56.43</td><td>74.00</td><td>-17.57</td><td>43.31</td><td>32.62</td><td>6.74</td><td>32.24</td><td>6.00</td><td>311</td><td>0 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.44	56.43	74.00	-17.57	43.31	32.62	6.74	32.24	6.00	311	0 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2486.44	56.43	74.00	-17.57	43.31	32.62	6.74	32.24	6.00	311	0 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>44.68</td><td>54.00</td><td>-9.32</td><td>31.58</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>311</td><td>0 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	44.68	54.00	-9.32	31.58	32.60	6.73	32.23	6.00	311	0 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.62	44.68	54.00	-9.32	31.58	32.60	6.73	32.23	6.00	311	0 AVERAGE																																													

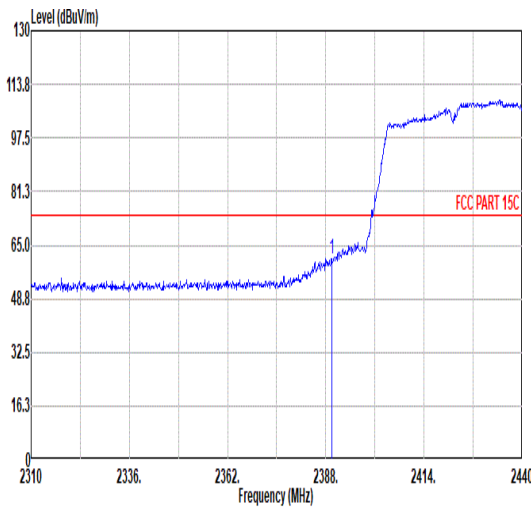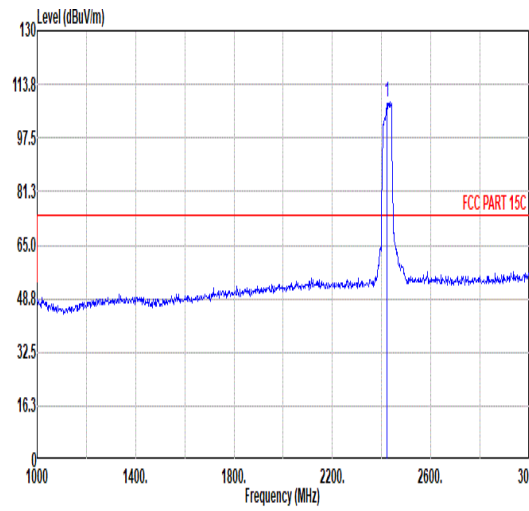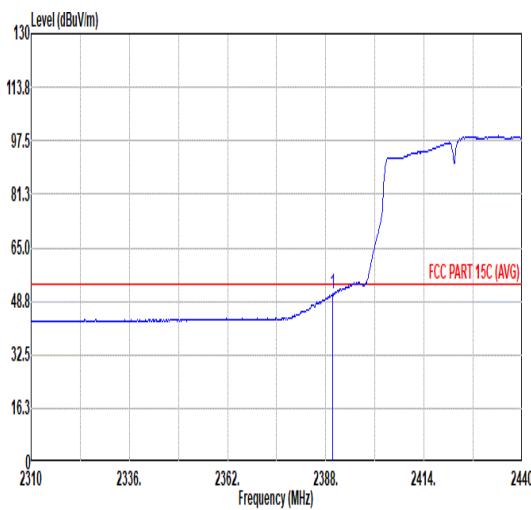
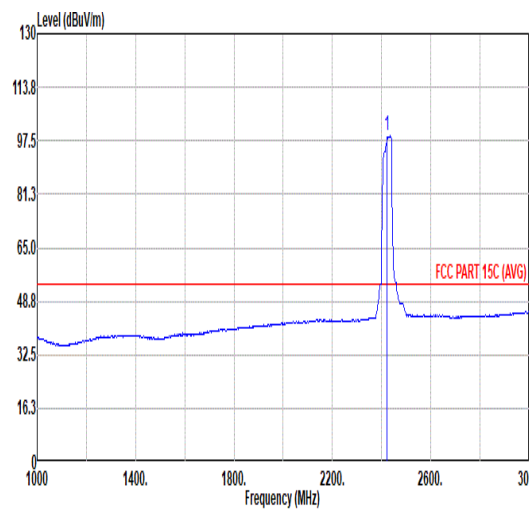


Mode	19																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																
Pol.	Vertical					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.69</td><td>61.04</td><td>74.00</td><td>-12.96</td><td>48.14</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>310</td><td>321 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.69	61.04	74.00	-12.96	48.14	32.48	6.60	32.18	6.00	310	321 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>108.21</td><td>-----</td><td>-----</td><td>95.29</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>310</td><td>321 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2422.00	108.21	-----	-----	95.29	32.46	6.66	32.20	6.00	310
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2389.69	61.04	74.00	-12.96	48.14	32.48	6.60	32.18	6.00	310	321 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2422.00	108.21	-----	-----	95.29	32.46	6.66	32.20	6.00	310	321 PEAK																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.82</td><td>50.78</td><td>54.00</td><td>-3.22</td><td>37.88</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>310</td><td>321 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.82	50.78	54.00	-3.22	37.88	32.48	6.60	32.18	6.00	310	321 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>98.88</td><td>-----</td><td>-----</td><td>85.96</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>310</td><td>321 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2422.00	98.88	-----	-----	85.96	32.46	6.66	32.20	6.00	310
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2389.82	50.78	54.00	-3.22	37.88	32.48	6.60	32.18	6.00	310	321 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																							
1 2422.00	98.88	-----	-----	85.96	32.46	6.66	32.20	6.00	310	321 AVERAGE																																																																																							



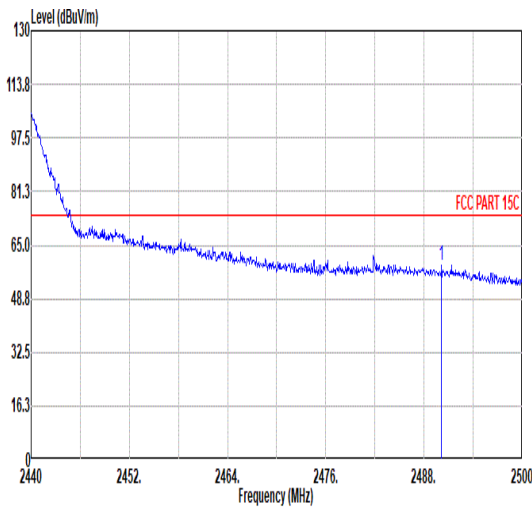
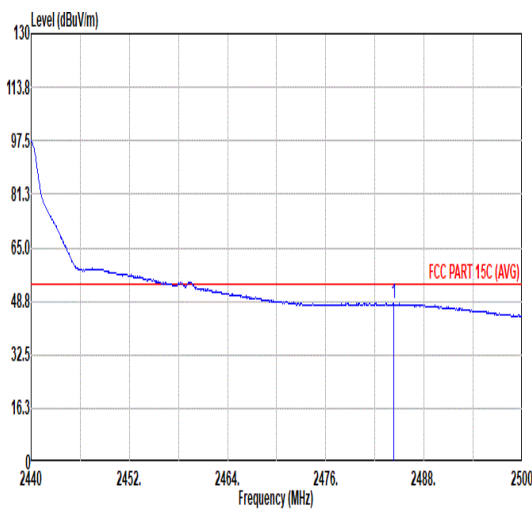


Mode	19																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																							
Pol.	Vertical										Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.16</td><td>58.97</td><td>74.00</td><td>-15.03</td><td>45.83</td><td>32.64</td><td>6.74</td><td>32.24</td><td>6.00</td><td>310</td><td>321 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.16	58.97	74.00	-15.03	45.83	32.64	6.74	32.24	6.00	310	321 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2490.16	58.97	74.00	-15.03	45.83	32.64	6.74	32.24	6.00	310	321 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.28</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>34.79</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>310</td><td>321 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.28	47.90	54.00	-6.10	34.79	32.61	6.73	32.23	6.00	310	321 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.28	47.90	54.00	-6.10	34.79	32.61	6.73	32.23	6.00	310	321 AVERAGE																																													

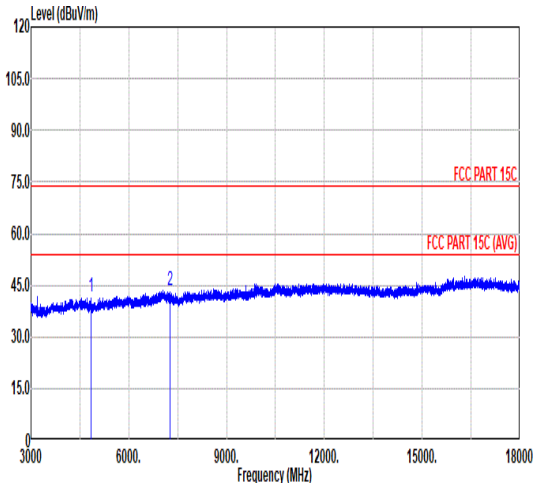
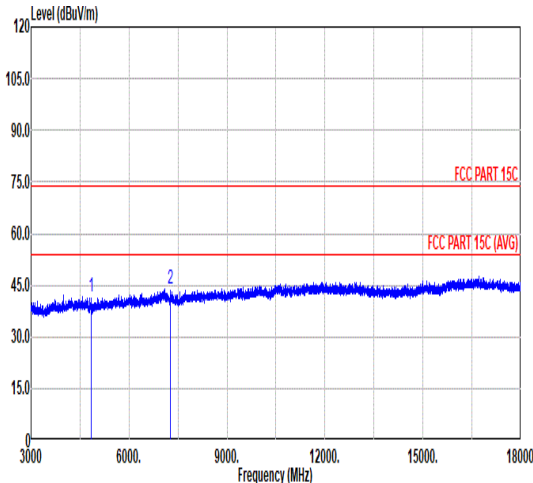


Mode	19																																																																																																																																																			
	Harmonic																																																																																																																																																			
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																																																																			
Pol.	Horizontal											Vertical																																																																																																																																								
Peak Avg																																																																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>41.44</td><td>74.00</td><td>-32.56</td><td>59.00</td><td>34.20</td><td>9.49</td><td>61.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>43.47</td><td>74.00</td><td>-30.53</td><td>56.80</td><td>35.63</td><td>11.67</td><td>60.63</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.44	74.00	-32.56	59.00	34.20	9.49	61.25	0.00	---	---	PEAK	2	7266.00	43.47	74.00	-30.53	56.80	35.63	11.67	60.63	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4844.00</td><td>41.46</td><td>74.00</td><td>-32.54</td><td>59.02</td><td>34.20</td><td>9.49</td><td>61.25</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>43.95</td><td>74.00</td><td>-30.05</td><td>57.28</td><td>35.63</td><td>11.67</td><td>60.63</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>															Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4844.00	41.46	74.00	-32.54	59.02	34.20	9.49	61.25	0.00	---	---	PEAK	2	7266.00	43.95	74.00	-30.05	57.28	35.63	11.67	60.63	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4844.00	41.44	74.00	-32.56	59.00	34.20	9.49	61.25	0.00	---	---	PEAK																																																																																																																																								
2	7266.00	43.47	74.00	-30.53	56.80	35.63	11.67	60.63	0.00	---	---	PEAK																																																																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																									
1	4844.00	41.46	74.00	-32.54	59.02	34.20	9.49	61.25	0.00	---	---	PEAK																																																																																																																																								
2	7266.00	43.95	74.00	-30.05	57.28	35.63	11.67	60.63	0.00	---	---	PEAK																																																																																																																																								

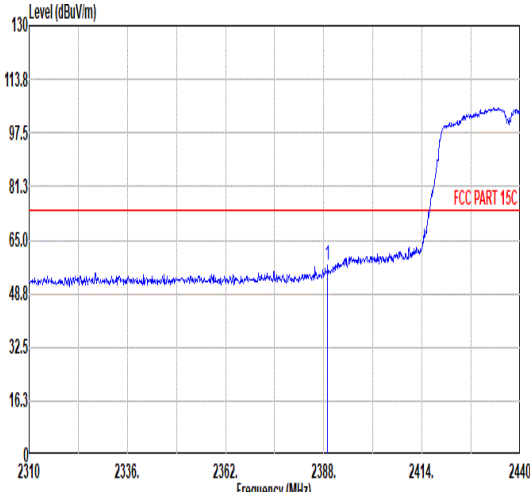
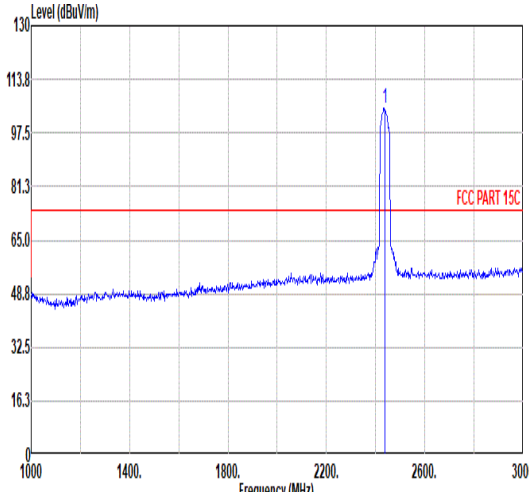
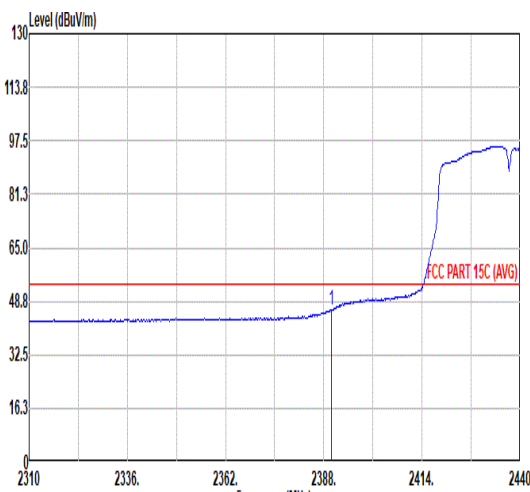
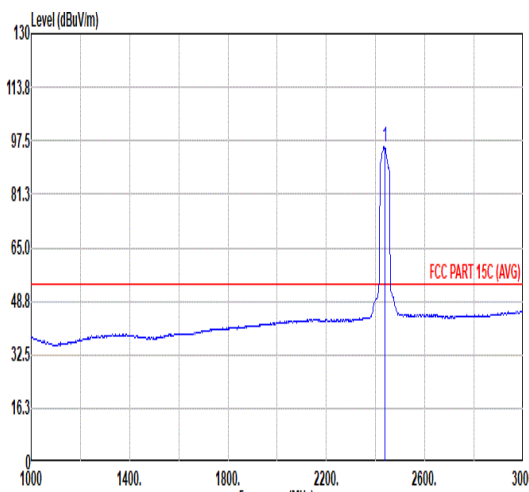


		20																																																																																																												
Mode		Band Edge - L																																																																																																												
		2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																												
Pol.		Horizontal					Fundamental																																																																																																							
Peak		 Horizontal Peak Spectrum Plot. Level (dBuV/m) vs Frequency (MHz) from 2310 to 2440 MHz. A red line indicates the FCC PART 15C limit at approximately 74 dBuV/m. The blue trace shows a rising signal starting around 2380 MHz, reaching the limit at 2437 MHz. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>57.36</td><td>74.00</td><td>-16.64</td><td>44.47</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>314</td><td>0 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	57.36	74.00	-16.64	44.47	32.47	6.60	32.18	6.00	314	0 PEAK	 Fundamental Peak Spectrum Plot. Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. A sharp peak is visible at 2437 MHz, exceeding the FCC PART 15C limit (red line at ~74 dBuV/m). <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>104.93</td><td>-----</td><td>92.00</td><td>32.47</td><td>6.66</td><td>32.20</td><td>6.00</td><td>314</td><td>0 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.93	-----	92.00	32.47	6.66	32.20	6.00	314	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2389.04	57.36	74.00	-16.64	44.47	32.47	6.60	32.18	6.00	314	0 PEAK																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2437.00	104.93	-----	92.00	32.47	6.66	32.20	6.00	314	0 PEAK																																																																																																				
Avg		 Horizontal Avg Spectrum Plot. Level (dBuV/m) vs Frequency (MHz) from 2310 to 2440 MHz. The average signal (blue trace) rises to meet the FCC PART 15C (AVG) limit (red line at ~74 dBuV/m) at 2437 MHz. <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.12</td><td>54.00</td><td>-7.88</td><td>33.22</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>314</td><td>0 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.12	54.00	-7.88	33.22	32.48	6.60	32.18	6.00	314	0 AVERAGE	 Fundamental Avg Spectrum Plot. Level (dBuV/m) vs Frequency (MHz) from 1000 to 3000 MHz. The average signal (blue trace) shows a peak at 2437 MHz that is below the FCC PART 15C (AVG) limit (red line at ~74 dBuV/m). <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>95.82</td><td>-----</td><td>82.90</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>314</td><td>0 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.82	-----	82.90	32.46	6.66	32.20	6.00	314	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2389.95	46.12	54.00	-7.88	33.22	32.48	6.60	32.18	6.00	314	0 AVERAGE																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2437.00	95.82	-----	82.90	32.46	6.66	32.20	6.00	314	0 AVERAGE																																																																																																				

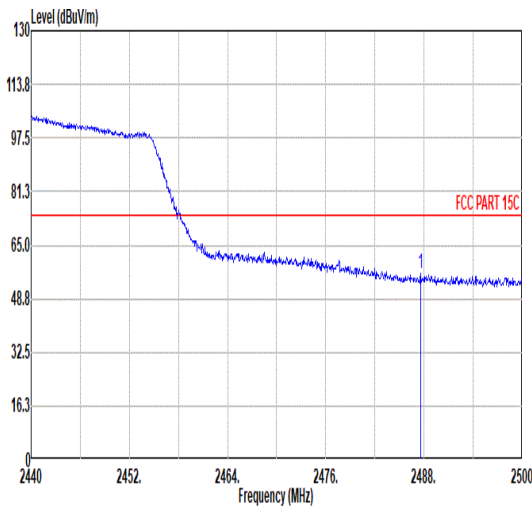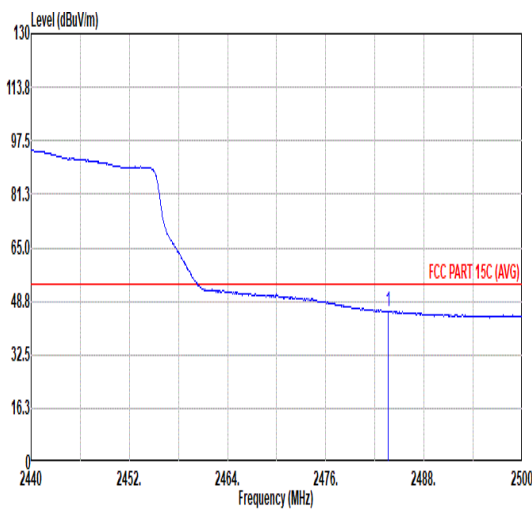

Mode	20																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																							
Pol.	Horizontal										Fundamental																																													
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.58</td><td>56.37</td><td>74.00</td><td>-17.63</td><td>43.24</td><td>32.63</td><td>6.74</td><td>32.24</td><td>6.00</td><td>314</td><td>0 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.58	56.37	74.00	-17.63	43.24	32.63	6.74	32.24	6.00	314	0 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2487.58	56.37	74.00	-17.63	43.24	32.63	6.74	32.24	6.00	314	0 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.62</td><td>45.74</td><td>54.00</td><td>-8.26</td><td>32.64</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>314</td><td>0 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	45.74	54.00	-8.26	32.64	32.60	6.73	32.23	6.00	314	0 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.62	45.74	54.00	-8.26	32.64	32.60	6.73	32.23	6.00	314	0 AVERAGE																																													

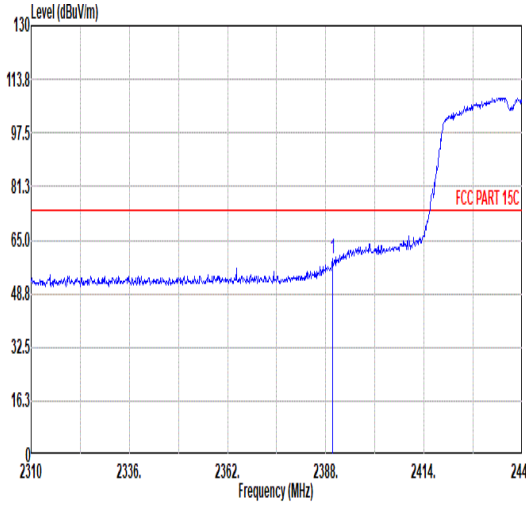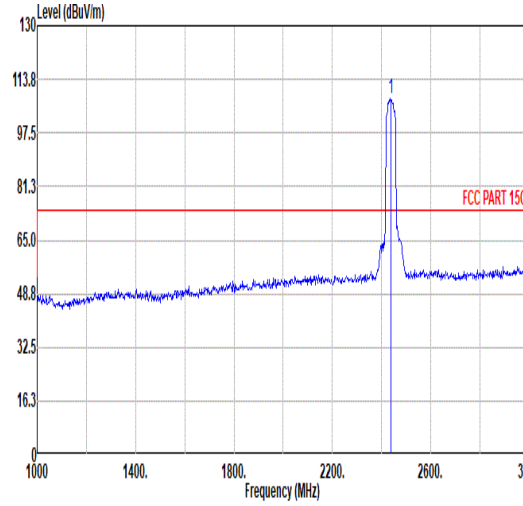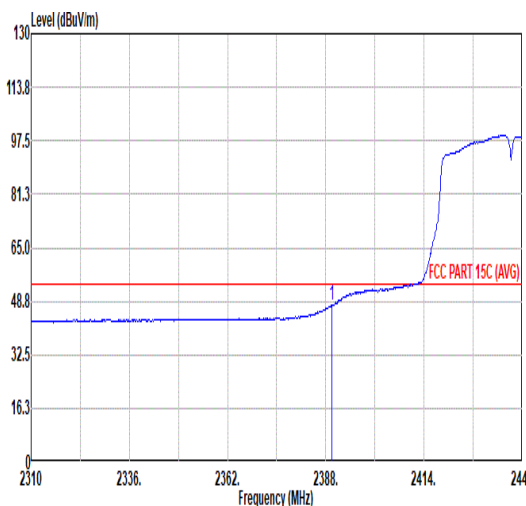
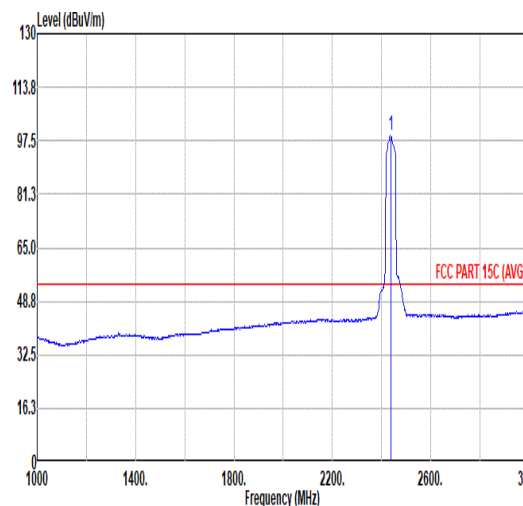


Mode	20																																																																																															
	Band Edge - L																																																																																															
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																															
Pol.	Vertical					Fundamental																																																																																										
Peak																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.82</td><td>59.26</td><td>74.00</td><td>-14.74</td><td>46.36</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>346</td><td>319 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.82	59.26	74.00	-14.74	46.36	32.48	6.60	32.18	6.00	346	319 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>107.82</td><td>-----</td><td>94.90</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>346</td><td>319 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2437.00	107.82	-----	94.90	32.46	6.66	32.20	6.00	346
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 2389.82	59.26	74.00	-14.74	46.36	32.48	6.60	32.18	6.00	346	319 PEAK																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 2437.00	107.82	-----	94.90	32.46	6.66	32.20	6.00	346	319 PEAK																																																																																							
Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.56</td><td>47.76</td><td>54.00</td><td>-6.24</td><td>34.87</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>346</td><td>319 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2389.56	47.76	54.00	-6.24	34.87	32.47	6.60	32.18	6.00	346	319 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>99.24</td><td>-----</td><td>86.32</td><td>32.46</td><td>6.66</td><td>32.20</td><td>6.00</td><td>346</td><td>319 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2437.00	99.24	-----	86.32	32.46	6.66	32.20	6.00	346
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 2389.56	47.76	54.00	-6.24	34.87	32.47	6.60	32.18	6.00	346	319 AVERAGE																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1 2437.00	99.24	-----	86.32	32.46	6.66	32.20	6.00	346	319 AVERAGE																																																																																							







Mode	20																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																					
Pol.	Vertical					Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.82</td><td>62.98</td><td>74.00</td><td>-11.02</td><td>49.87</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>346 319 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.82	62.98	74.00	-11.02	49.87	32.61	6.73	32.23	6.00	346 319 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2484.82	62.98	74.00	-11.02	49.87	32.61	6.73	32.23	6.00	346 319 PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>49.92</td><td>54.00</td><td>-4.08</td><td>36.82</td><td>32.60</td><td>6.73</td><td>32.23</td><td>6.00</td><td>346 319 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	49.92	54.00	-4.08	36.82	32.60	6.73	32.23	6.00	346 319 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.68	49.92	54.00	-4.08	36.82	32.60	6.73	32.23	6.00	346 319 AVERAGE																																												

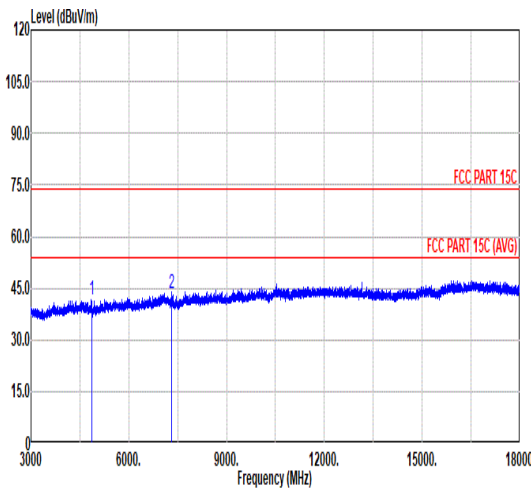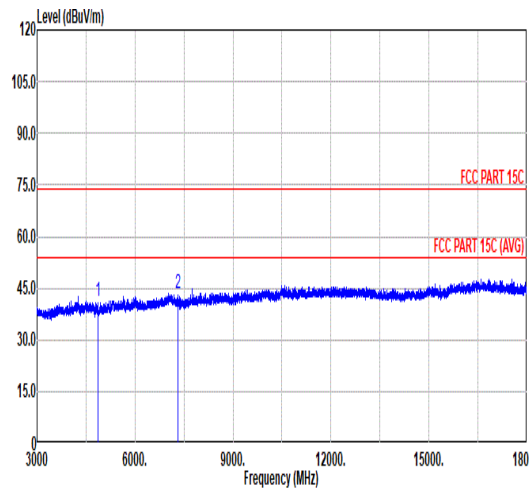

Mode	20																																																																						
	Harmonic																																																																						
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																						
Pol.	Horizontal						Vertical																																																																
Peak Avg																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.81</td><td>74.00</td><td>-32.19</td><td>59.37</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.65</td><td>74.00</td><td>-30.35</td><td>56.99</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.81	74.00	-32.19	59.37	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	43.65	74.00	-30.35	56.99	35.70	11.69	60.73	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	4874.00	41.81	74.00	-32.19	59.37	34.15	9.52	61.23	0.00	---	---	PEAK																																																											
2	7311.00	43.65	74.00	-30.35	56.99	35.70	11.69	60.73	0.00	---	---	PEAK																																																											
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.23</td><td>74.00</td><td>-32.77</td><td>58.79</td><td>34.15</td><td>9.52</td><td>61.23</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.60</td><td>74.00</td><td>-30.40</td><td>56.94</td><td>35.70</td><td>11.69</td><td>60.73</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	41.23	74.00	-32.77	58.79	34.15	9.52	61.23	0.00	---	---	PEAK	2	7311.00	43.60	74.00	-30.40	56.94	35.70	11.69	60.73	0.00	---	---	PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																												
1	4874.00	41.23	74.00	-32.77	58.79	34.15	9.52	61.23	0.00	---	---	PEAK																																																											
2	7311.00	43.60	74.00	-30.40	56.94	35.70	11.69	60.73	0.00	---	---	PEAK																																																											

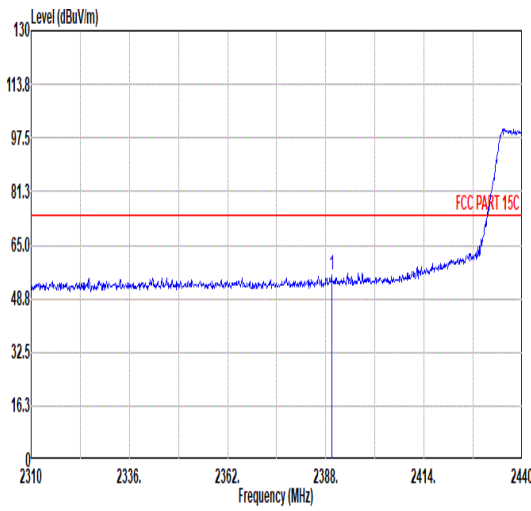
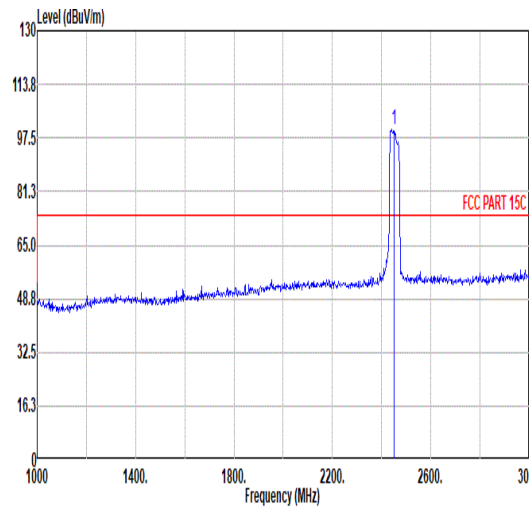
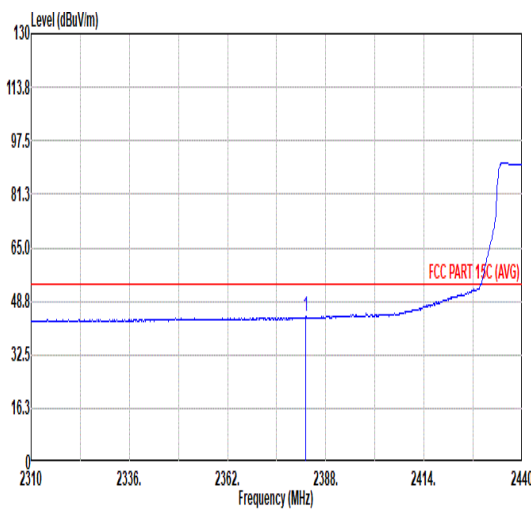
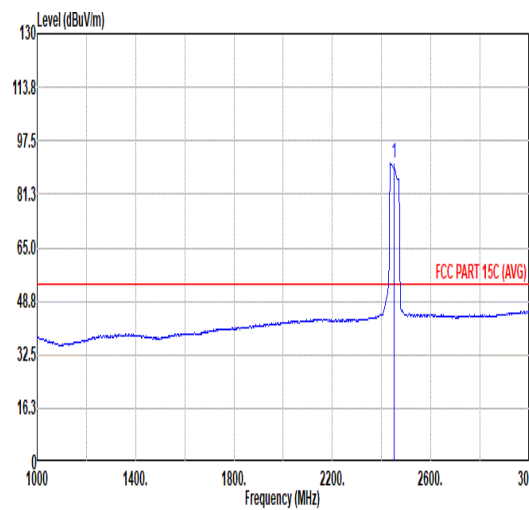


Mode	21																																																						
	Band Edge - L																																																						
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>55.73</td><td>74.00</td><td>-18.27</td><td>42.84</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>312 0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	55.73	74.00	-18.27	42.84	32.47	6.60	32.18	6.00	312 0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.56	55.73	74.00	-18.27	42.84	32.47	6.60	32.18	6.00	312 0 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>99.96</td><td>-----</td><td>87.06</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>312</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	99.96	-----	87.06	32.44	6.67	32.21	6.00	312	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	99.96	-----	87.06	32.44	6.67	32.21	6.00	312	0 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.67</td><td>44.12</td><td>54.00</td><td>-9.88</td><td>31.33</td><td>32.39</td><td>6.59</td><td>32.19</td><td>6.00</td><td>312 0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.67	44.12	54.00	-9.88	31.33	32.39	6.59	32.19	6.00	312 0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2382.67	44.12	54.00	-9.88	31.33	32.39	6.59	32.19	6.00	312 0 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>90.73</td><td>-----</td><td>77.80</td><td>32.46</td><td>6.67</td><td>32.20</td><td>6.00</td><td>312</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	90.73	-----	77.80	32.46	6.67	32.20	6.00	312	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	90.73	-----	77.80	32.46	6.67	32.20	6.00	312	0 AVERAGE																																													



Mode	21																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.58</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>43.66</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>312</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.58	56.77	74.00	-17.23	43.66	32.61	6.73	32.23	6.00	312	0 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.58	56.77	74.00	-17.23	43.66	32.61	6.73	32.23	6.00	312	0 PEAK																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.64</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>32.43</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>312</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.64	45.54	54.00	-8.46	32.43	32.61	6.73	32.23	6.00	312	0 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.64	45.54	54.00	-8.46	32.43	32.61	6.73	32.23	6.00	312	0 AVERAGE																																													

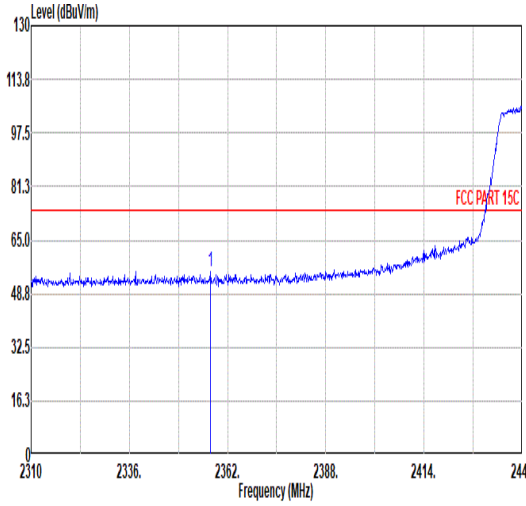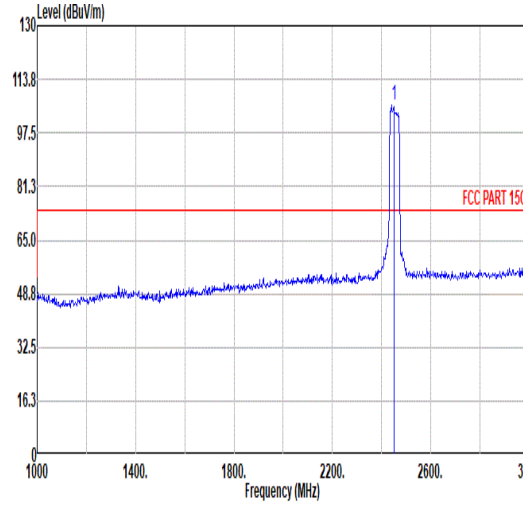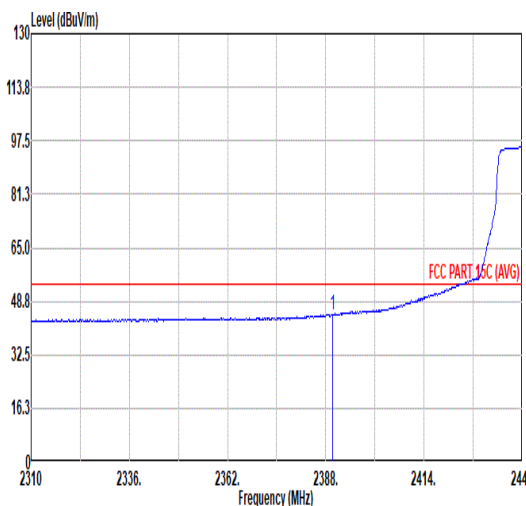
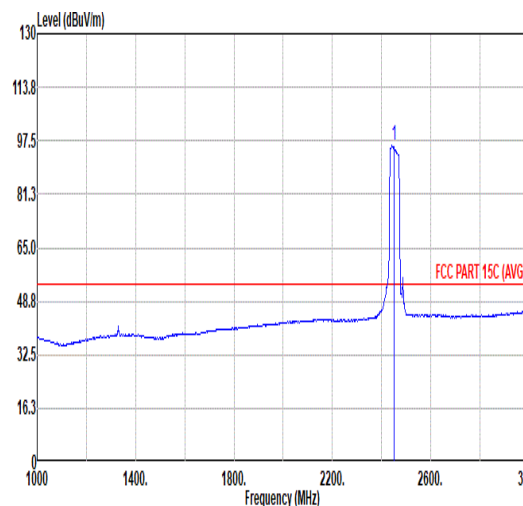


Mode	21																																																						
	Band Edge - L																																																						
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.45</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>43.19</td><td>32.09</td><td>6.55</td><td>32.19</td><td>6.00</td><td>310 325 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.45	55.64	74.00	-18.36	43.19	32.09	6.55	32.19	6.00	310 325 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2357.45	55.64	74.00	-18.36	43.19	32.09	6.55	32.19	6.00	310 325 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>105.83</td><td>-----</td><td>92.93</td><td>32.44</td><td>6.67</td><td>32.21</td><td>6.00</td><td>310</td><td>325 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	105.83	-----	92.93	32.44	6.67	32.21	6.00	310	325 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	105.83	-----	92.93	32.44	6.67	32.21	6.00	310	325 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>44.81</td><td>54.00</td><td>-9.19</td><td>31.91</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>310 325 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	44.81	54.00	-9.19	31.91	32.48	6.60	32.18	6.00	310 325 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.82	44.81	54.00	-9.19	31.91	32.48	6.60	32.18	6.00	310 325 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>96.03</td><td>-----</td><td>83.13</td><td>32.43</td><td>6.68</td><td>32.21</td><td>6.00</td><td>310</td><td>325 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	96.03	-----	83.13	32.43	6.68	32.21	6.00	310	325 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	96.03	-----	83.13	32.43	6.68	32.21	6.00	310	325 AVERAGE																																													







Mode	21																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH9_2452MHz																																													
Pol.	Vertical	Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.76</td><td>61.35</td><td>74.00</td><td>-12.65</td><td>48.24</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>310 325 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.76	61.35	74.00	-12.65	48.24	32.61	6.73	32.23	6.00	310 325 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.76	61.35	74.00	-12.65	48.24	32.61	6.73	32.23	6.00	310 325 PEAK																																				
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.52</td><td>50.04</td><td>54.00</td><td>-3.96</td><td>36.93</td><td>32.61</td><td>6.73</td><td>32.23</td><td>6.00</td><td>310 325 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.52	50.04	54.00	-3.96	36.93	32.61	6.73	32.23	6.00	310 325 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	2484.52	50.04	54.00	-3.96	36.93	32.61	6.73	32.23	6.00	310 325 AVERAGE																																				



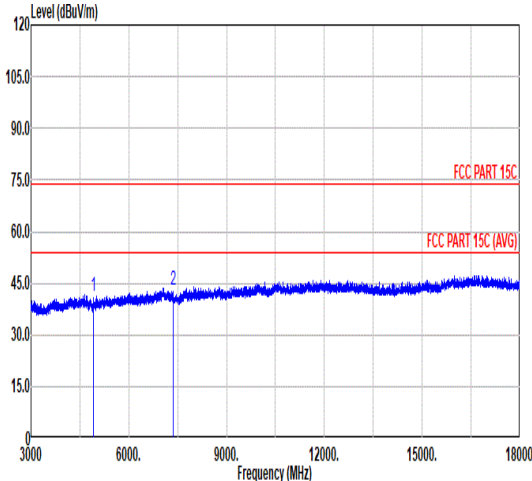
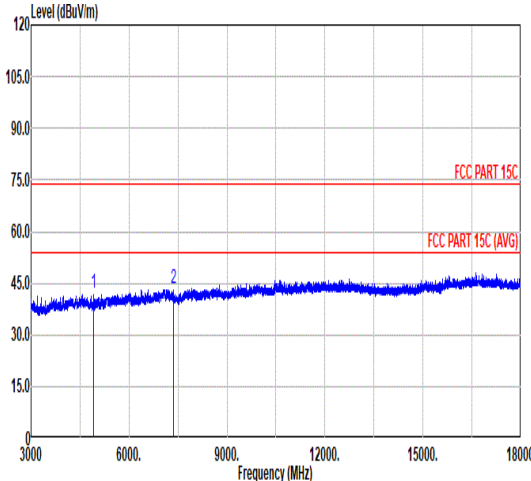


Mode	21																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>58.95</td><td>34.09</td><td>9.55</td><td>61.20</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>42.93</td><td>74.00</td><td>-31.07</td><td>56.35</td><td>35.70</td><td>11.71</td><td>60.83</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	41.39	74.00	-32.61	58.95	34.09	9.55	61.20	0.00	---	---	PEAK	2	7356.00	42.93	74.00	-31.07	56.35	35.70	11.71	60.83	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4904.00</td><td>42.13</td><td>74.00</td><td>-31.87</td><td>59.69</td><td>34.09</td><td>9.55</td><td>61.20</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>43.49</td><td>74.00</td><td>-30.51</td><td>56.91</td><td>35.70</td><td>11.71</td><td>60.83</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	42.13	74.00	-31.87	59.69	34.09	9.55	61.20	0.00	---	---	PEAK	2	7356.00	43.49	74.00	-30.51	56.91	35.70	11.71	60.83	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4904.00	41.39	74.00	-32.61	58.95	34.09	9.55	61.20	0.00	---	---	PEAK																																																																																																																						
2	7356.00	42.93	74.00	-31.07	56.35	35.70	11.71	60.83	0.00	---	---	PEAK																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1	4904.00	42.13	74.00	-31.87	59.69	34.09	9.55	61.20	0.00	---	---	PEAK																																																																																																																						
2	7356.00	43.49	74.00	-30.51	56.91	35.70	11.71	60.83	0.00	---	---	PEAK																																																																																																																						

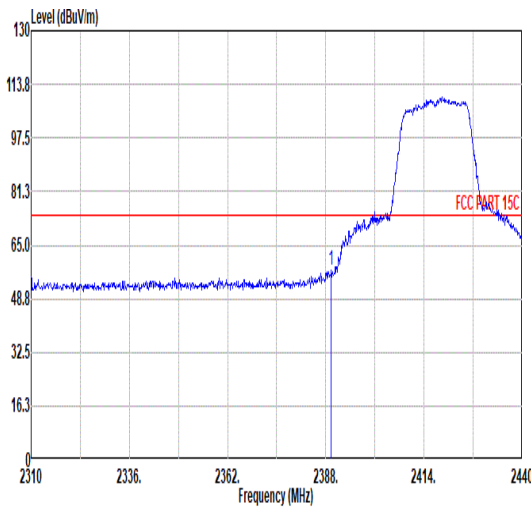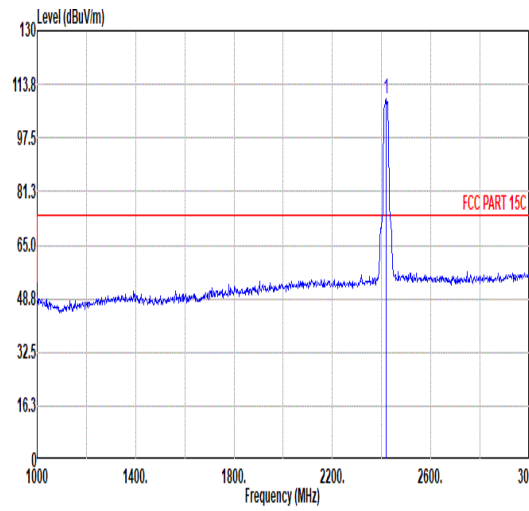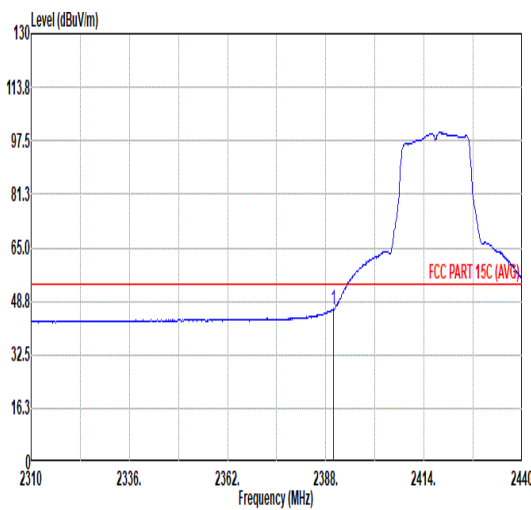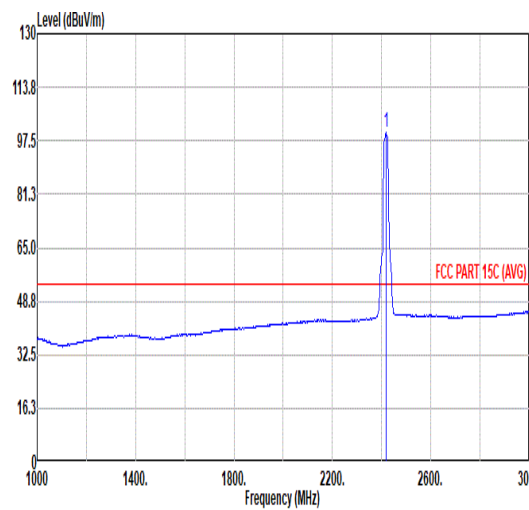



Mode	22																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>57.33</td><td>74.00</td><td>-16.67</td><td>44.44</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>300 78 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	57.33	74.00	-16.67	44.44	32.47	6.60	32.18	6.00	300 78 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>109.29</td><td>-----</td><td>96.31</td><td>32.53</td><td>6.64</td><td>32.19</td><td>6.00</td><td>300</td><td>78 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	109.29	-----	96.31	32.53	6.64	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.43	57.33	74.00	-16.67	44.44	32.47	6.60	32.18	6.00	300 78 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2417.00	109.29	-----	96.31	32.53	6.64	32.19	6.00	300	78 PEAK																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.32</td><td>54.00</td><td>-7.68</td><td>33.42</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>300 78 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.32	54.00	-7.68	33.42	32.48	6.60	32.18	6.00	300 78 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>99.83</td><td>-----</td><td>86.85</td><td>32.53</td><td>6.64</td><td>32.19</td><td>6.00</td><td>300</td><td>78 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	99.83	-----	86.85	32.53	6.64	32.19	6.00	300
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	46.32	54.00	-7.68	33.42	32.48	6.60	32.18	6.00	300 78 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2417.00	99.83	-----	86.85	32.53	6.64	32.19	6.00	300	78 AVERAGE																																																																																							

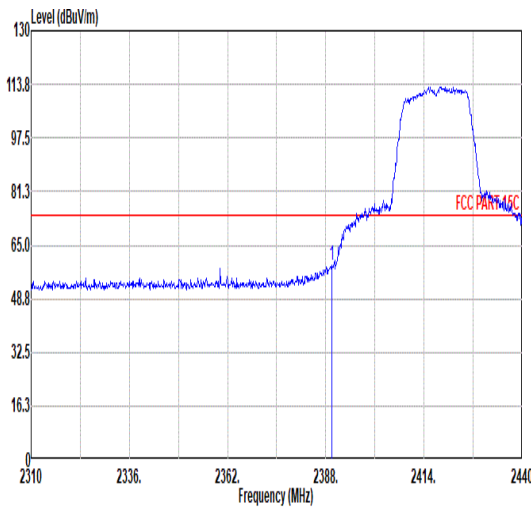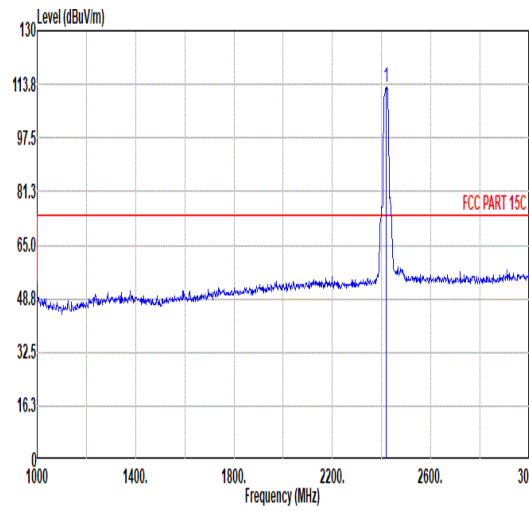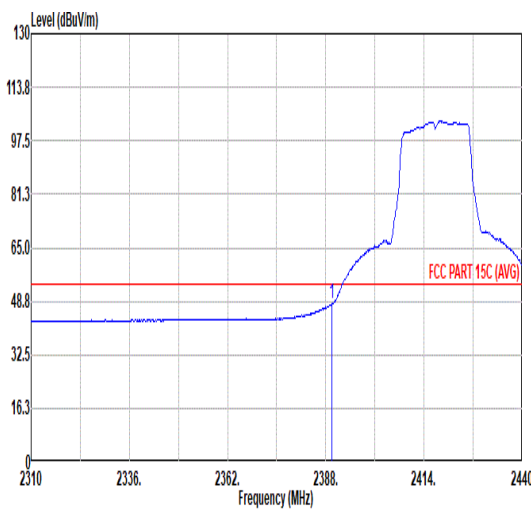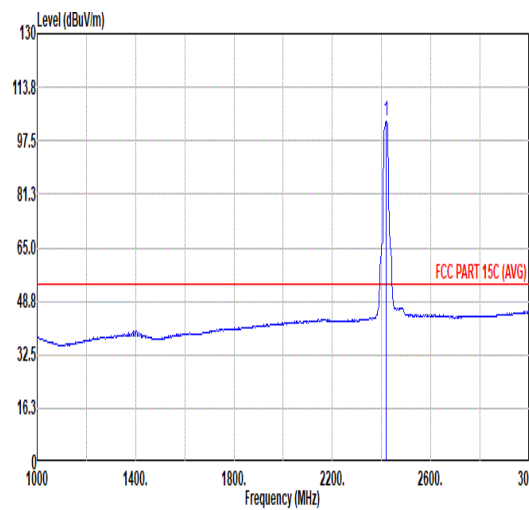



Mode	22																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																																																
Pol.	Vertical					Fundamental																																																																																											
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>59.01</td><td>74.00</td><td>-14.99</td><td>46.12</td><td>32.47</td><td>6.60</td><td>32.18</td><td>6.00</td><td>326 304 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	59.01	74.00	-14.99	46.12	32.47	6.60	32.18	6.00	326 304 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>112.93</td><td>-----</td><td>99.95</td><td>32.53</td><td>6.64</td><td>32.19</td><td>6.00</td><td>326</td><td>304 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	112.93	-----	99.95	32.53	6.64	32.19	6.00	326
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.56	59.01	74.00	-14.99	46.12	32.47	6.60	32.18	6.00	326 304 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2417.00	112.93	-----	99.95	32.53	6.64	32.19	6.00	326	304 PEAK																																																																																							
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>48.19</td><td>54.00</td><td>-5.81</td><td>35.29</td><td>32.48</td><td>6.60</td><td>32.18</td><td>6.00</td><td>304 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	48.19	54.00	-5.81	35.29	32.48	6.60	32.18	6.00	304 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>103.43</td><td>-----</td><td>90.45</td><td>32.53</td><td>6.64</td><td>32.19</td><td>6.00</td><td>326</td><td>304 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	103.43	-----	90.45	32.53	6.64	32.19	6.00	326
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.69	48.19	54.00	-5.81	35.29	32.48	6.60	32.18	6.00	304 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2417.00	103.43	-----	90.45	32.53	6.64	32.19	6.00	326	304 AVERAGE																																																																																							

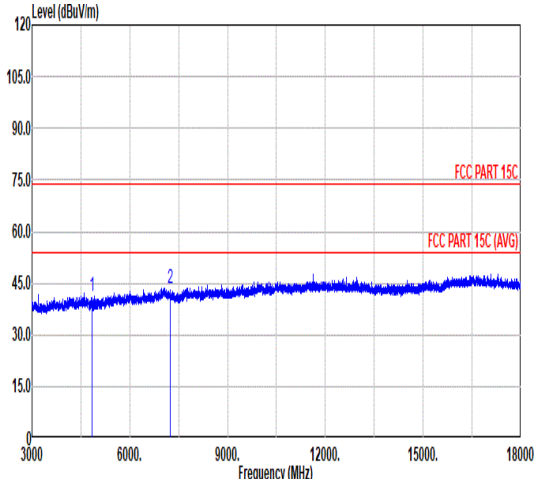

Mode	22																																																																			
	Harmonic																																																																			
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																			
Pol.	Horizontal																																																																			
Peak Avg																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4834.00</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>58.94</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7251.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>56.78</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK	2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK																																																									
2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4834.00</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>58.94</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7251.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>56.78</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK	2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK																																																									
2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4834.00</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>58.94</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7251.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>56.78</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK	2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK																																																									
2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4834.00</td><td>41.36</td><td>74.00</td><td>-32.64</td><td>58.94</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7251.00</td><td>43.46</td><td>74.00</td><td>-30.54</td><td>56.78</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK	2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4834.00	41.36	74.00	-32.64	58.94	34.20	9.48	61.26	0.00	---	PEAK																																																									
2	7251.00	43.46	74.00	-30.54	56.78	35.60	11.67	60.59	0.00	---	PEAK																																																									
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4834.00</td><td>40.90</td><td>74.00</td><td>-33.10</td><td>58.48</td><td>34.20</td><td>9.48</td><td>61.26</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7251.00</td><td>43.62</td><td>74.00</td><td>-30.38</td><td>56.94</td><td>35.60</td><td>11.67</td><td>60.59</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4834.00	40.90	74.00	-33.10	58.48	34.20	9.48	61.26	0.00	---	PEAK	2	7251.00	43.62	74.00	-30.38	56.94	35.60	11.67	60.59	0.00	---	PEAK	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	4834.00	40.90	74.00	-33.10	58.48	34.20	9.48	61.26	0.00	---	PEAK																																																									
2	7251.00	43.62	74.00	-30.38	56.94	35.60	11.67	60.59	0.00	---	PEAK																																																									

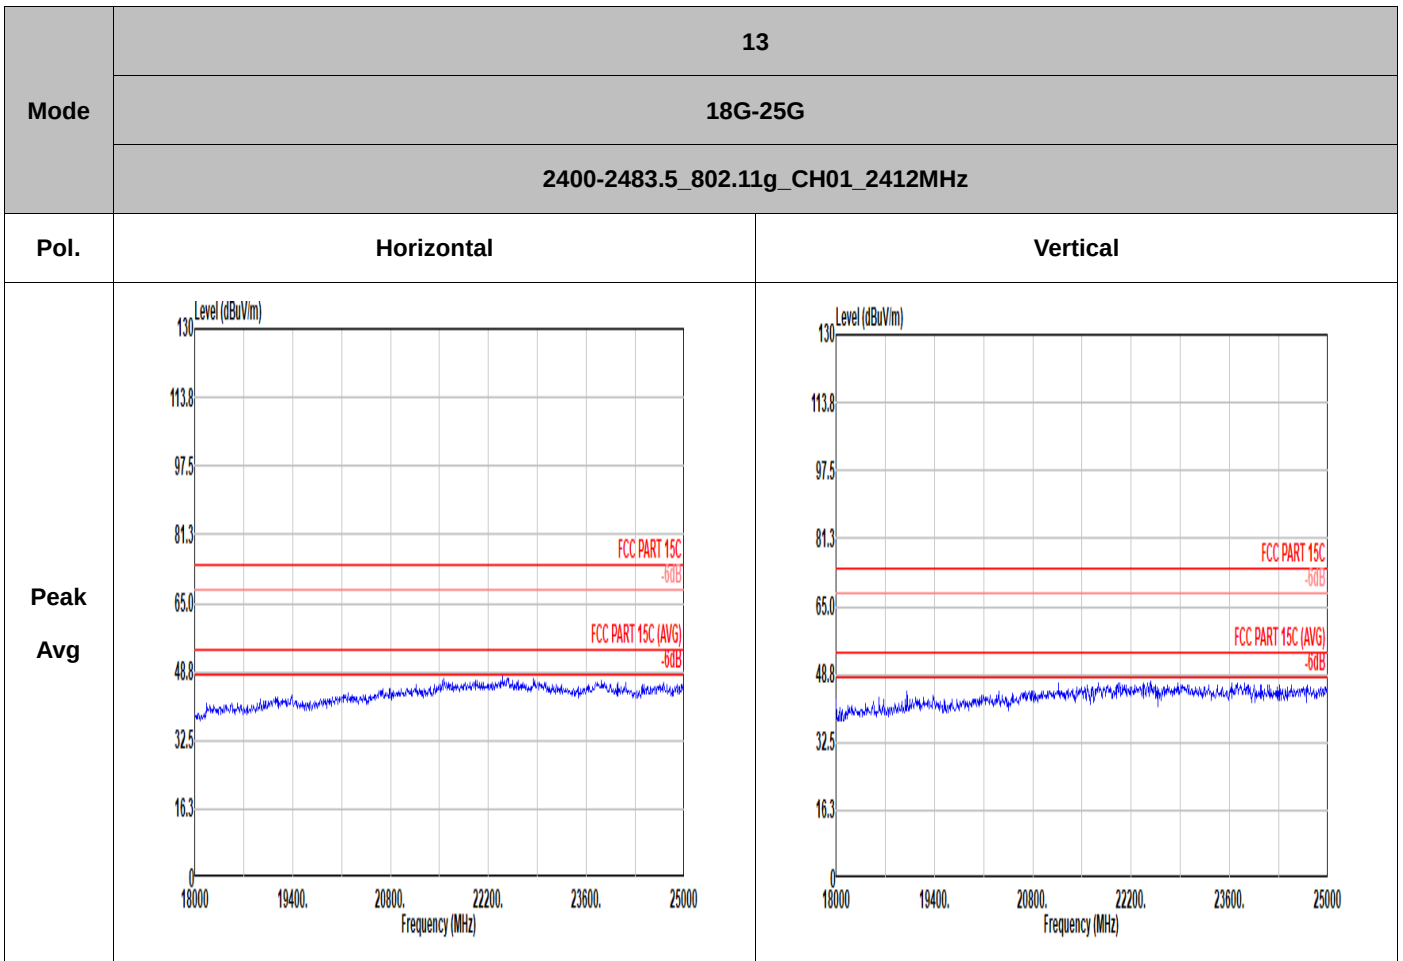

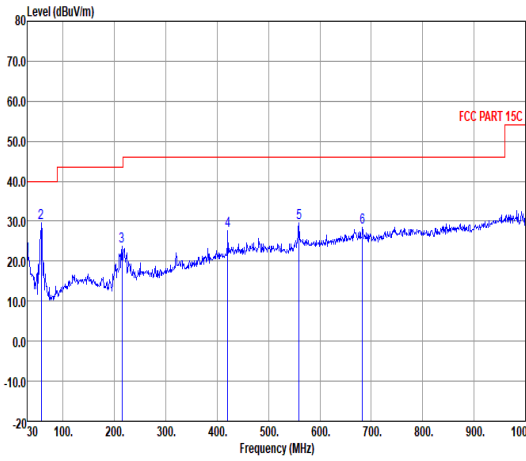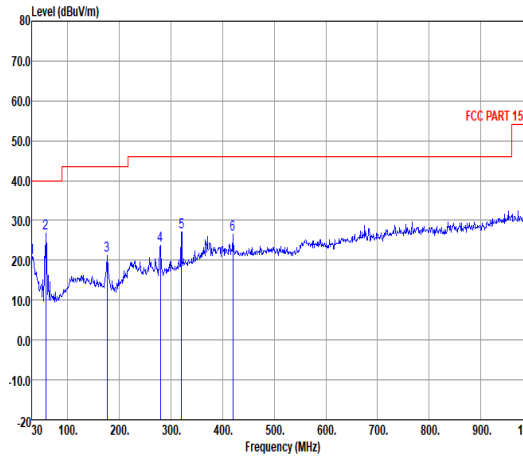


Mode	13																																																																																																																																																																																																																						
	30M-1G																																																																																																																																																																																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																																																																																																																						
Pol.	Horizontal											Vertical																																																																																																																																																																																																											
Peak																																																																																																																																																																																																																							
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>21.20</td><td>40.00</td><td>-18.00</td><td>28.94</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>57.16</td><td>29.58</td><td>40.00</td><td>-10.42</td><td>48.27</td><td>13.10</td><td>1.12</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>214.30</td><td>23.76</td><td>43.50</td><td>-19.74</td><td>38.07</td><td>16.28</td><td>2.23</td><td>32.82</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>420.91</td><td>27.73</td><td>46.00</td><td>-18.27</td><td>35.50</td><td>22.03</td><td>3.13</td><td>32.93</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>559.62</td><td>29.58</td><td>46.00</td><td>-16.42</td><td>33.99</td><td>25.08</td><td>3.61</td><td>33.10</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>682.81</td><td>28.35</td><td>46.00</td><td>-17.65</td><td>32.16</td><td>25.23</td><td>3.99</td><td>33.03</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	30.00	21.20	40.00	-18.00	28.94	24.57	0.71	33.02	0.00	---	Peak	2	57.16	29.58	40.00	-10.42	48.27	13.10	1.12	32.91	0.00	---	Peak	3	214.30	23.76	43.50	-19.74	38.07	16.28	2.23	32.82	0.00	---	Peak	4	420.91	27.73	46.00	-18.27	35.50	22.03	3.13	32.93	0.00	---	Peak	5	559.62	29.58	46.00	-16.42	33.99	25.08	3.61	33.10	0.00	---	Peak	6	682.81	28.35	46.00	-17.65	32.16	25.23	3.99	33.03	0.00	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.00</td><td>20.60</td><td>40.00</td><td>-19.40</td><td>28.34</td><td>24.57</td><td>0.71</td><td>33.02</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>57.16</td><td>26.66</td><td>40.00</td><td>-13.34</td><td>45.35</td><td>13.10</td><td>1.12</td><td>32.91</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>176.47</td><td>21.12</td><td>43.50</td><td>-22.38</td><td>36.85</td><td>15.89</td><td>2.01</td><td>32.83</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>279.29</td><td>23.85</td><td>46.00</td><td>-22.15</td><td>35.15</td><td>18.95</td><td>2.55</td><td>32.80</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>320.03</td><td>27.21</td><td>46.00</td><td>-18.79</td><td>37.58</td><td>19.77</td><td>2.72</td><td>32.86</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>419.94</td><td>26.40</td><td>46.00</td><td>-19.60</td><td>34.17</td><td>22.02</td><td>3.13</td><td>32.92</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>													Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	30.00	20.60	40.00	-19.40	28.34	24.57	0.71	33.02	0.00	---	Peak	2	57.16	26.66	40.00	-13.34	45.35	13.10	1.12	32.91	0.00	---	Peak	3	176.47	21.12	43.50	-22.38	36.85	15.89	2.01	32.83	0.00	---	Peak	4	279.29	23.85	46.00	-22.15	35.15	18.95	2.55	32.80	0.00	---	Peak	5	320.03	27.21	46.00	-18.79	37.58	19.77	2.72	32.86	0.00	---	Peak	6	419.94	26.40	46.00	-19.60	34.17	22.02	3.13	32.92	0.00	---
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																													
1	30.00	21.20	40.00	-18.00	28.94	24.57	0.71	33.02	0.00	---	Peak																																																																																																																																																																																																												
2	57.16	29.58	40.00	-10.42	48.27	13.10	1.12	32.91	0.00	---	Peak																																																																																																																																																																																																												
3	214.30	23.76	43.50	-19.74	38.07	16.28	2.23	32.82	0.00	---	Peak																																																																																																																																																																																																												
4	420.91	27.73	46.00	-18.27	35.50	22.03	3.13	32.93	0.00	---	Peak																																																																																																																																																																																																												
5	559.62	29.58	46.00	-16.42	33.99	25.08	3.61	33.10	0.00	---	Peak																																																																																																																																																																																																												
6	682.81	28.35	46.00	-17.65	32.16	25.23	3.99	33.03	0.00	---	Peak																																																																																																																																																																																																												
	Freq	Level	Limit	Over	ReadAntenna	Cable	Preamp	Aux	A/Pos	T/Pos	Remark																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																													
1	30.00	20.60	40.00	-19.40	28.34	24.57	0.71	33.02	0.00	---	Peak																																																																																																																																																																																																												
2	57.16	26.66	40.00	-13.34	45.35	13.10	1.12	32.91	0.00	---	Peak																																																																																																																																																																																																												
3	176.47	21.12	43.50	-22.38	36.85	15.89	2.01	32.83	0.00	---	Peak																																																																																																																																																																																																												
4	279.29	23.85	46.00	-22.15	35.15	18.95	2.55	32.80	0.00	---	Peak																																																																																																																																																																																																												
5	320.03	27.21	46.00	-18.79	37.58	19.77	2.72	32.86	0.00	---	Peak																																																																																																																																																																																																												
6	419.94	26.40	46.00	-19.60	34.17	22.02	3.13	32.92	0.00	---	Peak																																																																																																																																																																																																												



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.36	-	-	10Hz
802.11g	98.26	-	-	10Hz
802.11n HT20	97.77	1.9058	0.5247	0.6kHz
802.11n HT40	94.89	0.9420	1.0615	1.1kHz

802.11b

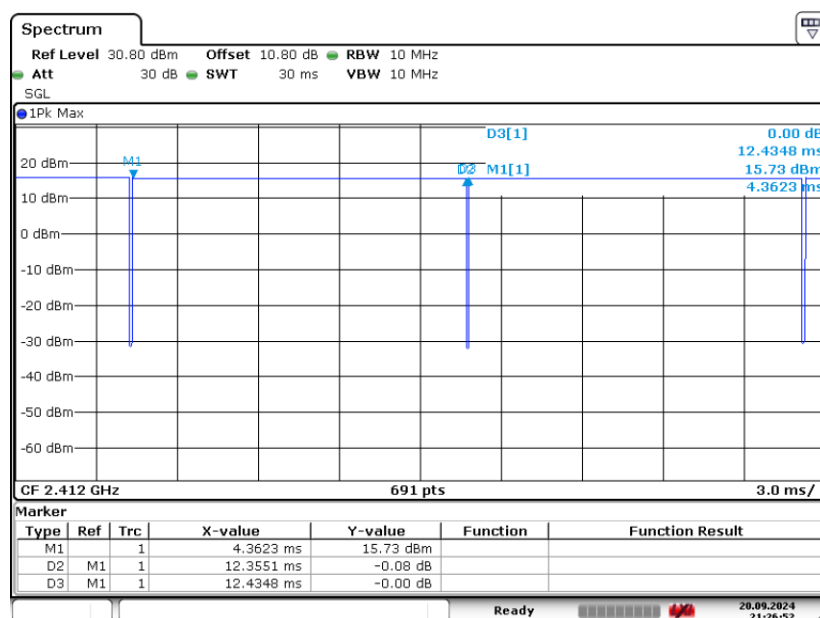




802.11g

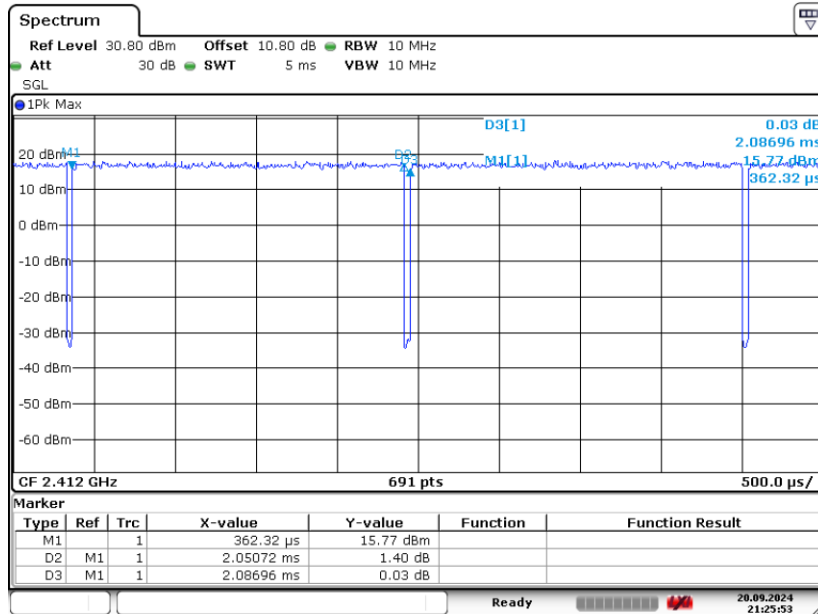

802.11n HT20

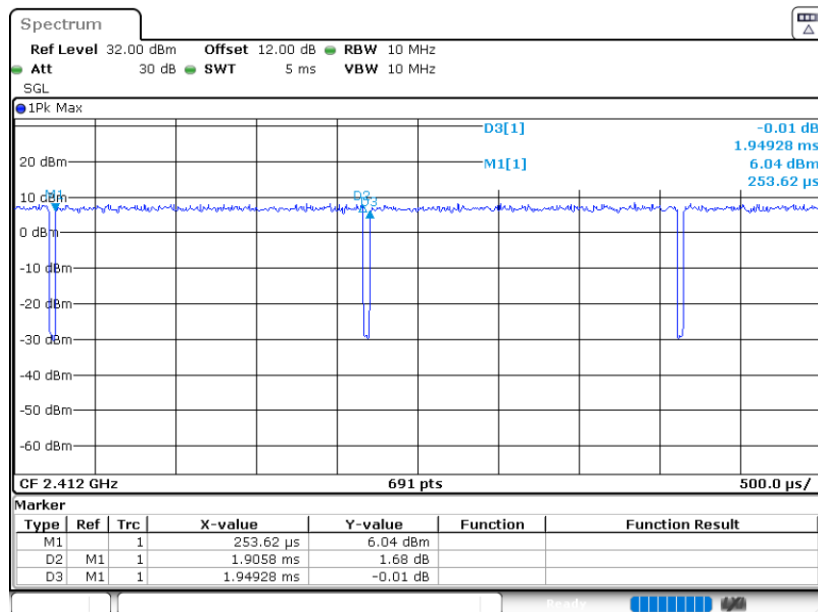



802.11n HT40

