






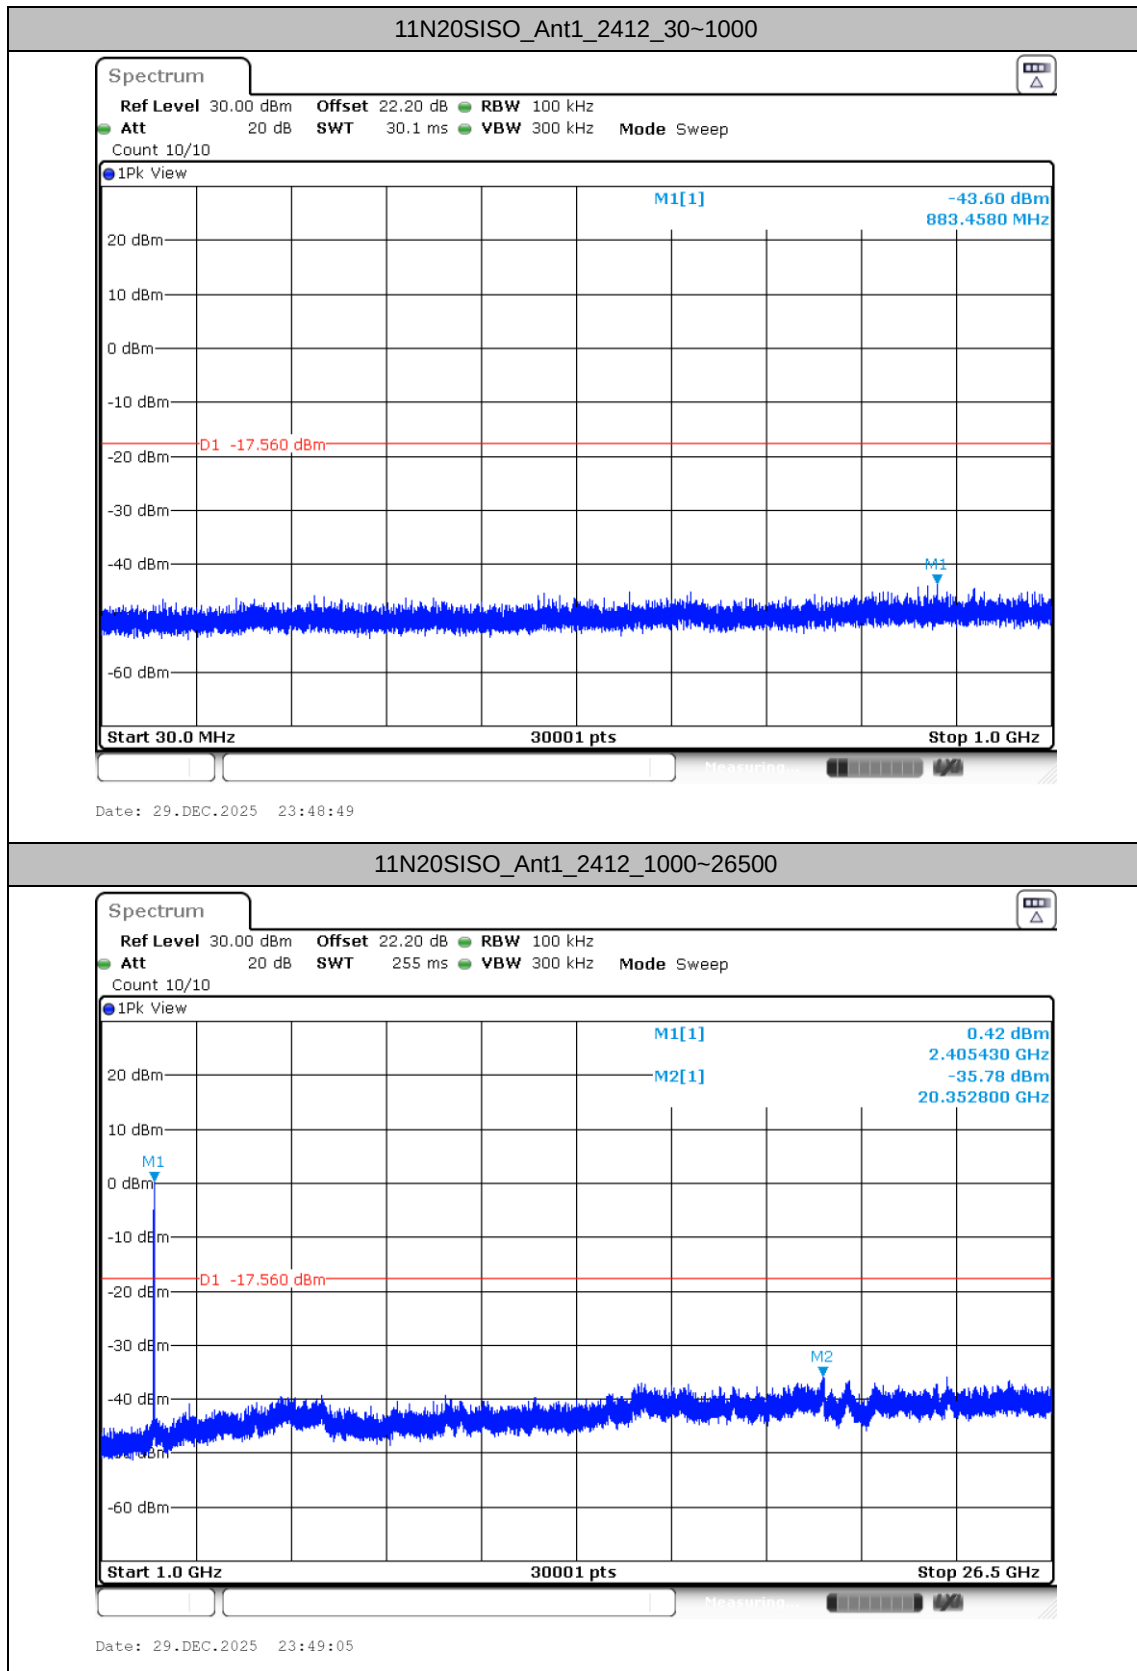



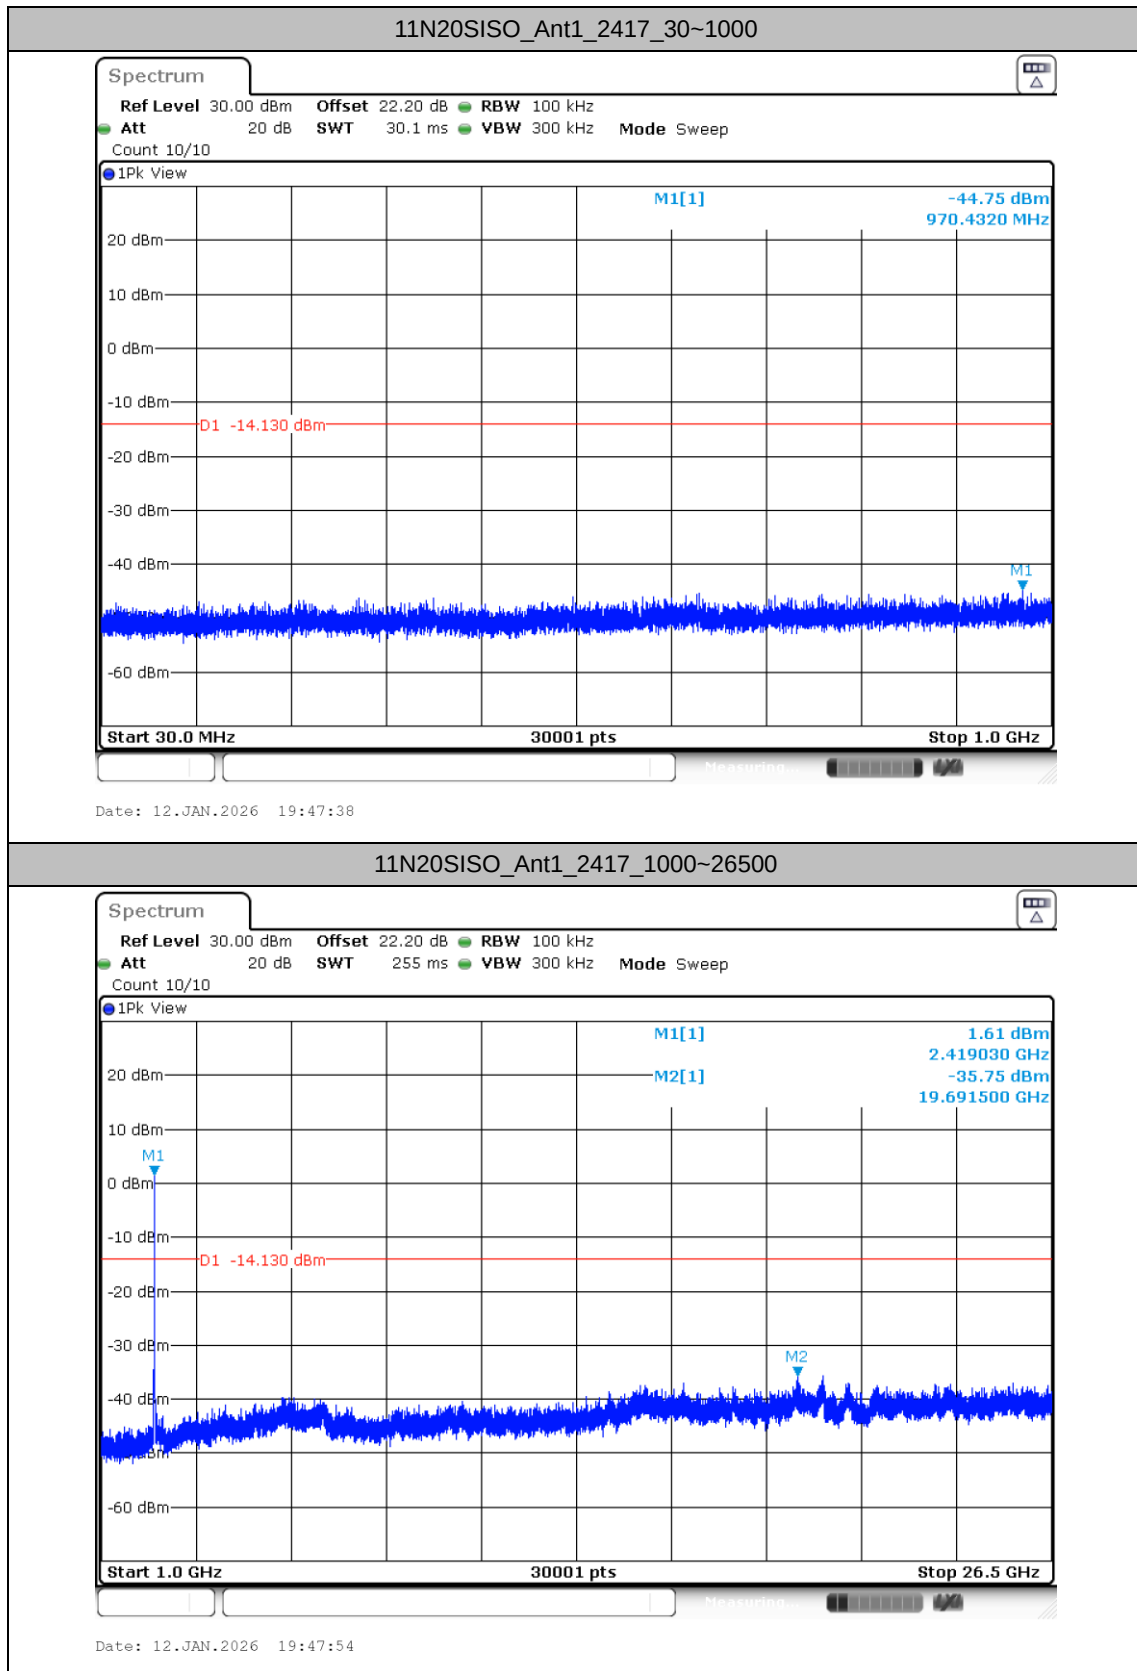


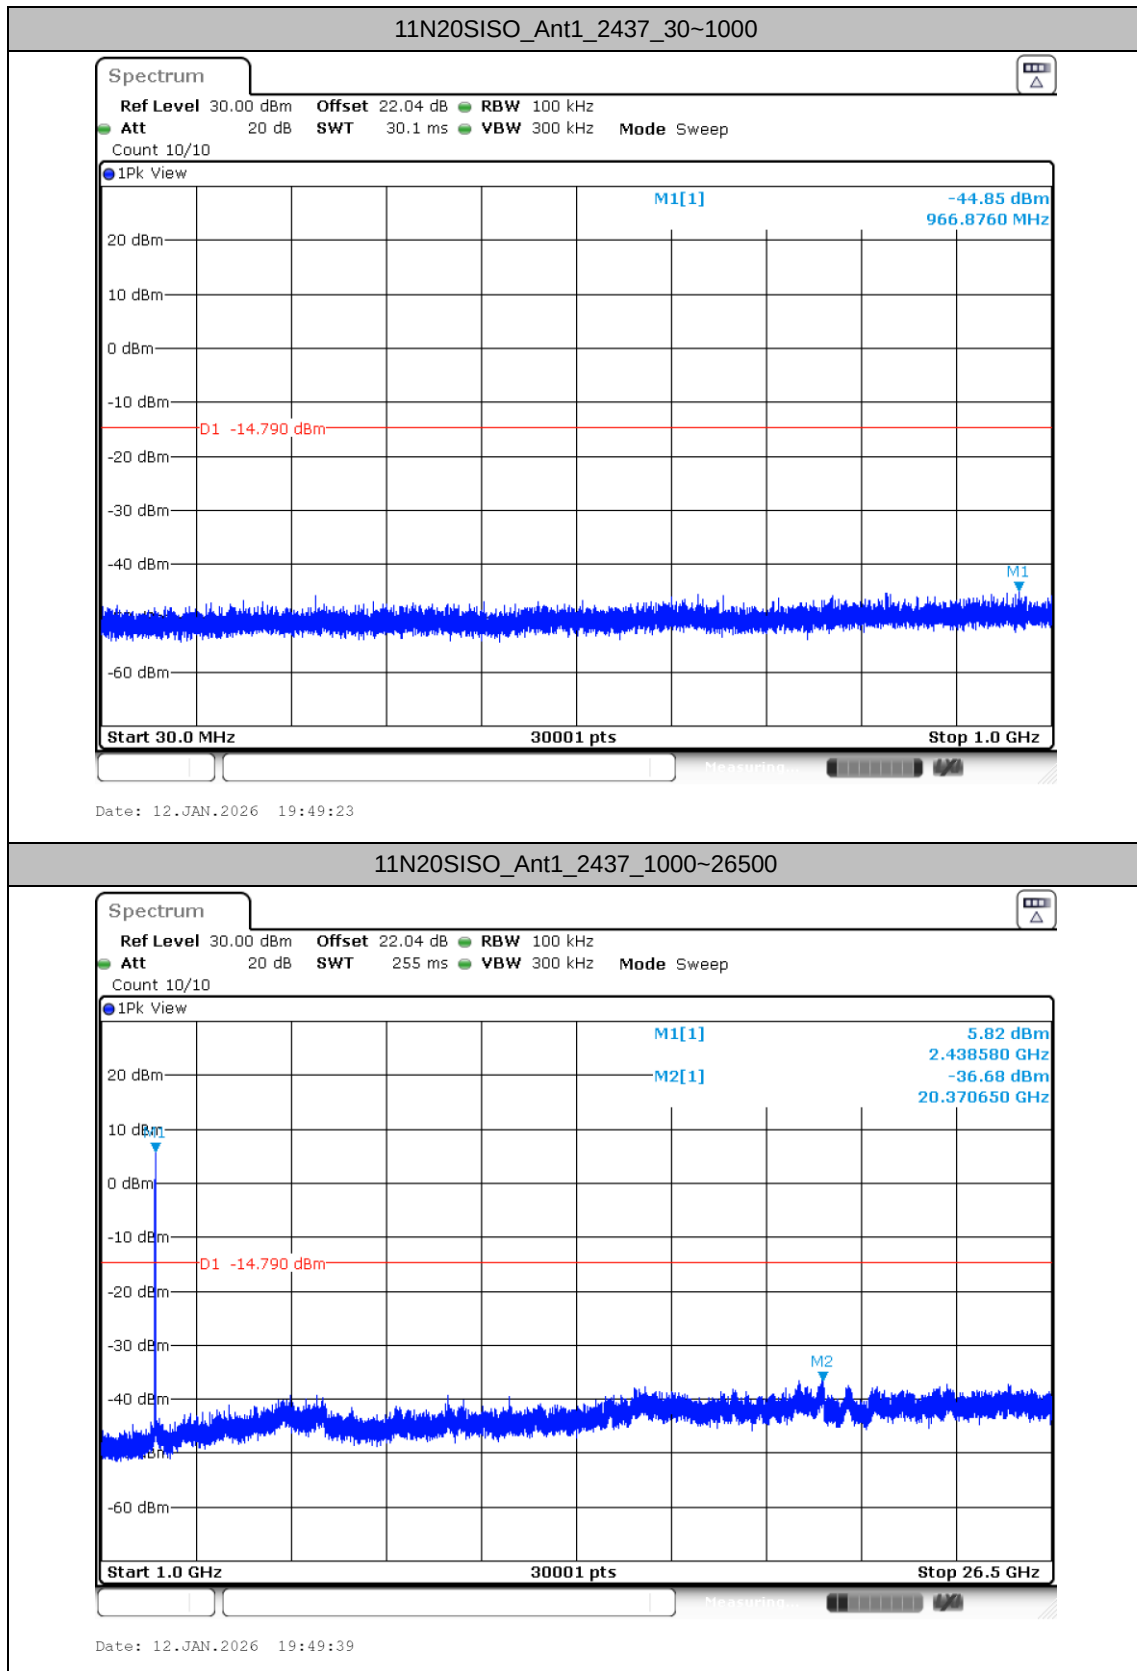

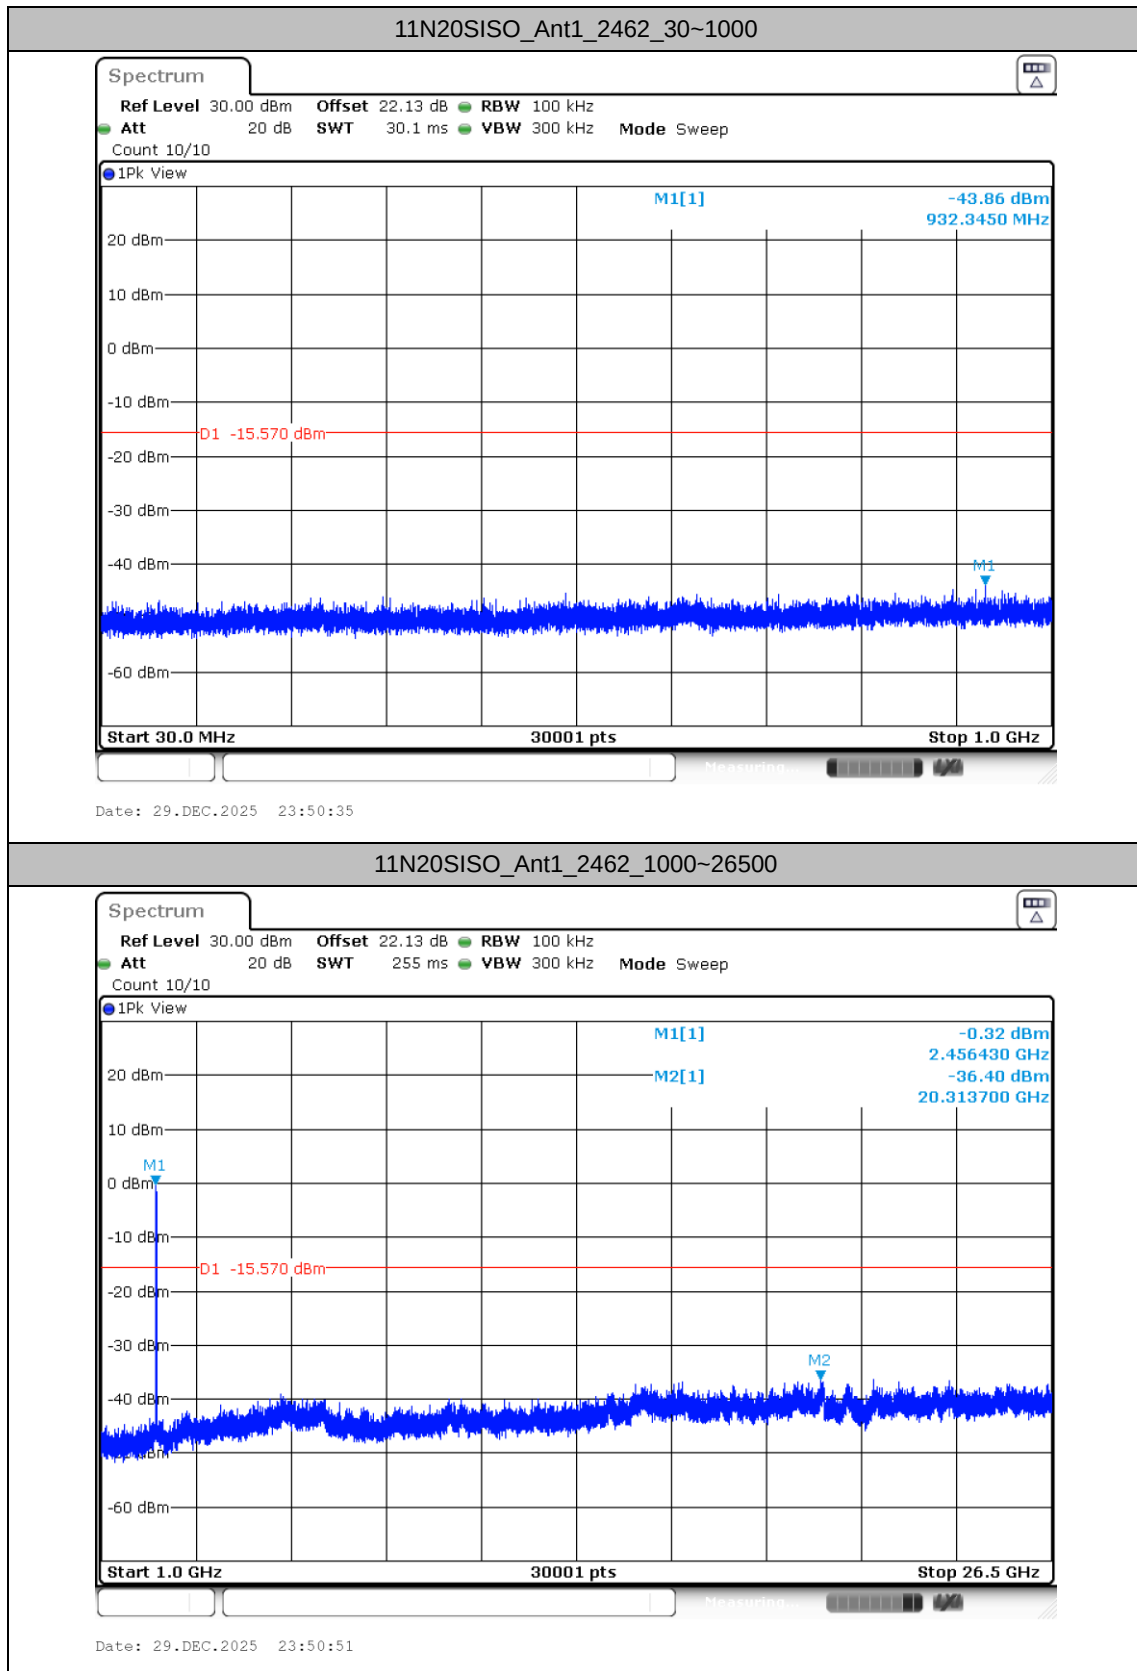

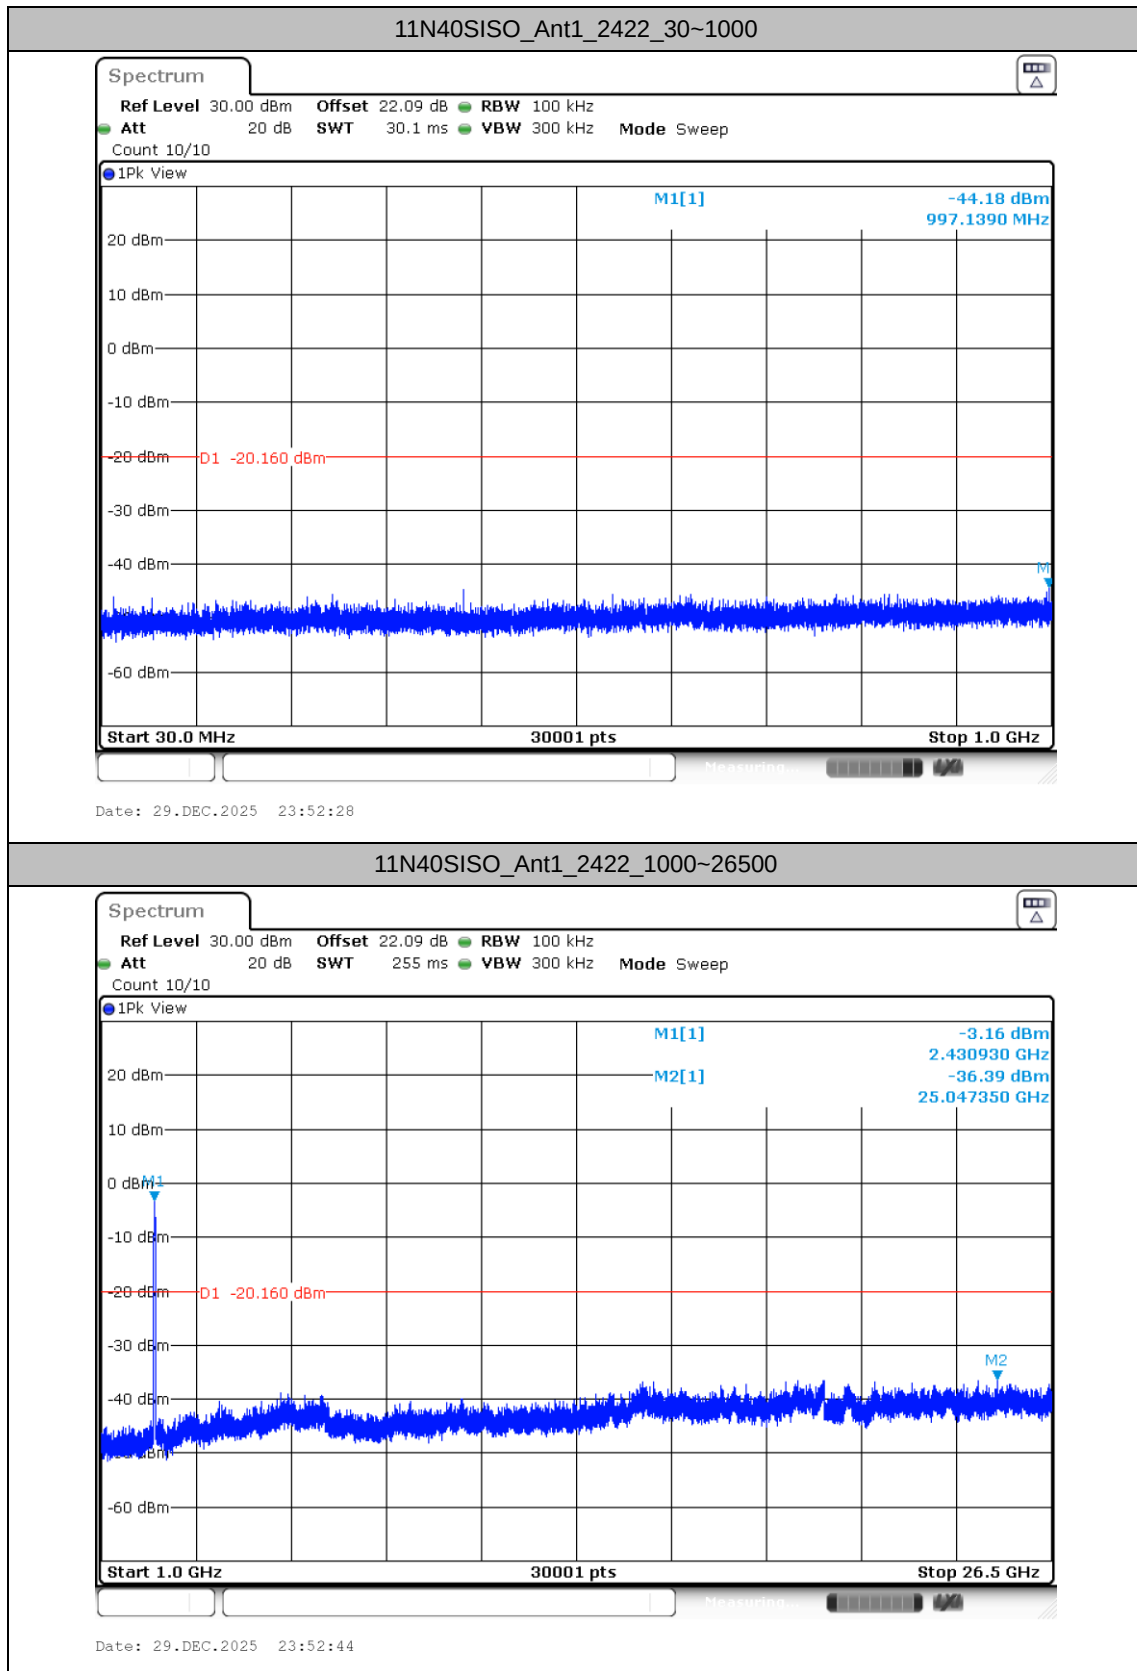


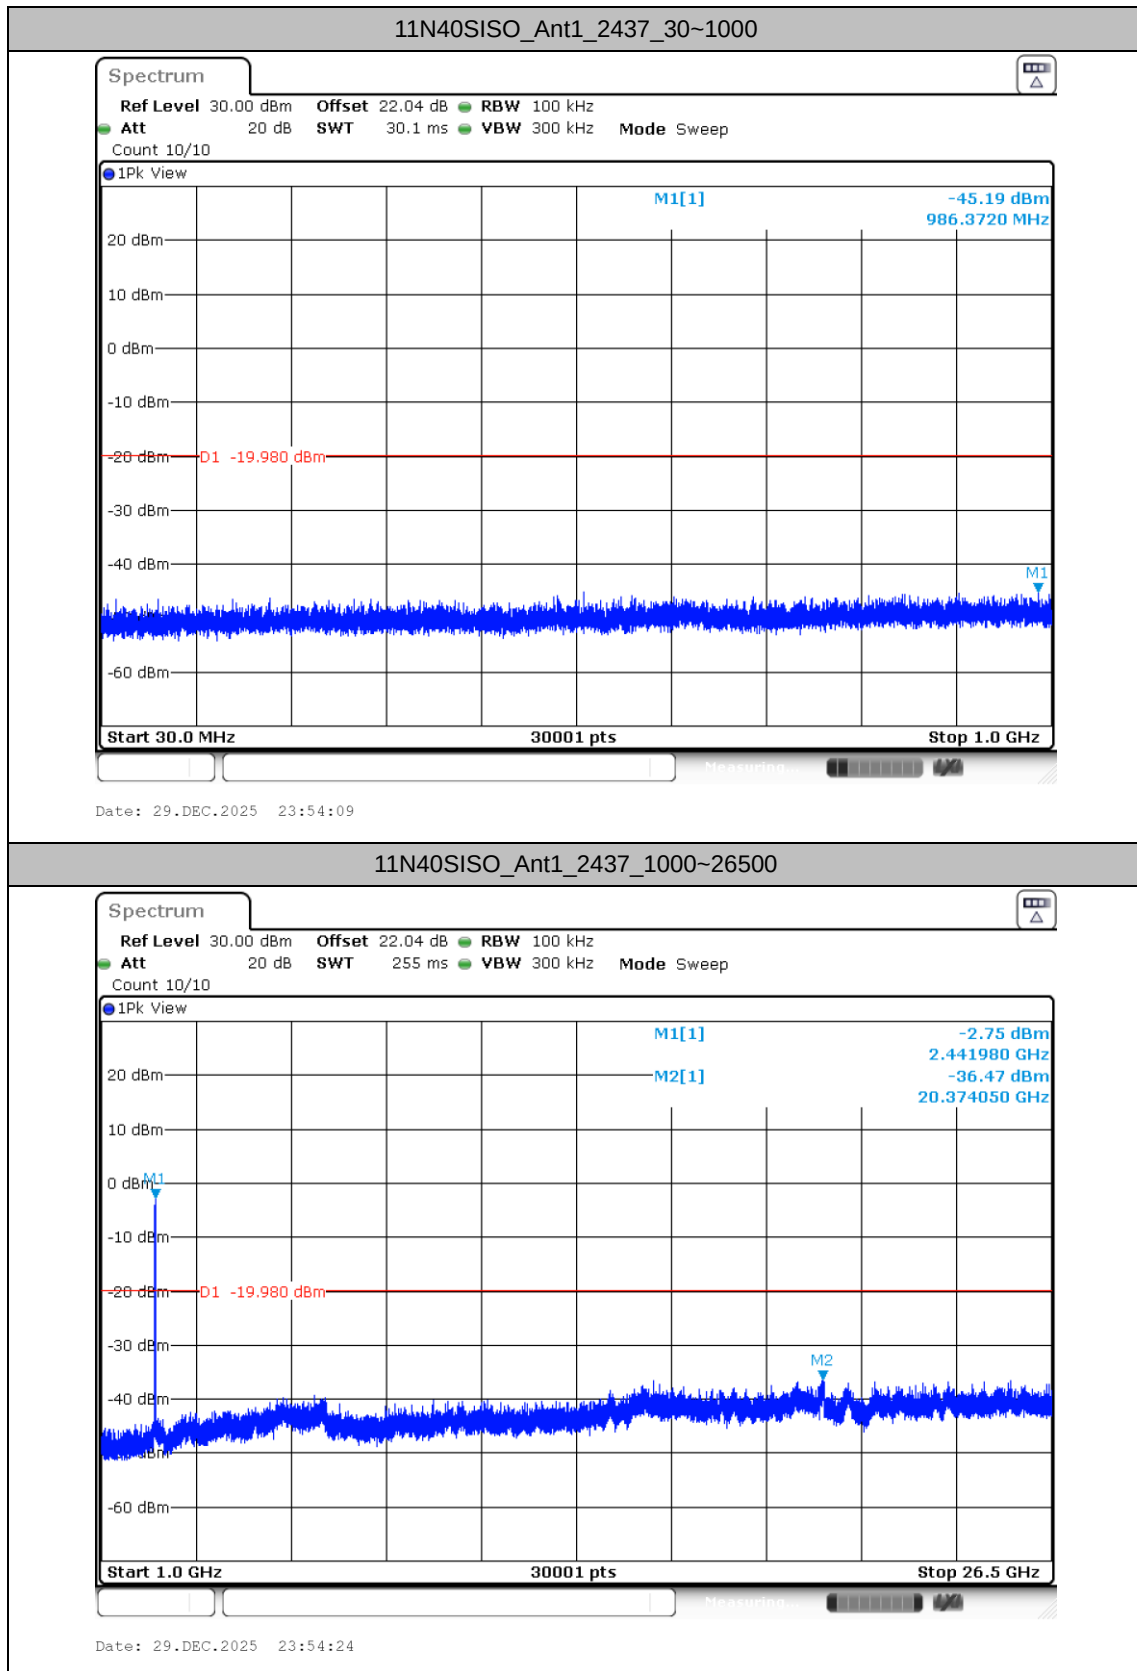

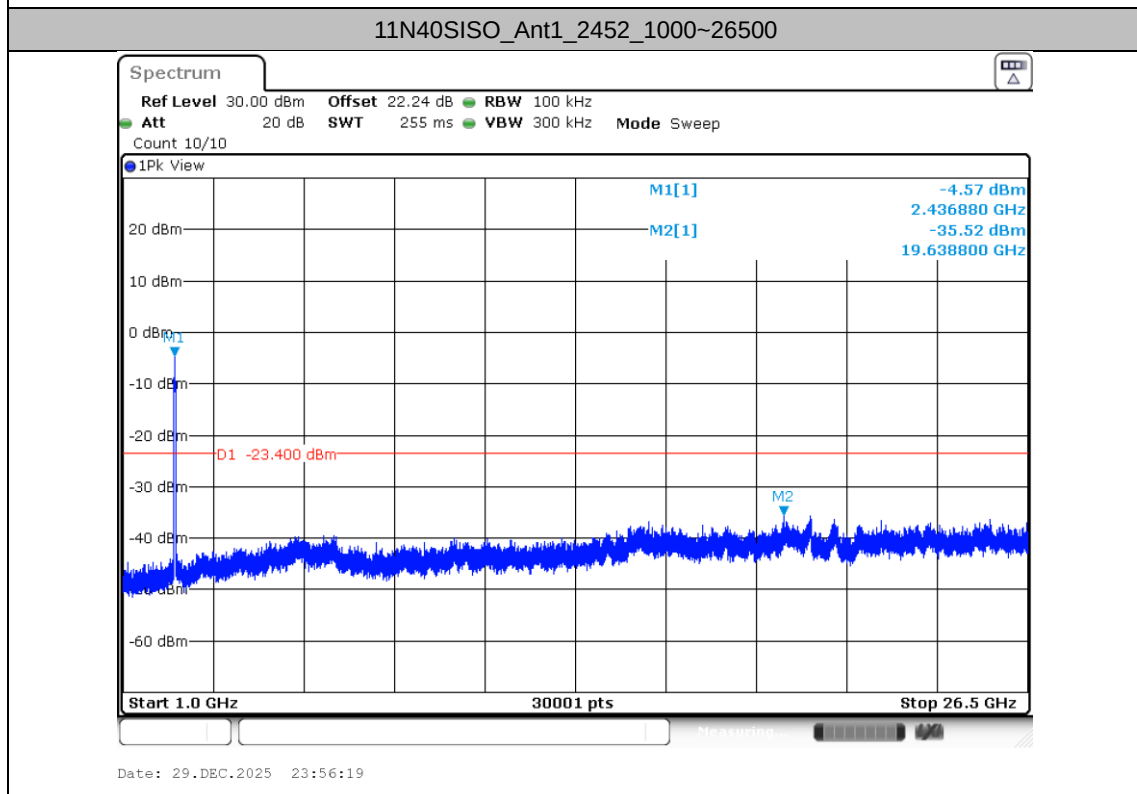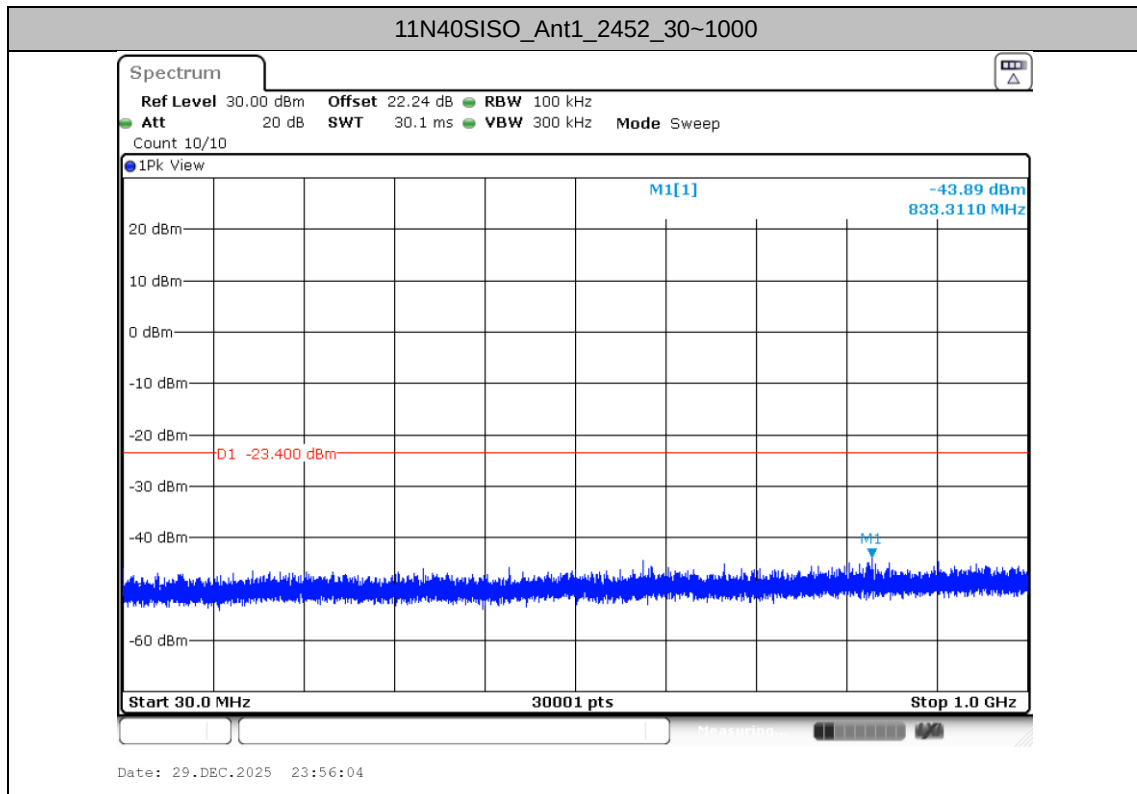




Appendix B. AC Conducted Emission Test Results

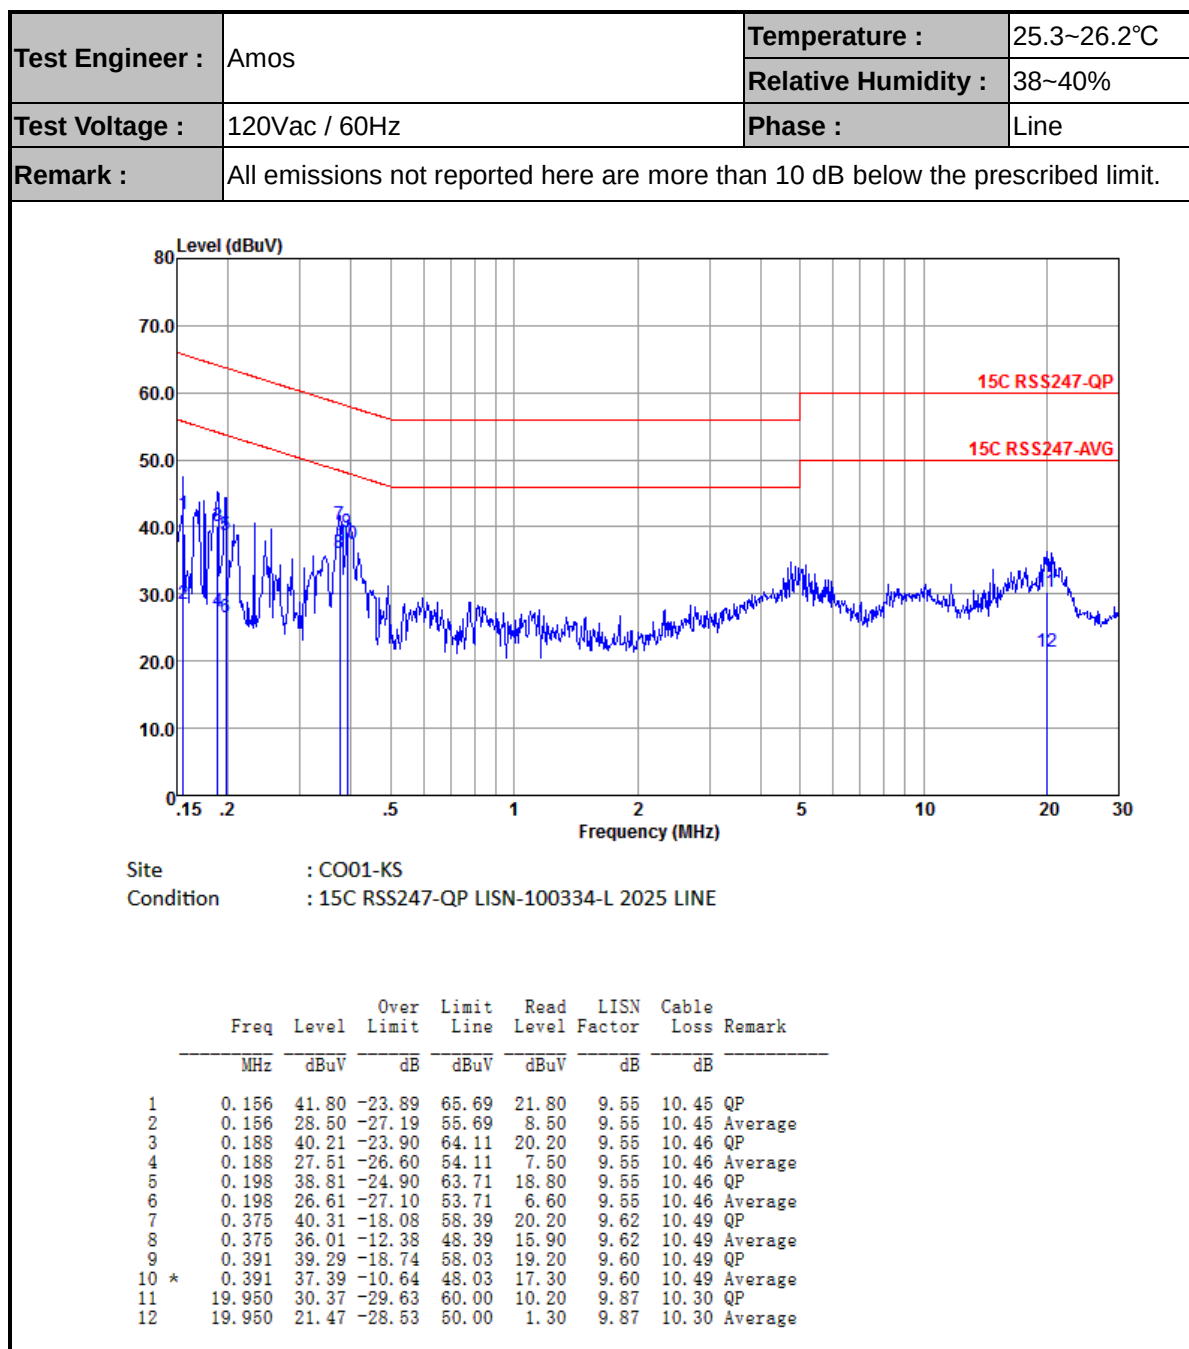



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

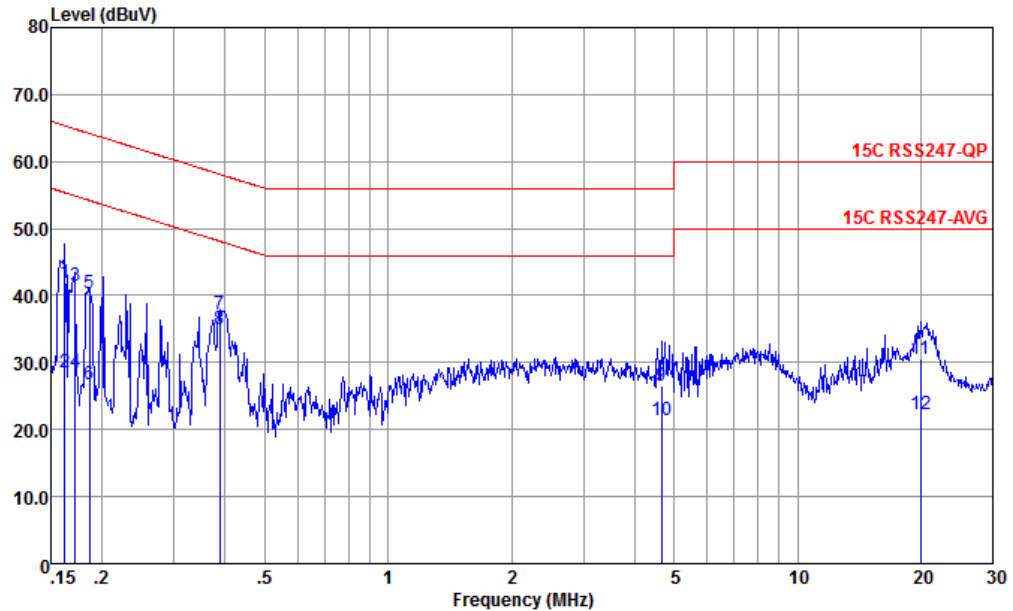

Site : CO01-KS
Condition : 15C RSS247-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.162	41.90	-23.44	65.34	21.90	9.55	10.45	QP
2	0.162	28.50	-26.84	55.34	8.50	9.55	10.45	Average
3	0.172	41.50	-23.36	64.86	21.50	9.55	10.45	QP
4	0.172	28.56	-26.30	54.86	8.56	9.55	10.45	Average
5	0.186	40.23	-23.97	64.20	20.19	9.58	10.46	QP
6	0.186	26.63	-27.57	54.20	6.59	9.58	10.46	Average
7	0.387	37.29	-20.83	58.12	17.20	9.60	10.49	QP
8 *	0.387	34.89	-13.23	48.12	14.80	9.60	10.49	Average
9	4.647	26.42	-29.58	56.00	6.60	9.62	10.20	QP
10	4.647	21.32	-24.68	46.00	1.50	9.62	10.20	Average
11	19.950	30.58	-29.42	60.00	10.50	9.78	10.30	QP
12	19.950	22.38	-27.62	50.00	2.30	9.78	10.30	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix. C Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42%
		Temperature :	22 ~ 23°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1	802.11n HT40	3	2422	MCS0	-	-
Mode 11	2400-2483.5	1	802.11n HT40	6	2437	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT40	9	2452	MCS0	-	-
Mode 13	2400-2483.5	1	802.11n HT20	2	2417	MCS0	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.95	42.49	54.00	-11.51	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	41.10	74.00	-32.90	V	PEAK	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	7311.00	43.69	74.00	-30.31	H	PEAK	Pass	Harmonic
3	802.11b	11	2488.66	44.90	54.00	-9.10	H	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	44.56	74.00	-29.44	H	PEAK	Pass	Harmonic
4	802.11g	01	2389.95	47.69	54.00	-6.31	H	AVERAGE	Pass	Band Edge
4	802.11g	01	3216.00	47.95	78.73	-30.78	H	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	43.96	74.00	-30.04	H	PEAK	Pass	Harmonic
6	802.11g	11	2483.50	50.01	54.00	-3.99	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	42.62	74.00	-31.38	H	PEAK	Pass	Harmonic
7	802.11n HT20	01	2389.95	47.45	54.00	-6.55	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	3216.00	47.95	76.67	-28.72	H	PEAK	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	43.51	74.00	-30.49	H	PEAK	Pass	Harmonic
9	802.11n HT20	11	2483.50	50.02	54.00	-3.98	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	43.00	74.00	-31.00	V	PEAK	Pass	Harmonic
10	802.11n HT40	3	2389.95	47.90	54.00	-6.10	H	AVERAGE	Pass	Band Edge
10	802.11n HT40	3	7266.00	42.89	74.00	-31.11	V	PEAK	Pass	Harmonic
11	802.11n HT40	6	2483.56	45.18	54.00	-8.82	H	AVERAGE	Pass	Band Edge
11	802.11n HT40	6	7311.00	43.42	74.00	-30.58	H	PEAK	Pass	Harmonic
12	802.11n HT40	9	2485.18	45.72	54.00	-8.28	H	AVERAGE	Pass	Band Edge
12	802.11n HT40	9	3270.00	44.43	73.43	-29.00	H	PEAK	Pass	Harmonic
13	802.11n HT20	2	2389.95	46.21	54.00	-7.79	H	AVERAGE	Pass	Band Edge
13	802.11n HT20	2	3222.00	48.08	81.29	-33.21	H	PEAK	Pass	Harmonic

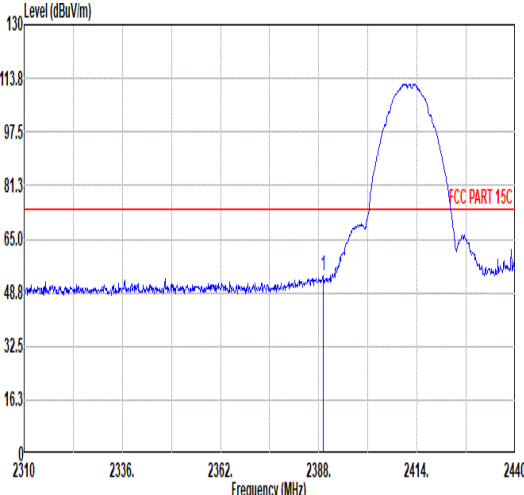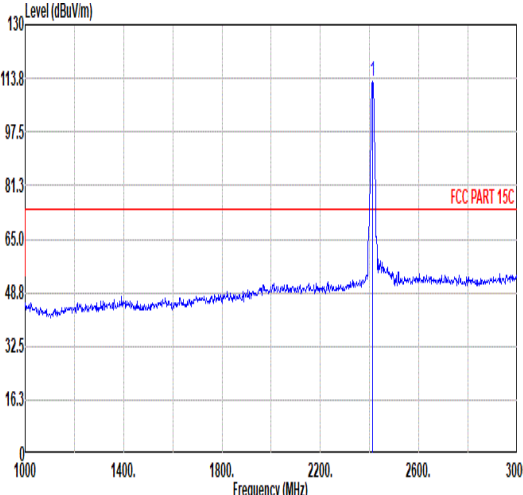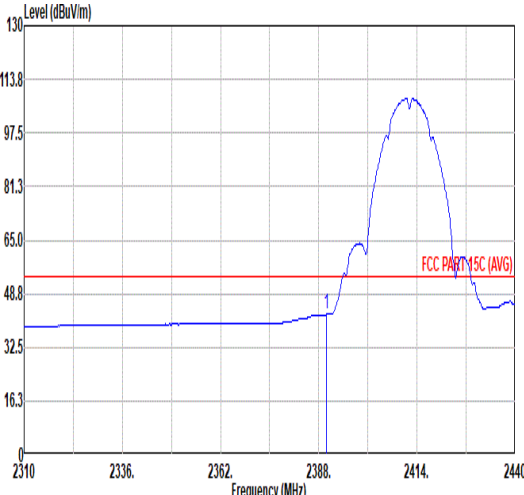
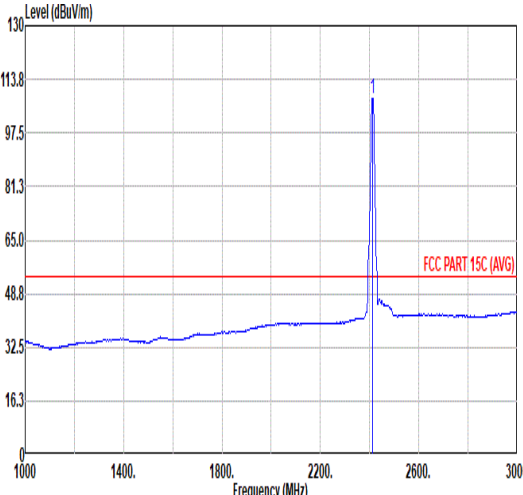


Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>54.09</td><td>74.00</td><td>-19.91</td><td>44.88</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>128 34 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	54.09	74.00	-19.91	44.88	32.24	7.96	36.99	6.00	128 34 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.17	54.09	74.00	-19.91	44.88	32.24	7.96	36.99	6.00	128 34 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>112.74</td><td>-----</td><td>103.30</td><td>32.44</td><td>8.00</td><td>37.00</td><td>6.00</td><td>128</td><td>34 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	112.74	-----	103.30	32.44	8.00	37.00	6.00	128	34 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	112.74	-----	103.30	32.44	8.00	37.00	6.00	128	34 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>42.49</td><td>54.00</td><td>-11.51</td><td>33.28</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>128 34 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.49	54.00	-11.51	33.28	32.24	7.96	36.99	6.00	128 34 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	42.49	54.00	-11.51	33.28	32.24	7.96	36.99	6.00	128 34 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.00</td><td>-----</td><td>98.56</td><td>32.44</td><td>8.00</td><td>37.00</td><td>6.00</td><td>128</td><td>34 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.00	-----	98.56	32.44	8.00	37.00	6.00	128	34 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	108.00	-----	98.56	32.44	8.00	37.00	6.00	128	34 AVERAGE																																													

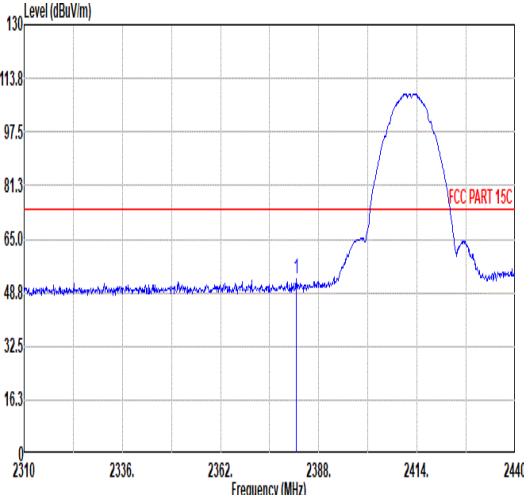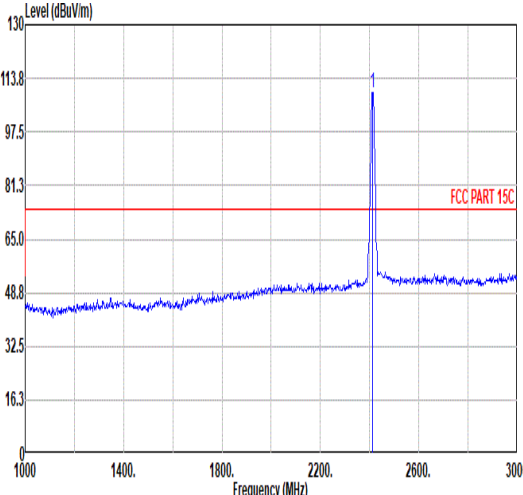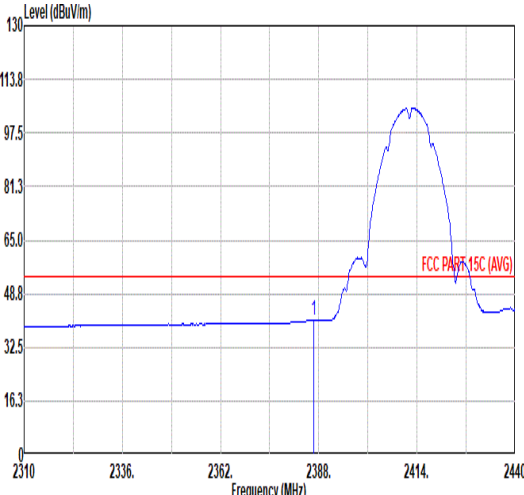
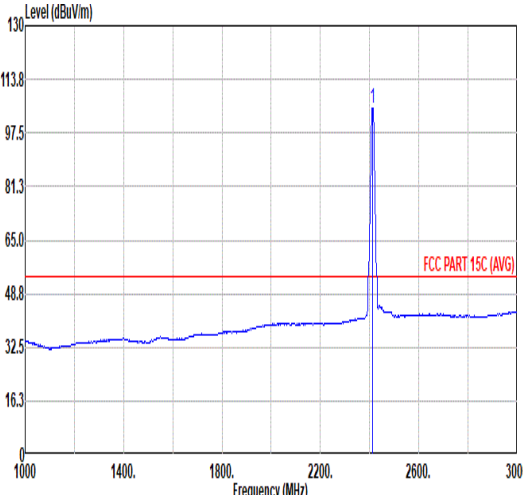


Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2382.02</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>43.69</td><td>32.19</td><td>7.95</td><td>37.00</td><td>6.00</td><td>160 334 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.02	52.83	74.00	-21.17	43.69	32.19	7.95	37.00	6.00	160 334 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>109.64</td><td>-----</td><td>100.17</td><td>32.47</td><td>8.00</td><td>37.00</td><td>6.00</td><td>160</td><td>334 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.64	-----	100.17	32.47	8.00	37.00	6.00	160	334 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2382.02	52.83	74.00	-21.17	43.69	32.19	7.95	37.00	6.00	160 334 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	109.64	-----	100.17	32.47	8.00	37.00	6.00	160	334 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.70</td><td>40.94</td><td>54.00</td><td>-13.06</td><td>31.75</td><td>32.22</td><td>7.96</td><td>36.99</td><td>6.00</td><td>160 334 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	40.94	54.00	-13.06	31.75	32.22	7.96	36.99	6.00	160 334 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.12</td><td>-----</td><td>95.68</td><td>32.44</td><td>8.00</td><td>37.00</td><td>6.00</td><td>160</td><td>334 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.12	-----	95.68	32.44	8.00	37.00	6.00	160	334 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2386.70	40.94	54.00	-13.06	31.75	32.22	7.96	36.99	6.00	160 334 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	105.12	-----	95.68	32.44	8.00	37.00	6.00	160	334 AVERAGE																																																																																



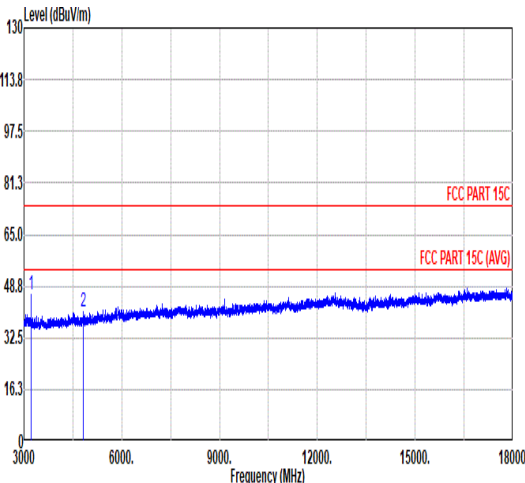
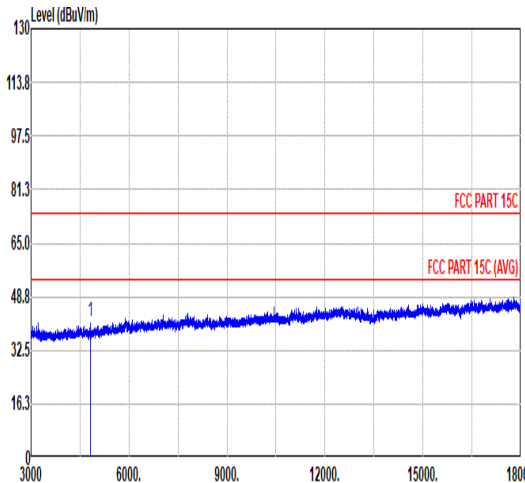


Mode	1																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																				
ANT	1																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg																																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3216.00</td><td>46.10</td><td>83.53</td><td>-37.43</td><td>69.32</td><td>32.00</td><td>9.20</td><td>65.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>40.55</td><td>74.00</td><td>-33.45</td><td>60.59</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	46.10	83.53	-37.43	69.32	32.00	9.20	65.22	0.00	---	---	PEAK	2	4824.00	40.55	74.00	-33.45	60.59	33.95	11.40	65.39	0.00	---	---	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>41.10</td><td>74.00</td><td>-32.90</td><td>61.14</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.10	74.00	-32.90	61.14	33.95	11.40	65.39	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	3216.00	46.10	83.53	-37.43	69.32	32.00	9.20	65.22	0.00	---	---	PEAK																																																																																																									
2	4824.00	40.55	74.00	-33.45	60.59	33.95	11.40	65.39	0.00	---	---	PEAK																																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																											
1	4824.00	41.10	74.00	-32.90	61.14	33.95	11.40	65.39	0.00	---	---	PEAK																																																																																																									



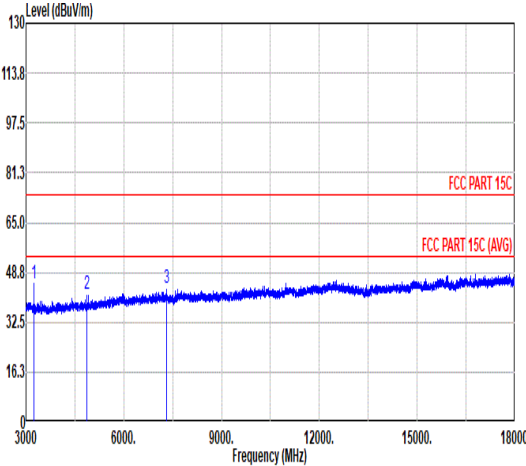
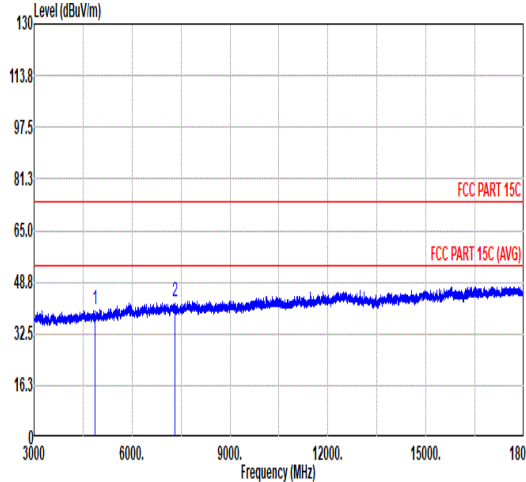


		2																																																																																		
Mode		Harmonic																																																																																		
		2400-2483.5_802.11b_CH06_2437MHz																																																																																		
ANT		1																																																																																		
Pol.		Horizontal																																																																																		
Peak Avg																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>3249.00</td><td>44.96</td><td>84.01</td><td>-39.05</td><td>68.30</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>41.46</td><td>74.00</td><td>-32.54</td><td>61.64</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>43.69</td><td>74.00</td><td>-30.31</td><td>59.74</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3249.00	44.96	84.01	-39.05	68.30	32.61	9.26	65.21	0.00	---	--- PEAK	2	4874.00	41.46	74.00	-32.54	61.64	33.90	11.47	65.55	0.00	---	--- PEAK	3	7311.00	43.69	74.00	-30.31	59.74	35.80	14.13	65.98	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																										
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	3249.00	44.96	84.01	-39.05	68.30	32.61	9.26	65.21	0.00	---	--- PEAK																																																																									
2	4874.00	41.46	74.00	-32.54	61.64	33.90	11.47	65.55	0.00	---	--- PEAK																																																																									
3	7311.00	43.69	74.00	-30.31	59.74	35.80	14.13	65.98	0.00	---	--- PEAK																																																																									
		Vertical																																																																																		
																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>4874.00</td><td>40.13</td><td>74.00</td><td>-33.87</td><td>60.31</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.74</td><td>74.00</td><td>-31.26</td><td>58.79</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	40.13	74.00	-33.87	60.31	33.90	11.47	65.55	0.00	---	--- PEAK	2	7311.00	42.74	74.00	-31.26	58.79	35.80	14.13	65.98	0.00	---	--- PEAK												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1	4874.00	40.13	74.00	-33.87	60.31	33.90	11.47	65.55	0.00	---	--- PEAK																																																																									
2	7311.00	42.74	74.00	-31.26	58.79	35.80	14.13	65.98	0.00	---	--- PEAK																																																																									

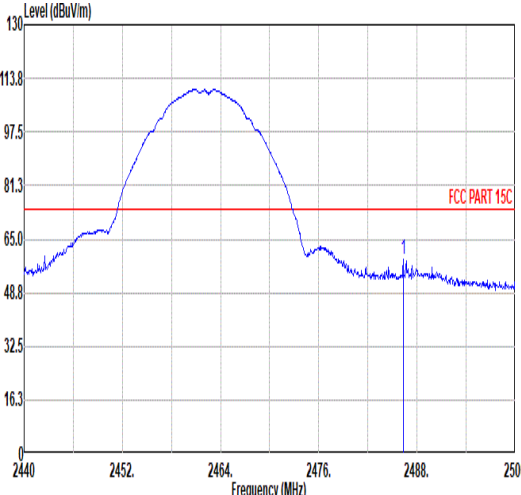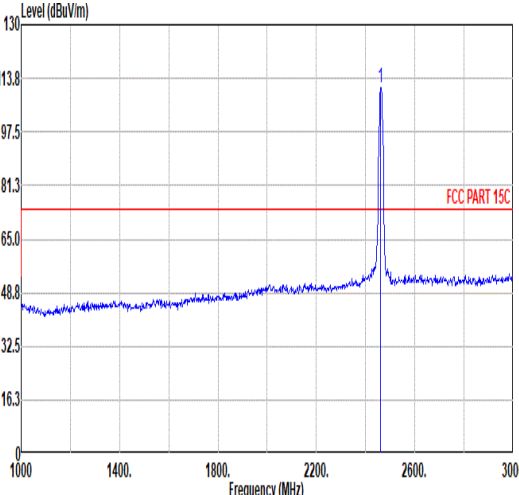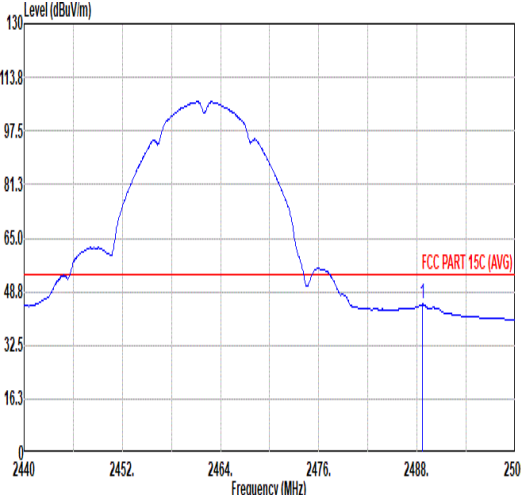
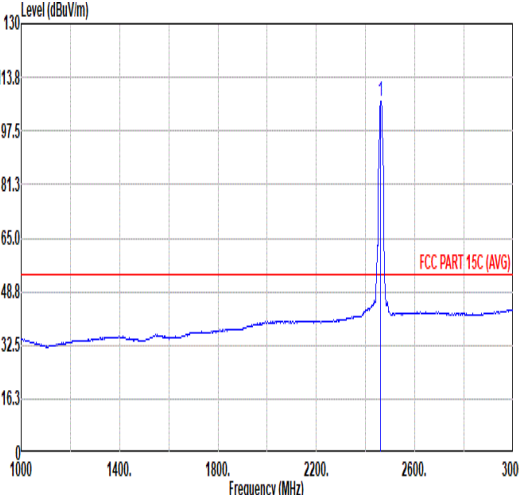


Mode	3																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.32</td><td>58.75</td><td>74.00</td><td>-15.25</td><td>49.15</td><td>32.54</td><td>8.11</td><td>37.05</td><td>6.00</td><td>100</td><td>331 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.32	58.75	74.00	-15.25	49.15	32.54	8.11	37.05	6.00	100	331 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>110.99</td><td>-----</td><td>-----</td><td>101.17</td><td>32.78</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>331 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.99	-----	-----	101.17	32.78	8.07	37.03	6.00	100	331 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2486.32	58.75	74.00	-15.25	49.15	32.54	8.11	37.05	6.00	100	331 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	110.99	-----	-----	101.17	32.78	8.07	37.03	6.00	100	331 PEAK																																																																																										
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2488.66</td><td>44.90</td><td>54.00</td><td>-9.10</td><td>35.33</td><td>32.51</td><td>8.11</td><td>37.05</td><td>6.00</td><td>100</td><td>331 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.66	44.90	54.00	-9.10	35.33	32.51	8.11	37.05	6.00	100	331 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>106.37</td><td>-----</td><td>-----</td><td>96.55</td><td>32.78</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>331 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.37	-----	-----	96.55	32.78	8.07	37.03	6.00	100	331 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2488.66	44.90	54.00	-9.10	35.33	32.51	8.11	37.05	6.00	100	331 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	106.37	-----	-----	96.55	32.78	8.07	37.03	6.00	100	331 AVERAGE																																																																																										

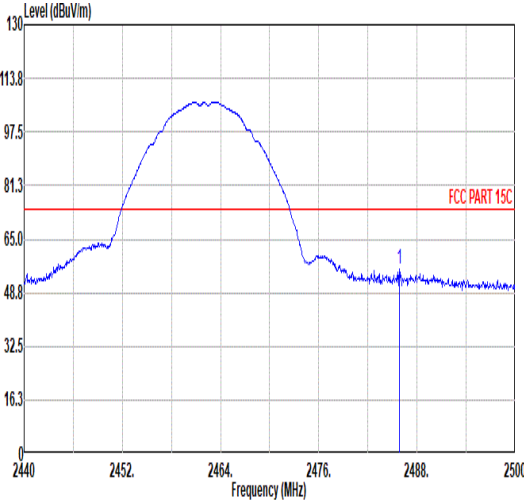
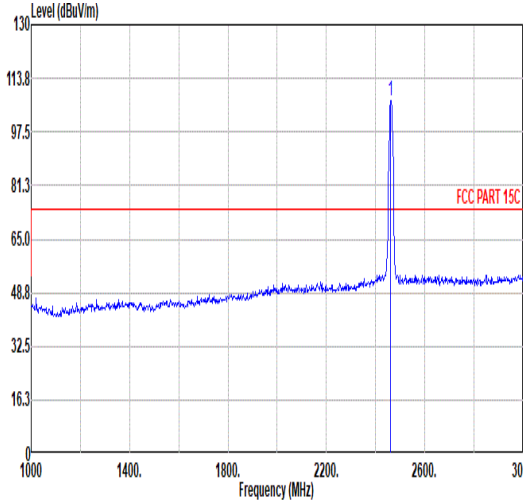
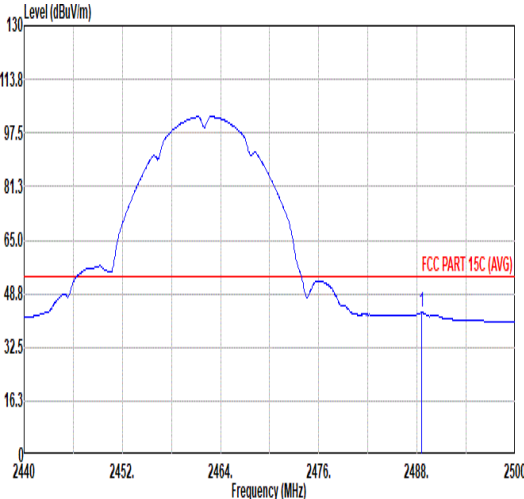
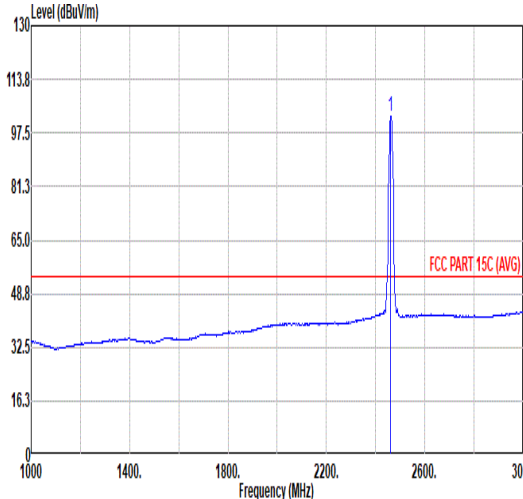


Mode	3																																																																																																						
	Band Edge																																																																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.84</td><td>55.94</td><td>74.00</td><td>-18.06</td><td>46.35</td><td>32.54</td><td>8.10</td><td>37.05</td><td>6.00</td><td>300</td><td>344</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.84	55.94	74.00	-18.06	46.35	32.54	8.10	37.05	6.00	300	344	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.13</td><td>-----</td><td>-----</td><td>97.31</td><td>32.78</td><td>8.07</td><td>37.03</td><td>6.00</td><td>300</td><td>344</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.13	-----	-----	97.31	32.78	8.07	37.03	6.00	300	344
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2485.84	55.94	74.00	-18.06	46.35	32.54	8.10	37.05	6.00	300	344	PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	107.13	-----	-----	97.31	32.78	8.07	37.03	6.00	300	344	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2488.60</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>33.45</td><td>32.51</td><td>8.11</td><td>37.05</td><td>6.00</td><td>300</td><td>344</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.60	43.02	54.00	-10.98	33.45	32.51	8.11	37.05	6.00	300	344	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.63</td><td>-----</td><td>-----</td><td>92.81</td><td>32.78</td><td>8.07</td><td>37.03</td><td>6.00</td><td>300</td><td>344</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.63	-----	-----	92.81	32.78	8.07	37.03	6.00	300	344
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2488.60	43.02	54.00	-10.98	33.45	32.51	8.11	37.05	6.00	300	344	AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																													
1	2462.00	102.63	-----	-----	92.81	32.78	8.07	37.03	6.00	300	344	AVERAGE																																																																																											

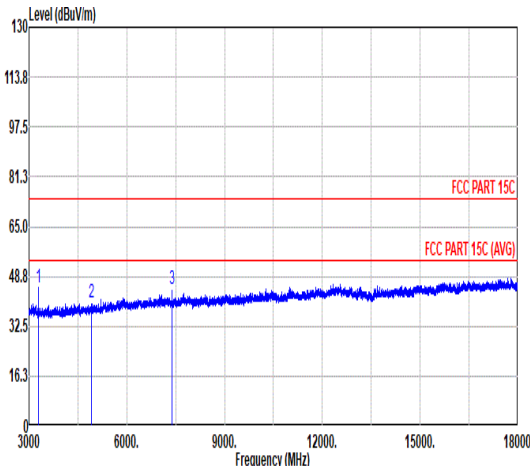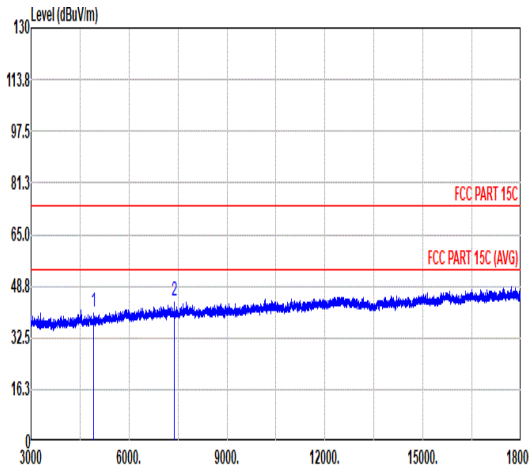

Mode	3																																																																																
	Harmonic																																																																																
	2400-2483.5_802.11b_CH11_2462MHz																																																																																
ANT	1																																																																																
Pol.	Horizontal																																																																																
Peak Avg																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>3283.00</td><td>45.25</td><td>83.86</td><td>-38.61</td><td>68.65</td><td>32.47</td><td>9.32</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.06</td><td>74.00</td><td>-33.94</td><td>68.17</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>44.56</td><td>74.00</td><td>-29.44</td><td>68.72</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3283.00	45.25	83.86	-38.61	68.65	32.47	9.32	65.19	0.00	---	PEAK	2	4924.00	40.06	74.00	-33.94	68.17	33.90	11.54	65.55	0.00	---	PEAK	3	7386.00	44.56	74.00	-29.44	68.72	35.80	14.19	66.15	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																							
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	3283.00	45.25	83.86	-38.61	68.65	32.47	9.32	65.19	0.00	---	PEAK																																																																						
2	4924.00	40.06	74.00	-33.94	68.17	33.90	11.54	65.55	0.00	---	PEAK																																																																						
3	7386.00	44.56	74.00	-29.44	68.72	35.80	14.19	66.15	0.00	---	PEAK																																																																						
Vertical																																																																																	
																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.74</td><td>74.00</td><td>-33.26</td><td>68.85</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>43.91</td><td>74.00</td><td>-30.09</td><td>68.07</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	40.74	74.00	-33.26	68.85	33.90	11.54	65.55	0.00	---	PEAK	2	7386.00	43.91	74.00	-30.09	68.07	35.80	14.19	66.15	0.00	---	PEAK												
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																						
1	4924.00	40.74	74.00	-33.26	68.85	33.90	11.54	65.55	0.00	---	PEAK																																																																						
2	7386.00	43.91	74.00	-30.09	68.07	35.80	14.19	66.15	0.00	---	PEAK																																																																						

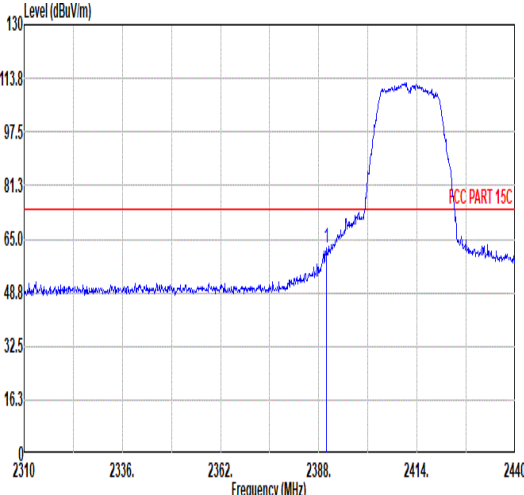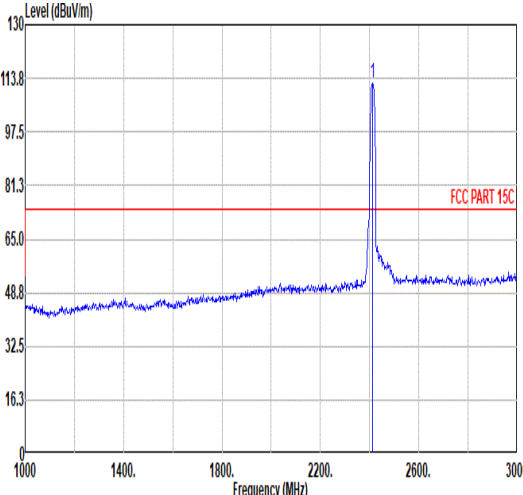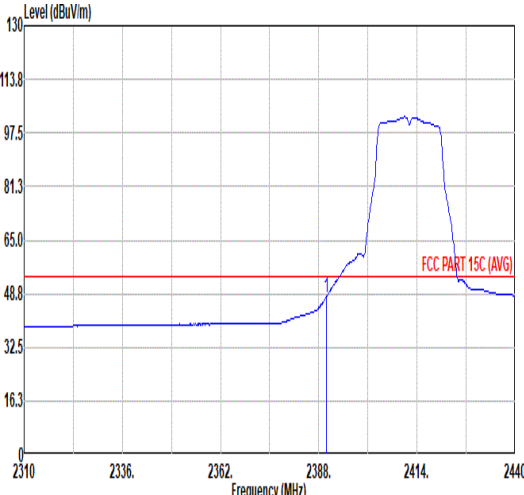
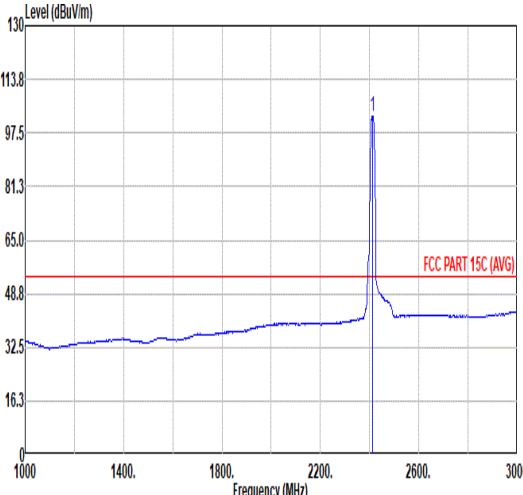


Mode	4																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	1																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>62.29</td><td>74.00</td><td>-11.71</td><td>53.08</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>127 36 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	62.29	74.00	-11.71	53.08	32.24	7.96	36.99	6.00	127 36 PEAK	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>112.11</td><td>-----</td><td>-----</td><td>102.67</td><td>32.44</td><td>8.00</td><td>37.00</td><td>6.00</td><td>127 36 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	112.11	-----	-----	102.67	32.44	8.00	37.00	6.00	127 36 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	62.29	74.00	-11.71	53.08	32.24	7.96	36.99	6.00	127 36 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	112.11	-----	-----	102.67	32.44	8.00	37.00	6.00	127 36 PEAK																																																																																
Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.69</td><td>54.00</td><td>-6.31</td><td>38.48</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>127 36 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.69	54.00	-6.31	38.48	32.24	7.96	36.99	6.00	127 36 AVERAGE	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>102.68</td><td>-----</td><td>-----</td><td>93.27</td><td>32.42</td><td>7.99</td><td>37.00</td><td>6.00</td><td>127 36 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.68	-----	-----	93.27	32.42	7.99	37.00	6.00	127 36 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	47.69	54.00	-6.31	38.48	32.24	7.96	36.99	6.00	127 36 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2412.00	102.68	-----	-----	93.27	32.42	7.99	37.00	6.00	127 36 AVERAGE																																																																																





Mode	4																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.56</td><td>58.12</td><td>74.00</td><td>-15.88</td><td>48.91</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>160 333 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	58.12	74.00	-15.88	48.91	32.24	7.96	36.99	6.00	160 333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.56	58.12	74.00	-15.88	48.91	32.24	7.96	36.99	6.00	160 333 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.62</td><td>-----</td><td>-----</td><td>100.15</td><td>32.47</td><td>8.00</td><td>37.00</td><td>6.00</td><td>160 333 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.62	-----	-----	100.15	32.47	8.00	37.00	6.00	160 333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	109.62	-----	-----	100.15	32.47	8.00	37.00	6.00	160 333 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>35.02</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>160 333 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.23	54.00	-9.77	35.02	32.24	7.96	36.99	6.00	160 333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	44.23	54.00	-9.77	35.02	32.24	7.96	36.99	6.00	160 333 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.00</td><td>-----</td><td>-----</td><td>90.53</td><td>32.47</td><td>8.00</td><td>37.00</td><td>6.00</td><td>160 333 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.00	-----	-----	90.53	32.47	8.00	37.00	6.00	160 333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	100.00	-----	-----	90.53	32.47	8.00	37.00	6.00	160 333 AVERAGE																																													



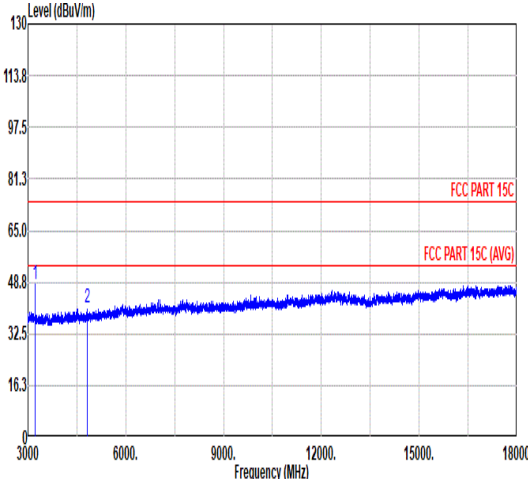
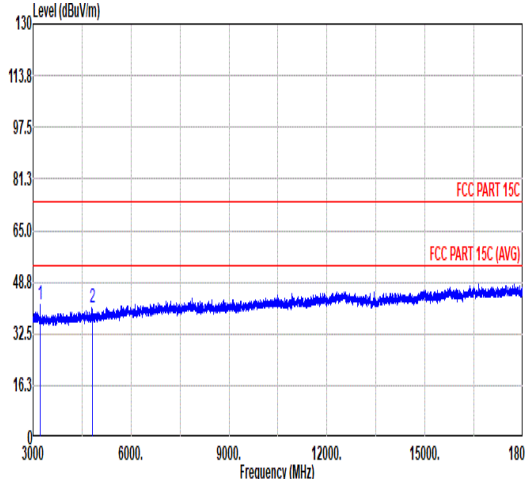


Mode	4																																																																										
	Harmonic																																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																																										
ANT	1																																																																										
Pol.	Horizontal						Vertical																																																																				
Peak Avg																																																																											
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>47.95</td><td>78.73</td><td>-30.78</td><td>71.17</td><td>32.80</td><td>9.20</td><td>65.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>40.56</td><td>74.00</td><td>-33.44</td><td>60.60</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	47.95	78.73	-30.78	71.17	32.80	9.20	65.22	0.00	---	---	PEAK	2	4824.00	40.56	74.00	-33.44	60.60	33.95	11.40	65.39	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																															
1	3216.00	47.95	78.73	-30.78	71.17	32.80	9.20	65.22	0.00	---	---	PEAK																																																															
2	4824.00	40.56	74.00	-33.44	60.60	33.95	11.40	65.39	0.00	---	---	PEAK																																																															
<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>41.51</td><td>74.00</td><td>-32.49</td><td>64.73</td><td>32.80</td><td>9.20</td><td>65.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>40.87</td><td>74.00</td><td>-33.13</td><td>60.91</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3216.00	41.51	74.00	-32.49	64.73	32.80	9.20	65.22	0.00	---	---	PEAK	2	4824.00	40.87	74.00	-33.13	60.91	33.95	11.40	65.39	0.00	---	---	PEAK	
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																															
1	3216.00	41.51	74.00	-32.49	64.73	32.80	9.20	65.22	0.00	---	---	PEAK																																																															
2	4824.00	40.87	74.00	-33.13	60.91	33.95	11.40	65.39	0.00	---	---	PEAK																																																															

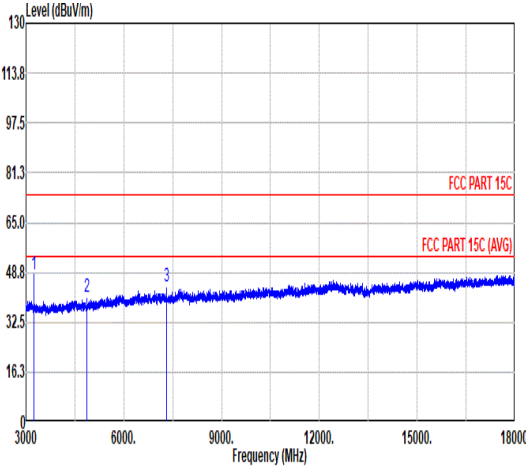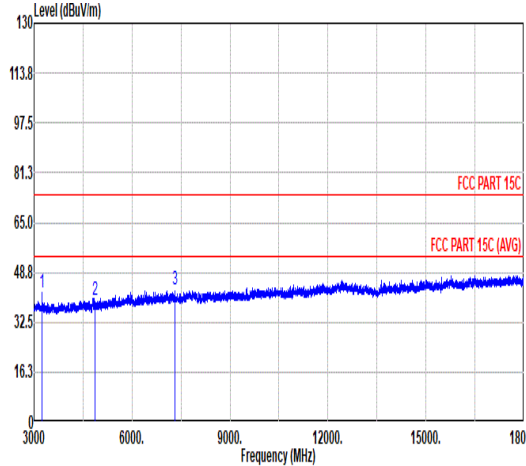

Mode	5																																																																																																																																																												
	Harmonic																																																																																																																																																												
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																												
ANT	1																																																																																																																																																												
Pol.	Horizontal								Vertical																																																																																																																																																				
Peak Avg																																																																																																																																																													
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3249.00</td><td>47.89</td><td>82.52</td><td>-34.63</td><td>71.23</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>40.68</td><td>74.00</td><td>-33.32</td><td>60.86</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>43.96</td><td>74.00</td><td>-30.04</td><td>60.01</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3249.00	47.89	82.52	-34.63	71.23	32.61	9.26	65.21	0.00	---	--- PEAK	2	4874.00	40.68	74.00	-33.32	60.86	33.90	11.47	65.55	0.00	---	--- PEAK	3	7311.00	43.96	74.00	-30.04	60.01	35.80	14.13	65.98	0.00	---	--- PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>3249.00</td><td>42.28</td><td>80.29</td><td>-38.01</td><td>65.62</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>39.97</td><td>74.00</td><td>-34.03</td><td>60.15</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>43.21</td><td>74.00</td><td>-30.79</td><td>59.26</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	3249.00	42.28	80.29	-38.01	65.62	32.61	9.26	65.21	0.00	---	--- PEAK	2	4874.00	39.97	74.00	-34.03	60.15	33.90	11.47	65.55	0.00	---	--- PEAK	3	7311.00	43.21	74.00	-30.79	59.26	35.80	14.13	65.98	0.00	---
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	3249.00	47.89	82.52	-34.63	71.23	32.61	9.26	65.21	0.00	---	--- PEAK																																																																																																																																																		
2	4874.00	40.68	74.00	-33.32	60.86	33.90	11.47	65.55	0.00	---	--- PEAK																																																																																																																																																		
3	7311.00	43.96	74.00	-30.04	60.01	35.80	14.13	65.98	0.00	---	--- PEAK																																																																																																																																																		
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	3249.00	42.28	80.29	-38.01	65.62	32.61	9.26	65.21	0.00	---	--- PEAK																																																																																																																																																		
2	4874.00	39.97	74.00	-34.03	60.15	33.90	11.47	65.55	0.00	---	--- PEAK																																																																																																																																																		
3	7311.00	43.21	74.00	-30.79	59.26	35.80	14.13	65.98	0.00	---	--- PEAK																																																																																																																																																		

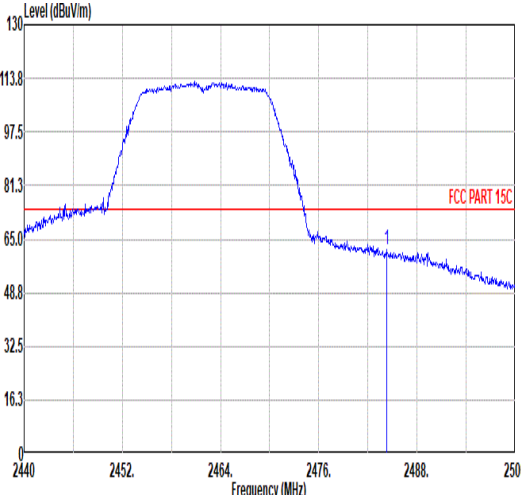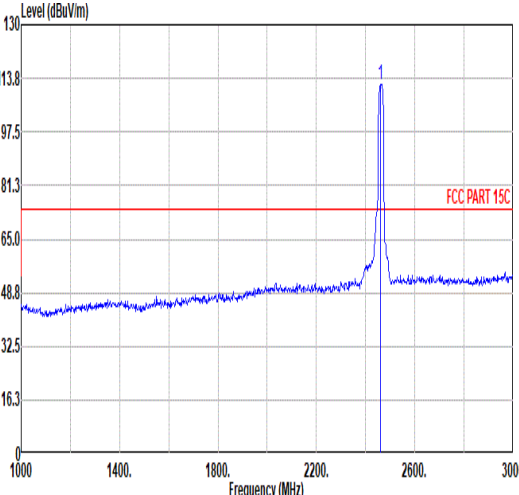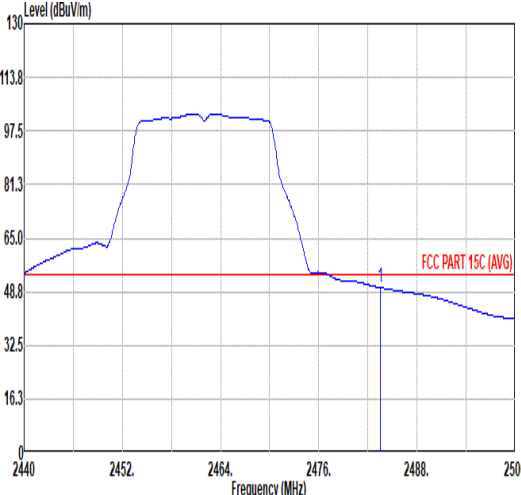
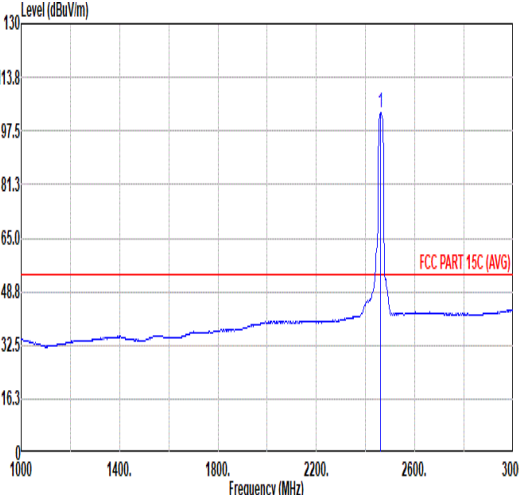


Mode	6																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.28</td><td>61.98</td><td>74.00</td><td>-12.02</td><td>52.37</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>335 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.28	61.98	74.00	-12.02	52.37	32.56	8.10	37.05	6.00	100	335 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>111.79</td><td>-----</td><td>-----</td><td>101.99</td><td>32.76</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>335 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.79	-----	-----	101.99	32.76	8.07	37.03	6.00	100	335 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2484.28	61.98	74.00	-12.02	52.37	32.56	8.10	37.05	6.00	100	335 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	111.79	-----	-----	101.99	32.76	8.07	37.03	6.00	100	335 PEAK																																																																																										
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>50.01</td><td>54.00</td><td>-3.99</td><td>40.40</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>335 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.01	54.00	-3.99	40.40	32.56	8.10	37.05	6.00	100	335 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.96</td><td>-----</td><td>-----</td><td>93.12</td><td>32.80</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>335 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.96	-----	-----	93.12	32.80	8.07	37.03	6.00	100	335 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.50	50.01	54.00	-3.99	40.40	32.56	8.10	37.05	6.00	100	335 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	102.96	-----	-----	93.12	32.80	8.07	37.03	6.00	100	335 AVERAGE																																																																																										







Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.52</td><td>58.60</td><td>74.00</td><td>-15.40</td><td>49.00</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>297 343 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.52	58.60	74.00	-15.40	49.00	32.55	8.10	37.05	6.00	297 343 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>108.85</td><td>-----</td><td>-----</td><td>99.05</td><td>32.76</td><td>8.07</td><td>37.03</td><td>6.00</td><td>297 343 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.85	-----	-----	99.05	32.76	8.07	37.03	6.00	297 343 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2484.52	58.60	74.00	-15.40	49.00	32.55	8.10	37.05	6.00	297 343 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	108.85	-----	-----	99.05	32.76	8.07	37.03	6.00	297 343 PEAK																																																																																										
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>47.13</td><td>54.00</td><td>-6.87</td><td>37.52</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>297 343 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.13	54.00	-6.87	37.52	32.56	8.10	37.05	6.00	297 343 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>99.17</td><td>-----</td><td>-----</td><td>89.37</td><td>32.76</td><td>8.07</td><td>37.03</td><td>6.00</td><td>297 343 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.17	-----	-----	89.37	32.76	8.07	37.03	6.00	297 343 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	47.13	54.00	-6.87	37.52	32.56	8.10	37.05	6.00	297 343 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	99.17	-----	-----	89.37	32.76	8.07	37.03	6.00	297 343 AVERAGE																																																																																										

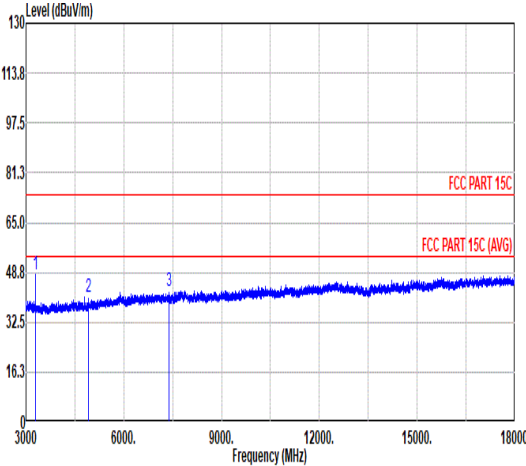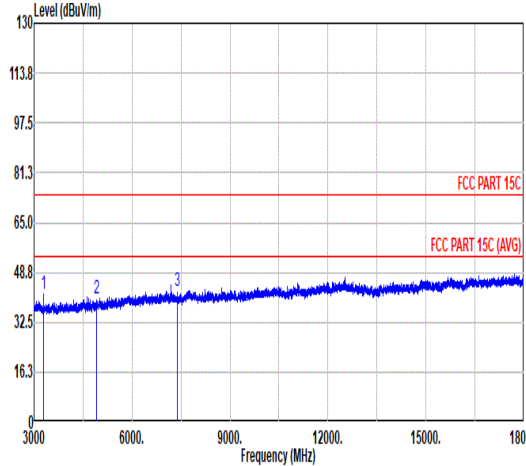

Mode	6																																																																																																																																																				
	Harmonic																																																																																																																																																				
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																				
ANT	1																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																														
Peak Avg																																																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3283.00</td><td>48.18</td><td>80.42</td><td>-32.24</td><td>71.58</td><td>32.47</td><td>9.32</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.63</td><td>74.00</td><td>-33.37</td><td>60.74</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>42.62</td><td>74.00</td><td>-31.38</td><td>58.78</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3283.00	48.18	80.42	-32.24	71.58	32.47	9.32	65.19	0.00	---	PEAK	2	4924.00	40.63	74.00	-33.37	60.74	33.90	11.54	65.55	0.00	---	PEAK	3	7386.00	42.62	74.00	-31.38	58.78	35.80	14.19	66.15	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3283.00</td><td>41.69</td><td>80.01</td><td>-38.32</td><td>65.09</td><td>32.47</td><td>9.32</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.38</td><td>74.00</td><td>-33.62</td><td>60.49</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>42.56</td><td>74.00</td><td>-31.44</td><td>58.72</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3283.00	41.69	80.01	-38.32	65.09	32.47	9.32	65.19	0.00	---	PEAK	2	4924.00	40.38	74.00	-33.62	60.49	33.90	11.54	65.55	0.00	---	PEAK	3	7386.00	42.56	74.00	-31.44	58.72	35.80	14.19	66.15	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3283.00	48.18	80.42	-32.24	71.58	32.47	9.32	65.19	0.00	---	PEAK																																																																																																																																										
2	4924.00	40.63	74.00	-33.37	60.74	33.90	11.54	65.55	0.00	---	PEAK																																																																																																																																										
3	7386.00	42.62	74.00	-31.38	58.78	35.80	14.19	66.15	0.00	---	PEAK																																																																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3283.00	41.69	80.01	-38.32	65.09	32.47	9.32	65.19	0.00	---	PEAK																																																																																																																																										
2	4924.00	40.38	74.00	-33.62	60.49	33.90	11.54	65.55	0.00	---	PEAK																																																																																																																																										
3	7386.00	42.56	74.00	-31.44	58.72	35.80	14.19	66.15	0.00	---	PEAK																																																																																																																																										

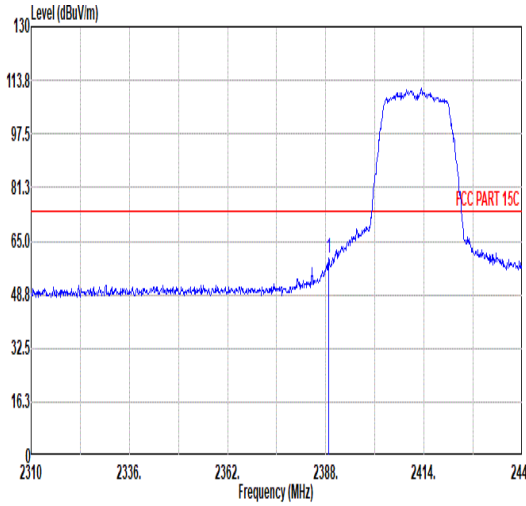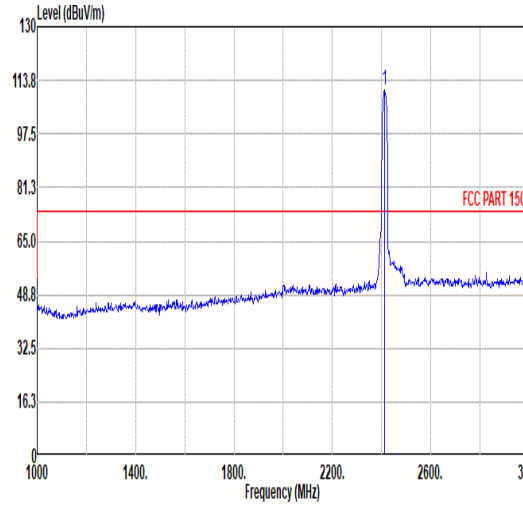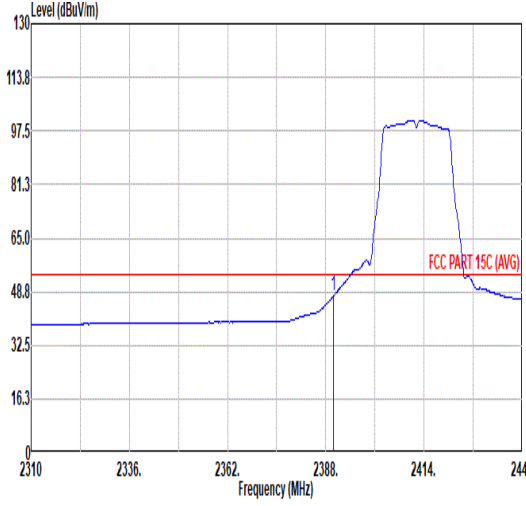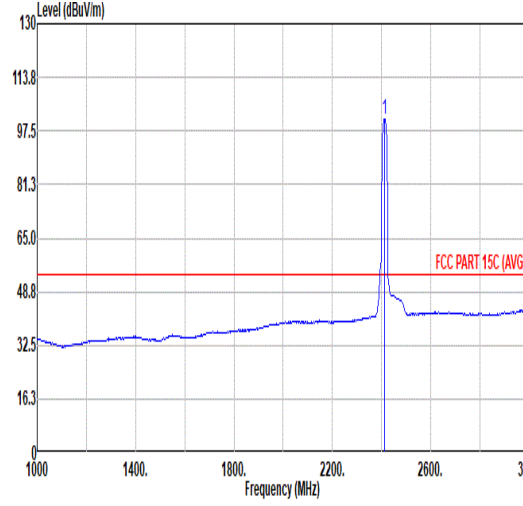

Mode	7																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.78</td><td>60.03</td><td>74.00</td><td>-13.97</td><td>50.83</td><td>32.23</td><td>7.96</td><td>36.99</td><td>6.00</td><td>129 34 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.78	60.03	74.00	-13.97	50.83	32.23	7.96	36.99	6.00	129 34 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.68</td><td>-----</td><td>-----</td><td>101.24</td><td>32.44</td><td>8.00</td><td>37.00</td><td>6.00</td><td>129 34 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.68	-----	-----	101.24	32.44	8.00	37.00	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2388.78	60.03	74.00	-13.97	50.83	32.23	7.96	36.99	6.00	129 34 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	110.68	-----	-----	101.24	32.44	8.00	37.00	6.00	129 34 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.45</td><td>54.00</td><td>-6.55</td><td>38.24</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>129 34 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.45	54.00	-6.55	38.24	32.24	7.96	36.99	6.00	129 34 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.05</td><td>-----</td><td>-----</td><td>91.64</td><td>32.42</td><td>7.99</td><td>37.00</td><td>6.00</td><td>129 34 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.05	-----	-----	91.64	32.42	7.99	37.00	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	47.45	54.00	-6.55	38.24	32.24	7.96	36.99	6.00	129 34 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.05	-----	-----	91.64	32.42	7.99	37.00	6.00	129 34 AVERAGE																																																																																									





		7																																																							
Mode		Band Edge																																																							
		2400-2483.5_802.11n_HT20_CH01_2412MHz																																																							
ANT		1																																																							
Pol.		Vertical																																																							
Peak																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>46.51</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>162</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	55.72	74.00	-18.28	46.51	32.24	7.96	36.99	6.00	162	334 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2389.95	55.72	74.00	-18.28	46.51	32.24	7.96	36.99	6.00	162	334 PEAK																																														
Fundamental																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.75</td><td>-----</td><td>-----</td><td>98.28</td><td>32.47</td><td>8.00</td><td>37.00</td><td>6.00</td><td>162</td><td>334 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.75	-----	-----	98.28	32.47	8.00	37.00	6.00	162	334 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2412.00	107.75	-----	-----	98.28	32.47	8.00	37.00	6.00	162	334 PEAK																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.18</td><td>54.00</td><td>-9.82</td><td>34.97</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>162</td><td>334 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.18	54.00	-9.82	34.97	32.24	7.96	36.99	6.00	162	334 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2389.95	44.18	54.00	-9.82	34.97	32.24	7.96	36.99	6.00	162	334 AVERAGE																																														
Avg																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.37</td><td>-----</td><td>-----</td><td>88.90</td><td>32.47</td><td>8.00</td><td>37.00</td><td>6.00</td><td>162</td><td>334 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.37	-----	-----	88.90	32.47	8.00	37.00	6.00	162	334 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																															
1	2412.00	98.37	-----	-----	88.90	32.47	8.00	37.00	6.00	162	334 AVERAGE																																														







Mode	7																																																																									
	Harmonic																																																																									
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																									
ANT	1																																																																									
Pol.	Horizontal						Vertical																																																																			
Peak Avg																																																																										
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3216.00</td><td>47.95</td><td>76.67</td><td>-28.72</td><td>71.17</td><td>32.00</td><td>9.20</td><td>65.22</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>40.06</td><td>74.00</td><td>-33.94</td><td>60.10</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3216.00	47.95	76.67	-28.72	71.17	32.00	9.20	65.22	0.00	---	---	PEAK	2	4824.00	40.06	74.00	-33.94	60.10	33.95	11.40	65.39	0.00	---	---	PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																															
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1	3216.00	47.95	76.67	-28.72	71.17	32.00	9.20	65.22	0.00	---	---	PEAK																																																														
2	4824.00	40.06	74.00	-33.94	60.10	33.95	11.40	65.39	0.00	---	---	PEAK																																																														
<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>40.10</td><td>74.00</td><td>-33.90</td><td>60.14</td><td>33.95</td><td>11.40</td><td>65.39</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>														Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.10	74.00	-33.90	60.14	33.95	11.40	65.39	0.00	---	---	PEAK														
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																															
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1	4824.00	40.10	74.00	-33.90	60.14	33.95	11.40	65.39	0.00	---	---	PEAK																																																														



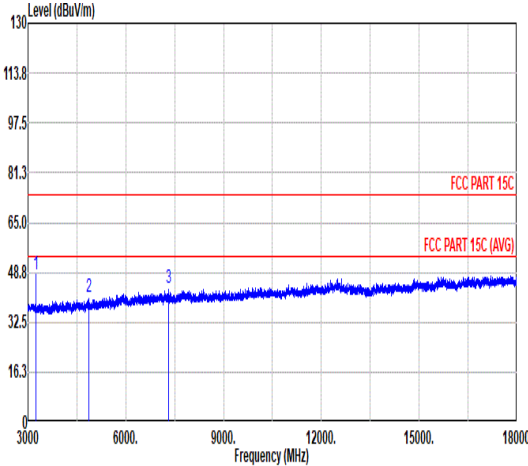
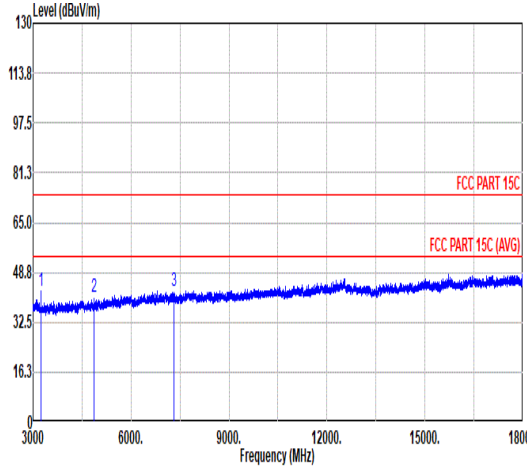


Mode	8																																																																																																																																																				
	Harmonic																																																																																																																																																				
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																																																																																				
ANT	1																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																														
Peak Avg																																																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3249.00</td><td>47.97</td><td>82.66</td><td>-34.69</td><td>71.31</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>40.70</td><td>74.00</td><td>-33.30</td><td>60.88</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>43.51</td><td>74.00</td><td>-30.49</td><td>59.56</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3249.00	47.97	82.66	-34.69	71.31	32.61	9.26	65.21	0.00	---	PEAK	2	4874.00	40.70	74.00	-33.30	60.88	33.90	11.47	65.55	0.00	---	PEAK	3	7311.00	43.51	74.00	-30.49	59.56	35.80	14.13	65.98	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3249.00</td><td>42.70</td><td>81.58</td><td>-38.88</td><td>66.04</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>40.79</td><td>74.00</td><td>-33.21</td><td>60.97</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>42.82</td><td>74.00</td><td>-31.18</td><td>58.87</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3249.00	42.70	81.58	-38.88	66.04	32.61	9.26	65.21	0.00	---	PEAK	2	4874.00	40.79	74.00	-33.21	60.97	33.90	11.47	65.55	0.00	---	PEAK	3	7311.00	42.82	74.00	-31.18	58.87	35.80	14.13	65.98	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3249.00	47.97	82.66	-34.69	71.31	32.61	9.26	65.21	0.00	---	PEAK																																																																																																																																										
2	4874.00	40.70	74.00	-33.30	60.88	33.90	11.47	65.55	0.00	---	PEAK																																																																																																																																										
3	7311.00	43.51	74.00	-30.49	59.56	35.80	14.13	65.98	0.00	---	PEAK																																																																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3249.00	42.70	81.58	-38.88	66.04	32.61	9.26	65.21	0.00	---	PEAK																																																																																																																																										
2	4874.00	40.79	74.00	-33.21	60.97	33.90	11.47	65.55	0.00	---	PEAK																																																																																																																																										
3	7311.00	42.82	74.00	-31.18	58.87	35.80	14.13	65.98	0.00	---	PEAK																																																																																																																																										

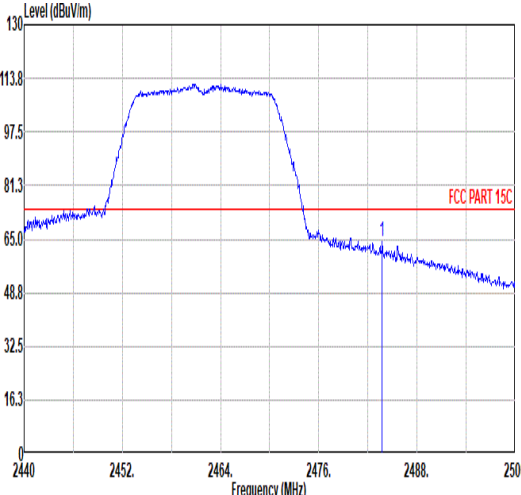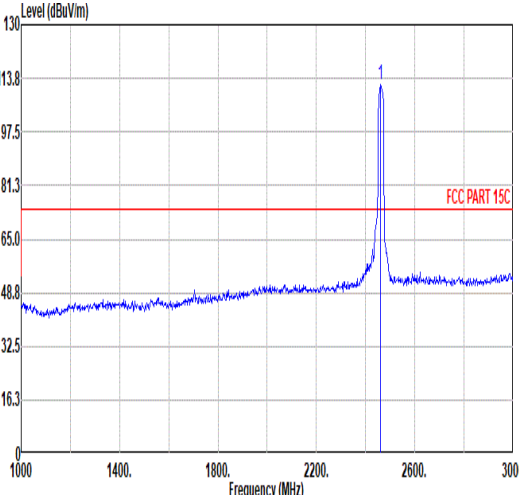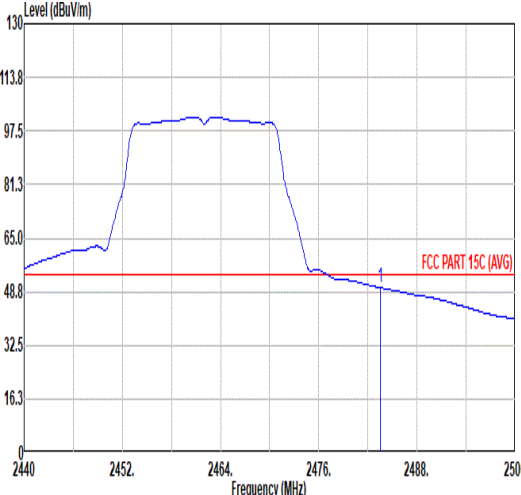
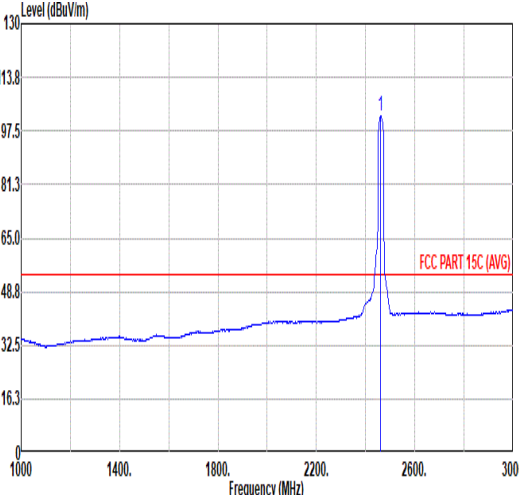


Mode	9																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.74</td><td>64.15</td><td>74.00</td><td>-9.85</td><td>54.54</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>333 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.74	64.15	74.00	-9.85	54.54	32.56	8.10	37.05	6.00	100	333 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>111.69</td><td>-----</td><td>-----</td><td>101.85</td><td>32.80</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>333 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	111.69	-----	-----	101.85	32.80	8.07	37.03	6.00	100	333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.74	64.15	74.00	-9.85	54.54	32.56	8.10	37.05	6.00	100	333 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	111.69	-----	-----	101.85	32.80	8.07	37.03	6.00	100	333 PEAK																																																																																										
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>50.02</td><td>54.00</td><td>-3.98</td><td>40.41</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>333 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.02	54.00	-3.98	40.41	32.56	8.10	37.05	6.00	100	333 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.96</td><td>-----</td><td>-----</td><td>92.16</td><td>32.76</td><td>8.07</td><td>37.03</td><td>6.00</td><td>100</td><td>333 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.96	-----	-----	92.16	32.76	8.07	37.03	6.00	100	333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.50	50.02	54.00	-3.98	40.41	32.56	8.10	37.05	6.00	100	333 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	101.96	-----	-----	92.16	32.76	8.07	37.03	6.00	100	333 AVERAGE																																																																																										

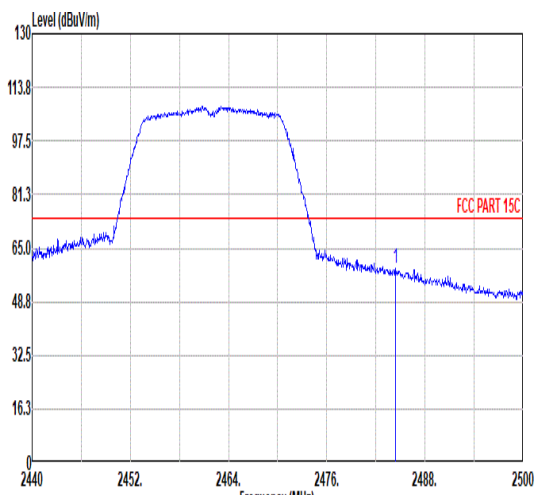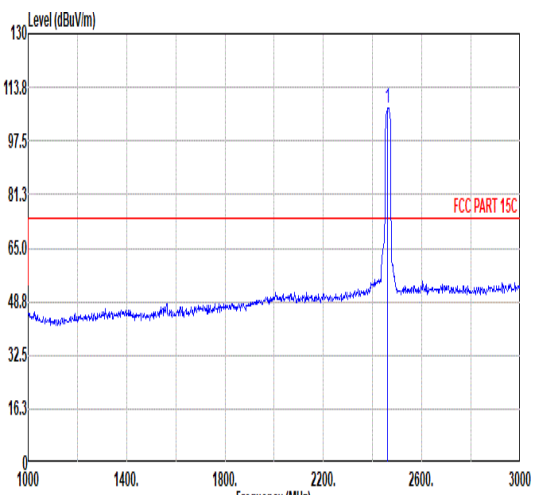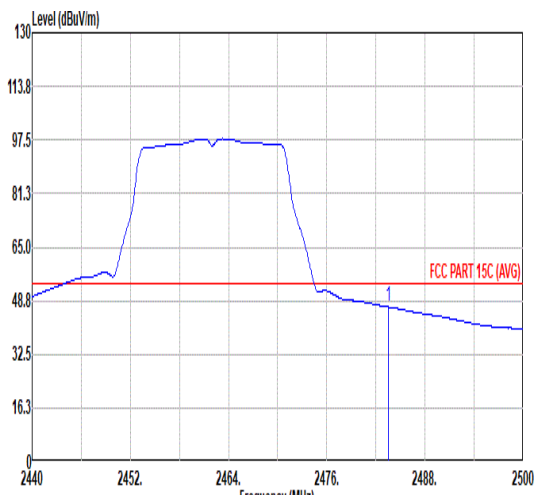
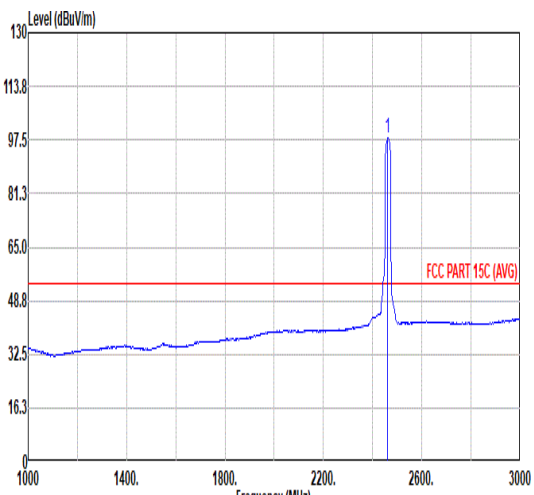


Mode	9																																																						
	Band Edge																																																						
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.40</td><td>58.91</td><td>74.00</td><td>-15.09</td><td>49.30</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>302 343 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.40	58.91	74.00	-15.09	49.30	32.56	8.10	37.05	6.00	302 343 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.40	58.91	74.00	-15.09	49.30	32.56	8.10	37.05	6.00	302 343 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.62</td><td>-----</td><td>-----</td><td>97.82</td><td>32.76</td><td>8.07</td><td>37.03</td><td>6.00</td><td>302 343 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.62	-----	-----	97.82	32.76	8.07	37.03	6.00	302 343 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	107.62	-----	-----	97.82	32.76	8.07	37.03	6.00	302 343 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.92</td><td>54.00</td><td>-7.08</td><td>37.31</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>302 343 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.92	54.00	-7.08	37.31	32.56	8.10	37.05	6.00	302 343 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	46.92	54.00	-7.08	37.31	32.56	8.10	37.05	6.00	302 343 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.16</td><td>-----</td><td>-----</td><td>88.32</td><td>32.80</td><td>8.07</td><td>37.03</td><td>6.00</td><td>302 343 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.16	-----	-----	88.32	32.80	8.07	37.03	6.00	302 343 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	98.16	-----	-----	88.32	32.80	8.07	37.03	6.00	302 343 AVERAGE																																													

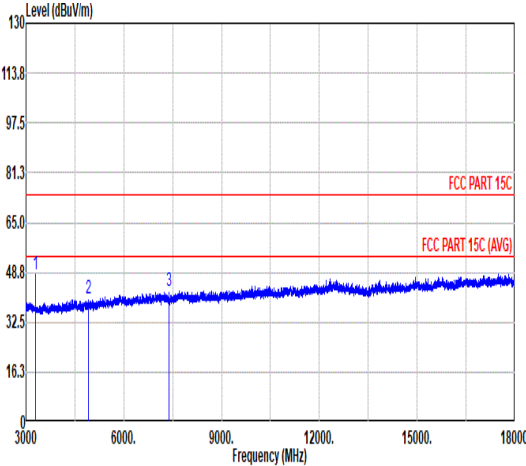
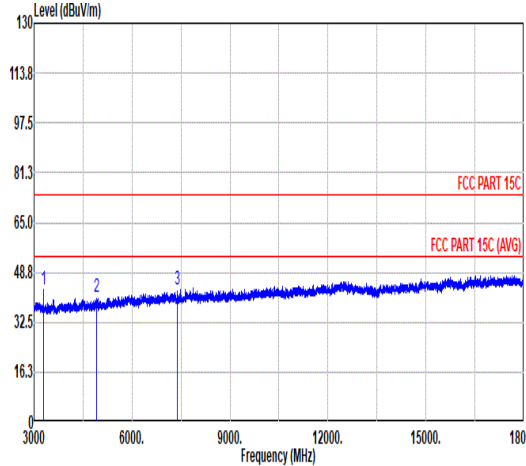


Mode	9																																																																																																																																																				
	Harmonic																																																																																																																																																				
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																				
ANT	1																																																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																																																														
Peak Avg																																																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3282.00</td><td>48.23</td><td>81.51</td><td>-33.28</td><td>71.64</td><td>32.47</td><td>9.31</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.27</td><td>74.00</td><td>-33.73</td><td>60.38</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>42.62</td><td>74.00</td><td>-31.38</td><td>58.78</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3282.00	48.23	81.51	-33.28	71.64	32.47	9.31	65.19	0.00	---	PEAK	2	4924.00	40.27	74.00	-33.73	60.38	33.90	11.54	65.55	0.00	---	PEAK	3	7386.00	42.62	74.00	-31.38	58.78	35.80	14.19	66.15	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3282.00</td><td>42.96</td><td>88.34</td><td>-45.38</td><td>66.37</td><td>32.47</td><td>9.31</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4924.00</td><td>40.50</td><td>74.00</td><td>-33.50</td><td>60.61</td><td>33.90</td><td>11.54</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7386.00</td><td>43.00</td><td>74.00</td><td>-31.00</td><td>59.16</td><td>35.80</td><td>14.19</td><td>66.15</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3282.00	42.96	88.34	-45.38	66.37	32.47	9.31	65.19	0.00	---	PEAK	2	4924.00	40.50	74.00	-33.50	60.61	33.90	11.54	65.55	0.00	---	PEAK	3	7386.00	43.00	74.00	-31.00	59.16	35.80	14.19	66.15	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3282.00	48.23	81.51	-33.28	71.64	32.47	9.31	65.19	0.00	---	PEAK																																																																																																																																										
2	4924.00	40.27	74.00	-33.73	60.38	33.90	11.54	65.55	0.00	---	PEAK																																																																																																																																										
3	7386.00	42.62	74.00	-31.38	58.78	35.80	14.19	66.15	0.00	---	PEAK																																																																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																											
1	3282.00	42.96	88.34	-45.38	66.37	32.47	9.31	65.19	0.00	---	PEAK																																																																																																																																										
2	4924.00	40.50	74.00	-33.50	60.61	33.90	11.54	65.55	0.00	---	PEAK																																																																																																																																										
3	7386.00	43.00	74.00	-31.00	59.16	35.80	14.19	66.15	0.00	---	PEAK																																																																																																																																										



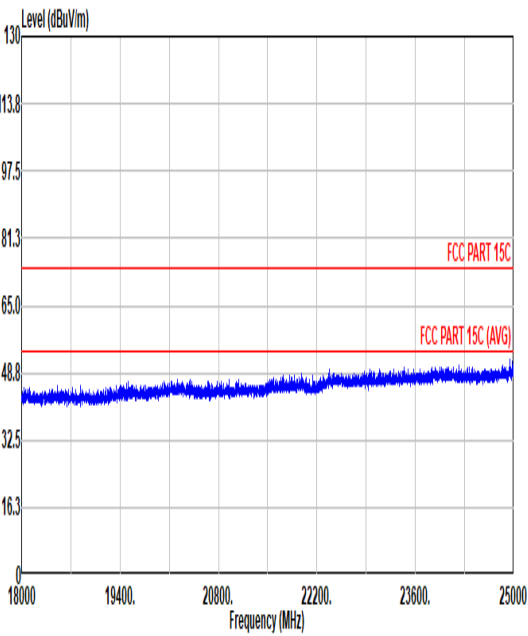
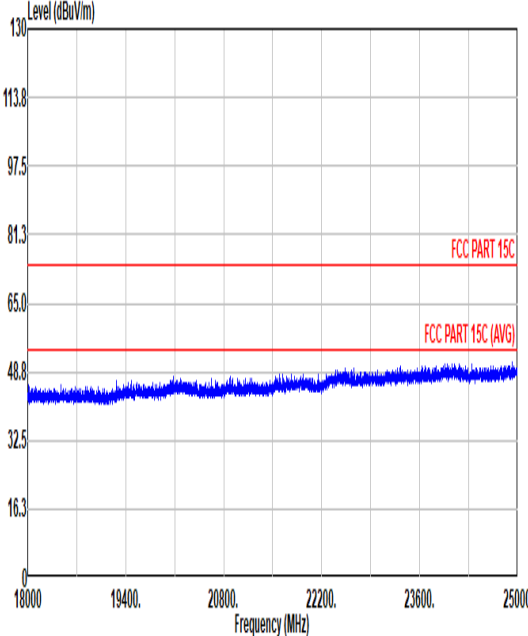


Mode	9	
	18G-25G	
	2400-2483.5_802.11n HT20_CH11_2462MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		

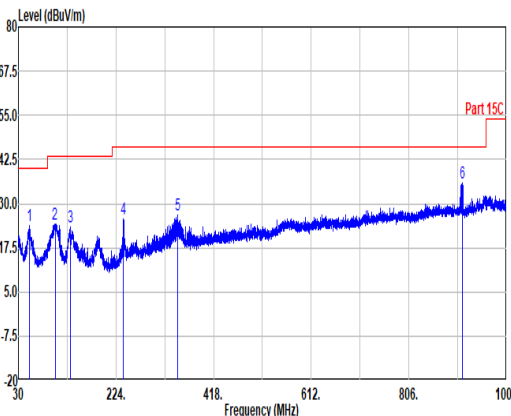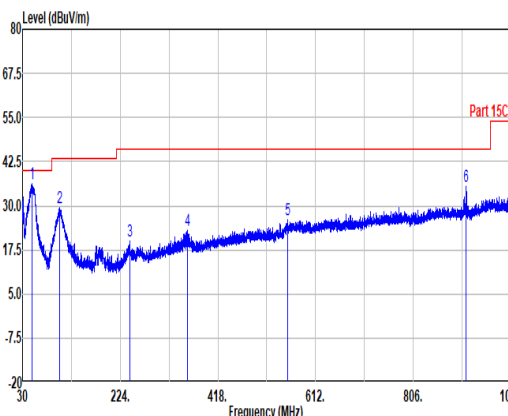

Mode	9																																																																																																																																																																																																																											
	30M-1G																																																																																																																																																																																																																											
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																																					
Peak																																																																																																																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>51.58</td><td>23.61</td><td>40.00</td><td>-16.39</td><td>41.63</td><td>13.93</td><td>0.88</td><td>32.83</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>102.87</td><td>24.30</td><td>43.50</td><td>-19.20</td><td>38.97</td><td>16.51</td><td>1.64</td><td>32.82</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>133.18</td><td>23.25</td><td>43.50</td><td>-20.25</td><td>36.65</td><td>17.77</td><td>1.85</td><td>33.02</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>238.67</td><td>25.69</td><td>46.00</td><td>-20.31</td><td>38.69</td><td>17.31</td><td>2.51</td><td>32.82</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>346.10</td><td>26.77</td><td>46.00</td><td>-19.23</td><td>36.11</td><td>20.49</td><td>3.02</td><td>32.85</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>912.46</td><td>35.98</td><td>46.00</td><td>-10.02</td><td>32.79</td><td>29.92</td><td>4.91</td><td>31.64</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	51.58	23.61	40.00	-16.39	41.63	13.93	0.88	32.83	0.00	---	---	Peak	2	102.87	24.30	43.50	-19.20	38.97	16.51	1.64	32.82	0.00	---	---	Peak	3	133.18	23.25	43.50	-20.25	36.65	17.77	1.85	33.02	0.00	---	---	Peak	4	238.67	25.69	46.00	-20.31	38.69	17.31	2.51	32.82	0.00	---	---	Peak	5	346.10	26.77	46.00	-19.23	36.11	20.49	3.02	32.85	0.00	---	---	Peak	6	912.46	35.98	46.00	-10.02	32.79	29.92	4.91	31.64	0.00	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>48.43</td><td>36.08</td><td>40.00</td><td>-3.92</td><td>52.63</td><td>15.36</td><td>0.82</td><td>32.73</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>104.08</td><td>29.25</td><td>43.50</td><td>-14.25</td><td>43.78</td><td>16.65</td><td>1.65</td><td>32.83</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>243.64</td><td>19.86</td><td>46.00</td><td>-26.14</td><td>32.20</td><td>17.94</td><td>2.54</td><td>32.82</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>357.13</td><td>23.06</td><td>46.00</td><td>-22.94</td><td>31.95</td><td>20.90</td><td>3.07</td><td>32.86</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>556.59</td><td>25.95</td><td>46.00</td><td>-20.05</td><td>28.53</td><td>26.29</td><td>3.83</td><td>32.70</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>911.12</td><td>35.43</td><td>46.00</td><td>-10.57</td><td>32.30</td><td>29.88</td><td>4.91</td><td>31.66</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	48.43	36.08	40.00	-3.92	52.63	15.36	0.82	32.73	0.00	---	---	Peak	2	104.08	29.25	43.50	-14.25	43.78	16.65	1.65	32.83	0.00	---	---	Peak	3	243.64	19.86	46.00	-26.14	32.20	17.94	2.54	32.82	0.00	---	---	Peak	4	357.13	23.06	46.00	-22.94	31.95	20.90	3.07	32.86	0.00	---	---	Peak	5	556.59	25.95	46.00	-20.05	28.53	26.29	3.83	32.70	0.00	---	---	Peak	6	911.12	35.43	46.00	-10.57	32.30	29.88	4.91	31.66	0.00	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																															
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																
	1	51.58	23.61	40.00	-16.39	41.63	13.93	0.88	32.83	0.00	---	---	Peak																																																																																																																																																																																																															
	2	102.87	24.30	43.50	-19.20	38.97	16.51	1.64	32.82	0.00	---	---	Peak																																																																																																																																																																																																															
	3	133.18	23.25	43.50	-20.25	36.65	17.77	1.85	33.02	0.00	---	---	Peak																																																																																																																																																																																																															
	4	238.67	25.69	46.00	-20.31	38.69	17.31	2.51	32.82	0.00	---	---	Peak																																																																																																																																																																																																															
	5	346.10	26.77	46.00	-19.23	36.11	20.49	3.02	32.85	0.00	---	---	Peak																																																																																																																																																																																																															
	6	912.46	35.98	46.00	-10.02	32.79	29.92	4.91	31.64	0.00	---	---	Peak																																																																																																																																																																																																															
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																	
1	48.43	36.08	40.00	-3.92	52.63	15.36	0.82	32.73	0.00	---	---	Peak																																																																																																																																																																																																																
2	104.08	29.25	43.50	-14.25	43.78	16.65	1.65	32.83	0.00	---	---	Peak																																																																																																																																																																																																																
3	243.64	19.86	46.00	-26.14	32.20	17.94	2.54	32.82	0.00	---	---	Peak																																																																																																																																																																																																																
4	357.13	23.06	46.00	-22.94	31.95	20.90	3.07	32.86	0.00	---	---	Peak																																																																																																																																																																																																																
5	556.59	25.95	46.00	-20.05	28.53	26.29	3.83	32.70	0.00	---	---	Peak																																																																																																																																																																																																																
6	911.12	35.43	46.00	-10.57	32.30	29.88	4.91	31.66	0.00	---	---	Peak																																																																																																																																																																																																																

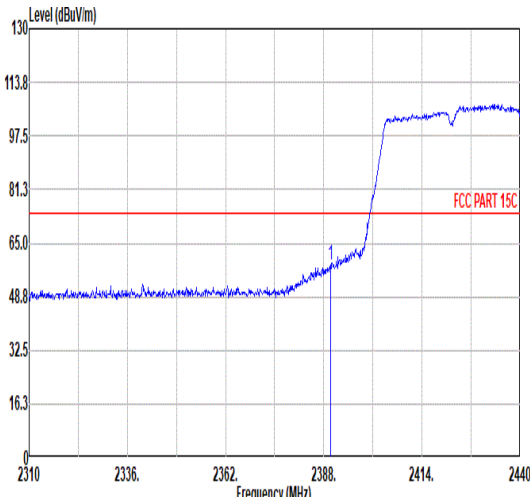
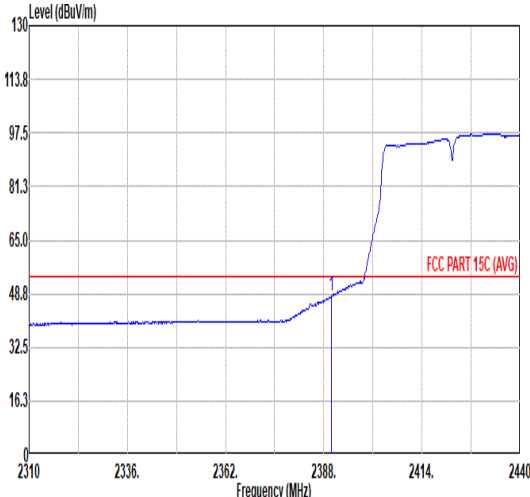
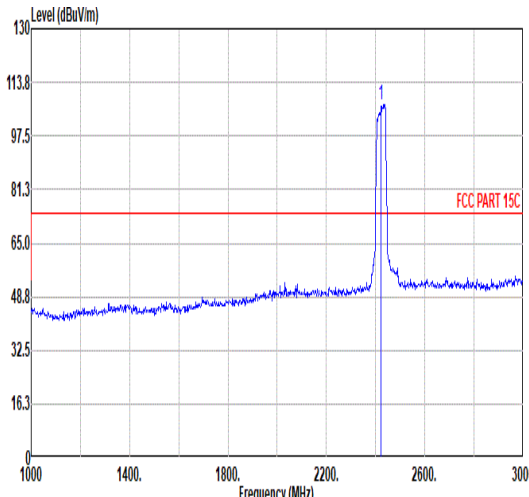
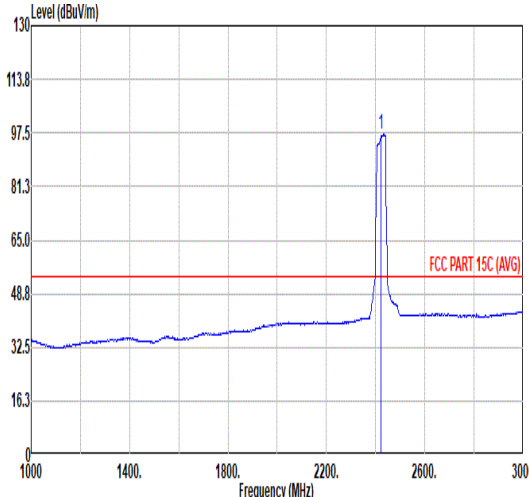


		10																																																						
Mode		Band Edge - L																																																						
		2400-2483.5_802.11n HT40_CH3_2422MHz																																																						
ANT		1																																																						
Pol.		Horizontal					Fundamental																																																	
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>58.17</td><td>74.00</td><td>-15.83</td><td>48.96</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>333 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	58.17	74.00	-15.83	48.96	32.24	7.96	36.99	6.00	100	333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.82	58.17	74.00	-15.83	48.96	32.24	7.96	36.99	6.00	100	333 PEAK																																													
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.90</td><td>54.00</td><td>-6.10</td><td>38.69</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>333 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.90	54.00	-6.10	38.69	32.24	7.96	36.99	6.00	100	333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	47.90	54.00	-6.10	38.69	32.24	7.96	36.99	6.00	100	333 AVERAGE																																													
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>107.13</td><td>-----</td><td>-----</td><td>97.43</td><td>32.68</td><td>8.03</td><td>37.01</td><td>6.00</td><td>100</td><td>333 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	107.13	-----	-----	97.43	32.68	8.03	37.01	6.00	100	333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2422.00	107.13	-----	-----	97.43	32.68	8.03	37.01	6.00	100	333 PEAK																																													
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>97.26</td><td>-----</td><td>-----</td><td>87.56</td><td>32.68</td><td>8.03</td><td>37.01</td><td>6.00</td><td>100</td><td>333 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	97.26	-----	-----	87.56	32.68	8.03	37.01	6.00	100	333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2422.00	97.26	-----	-----	87.56	32.68	8.03	37.01	6.00	100	333 AVERAGE																																													



Mode	10																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.76</td><td>56.79</td><td>74.00</td><td>-17.21</td><td>47.19</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>333</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.76	56.79	74.00	-17.21	47.19	32.55	8.10	37.05	6.00	100	333	PEAK	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.76	56.79	74.00	-17.21	47.19	32.55	8.10	37.05	6.00	100	333	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.10</td><td>44.88</td><td>54.00</td><td>-9.12</td><td>35.27</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>333</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.10	44.88	54.00	-9.12	35.27	32.56	8.10	37.05	6.00	100	333	AVERAGE	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.10	44.88	54.00	-9.12	35.27	32.56	8.10	37.05	6.00	100	333	AVERAGE																																												

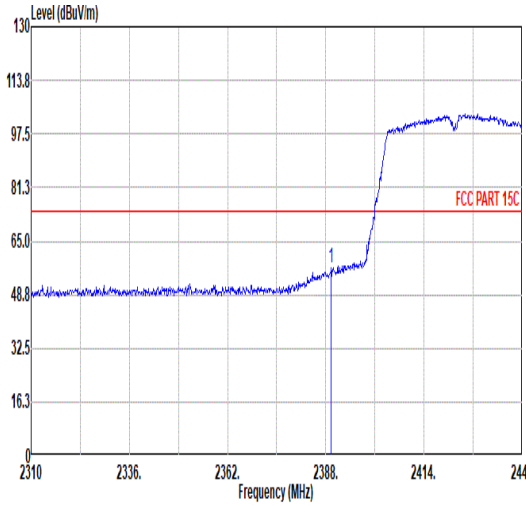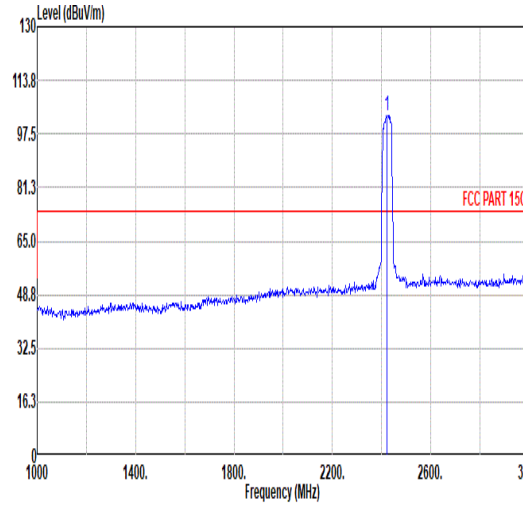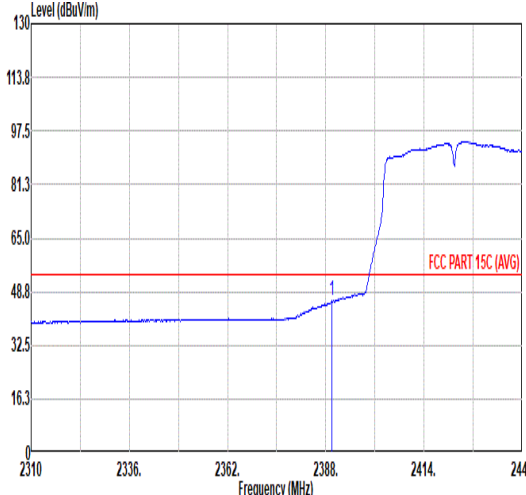
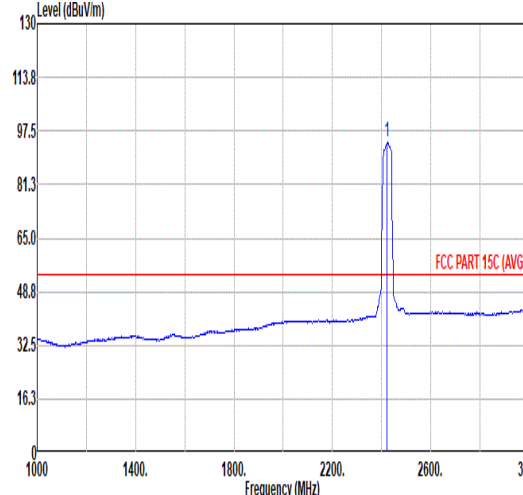


Mode	10																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.43</td><td>56.96</td><td>74.00</td><td>-17.04</td><td>47.75</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>330 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	56.96	74.00	-17.04	47.75	32.24	7.96	36.99	6.00	100	330 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>103.24</td><td>-----</td><td>-----</td><td>93.62</td><td>32.61</td><td>8.02</td><td>37.01</td><td>6.00</td><td>100</td><td>330 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	103.24	-----	-----	93.62	32.61	8.02	37.01	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.43	56.96	74.00	-17.04	47.75	32.24	7.96	36.99	6.00	100	330 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2422.00	103.24	-----	-----	93.62	32.61	8.02	37.01	6.00	100	330 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>45.88</td><td>54.00</td><td>-8.12</td><td>36.67</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>330 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	45.88	54.00	-8.12	36.67	32.24	7.96	36.99	6.00	100	330 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>93.98</td><td>-----</td><td>-----</td><td>84.39</td><td>32.59</td><td>8.01</td><td>37.01</td><td>6.00</td><td>100</td><td>330 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	93.98	-----	-----	84.39	32.59	8.01	37.01	6.00	100
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.69	45.88	54.00	-8.12	36.67	32.24	7.96	36.99	6.00	100	330 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2422.00	93.98	-----	-----	84.39	32.59	8.01	37.01	6.00	100	330 AVERAGE																																																																																										







Mode	10																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																					
ANT	1																																																					
Pol.	Vertical					Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.70</td><td>54.13</td><td>74.00</td><td>-19.87</td><td>44.55</td><td>32.52</td><td>8.11</td><td>37.05</td><td>6.00</td><td>100</td><td>330</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2487.70	54.13	74.00	-19.87	44.55	32.52	8.11	37.05	6.00	100	330	PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2487.70	54.13	74.00	-19.87	44.55	32.52	8.11	37.05	6.00	100	330	PEAK																																										
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.76</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>33.78</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>330</td><td>AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.76	43.38	54.00	-10.62	33.78	32.55	8.10	37.05	6.00	100	330	AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2484.76	43.38	54.00	-10.62	33.78	32.55	8.10	37.05	6.00	100	330	AVERAGE																																										

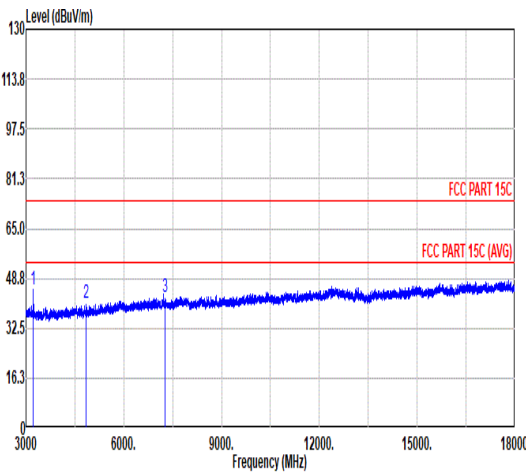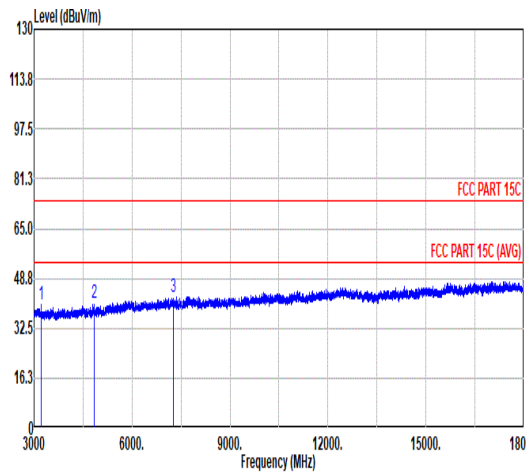

Mode	10																																																																																																																																																								
	Harmonic																																																																																																																																																								
	2400-2483.5_802.11n HT40_CH3_2422MHz																																																																																																																																																								
ANT	1																																																																																																																																																								
Pol.	Horizontal								Vertical																																																																																																																																																
Peak Avg																																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3229.00</td><td>45.32</td><td>76.54</td><td>-31.22</td><td>68.59</td><td>32.73</td><td>9.22</td><td>65.22</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4844.00</td><td>40.96</td><td>74.00</td><td>-33.04</td><td>61.08</td><td>33.91</td><td>11.43</td><td>65.46</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7266.00</td><td>42.74</td><td>74.00</td><td>-31.26</td><td>58.81</td><td>35.73</td><td>14.09</td><td>65.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3229.00	45.32	76.54	-31.22	68.59	32.73	9.22	65.22	0.00	---	PEAK	2	4844.00	40.96	74.00	-33.04	61.08	33.91	11.43	65.46	0.00	---	PEAK	3	7266.00	42.74	74.00	-31.26	58.81	35.73	14.09	65.89	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3229.00</td><td>40.38</td><td>74.14</td><td>-33.76</td><td>63.65</td><td>32.73</td><td>9.22</td><td>65.22</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4844.00</td><td>40.66</td><td>74.00</td><td>-33.34</td><td>60.78</td><td>33.91</td><td>11.43</td><td>65.46</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7266.00</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>58.96</td><td>35.73</td><td>14.09</td><td>65.89</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3229.00	40.38	74.14	-33.76	63.65	32.73	9.22	65.22	0.00	---	PEAK	2	4844.00	40.66	74.00	-33.34	60.78	33.91	11.43	65.46	0.00	---	PEAK	3	7266.00	42.89	74.00	-31.11	58.96	35.73	14.09	65.89	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																															
1	3229.00	45.32	76.54	-31.22	68.59	32.73	9.22	65.22	0.00	---	PEAK																																																																																																																																														
2	4844.00	40.96	74.00	-33.04	61.08	33.91	11.43	65.46	0.00	---	PEAK																																																																																																																																														
3	7266.00	42.74	74.00	-31.26	58.81	35.73	14.09	65.89	0.00	---	PEAK																																																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																															
1	3229.00	40.38	74.14	-33.76	63.65	32.73	9.22	65.22	0.00	---	PEAK																																																																																																																																														
2	4844.00	40.66	74.00	-33.34	60.78	33.91	11.43	65.46	0.00	---	PEAK																																																																																																																																														
3	7266.00	42.89	74.00	-31.11	58.96	35.73	14.09	65.89	0.00	---	PEAK																																																																																																																																														

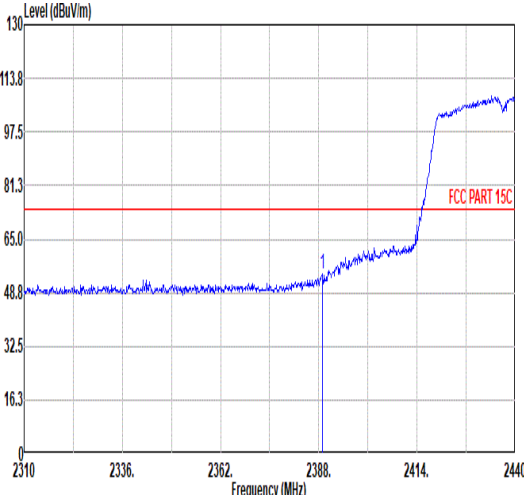
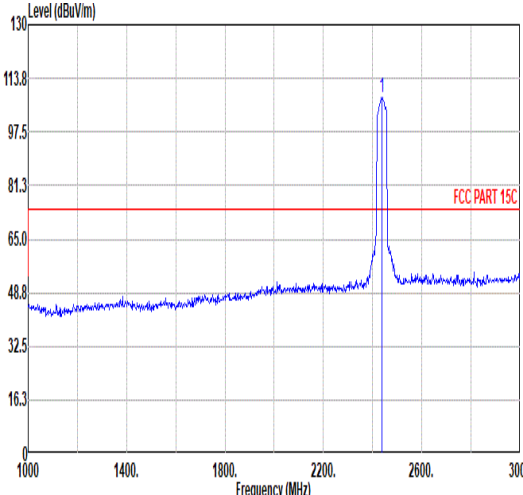
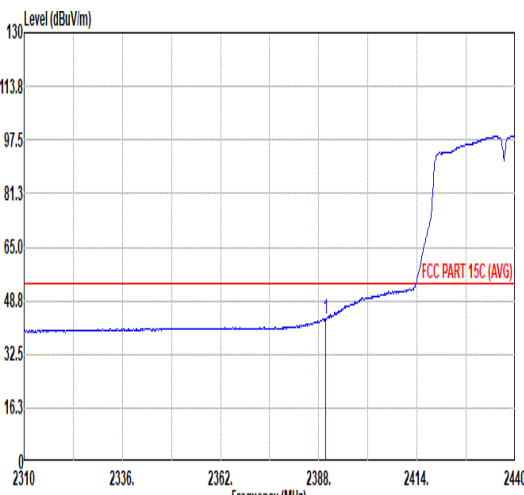
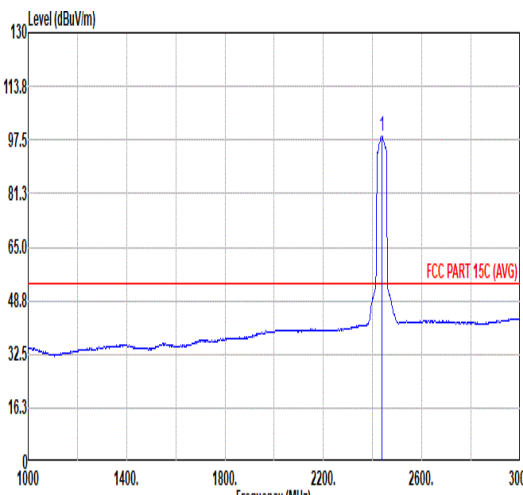


Mode	11																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>54.38</td><td>74.00</td><td>-19.62</td><td>45.18</td><td>32.23</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>331 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	54.38	74.00	-19.62	45.18	32.23	7.96	36.99	6.00	100	331 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>107.91</td><td>-----</td><td>-----</td><td>98.17</td><td>32.73</td><td>8.03</td><td>37.02</td><td>6.00</td><td>100</td><td>331 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	107.91	-----	-----	98.17	32.73	8.03	37.02	6.00	100	331 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2388.91	54.38	74.00	-19.62	45.18	32.23	7.96	36.99	6.00	100	331 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2437.00	107.91	-----	-----	98.17	32.73	8.03	37.02	6.00	100	331 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>34.08</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>100</td><td>331 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	43.29	54.00	-10.71	34.08	32.24	7.96	36.99	6.00	100	331 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>98.55</td><td>-----</td><td>-----</td><td>88.82</td><td>32.71</td><td>8.03</td><td>37.01</td><td>6.00</td><td>100</td><td>331 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	98.55	-----	-----	88.82	32.71	8.03	37.01	6.00	100	331 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.82	43.29	54.00	-10.71	34.08	32.24	7.96	36.99	6.00	100	331 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2437.00	98.55	-----	-----	88.82	32.71	8.03	37.01	6.00	100	331 AVERAGE																																																																																										



Mode	11																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.06</td><td>58.06</td><td>74.00</td><td>-15.94</td><td>48.46</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>331</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.06	58.06	74.00	-15.94	48.46	32.55	8.10	37.05	6.00	100	331	PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.06	58.06	74.00	-15.94	48.46	32.55	8.10	37.05	6.00	100	331	PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>45.18</td><td>54.00</td><td>-8.82</td><td>35.57</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>100</td><td>331</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	45.18	54.00	-8.82	35.57	32.56	8.10	37.05	6.00	100	331	AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	45.18	54.00	-8.82	35.57	32.56	8.10	37.05	6.00	100	331	AVERAGE																																											

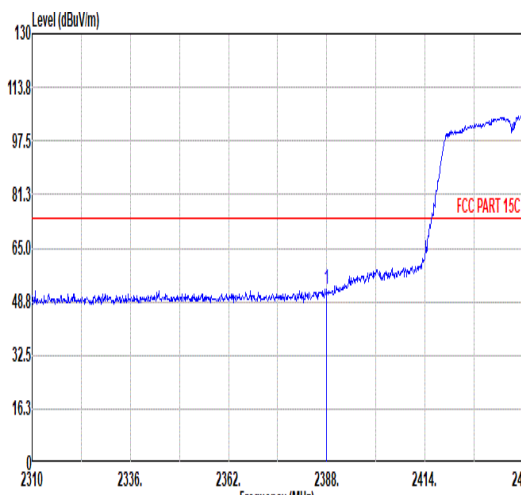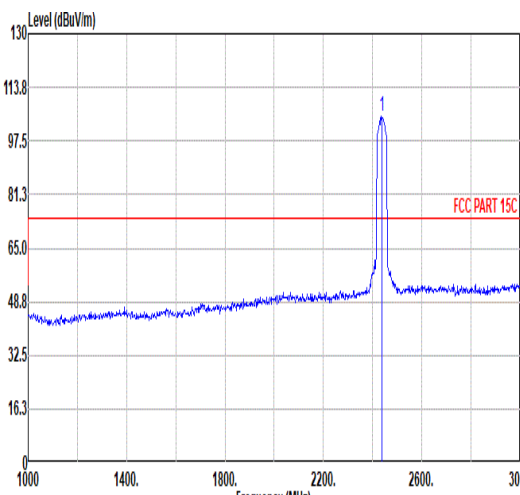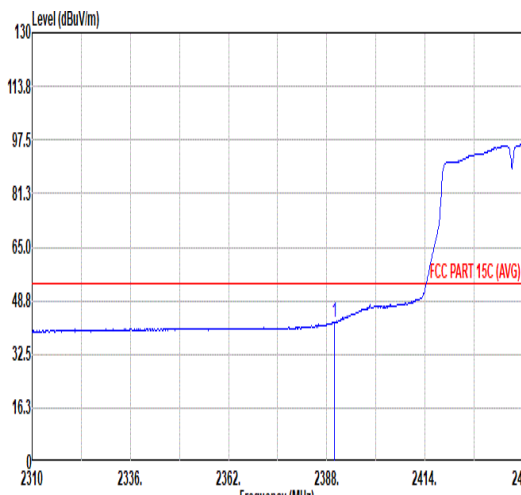
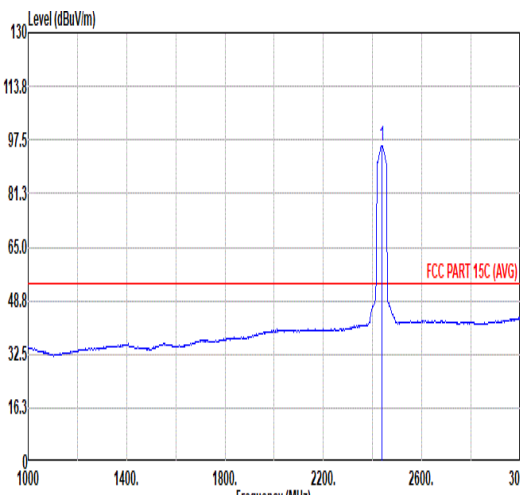


Mode	11																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.87</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>43.12</td><td>32.23</td><td>7.96</td><td>36.99</td><td>6.00</td><td>154</td><td>331 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.87	52.32	74.00	-21.68	43.12	32.23	7.96	36.99	6.00	154	331 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>104.96</td><td>-----</td><td>-----</td><td>95.23</td><td>32.71</td><td>8.03</td><td>37.01</td><td>6.00</td><td>154</td><td>331 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.96	-----	-----	95.23	32.71	8.03	37.01	6.00	154	331 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2387.87	52.32	74.00	-21.68	43.12	32.23	7.96	36.99	6.00	154	331 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2437.00	104.96	-----	-----	95.23	32.71	8.03	37.01	6.00	154	331 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>42.35</td><td>54.00</td><td>-11.65</td><td>33.14</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>154</td><td>331 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	42.35	54.00	-11.65	33.14	32.24	7.96	36.99	6.00	154	331 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>95.90</td><td>-----</td><td>-----</td><td>86.10</td><td>32.78</td><td>8.04</td><td>37.02</td><td>6.00</td><td>154</td><td>331 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.90	-----	-----	86.10	32.78	8.04	37.02	6.00	154	331 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	42.35	54.00	-11.65	33.14	32.24	7.96	36.99	6.00	154	331 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2437.00	95.90	-----	-----	86.10	32.78	8.04	37.02	6.00	154	331 AVERAGE																																																																																										







Mode	11																																																								
	Band Edge - R																																																								
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																								
ANT	1																																																								
Pol.	Vertical										Fundamental																																														
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.82</td><td>55.64</td><td>74.00</td><td>-18.36</td><td>46.04</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>154</td><td>331 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.82	55.64	74.00	-18.36	46.04	32.55	8.10	37.05	6.00	154	331 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2484.82	55.64	74.00	-18.36	46.04	32.55	8.10	37.05	6.00	154	331 PEAK																																														
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.74</td><td>43.77</td><td>54.00</td><td>-10.23</td><td>34.16</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>154</td><td>331 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.74	43.77	54.00	-10.23	34.16	32.56	8.10	37.05	6.00	154	331 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2483.74	43.77	54.00	-10.23	34.16	32.56	8.10	37.05	6.00	154	331 AVERAGE																																														

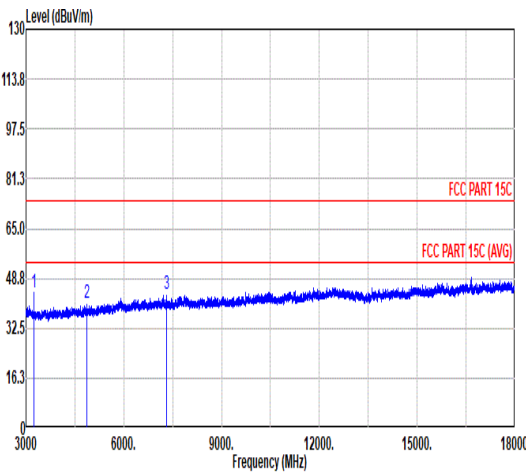
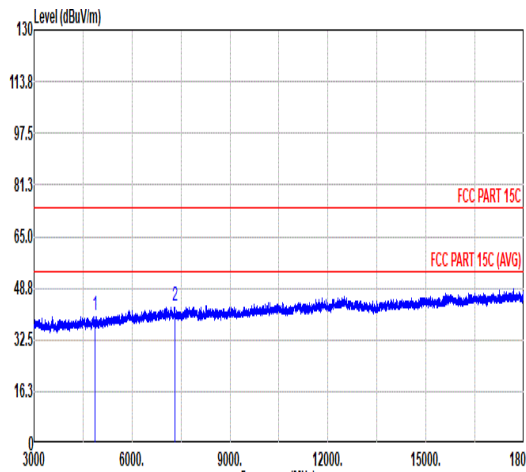


Mode	11																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11n HT40_CH6_2437MHz																																																																																																																																									
ANT	1																																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																																			
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3249.00</td><td>44.25</td><td>76.54</td><td>-32.29</td><td>67.59</td><td>32.61</td><td>9.26</td><td>65.21</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4874.00</td><td>40.95</td><td>74.00</td><td>-33.05</td><td>61.13</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7311.00</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>59.47</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3249.00	44.25	76.54	-32.29	67.59	32.61	9.26	65.21	0.00	---	PEAK	2	4874.00	40.95	74.00	-33.05	61.13	33.90	11.47	65.55	0.00	---	PEAK	3	7311.00	43.42	74.00	-30.58	59.47	35.80	14.13	65.98	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.43</td><td>74.00</td><td>-33.57</td><td>60.61</td><td>33.90</td><td>11.47</td><td>65.55</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>43.10</td><td>74.00</td><td>-30.90</td><td>59.15</td><td>35.80</td><td>14.13</td><td>65.98</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.43	74.00	-33.57	60.61	33.90	11.47	65.55	0.00	---	PEAK	2	7311.00	43.10	74.00	-30.90	59.15	35.80	14.13	65.98	0.00	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	3249.00	44.25	76.54	-32.29	67.59	32.61	9.26	65.21	0.00	---	PEAK																																																																																																																															
2	4874.00	40.95	74.00	-33.05	61.13	33.90	11.47	65.55	0.00	---	PEAK																																																																																																																															
3	7311.00	43.42	74.00	-30.58	59.47	35.80	14.13	65.98	0.00	---	PEAK																																																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																
1	4874.00	40.43	74.00	-33.57	60.61	33.90	11.47	65.55	0.00	---	PEAK																																																																																																																															
2	7311.00	43.10	74.00	-30.90	59.15	35.80	14.13	65.98	0.00	---	PEAK																																																																																																																															

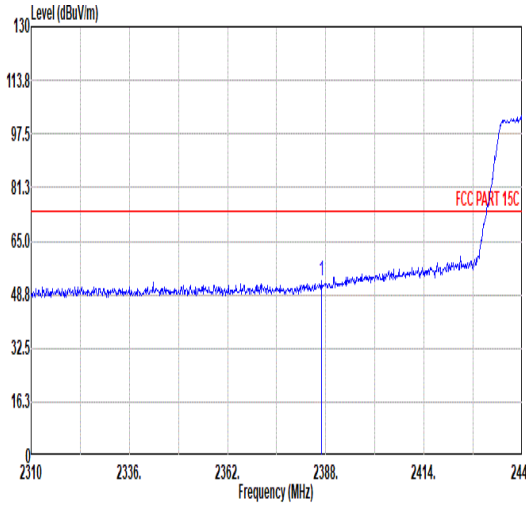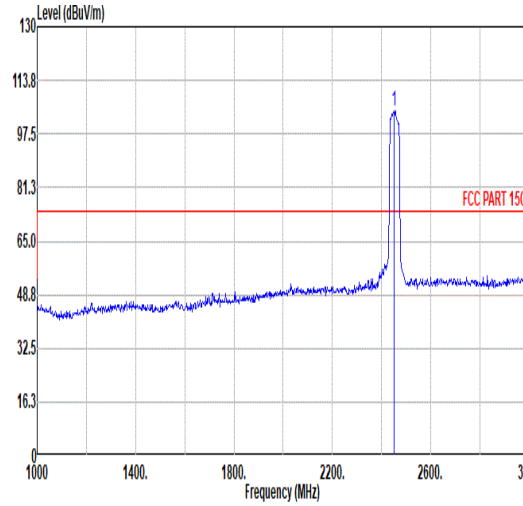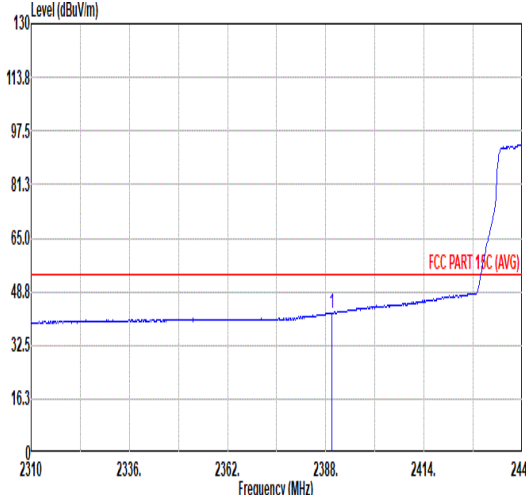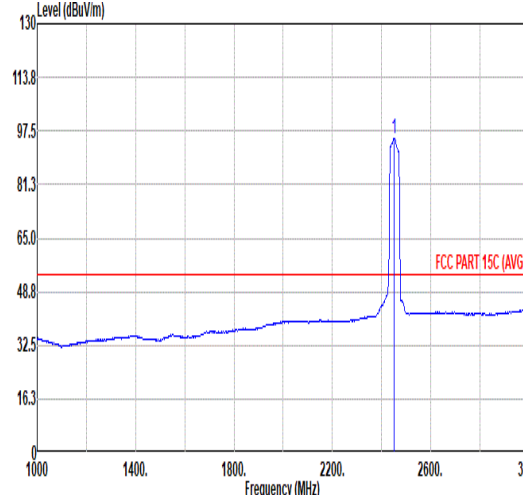

Mode	12																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2386.96</td><td>52.85</td><td>74.00</td><td>-21.15</td><td>43.66</td><td>32.22</td><td>7.96</td><td>36.99</td><td>6.00</td><td>107</td><td>32 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.96	52.85	74.00	-21.15	43.66	32.22	7.96	36.99	6.00	107	32 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>104.73</td><td>-----</td><td>-----</td><td>94.81</td><td>32.90</td><td>8.05</td><td>37.03</td><td>6.00</td><td>107</td><td>32 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	104.73	-----	-----	94.81	32.90	8.05	37.03	6.00	107	32 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2386.96	52.85	74.00	-21.15	43.66	32.22	7.96	36.99	6.00	107	32 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2452.00	104.73	-----	-----	94.81	32.90	8.05	37.03	6.00	107	32 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>42.29</td><td>54.00</td><td>-11.71</td><td>33.08</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>107</td><td>32 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	42.29	54.00	-11.71	33.08	32.24	7.96	36.99	6.00	107	32 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>95.33</td><td>-----</td><td>-----</td><td>85.41</td><td>32.90</td><td>8.05</td><td>37.03</td><td>6.00</td><td>107</td><td>32 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	95.33	-----	-----	85.41	32.90	8.05	37.03	6.00	107	32 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.56	42.29	54.00	-11.71	33.08	32.24	7.96	36.99	6.00	107	32 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2452.00	95.33	-----	-----	85.41	32.90	8.05	37.03	6.00	107	32 AVERAGE																																																																																										

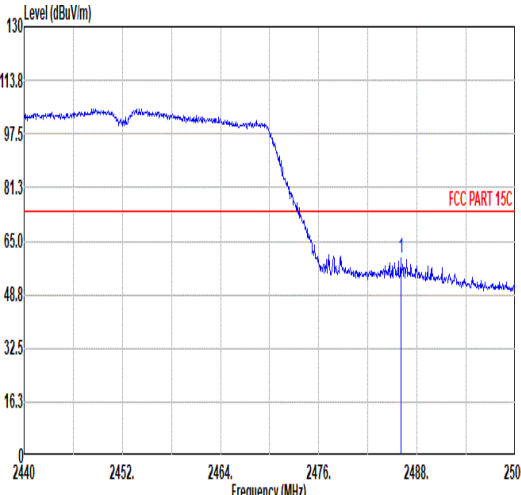
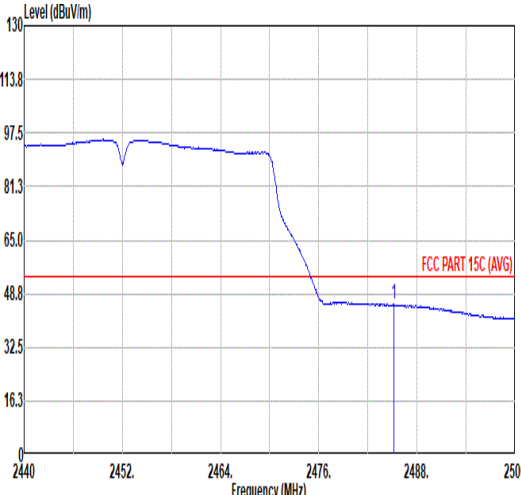


Mode	12																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																		
ANT	1																																																		
Pol.	Horizontal						Fundamental																																												
Peak							Blank																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.02</td><td>59.62</td><td>74.00</td><td>-14.38</td><td>50.03</td><td>32.54</td><td>8.10</td><td>37.05</td><td>6.00</td><td>107</td><td>32 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2486.02	59.62	74.00	-14.38	50.03
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2486.02	59.62	74.00	-14.38	50.03	32.54	8.10	37.05	6.00	107	32 PEAK																																								
Avg							Blank																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.18</td><td>45.72</td><td>54.00</td><td>-8.28</td><td>36.12</td><td>32.55</td><td>8.10</td><td>37.05</td><td>6.00</td><td>107</td><td>32 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.18	45.72	54.00	-8.28	36.12
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																								
1	2485.18	45.72	54.00	-8.28	36.12	32.55	8.10	37.05	6.00	107	32 AVERAGE																																								





Mode	12																																																																																									
	Band Edge - L																																																																																									
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.09</td><td>52.99</td><td>74.00</td><td>-21.01</td><td>43.80</td><td>32.22</td><td>7.96</td><td>36.99</td><td>6.00</td><td>179 333 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.09	52.99	74.00	-21.01	43.80	32.22	7.96	36.99	6.00	179 333 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>101.40</td><td>-----</td><td>-----</td><td>91.49</td><td>32.88</td><td>8.05</td><td>37.02</td><td>6.00</td><td>179 333 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	101.40	-----	-----	91.49	32.88	8.05	37.02	6.00	179 333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2387.09	52.99	74.00	-21.01	43.80	32.22	7.96	36.99	6.00	179 333 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	101.40	-----	-----	91.49	32.88	8.05	37.02	6.00	179 333 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>32.17</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>179 333 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	41.38	54.00	-12.62	32.17	32.24	7.96	36.99	6.00	179 333 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>92.33</td><td>-----</td><td>-----</td><td>82.41</td><td>32.90</td><td>8.05</td><td>37.03</td><td>6.00</td><td>179 333 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	92.33	-----	-----	82.41	32.90	8.05	37.03	6.00	179 333 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.56	41.38	54.00	-12.62	32.17	32.24	7.96	36.99	6.00	179 333 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	92.33	-----	-----	82.41	32.90	8.05	37.03	6.00	179 333 AVERAGE																																																																																



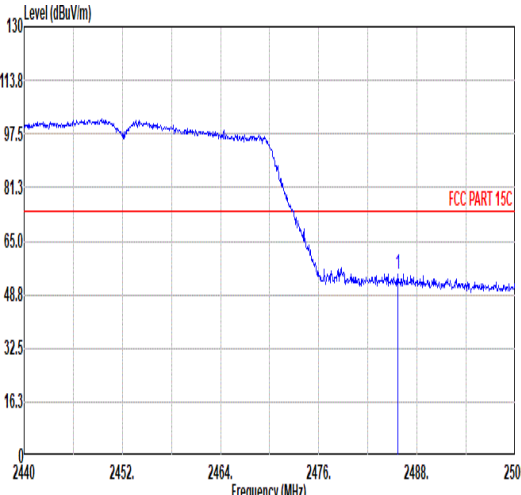
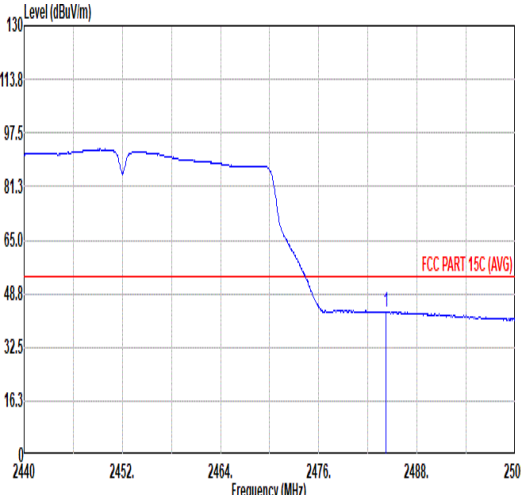


Mode	12																																																
	Band Edge - R																																																
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																
ANT	1																																																
Pol.	Vertical						Fundamental																																										
Peak							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.66</td><td>54.96</td><td>74.00</td><td>-19.04</td><td>45.37</td><td>32.54</td><td>8.10</td><td>37.05</td><td>6.00</td><td>179 333 PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2485.66	54.96	74.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2485.66	54.96	74.00	-19.04	45.37	32.54	8.10	37.05	6.00	179 333 PEAK																																							
Avg							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.22</td><td>43.23</td><td>54.00</td><td>-10.77</td><td>33.62</td><td>32.56</td><td>8.10</td><td>37.05</td><td>6.00</td><td>179 333 AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.22	43.23	54.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2484.22	43.23	54.00	-10.77	33.62	32.56	8.10	37.05	6.00	179 333 AVERAGE																																							



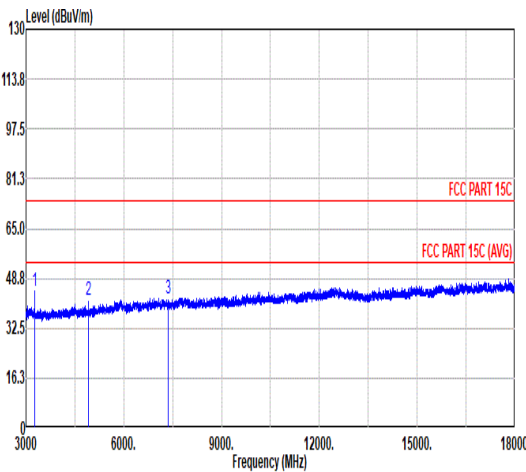
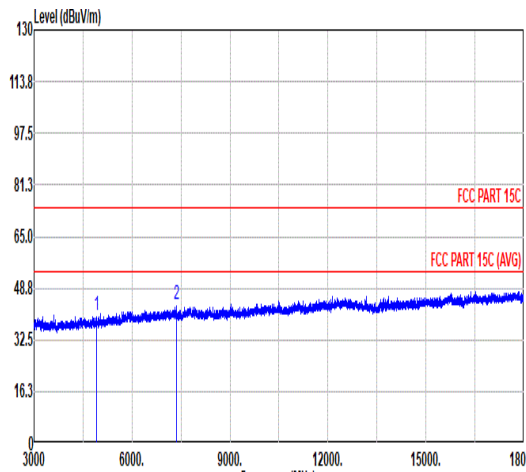


Mode	12																																																																																																																																								
	Harmonic																																																																																																																																								
	2400-2483.5_802.11n HT40_CH9_2452MHz																																																																																																																																								
ANT	1																																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																																		
Peak Avg																																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3270.00</td><td>44.43</td><td>73.43</td><td>-29.00</td><td>67.81</td><td>32.52</td><td>9.29</td><td>65.19</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>4904.00</td><td>41.72</td><td>74.00</td><td>-32.28</td><td>61.92</td><td>33.90</td><td>11.52</td><td>65.62</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7356.00</td><td>42.29</td><td>74.00</td><td>-31.71</td><td>58.41</td><td>35.80</td><td>14.16</td><td>66.08</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	3270.00	44.43	73.43	-29.00	67.81	32.52	9.29	65.19	0.00	---	PEAK	2	4904.00	41.72	74.00	-32.28	61.92	33.90	11.52	65.62	0.00	---	PEAK	3	7356.00	42.29	74.00	-31.71	58.41	35.80	14.16	66.08	0.00	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>40.44</td><td>74.00</td><td>-33.56</td><td>60.64</td><td>33.90</td><td>11.52</td><td>65.62</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>43.83</td><td>74.00</td><td>-30.17</td><td>59.95</td><td>35.80</td><td>14.16</td><td>66.08</td><td>0.00</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4904.00	40.44	74.00	-33.56	60.64	33.90	11.52	65.62	0.00	---	PEAK	2	7356.00	43.83	74.00	-30.17	59.95	35.80	14.16	66.08	0.00	---
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	3270.00	44.43	73.43	-29.00	67.81	32.52	9.29	65.19	0.00	---	PEAK																																																																																																																														
2	4904.00	41.72	74.00	-32.28	61.92	33.90	11.52	65.62	0.00	---	PEAK																																																																																																																														
3	7356.00	42.29	74.00	-31.71	58.41	35.80	14.16	66.08	0.00	---	PEAK																																																																																																																														
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																															
1	4904.00	40.44	74.00	-33.56	60.64	33.90	11.52	65.62	0.00	---	PEAK																																																																																																																														
2	7356.00	43.83	74.00	-30.17	59.95	35.80	14.16	66.08	0.00	---	PEAK																																																																																																																														

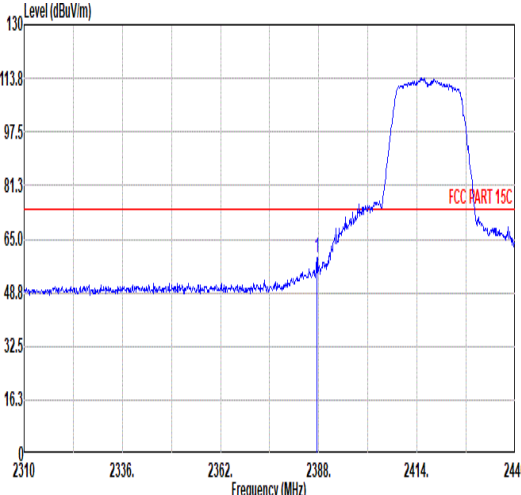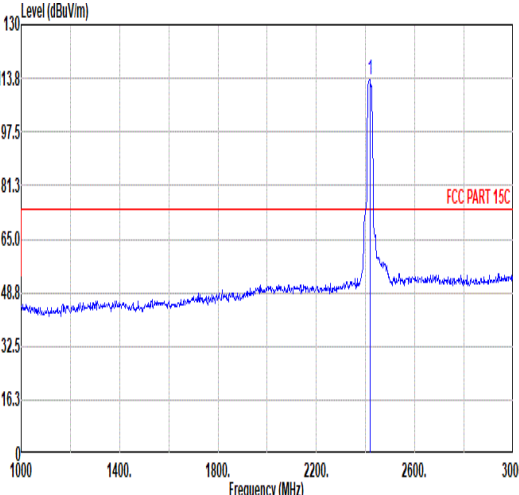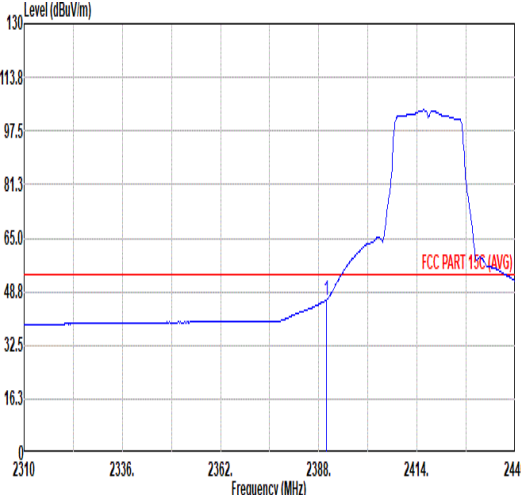
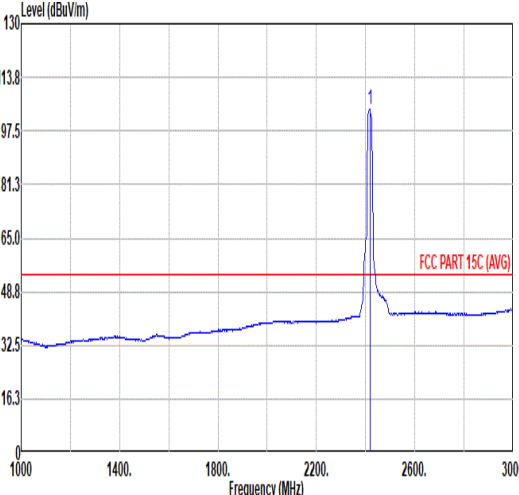


Mode	13																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.48</td><td>59.38</td><td>74.00</td><td>-14.62</td><td>50.19</td><td>32.22</td><td>7.96</td><td>36.99</td><td>6.00</td><td>130</td><td>35 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	59.38	74.00	-14.62	50.19	32.22	7.96	36.99	6.00	130	35 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>113.50</td><td>-----</td><td>-----</td><td>104.01</td><td>32.49</td><td>8.00</td><td>37.00</td><td>6.00</td><td>130</td><td>35 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	113.50	-----	-----	104.01	32.49	8.00	37.00	6.00	130	35 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2387.48	59.38	74.00	-14.62	50.19	32.22	7.96	36.99	6.00	130	35 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2417.00	113.50	-----	-----	104.01	32.49	8.00	37.00	6.00	130	35 PEAK																																																																																										
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>37.00</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>130</td><td>35 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	46.21	54.00	-7.79	37.00	32.24	7.96	36.99	6.00	130	35 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>104.06</td><td>-----</td><td>-----</td><td>94.57</td><td>32.49</td><td>8.00</td><td>37.00</td><td>6.00</td><td>130</td><td>35 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	104.06	-----	-----	94.57	32.49	8.00	37.00	6.00	130	35 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.95	46.21	54.00	-7.79	37.00	32.24	7.96	36.99	6.00	130	35 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2417.00	104.06	-----	-----	94.57	32.49	8.00	37.00	6.00	130	35 AVERAGE																																																																																										

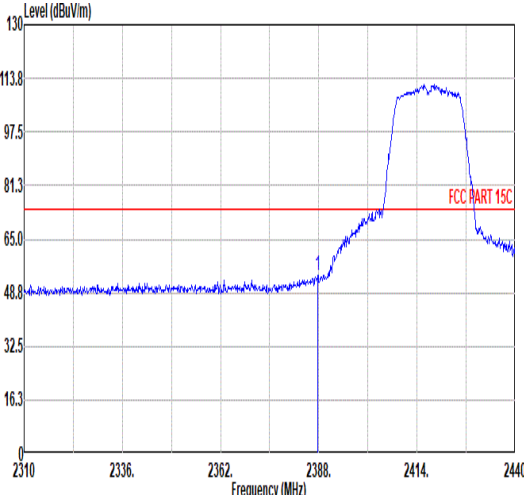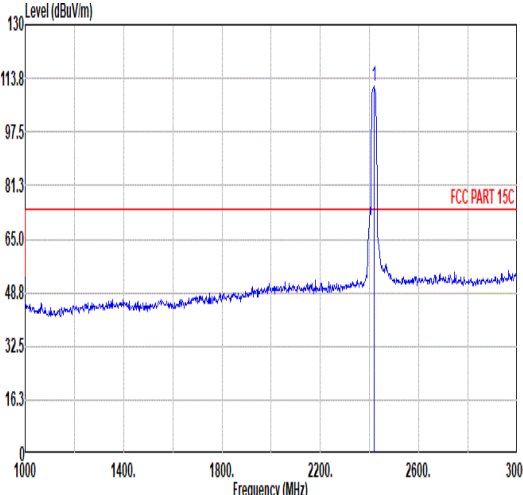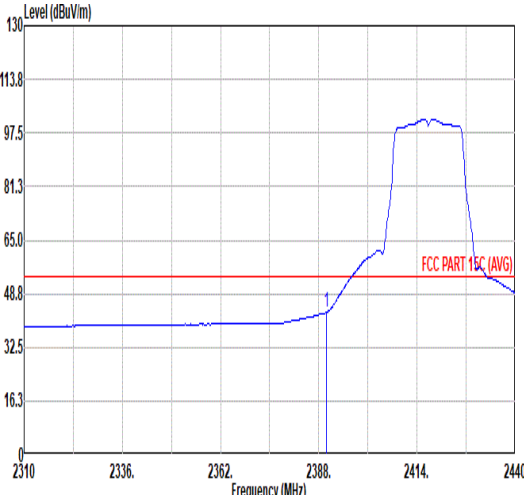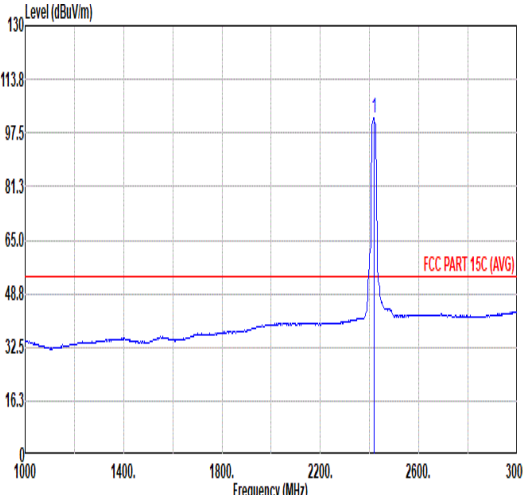

Mode	13																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																																									
ANT	1																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.74</td><td>54.01</td><td>74.00</td><td>-19.99</td><td>44.81</td><td>32.23</td><td>7.96</td><td>36.99</td><td>6.00</td><td>161 333 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.74	54.01	74.00	-19.99	44.81	32.23	7.96	36.99	6.00	161 333 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>111.39</td><td>-----</td><td>101.84</td><td>32.54</td><td>8.01</td><td>37.00</td><td>6.00</td><td>161</td><td>333 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	111.39	-----	101.84	32.54	8.01	37.00	6.00	161	333 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2387.74	54.01	74.00	-19.99	44.81	32.23	7.96	36.99	6.00	161 333 PEAK																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2417.00	111.39	-----	101.84	32.54	8.01	37.00	6.00	161	333 PEAK																																																																																
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>43.04</td><td>54.00</td><td>-10.96</td><td>33.83</td><td>32.24</td><td>7.96</td><td>36.99</td><td>6.00</td><td>161 333 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.04	54.00	-10.96	33.83	32.24	7.96	36.99	6.00	161 333 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2417.00</td><td>101.97</td><td>-----</td><td>92.48</td><td>32.49</td><td>8.00</td><td>37.00</td><td>6.00</td><td>161</td><td>333 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	101.97	-----	92.48	32.49	8.00	37.00	6.00	161	333 AVERAGE
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2389.95	43.04	54.00	-10.96	33.83	32.24	7.96	36.99	6.00	161 333 AVERAGE																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2417.00	101.97	-----	92.48	32.49	8.00	37.00	6.00	161	333 AVERAGE																																																																																

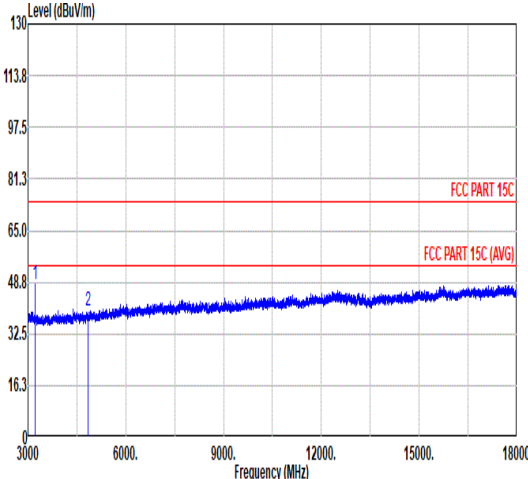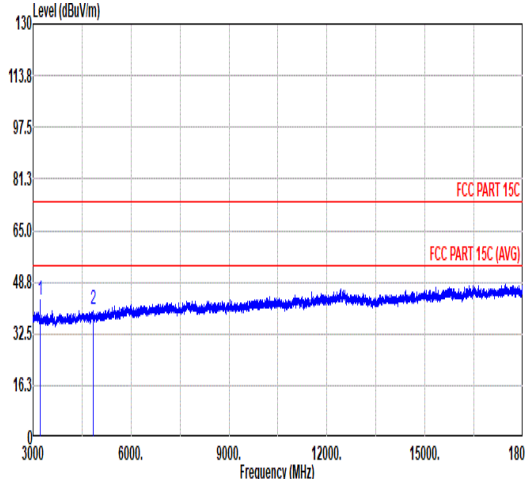


Mode	13																																																																																																																																																																																		
	Harmonic																																																																																																																																																																																		
	2400-2483.5_802.11n HT20_CH2_2417MHz																																																																																																																																																																																		
ANT	1																																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																																												
Peak																																																																																																																																																																																			
	Avg						Avg																																																																																																																																																																												
	<table><tr><th colspan="12"></th></tr><tr><th colspan="3"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="12"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3222.00</td><td>40.00</td><td>81.29</td><td>-33.21</td><td>71.32</td><td>32.77</td><td>9.21</td><td>65.22</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>4834.00</td><td>39.86</td><td>74.00</td><td>-34.14</td><td>59.94</td><td>33.93</td><td>11.42</td><td>65.43</td><td>0.00</td><td>---</td><td>---</td></tr></table>																					Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark														MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3222.00	40.00	81.29	-33.21	71.32	32.77	9.21	65.22	0.00	---	--- PEAK	2	4834.00	39.86	74.00	-34.14	59.94	33.93	11.42	65.43	0.00	---	---	<table><tr><th colspan="12"></th></tr><tr><th colspan="3"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th colspan="12"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>3223.00</td><td>43.29</td><td>79.68</td><td>-36.39</td><td>66.54</td><td>32.76</td><td>9.21</td><td>65.22</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>4834.00</td><td>40.05</td><td>74.00</td><td>-33.95</td><td>60.13</td><td>33.93</td><td>11.42</td><td>65.43</td><td>0.00</td><td>---</td><td>---</td></tr></table>																					Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark														MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	3223.00	43.29	79.68	-36.39	66.54	32.76	9.21	65.22	0.00	---	--- PEAK	2	4834.00	40.05	74.00	-33.95	60.13	33.93	11.42	65.43	0.00	---
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																								
1	3222.00	40.00	81.29	-33.21	71.32	32.77	9.21	65.22	0.00	---	--- PEAK																																																																																																																																																																								
2	4834.00	39.86	74.00	-34.14	59.94	33.93	11.42	65.43	0.00	---	---																																																																																																																																																																								
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			Remark																																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																								
1	3223.00	43.29	79.68	-36.39	66.54	32.76	9.21	65.22	0.00	---	--- PEAK																																																																																																																																																																								
2	4834.00	40.05	74.00	-33.95	60.13	33.93	11.42	65.43	0.00	---	---																																																																																																																																																																								


Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.04	-	-	10Hz
802.11g	98.32	-	-	10Hz
802.11n HT20	98.20	-	-	10Hz
802.11n HT40	94.95	0.94	1.064	1.1KHz


802.11b

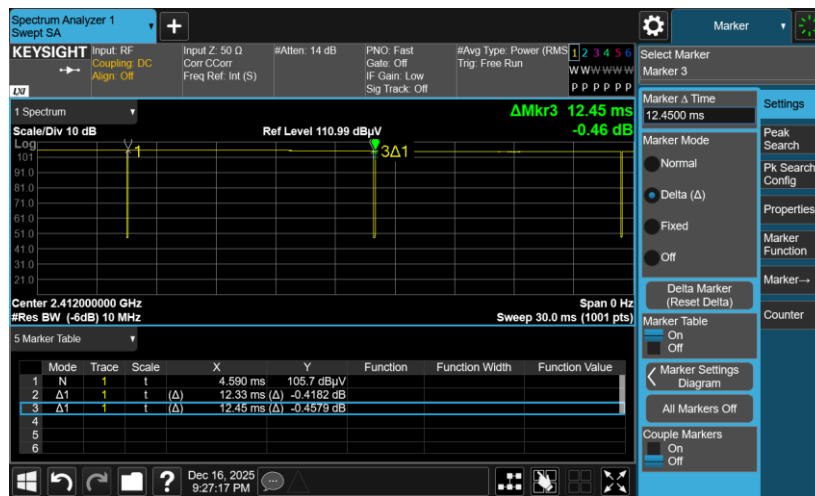

802.11g

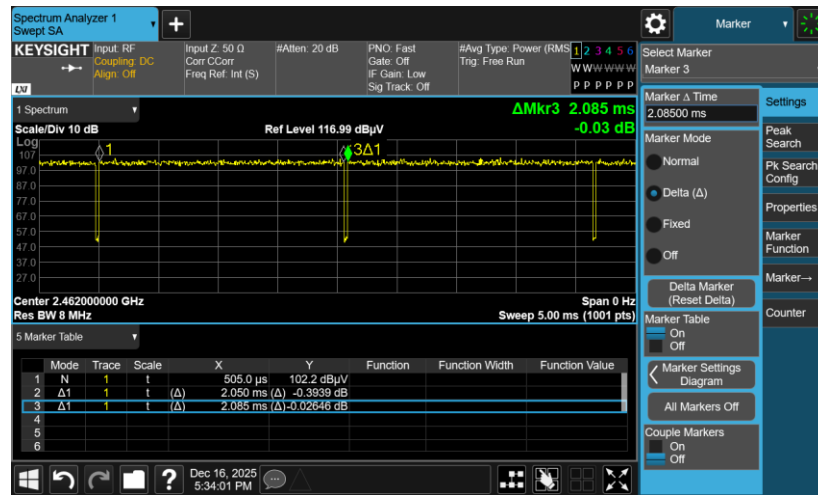

802.11n HT20

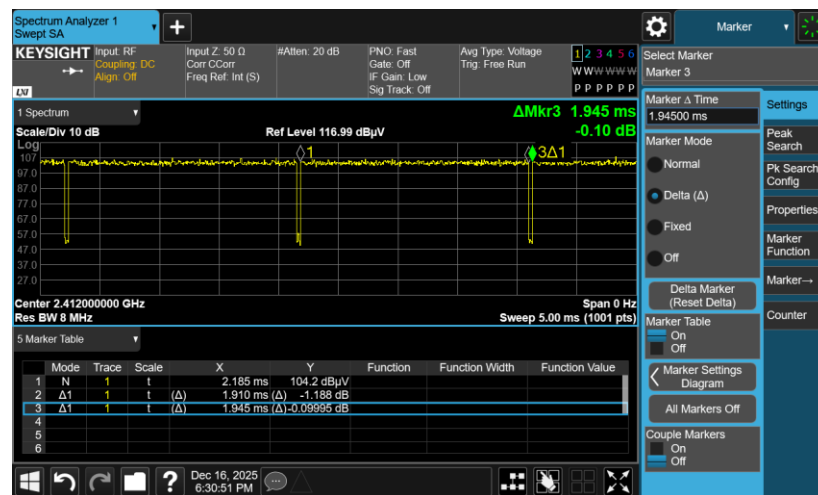

802.11n HT40

