






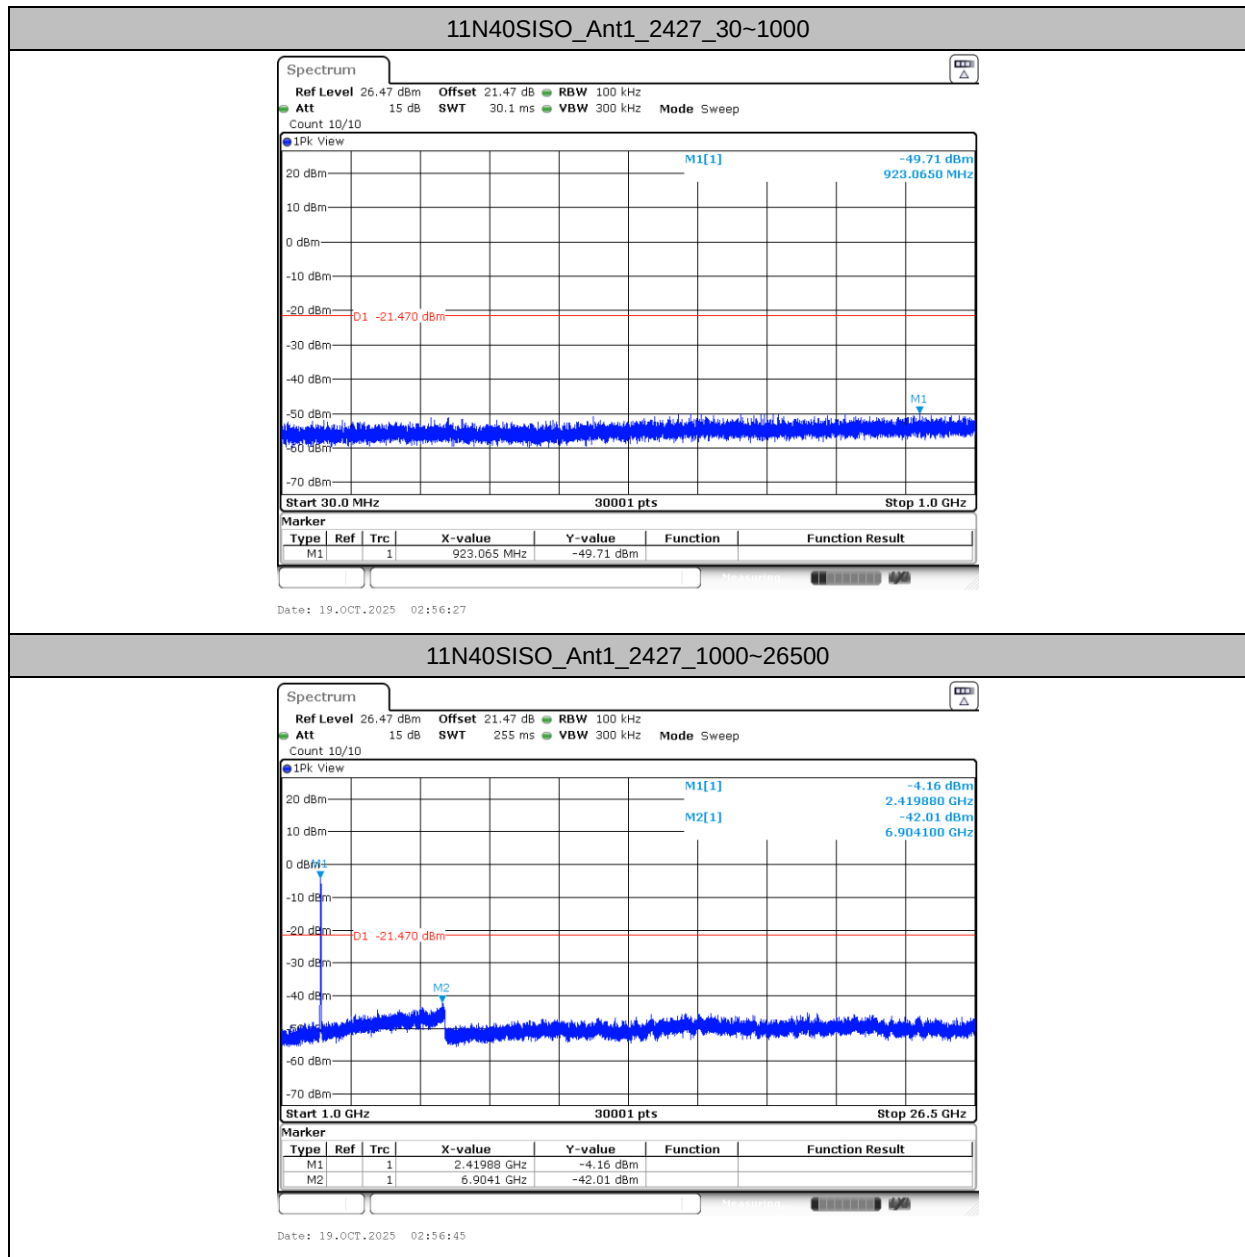


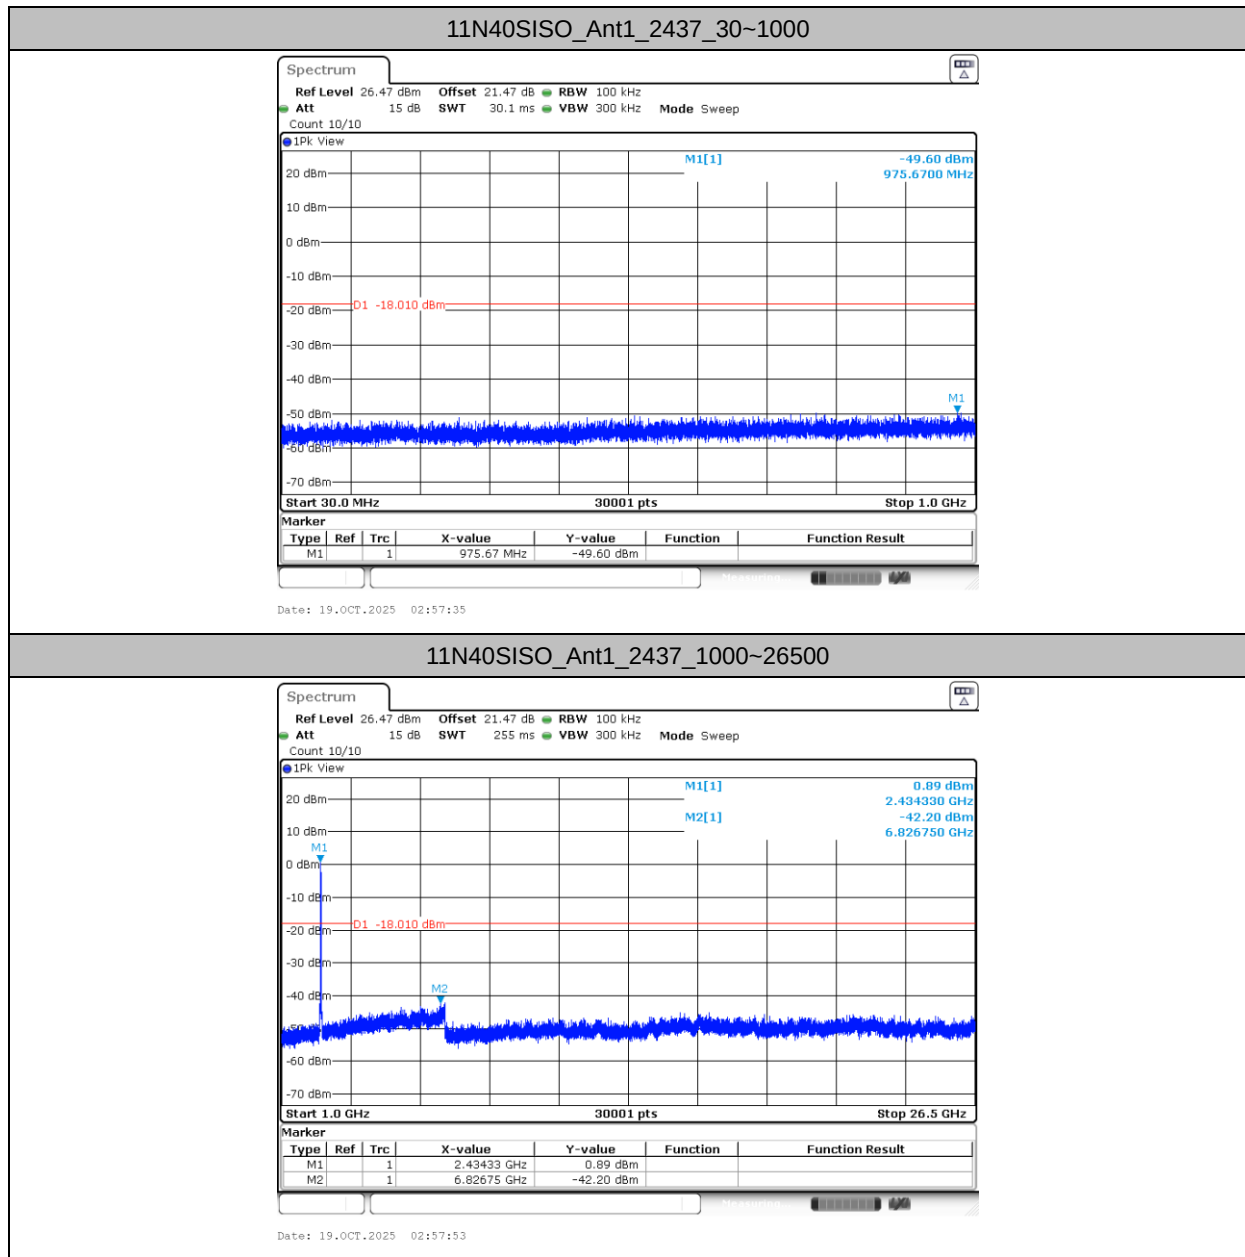

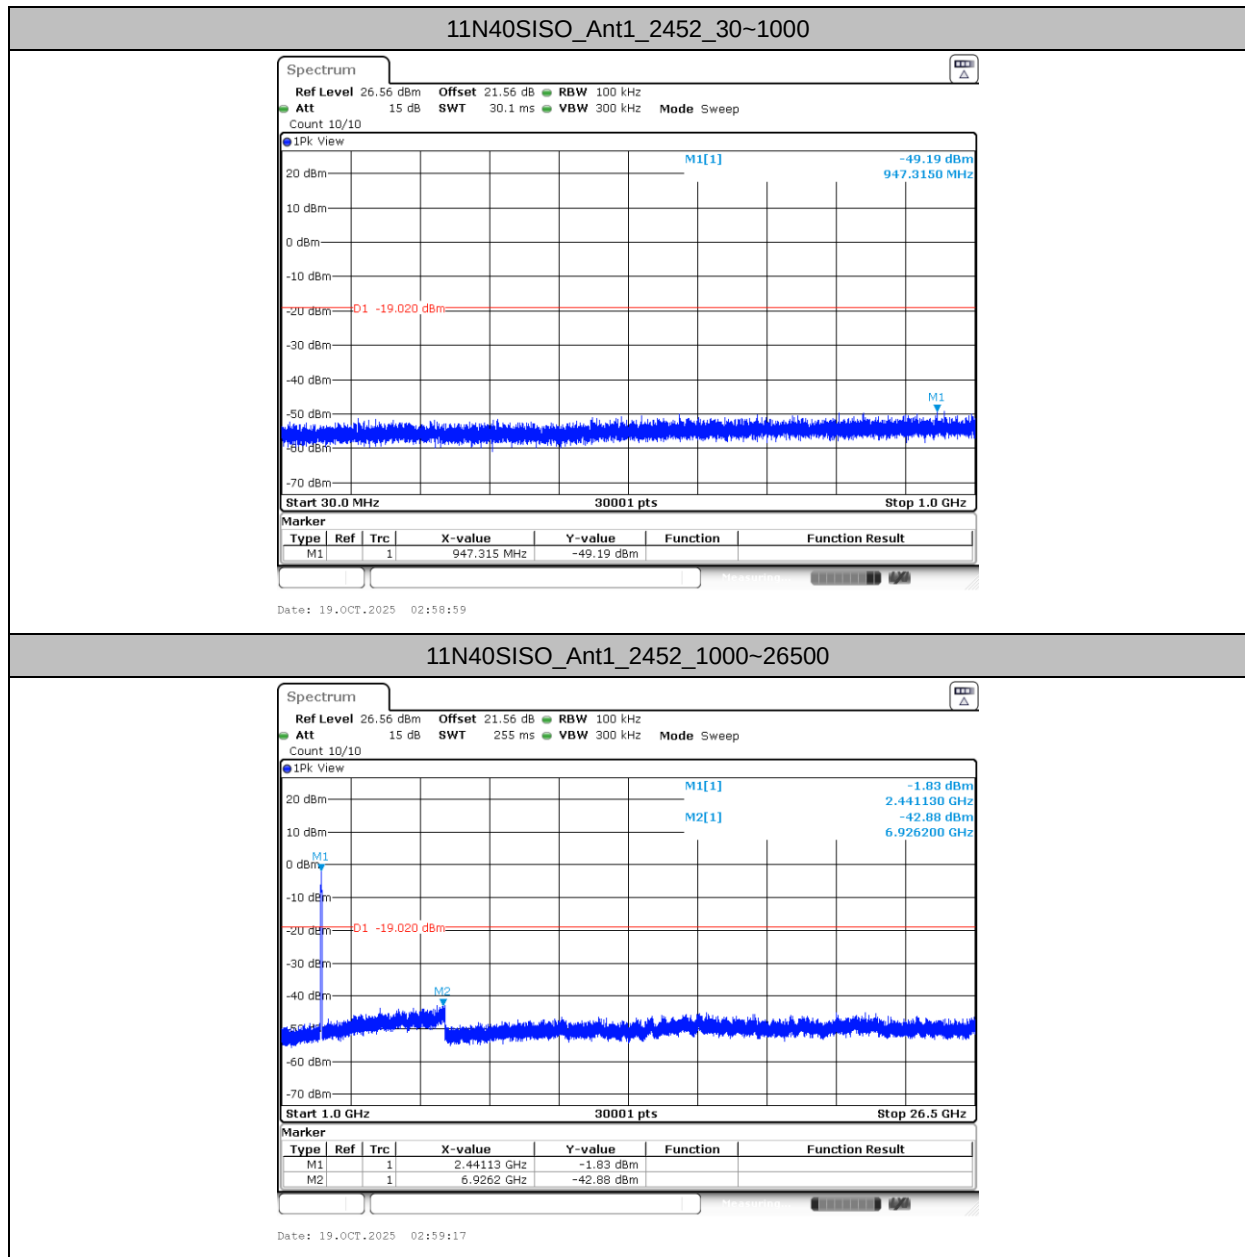

Appendix B. AC Conducted Emission Test Results


Test Engineer :	Amos	Temperature :	24.2 ~ 25.6℃
		Relative Humidity :	37 ~ 39%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

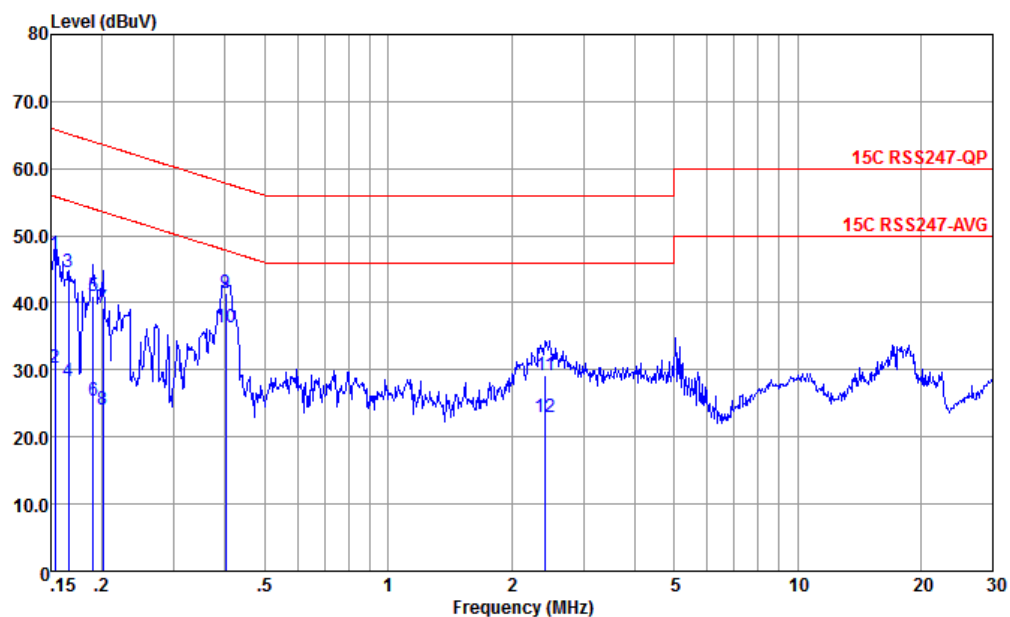

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.153	47.28	-18.54	65.82	36.60	0.23	10.45	QP
2	0.153	30.28	-25.54	55.82	19.60	0.23	10.45	Average
3	0.166	44.50	-20.66	65.16	33.80	0.25	10.45	QP
4	0.166	28.30	-26.86	55.16	17.60	0.25	10.45	Average
5	0.190	40.91	-23.11	64.02	30.20	0.25	10.46	QP
6	0.190	25.51	-28.51	54.02	14.80	0.25	10.46	Average
7	0.201	39.21	-24.37	63.58	28.50	0.25	10.46	QP
8	0.201	24.01	-29.57	53.58	13.30	0.25	10.46	Average
9	0.402	41.44	-16.37	57.81	30.60	0.35	10.49	QP
10 *	0.402	36.34	-11.47	47.81	25.50	0.35	10.49	Average
11	2.422	29.15	-26.85	56.00	18.50	0.42	10.23	QP
12	2.422	22.85	-23.15	46.00	12.20	0.42	10.23	Average

Test Engineer :	Amos	Temperature :	24.2 ~ 25.6℃
		Relative Humidity :	37 ~ 39%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

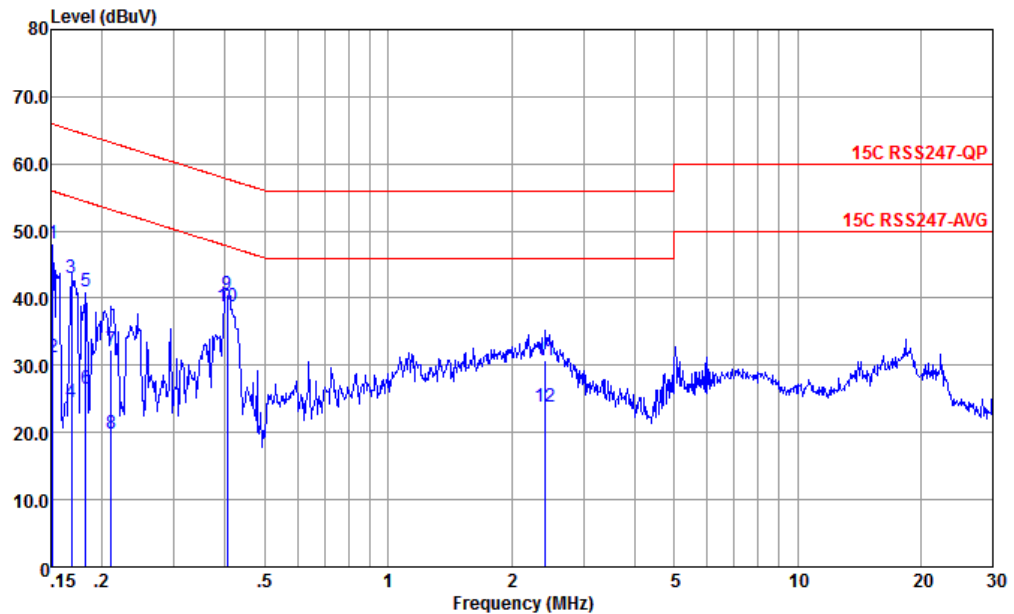

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.152	48.18	-17.73	65.91	37.50	0.23	10.45	QP
2	0.152	31.28	-24.63	55.91	20.60	0.23	10.45	Average
3	0.169	42.90	-22.13	65.03	32.20	0.25	10.45	QP
4	0.169	24.50	-30.53	55.03	13.80	0.25	10.45	Average
5	0.182	40.90	-23.47	64.37	30.19	0.25	10.46	QP
6	0.182	26.60	-27.77	54.37	15.89	0.25	10.46	Average
7	0.211	32.21	-30.97	63.18	21.50	0.25	10.46	QP
8	0.211	19.91	-33.27	53.18	9.20	0.25	10.46	Average
9	0.404	40.64	-17.13	57.77	29.80	0.35	10.49	QP
10 *	0.404	38.74	-9.03	47.77	27.90	0.35	10.49	Average
11	2.422	30.82	-25.18	56.00	20.20	0.39	10.23	QP
12	2.422	23.92	-22.08	46.00	13.30	0.39	10.23	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Chris	Relative Humidity :	52 ~ 56 %
		Temperature :	22 ~ 25 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	1	802.11n HT40	06	2437	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	1	802.11n HT40	04	2427	MCS0	-	-

**Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2388.00	43.77	54.00	-10.23	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	45.76	54.00	-8.24	V	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	44.48	74.00	-29.52	V	PEAK	Pass	Harmonic
3	802.11b	11	2483.50	41.75	54.00	-12.25	H	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	43.52	74.00	-30.48	V	PEAK	Pass	Harmonic
4	802.11g	01	2389.95	50.04	54.00	-3.96	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	45.55	74.00	-28.45	V	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	6499.50	46.19	77.56	-31.37	V	Peak	Pass	Harmonic
6	802.11g	11	2483.50	50.46	54.00	-3.54	H	AVERAGE	Pass	Band Edge
6	802.11g	11	4924.00	42.35	74.00	-31.65	V	PEAK	Pass	Harmonic
7	802.11n HT20	01	2389.95	50.06	54.00	-3.94	H	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	45.43	74.00	-28.57	V	PEAK	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	43.07	74.00	-30.93	H	PEAK	Pass	Harmonic
9	802.11n HT20	11	2483.56	47.77	54.00	-6.23	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	6565.50	47.04	78.36	-31.32	H	Peak	Pass	Harmonic
10	802.11n HT40	03	2389.95	50.08	54.00	-3.92	H	AVERAGE	Pass	Band Edge
10	802.11n HT40	03	6459.00	46.91	71.32	-24.41	V	Peak	Pass	Harmonic
11	802.11n HT40	06	2389.95	50.32	54.00	-3.68	H	AVERAGE	Pass	Band Edge
11	802.11n HT40	06	6499.50	46.26	75.09	-28.83	V	Peak	Pass	Harmonic
12	802.11n HT40	09	2483.50	50.66	54.00	-3.34	H	AVERAGE	Pass	Band Edge
12	802.11n HT40	09	6538.50	46.62	72.06	-25.44	V	Peak	Pass	Harmonic
13	802.11n HT40	04	2389.52	50.08	54.00	-3.92	H	AVERAGE	Pass	Band Edge
13	802.11n HT40	04	6472.50	46.37	72.37	-26.00	V	Peak	Pass	Harmonic

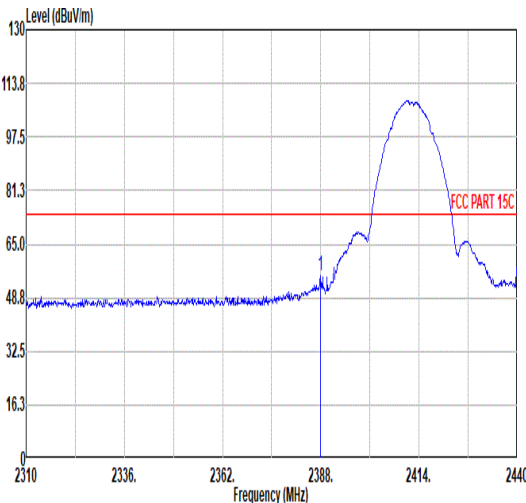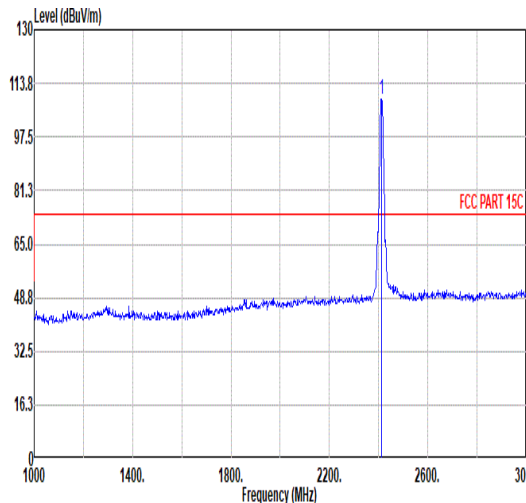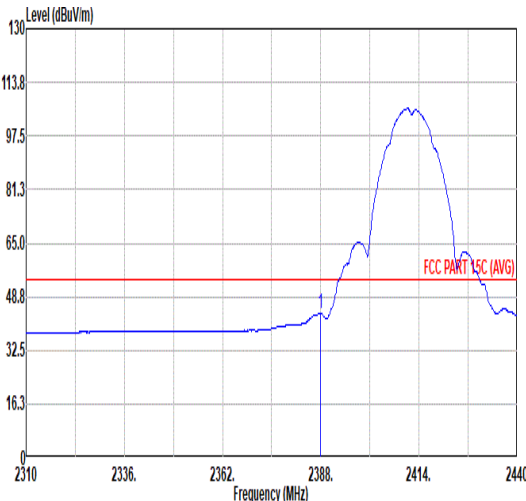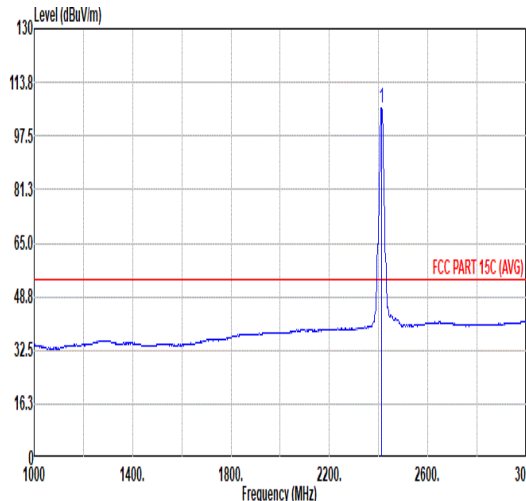

Mode	1																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Horizontal						Fundamental																																																																																														
Peak																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>55.44</td><td>74.00</td><td>-18.56</td><td>47.03</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>113 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	55.44	74.00	-18.56	47.03	32.48	7.16	37.23	6.00	100	113 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.03</td><td>-----</td><td>-----</td><td>100.60</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100</td><td>113 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.03	-----	-----	100.60	32.45	7.20	37.22	6.00	100	113 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2388.00	55.44	74.00	-18.56	47.03	32.48	7.16	37.23	6.00	100	113 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	109.03	-----	-----	100.60	32.45	7.20	37.22	6.00	100	113 PEAK																																																																																										
Avg																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.00</td><td>43.77</td><td>54.00</td><td>-10.23</td><td>35.36</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>100</td><td>113 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.00	43.77	54.00	-10.23	35.36	32.48	7.16	37.23	6.00	100	113 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.88</td><td>-----</td><td>-----</td><td>97.45</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>100</td><td>113 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.88	-----	-----	97.45	32.45	7.20	37.22	6.00	100	113 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2388.00	43.77	54.00	-10.23	35.36	32.48	7.16	37.23	6.00	100	113 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2412.00	105.88	-----	-----	97.45	32.45	7.20	37.22	6.00	100	113 AVERAGE																																																																																										





Mode	1																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.48</td><td>52.67</td><td>74.00</td><td>-21.33</td><td>44.27</td><td>32.47</td><td>7.16</td><td>37.23</td><td>6.00</td><td>400 176 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	52.67	74.00	-21.33	44.27	32.47	7.16	37.23	6.00	400 176 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2387.48	52.67	74.00	-21.33	44.27	32.47	7.16	37.23	6.00	400 176 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.01</td><td>-----</td><td>-----</td><td>100.58</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>400 176 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.01	-----	-----	100.58	32.45	7.20	37.22	6.00	400 176 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	109.01	-----	-----	100.58	32.45	7.20	37.22	6.00	400 176 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.74</td><td>43.55</td><td>54.00</td><td>-10.45</td><td>35.14</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>400 176 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2387.74	43.55	54.00	-10.45	35.14	32.48	7.16	37.23	6.00	400 176 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2387.74	43.55	54.00	-10.45	35.14	32.48	7.16	37.23	6.00	400 176 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.79</td><td>-----</td><td>-----</td><td>97.36</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>400 176 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.79	-----	-----	97.36	32.45	7.20	37.22	6.00	400 176 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	105.79	-----	-----	97.36	32.45	7.20	37.22	6.00	400 176 AVERAGE																																													






Mode	1																																																																																																																																														
	Harmonic																																																																																																																																														
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																																														
ANT	1																																																																																																																																														
Pol.	Horizontal						Vertical																																																																																																																																								
Peak Avg																																																																																																																																															
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>41.00</td><td>74.00</td><td>-32.92</td><td>61.89</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>46.59</td><td>84.40</td><td>-37.81</td><td>65.38</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	41.00	74.00	-32.92	61.89	34.85	10.29	65.95	0.00	---	---	PEAK	2	6432.00	46.59	84.40	-37.81	65.38	35.90	12.14	66.83	0.00	---	---	Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>48.84</td><td>74.00</td><td>-25.16</td><td>69.65</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>100</td><td>350</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>45.76</td><td>54.00</td><td>-8.24</td><td>66.57</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>100</td><td>350</td><td>AVERAGE</td></tr><tr><td>3</td><td>6432.00</td><td>45.99</td><td>83.62</td><td>-37.63</td><td>64.78</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4824.00	48.84	74.00	-25.16	69.65	34.85	10.29	65.95	0.00	100	350	PEAK	2	4824.00	45.76	54.00	-8.24	66.57	34.85	10.29	65.95	0.00	100	350	AVERAGE	3	6432.00	45.99	83.62	-37.63	64.78	35.90	12.14	66.83	0.00	---	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4824.00	41.00	74.00	-32.92	61.89	34.85	10.29	65.95	0.00	---	---	PEAK																																																																																																																																			
2	6432.00	46.59	84.40	-37.81	65.38	35.90	12.14	66.83	0.00	---	---	Peak																																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																					
1	4824.00	48.84	74.00	-25.16	69.65	34.85	10.29	65.95	0.00	100	350	PEAK																																																																																																																																			
2	4824.00	45.76	54.00	-8.24	66.57	34.85	10.29	65.95	0.00	100	350	AVERAGE																																																																																																																																			
3	6432.00	45.99	83.62	-37.63	64.78	35.90	12.14	66.83	0.00	---	---	Peak																																																																																																																																			



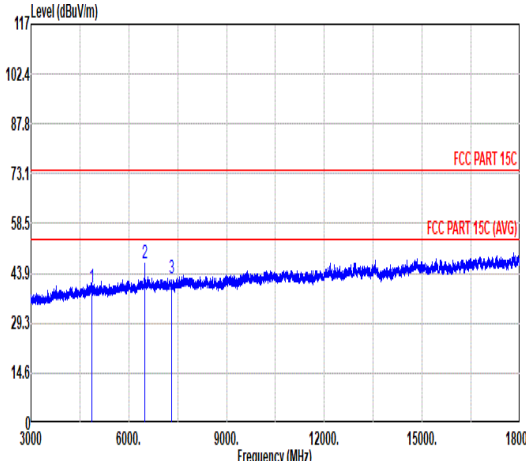
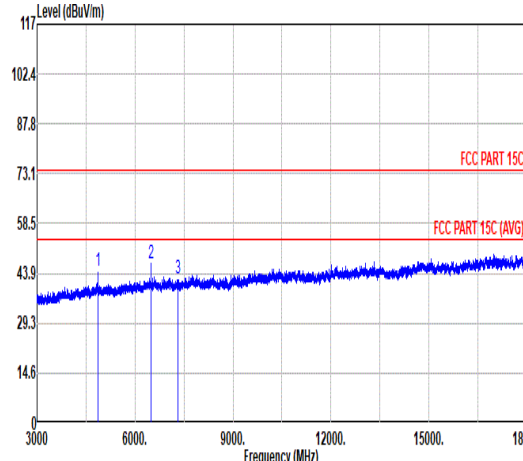


Mode	2																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																																																	
ANT	1																																																																																																																																																																	
Pol.	Horizontal											Vertical																																																																																																																																																						
Peak Avg																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>39.82</td><td>74.00</td><td>-34.18</td><td>60.58</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6498.00</td><td>46.94</td><td>81.93</td><td>-34.99</td><td>65.78</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>42.24</td><td>74.00</td><td>-31.76</td><td>60.59</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	39.82	74.00	-34.18	60.58	34.90	10.34	66.00	0.00	---	---	PEAK	2	6498.00	46.94	81.93	-34.99	65.78	35.90	12.16	66.90	0.00	---	---	Peak	3	7311.00	42.24	74.00	-31.76	60.59	36.42	12.78	67.55	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>44.48</td><td>74.00</td><td>-29.52</td><td>65.24</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>46.62</td><td>82.12</td><td>-35.50</td><td>65.46</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>42.18</td><td>74.00</td><td>-31.82</td><td>60.53</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	44.48	74.00	-29.52	65.24	34.90	10.34	66.00	0.00	---	---	PEAK	2	6499.50	46.62	82.12	-35.50	65.46	35.90	12.16	66.90	0.00	---	---	Peak	3	7311.00	42.18	74.00	-31.82	60.53	36.42	12.78	67.55	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																								
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	39.82	74.00	-34.18	60.58	34.90	10.34	66.00	0.00	---	---	PEAK																																																																																																																																																						
2	6498.00	46.94	81.93	-34.99	65.78	35.90	12.16	66.90	0.00	---	---	Peak																																																																																																																																																						
3	7311.00	42.24	74.00	-31.76	60.59	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	44.48	74.00	-29.52	65.24	34.90	10.34	66.00	0.00	---	---	PEAK																																																																																																																																																						
2	6499.50	46.62	82.12	-35.50	65.46	35.90	12.16	66.90	0.00	---	---	Peak																																																																																																																																																						
3	7311.00	42.18	74.00	-31.82	60.53	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																						

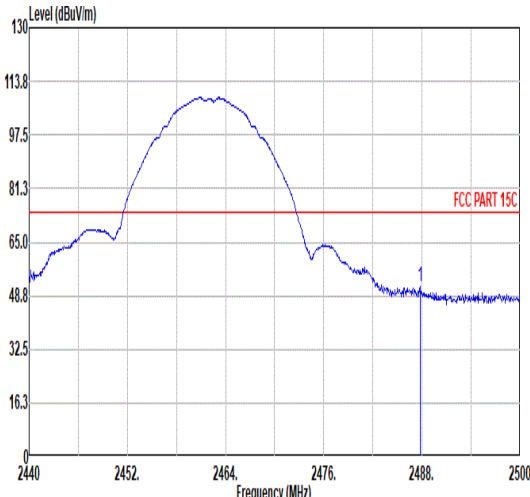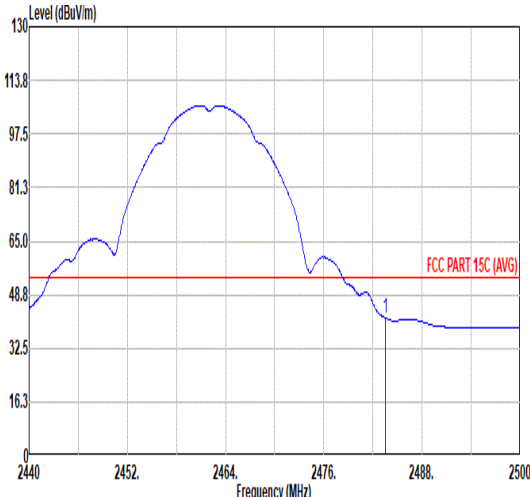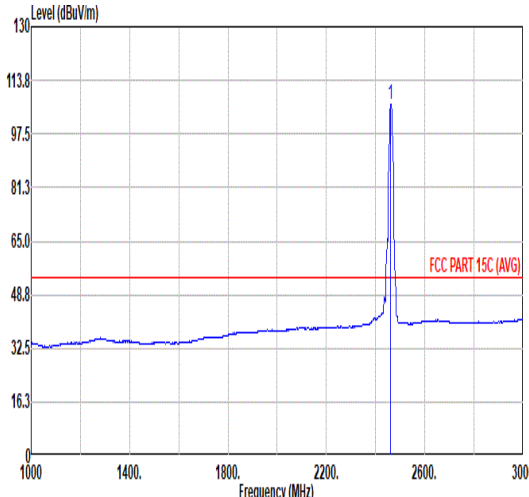

Mode	3																																																							
	Band Edge																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																							
ANT	1																																																							
Pol.	Horizontal																																																							
Peak	Fundamental																																																							
																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2487.76</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>42.68</td><td>32.45</td><td>7.34</td><td>37.20</td><td>6.00</td><td>302</td><td>265 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2487.76	51.27	74.00	-22.73	42.68	32.45	7.34	37.20	6.00	302
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2487.76	51.27	74.00	-22.73	42.68	32.45	7.34	37.20	6.00	302	265 PEAK																																													
Avg																																																								
																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>41.75</td><td>54.00</td><td>-12.25</td><td>33.19</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>302</td><td>265 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.50	41.75	54.00	-12.25	33.19	32.43	7.33	37.20	6.00	302
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.50	41.75	54.00	-12.25	33.19	32.43	7.33	37.20	6.00	302	265 AVERAGE																																													

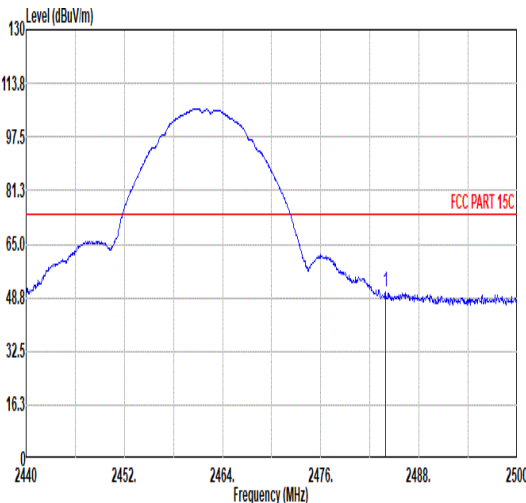
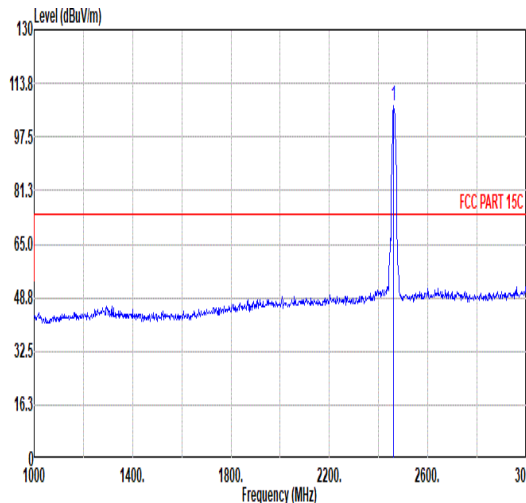
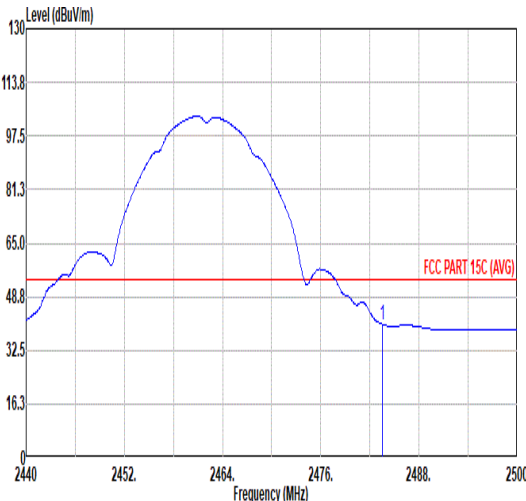
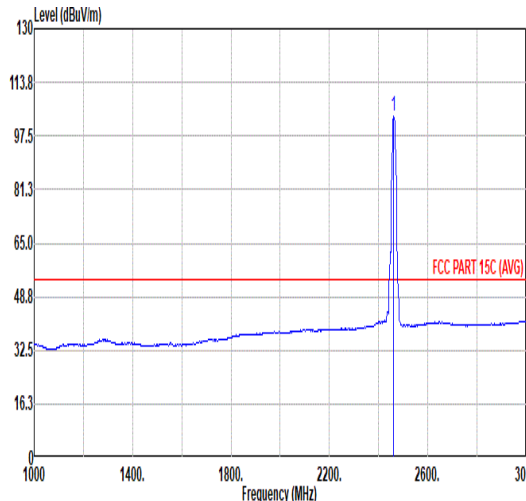


Mode	3																																																																																															
	Band Edge																																																																																															
	2400-2483.5_802.11b_CH11_2462MHz																																																																																															
ANT	1																																																																																															
Pol.	Vertical					Fundamental																																																																																										
Peak																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>50.49</td><td>74.00</td><td>-23.51</td><td>41.92</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>389 187 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	50.49	74.00	-23.51	41.92	32.44	7.33	37.20	6.00	389 187 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>106.71</td><td>-----</td><td>98.28</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>389 187 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.71	-----	98.28	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.92	50.49	74.00	-23.51	41.92	32.44	7.33	37.20	6.00	389 187 PEAK																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	106.71	-----	98.28	32.35	7.29	37.21	6.00	389 187 PEAK																																																																																							
Avg																																																																																																
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>40.46</td><td>54.00</td><td>-13.54</td><td>31.90</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>389 187 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	40.46	54.00	-13.54	31.90	32.43	7.33	37.20	6.00	389 187 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>103.58</td><td>-----</td><td>95.15</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>389 187 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.58	-----	95.15	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2483.50	40.46	54.00	-13.54	31.90	32.43	7.33	37.20	6.00	389 187 AVERAGE																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																							
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	2462.00	103.58	-----	95.15	32.35	7.29	37.21	6.00	389 187 AVERAGE																																																																																							







Mode	3																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																																									
ANT	1																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																								
Peak Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>41.20</td><td>74.00</td><td>-32.80</td><td>62.03</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>46.32</td><td>83.42</td><td>-37.10</td><td>65.05</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.32</td><td>74.00</td><td>-31.68</td><td>60.77</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	41.20	74.00	-32.80	62.03	34.85	10.40	66.08	0.00	---	--- PEAK	2	6565.50	46.32	83.42	-37.10	65.05	36.03	12.19	66.95	0.00	---	--- Peak	3	7386.00	42.32	74.00	-31.68	60.77	36.28	12.88	67.61	0.00	---	--- PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>64.35</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>45.39</td><td>80.54</td><td>-35.15</td><td>64.12</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>60.91</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	43.52	74.00	-30.48	64.35	34.85	10.40	66.08	0.00	---	--- PEAK	2	6565.50	45.39	80.54	-35.15	64.12	36.03	12.19	66.95	0.00	---	--- Peak	3	7386.00	42.46	74.00	-31.54	60.91	36.28	12.88	67.61	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	41.20	74.00	-32.80	62.03	34.85	10.40	66.08	0.00	---	--- PEAK																																																																																																																															
2	6565.50	46.32	83.42	-37.10	65.05	36.03	12.19	66.95	0.00	---	--- Peak																																																																																																																															
3	7386.00	42.32	74.00	-31.68	60.77	36.28	12.88	67.61	0.00	---	--- PEAK																																																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																
1	4924.00	43.52	74.00	-30.48	64.35	34.85	10.40	66.08	0.00	---	--- PEAK																																																																																																																															
2	6565.50	45.39	80.54	-35.15	64.12	36.03	12.19	66.95	0.00	---	--- Peak																																																																																																																															
3	7386.00	42.46	74.00	-31.54	60.91	36.28	12.88	67.61	0.00	---	--- PEAK																																																																																																																															

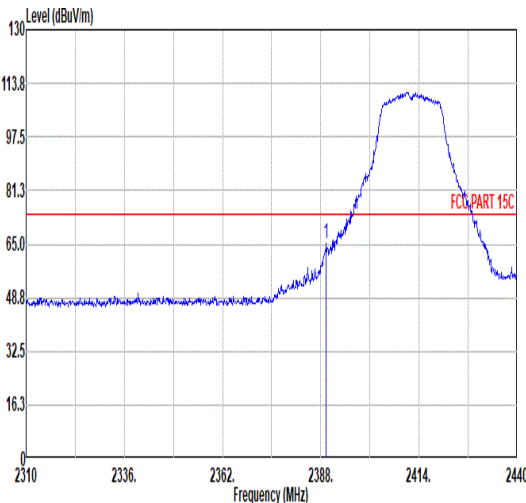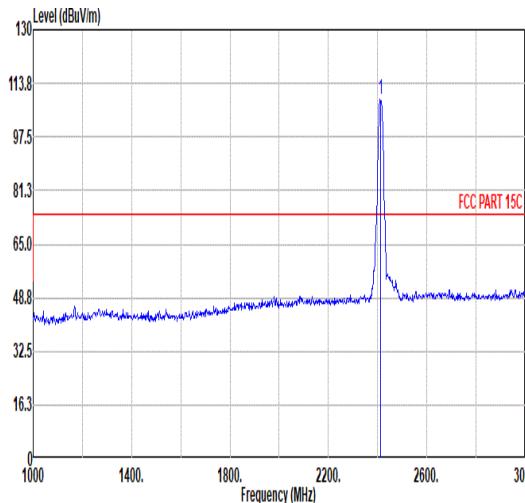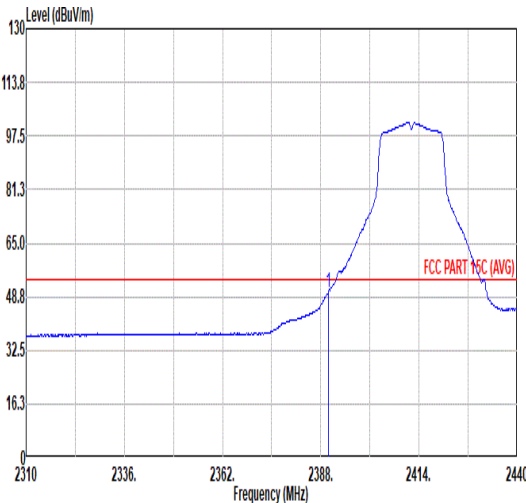
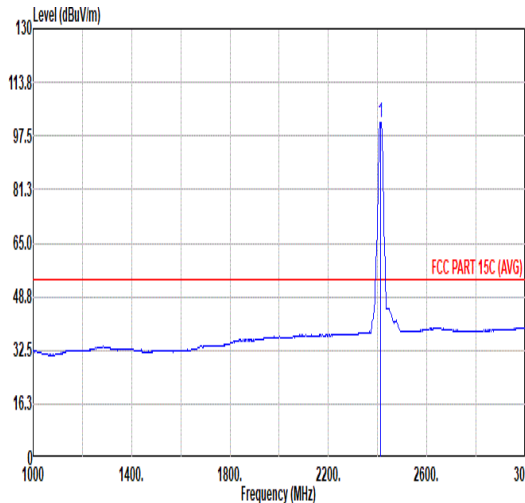


Mode	4																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.43</td><td>65.01</td><td>74.00</td><td>-8.99</td><td>56.60</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>321 278 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.43	65.01	74.00	-8.99	56.60	32.48	7.16	37.23	6.00	321 278 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.43	65.01	74.00	-8.99	56.60	32.48	7.16	37.23	6.00	321 278 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>109.10</td><td>74.00</td><td>35.10</td><td>100.66</td><td>32.46</td><td>7.20</td><td>37.22</td><td>6.00</td><td>321 278 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.10	74.00	35.10	100.66	32.46	7.20	37.22	6.00	321 278 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	109.10	74.00	35.10	100.66	32.46	7.20	37.22	6.00	321 278 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.04</td><td>54.00</td><td>-3.96</td><td>41.63</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>321 278 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.04	54.00	-3.96	41.63	32.48	7.16	37.23	6.00	321 278 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	50.04	54.00	-3.96	41.63	32.48	7.16	37.23	6.00	321 278 AVERAGE																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.45</td><td>-----</td><td>-----</td><td>93.02</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>321 278 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.45	-----	-----	93.02	32.45	7.20	37.22	6.00	321 278 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	101.45	-----	-----	93.02	32.45	7.20	37.22	6.00	321 278 AVERAGE																																													

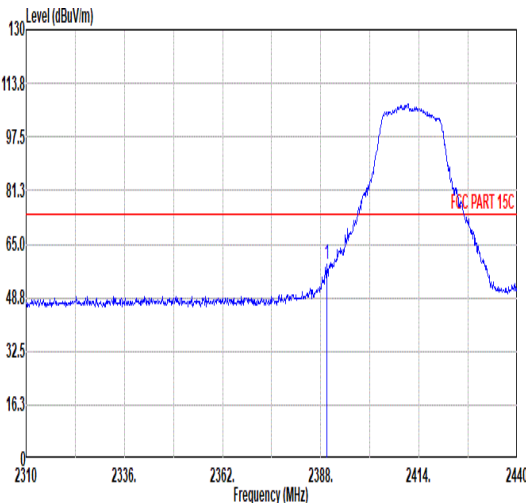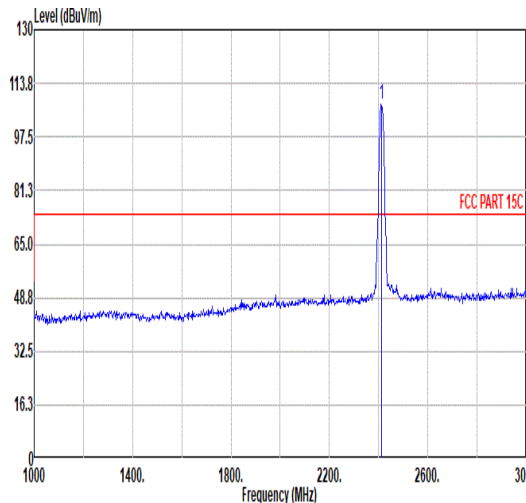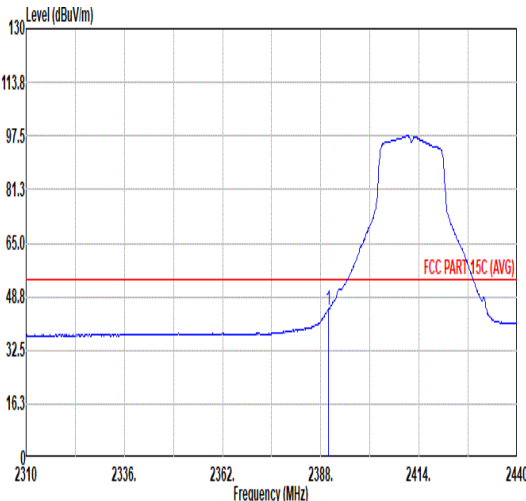
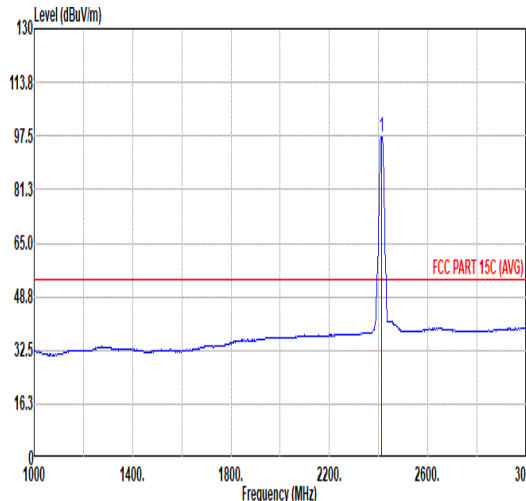


Mode	4																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>58.83</td><td>74.00</td><td>-15.17</td><td>50.42</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>275</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	58.83	74.00	-15.17	50.42	32.48	7.16	37.23	6.00	275	0 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.21</td><td>-----</td><td>-----</td><td>98.77</td><td>32.46</td><td>7.20</td><td>37.22</td><td>6.00</td><td>275</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.21	-----	-----	98.77	32.46	7.20	37.22	6.00	275
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.69	58.83	74.00	-15.17	50.42	32.48	7.16	37.23	6.00	275	0 PEAK																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	107.21	-----	-----	98.77	32.46	7.20	37.22	6.00	275	0 PEAK																																																																																																				
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.83</td><td>54.00</td><td>-9.17</td><td>36.42</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>275</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.83	54.00	-9.17	36.42	32.48	7.16	37.23	6.00	275	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.37</td><td>-----</td><td>-----</td><td>88.94</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>275</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.37	-----	-----	88.94	32.45	7.20	37.22	6.00	275
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.95	44.83	54.00	-9.17	36.42	32.48	7.16	37.23	6.00	275	0 AVERAGE																																																																																																				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2412.00	97.37	-----	-----	88.94	32.45	7.20	37.22	6.00	275	0 AVERAGE																																																																																																				



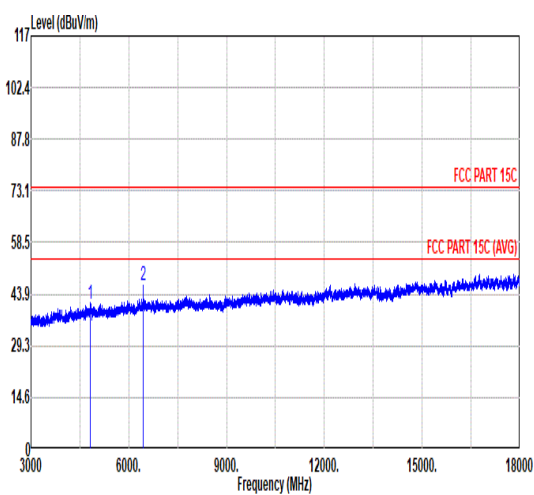
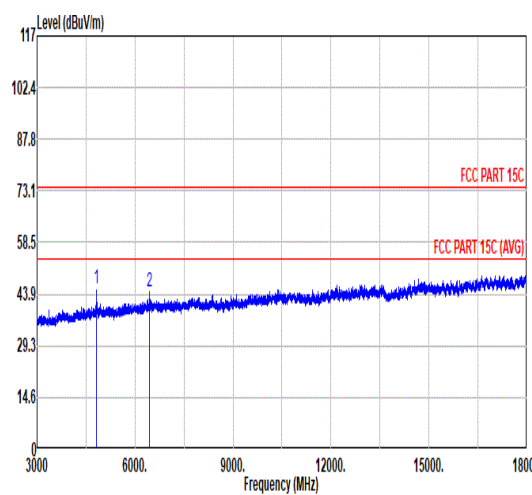


Mode	4																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>41.25</td><td>74.00</td><td>-32.75</td><td>62.06</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>46.34</td><td>79.64</td><td>-33.30</td><td>65.13</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.25	74.00	-32.75	62.06	34.85	10.29	65.95	0.00	---	PEAK	2	6432.00	46.34	79.64	-33.30	65.13	35.90	12.14	66.83	0.00	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.55</td><td>74.00</td><td>-28.45</td><td>66.36</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>44.79</td><td>97.56</td><td>-52.77</td><td>63.58</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.55	74.00	-28.45	66.36	34.85	10.29	65.95	0.00	---	PEAK	2	6432.00	44.79	97.56	-52.77	63.58	35.90	12.14	66.83	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	41.25	74.00	-32.75	62.06	34.85	10.29	65.95	0.00	---	PEAK																																																																																																																			
2	6432.00	46.34	79.64	-33.30	65.13	35.90	12.14	66.83	0.00	---	Peak																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	45.55	74.00	-28.45	66.36	34.85	10.29	65.95	0.00	---	PEAK																																																																																																																			
2	6432.00	44.79	97.56	-52.77	63.58	35.90	12.14	66.83	0.00	---	Peak																																																																																																																			



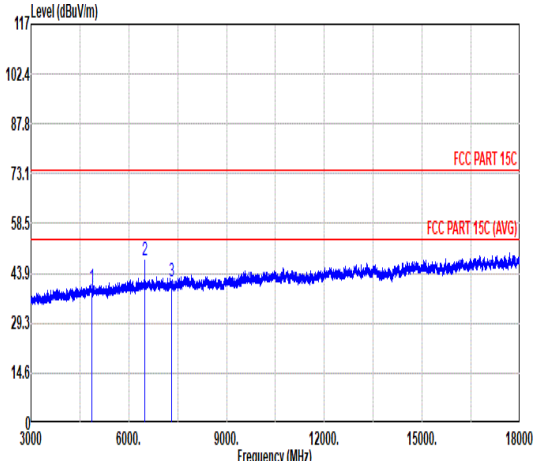
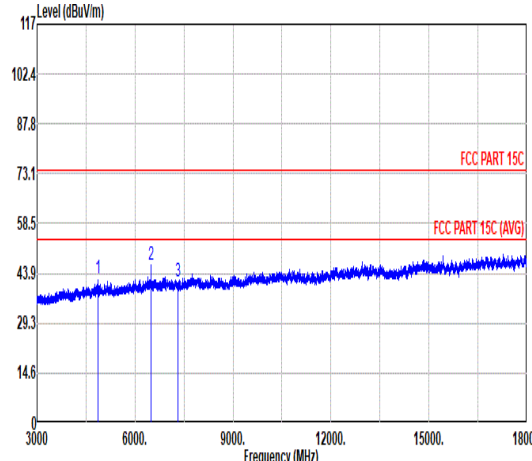


Mode	5																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal										Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>39.61</td><td>74.00</td><td>-34.39</td><td>68.37</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>47.53</td><td>79.64</td><td>-32.11</td><td>66.37</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.60</td><td>74.00</td><td>-32.40</td><td>59.95</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	39.61	74.00	-34.39	68.37	34.90	10.34	66.00	0.00	---	--- PEAK	2	6499.50	47.53	79.64	-32.11	66.37	35.90	12.16	66.90	0.00	---	--- Peak	3	7311.00	41.60	74.00	-32.40	59.95	36.42	12.78	67.55	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>42.37</td><td>74.00</td><td>-31.63</td><td>63.13</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>46.19</td><td>77.56</td><td>-31.37</td><td>65.03</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.66</td><td>74.00</td><td>-32.34</td><td>60.01</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	42.37	74.00	-31.63	63.13	34.90	10.34	66.00	0.00	---	--- PEAK	2	6499.50	46.19	77.56	-31.37	65.03	35.90	12.16	66.90	0.00	---	--- Peak	3	7311.00	41.66	74.00	-32.34	60.01	36.42	12.78	67.55	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4874.00	39.61	74.00	-34.39	68.37	34.90	10.34	66.00	0.00	---	--- PEAK																																																																																																																																																	
2	6499.50	47.53	79.64	-32.11	66.37	35.90	12.16	66.90	0.00	---	--- Peak																																																																																																																																																	
3	7311.00	41.60	74.00	-32.40	59.95	36.42	12.78	67.55	0.00	---	--- PEAK																																																																																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4874.00	42.37	74.00	-31.63	63.13	34.90	10.34	66.00	0.00	---	--- PEAK																																																																																																																																																	
2	6499.50	46.19	77.56	-31.37	65.03	35.90	12.16	66.90	0.00	---	--- Peak																																																																																																																																																	
3	7311.00	41.66	74.00	-32.34	60.01	36.42	12.78	67.55	0.00	---	--- PEAK																																																																																																																																																	

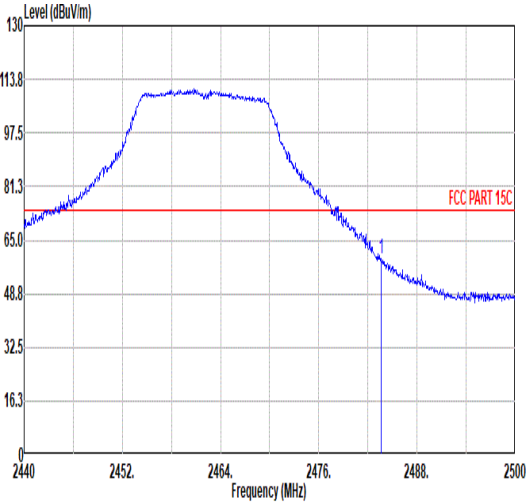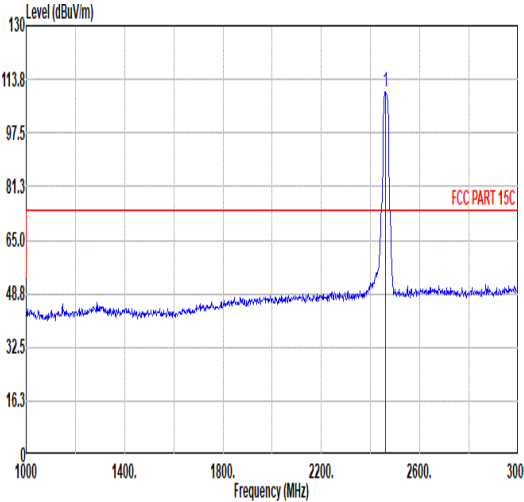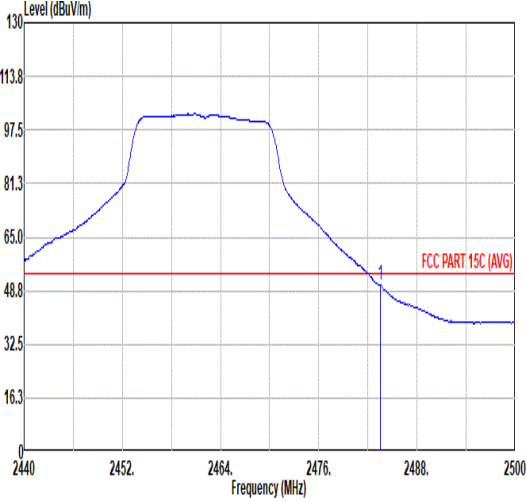
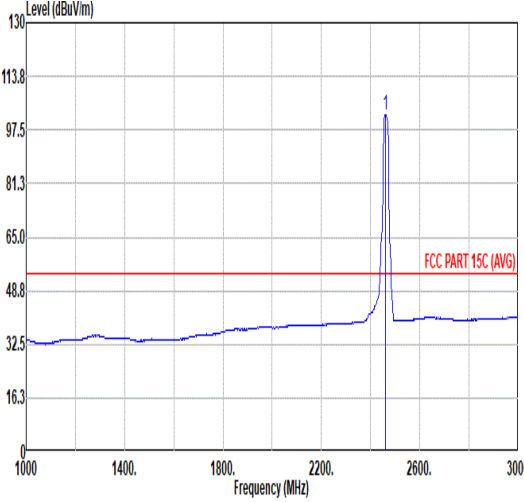


Mode	6																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>59.45</td><td>74.00</td><td>-14.55</td><td>50.89</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>346</td><td>72 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	59.45	74.00	-14.55	50.89	32.43	7.33	37.20	6.00	346	72 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>110.11</td><td>-----</td><td>-----</td><td>101.71</td><td>32.33</td><td>7.28</td><td>37.21</td><td>6.00</td><td>346</td><td>72 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.11	-----	-----	101.71	32.33	7.28	37.21	6.00	346
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.62	59.45	74.00	-14.55	50.89	32.43	7.33	37.20	6.00	346	72 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	110.11	-----	-----	101.71	32.33	7.28	37.21	6.00	346	72 PEAK																																																																																									
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>50.46</td><td>54.00</td><td>-3.54</td><td>41.90</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>346</td><td>72 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.46	54.00	-3.54	41.90	32.43	7.33	37.20	6.00	346	72 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>102.22</td><td>-----</td><td>-----</td><td>93.79</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>346</td><td>72 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.22	-----	-----	93.79	32.35	7.29	37.21	6.00	346
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2483.50	50.46	54.00	-3.54	41.90	32.43	7.33	37.20	6.00	346	72 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2462.00	102.22	-----	-----	93.79	32.35	7.29	37.21	6.00	346	72 AVERAGE																																																																																									

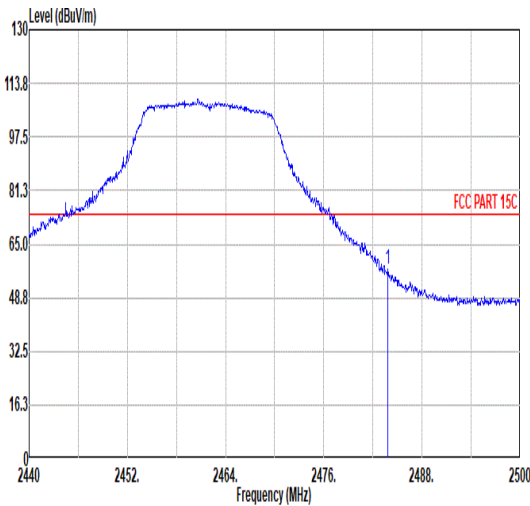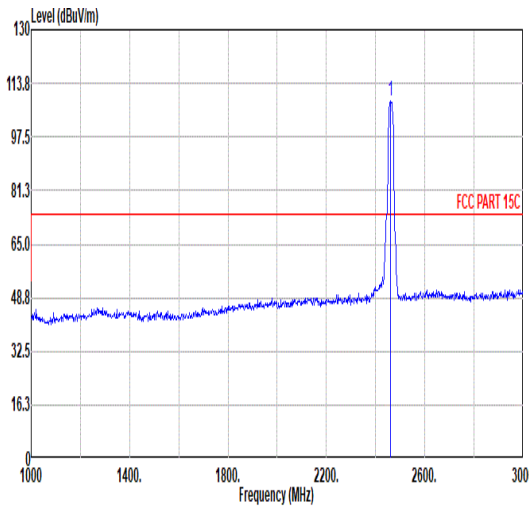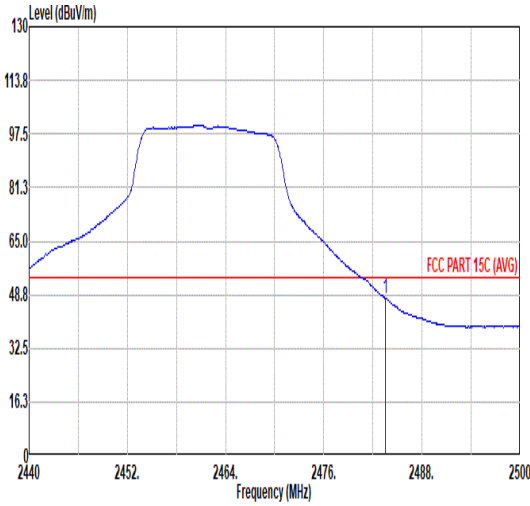
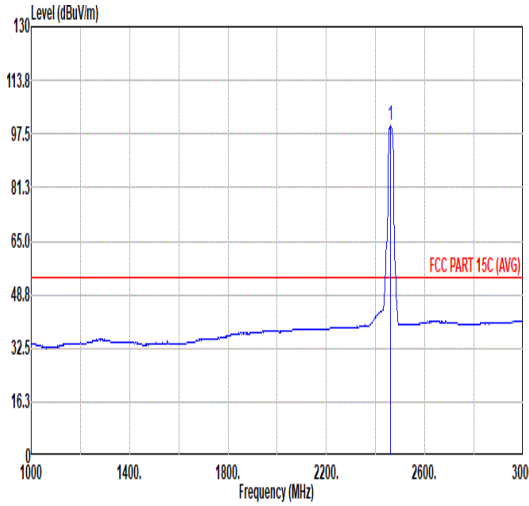


Mode	6																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.86</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>48.86</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>287 36 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.86	57.43	74.00	-16.57	48.86	32.44	7.33	37.20	6.00	287 36 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.52</td><td>-----</td><td>-----</td><td>100.10</td><td>32.34</td><td>7.29</td><td>37.21</td><td>6.00</td><td>287 36 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.52	-----	-----	100.10	32.34	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.86	57.43	74.00	-16.57	48.86	32.44	7.33	37.20	6.00	287 36 PEAK																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	108.52	-----	-----	100.10	32.34	7.29	37.21	6.00	287 36 PEAK																																																																																								
Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.79</td><td>54.00</td><td>-6.21</td><td>39.23</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>287 36 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.79	54.00	-6.21	39.23	32.43	7.33	37.20	6.00	287 36 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>99.99</td><td>-----</td><td>-----</td><td>91.56</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>287 36 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.99	-----	-----	91.56	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.50	47.79	54.00	-6.21	39.23	32.43	7.33	37.20	6.00	287 36 AVERAGE																																																																																								
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	99.99	-----	-----	91.56	32.35	7.29	37.21	6.00	287 36 AVERAGE																																																																																								

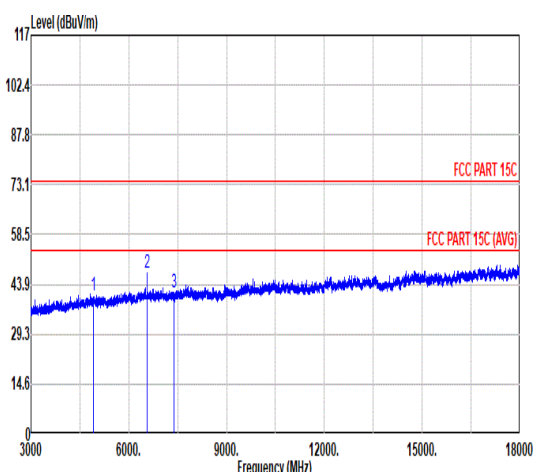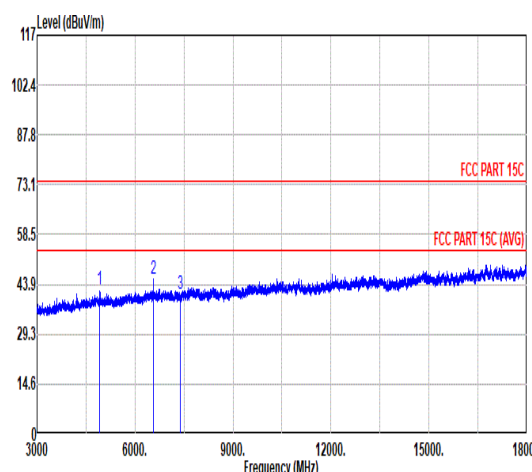

Mode	6																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																													
ANT	1																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.80</td><td>74.00</td><td>-33.20</td><td>61.63</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>47.37</td><td>80.67</td><td>-33.30</td><td>66.10</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>41.31</td><td>74.00</td><td>-32.69</td><td>59.76</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	40.80	74.00	-33.20	61.63	34.85	10.40	66.08	0.00	---	---	PEAK	2	6565.50	47.37	80.67	-33.30	66.10	36.03	12.19	66.95	0.00	---	---	Peak	3	7386.00	41.31	74.00	-32.69	59.76	36.28	12.88	67.61	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.35</td><td>74.00</td><td>-31.65</td><td>63.18</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>45.43</td><td>78.91</td><td>-33.48</td><td>64.16</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7386.00</td><td>41.09</td><td>74.00</td><td>-32.91</td><td>59.54</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4924.00	42.35	74.00	-31.65	63.18	34.85	10.40	66.08	0.00	---	---	PEAK	2	6565.50	45.43	78.91	-33.48	64.16	36.03	12.19	66.95	0.00	---	---	Peak	3	7386.00	41.09	74.00	-32.91	59.54	36.28	12.88	67.61	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4924.00	40.80	74.00	-33.20	61.63	34.85	10.40	66.08	0.00	---	---	PEAK																																																																																																																																																		
2	6565.50	47.37	80.67	-33.30	66.10	36.03	12.19	66.95	0.00	---	---	Peak																																																																																																																																																		
3	7386.00	41.31	74.00	-32.69	59.76	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4924.00	42.35	74.00	-31.65	63.18	34.85	10.40	66.08	0.00	---	---	PEAK																																																																																																																																																		
2	6565.50	45.43	78.91	-33.48	64.16	36.03	12.19	66.95	0.00	---	---	Peak																																																																																																																																																		
3	7386.00	41.09	74.00	-32.91	59.54	36.28	12.88	67.61	0.00	---	---	PEAK																																																																																																																																																		

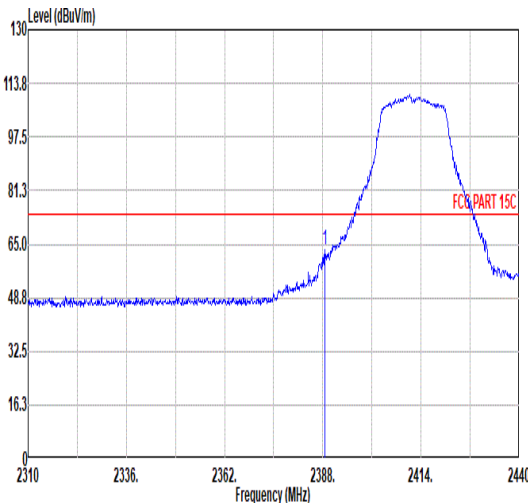
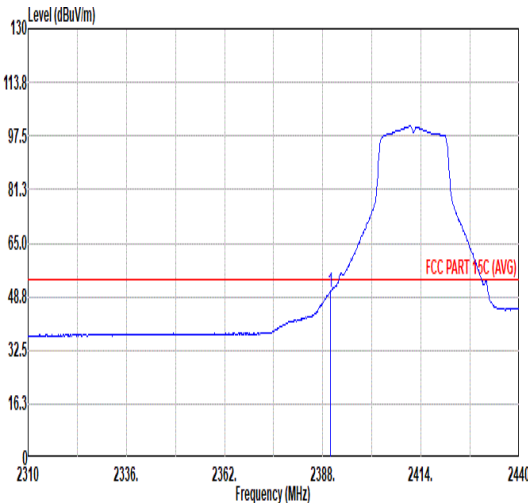


Mode	7																																																						
	Band Edge																																																						
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal																																																						
Peak	Fundamental																																																						
																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.65</td><td>63.10</td><td>74.00</td><td>-10.90</td><td>54.69</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>318</td><td>282 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2388.65	63.10	74.00	-10.90	54.69	32.48	7.16	37.23	6.00	318
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2388.65	63.10	74.00	-10.90	54.69	32.48	7.16	37.23	6.00	318	282 PEAK																																												
Avg	Fundamental																																																						
																																																							
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.06</td><td>54.00</td><td>-3.94</td><td>41.65</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>318</td><td>282 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	50.06	54.00	-3.94	41.65	32.48	7.16	37.23	6.00	318
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2389.95	50.06	54.00	-3.94	41.65	32.48	7.16	37.23	6.00	318	282 AVERAGE																																												





Mode	7																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.91</td><td>56.37</td><td>74.00</td><td>-17.63</td><td>47.96</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>276</td><td>0 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2388.91	56.37	74.00	-17.63	47.96	32.48	7.16	37.23	6.00	276	0 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.94</td><td>-----</td><td>-----</td><td>97.51</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>276</td><td>0 PEAK</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.94	-----	-----	97.51	32.45	7.20	37.22	6.00	276	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2388.91	56.37	74.00	-17.63	47.96	32.48	7.16	37.23	6.00	276	0 PEAK																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	105.94	-----	-----	97.51	32.45	7.20	37.22	6.00	276	0 PEAK																																																																																	
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.73</td><td>54.00</td><td>-9.27</td><td>36.32</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>276</td><td>0 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.73	54.00	-9.27	36.32	32.48	7.16	37.23	6.00	276	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.45</td><td>-----</td><td>-----</td><td>88.02</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>276</td><td>0 AVERAGE</td></tr></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.45	-----	-----	88.02	32.45	7.20	37.22	6.00	276	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2389.95	44.73	54.00	-9.27	36.32	32.48	7.16	37.23	6.00	276	0 AVERAGE																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2412.00	96.45	-----	-----	88.02	32.45	7.20	37.22	6.00	276	0 AVERAGE																																																																																	



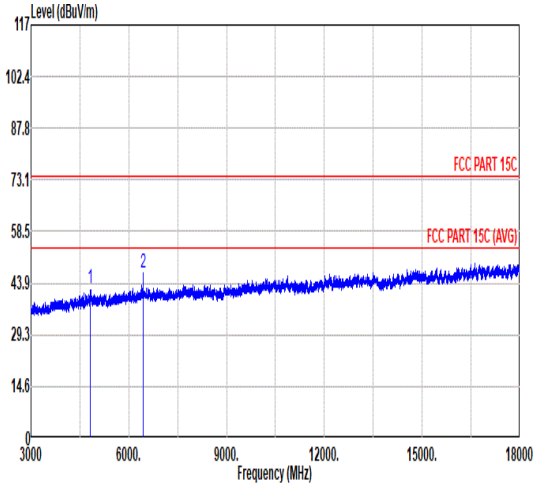
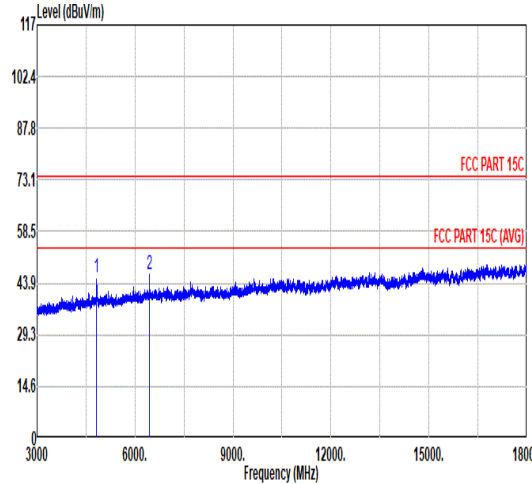


Mode	7																																																																																																																													
	Harmonic																																																																																																																													
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																													
ANT	1																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																							
Peak Avg																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>42.41</td><td>74.00</td><td>-31.59</td><td>63.22</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>46.99</td><td>78.94</td><td>-31.95</td><td>65.78</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.41	74.00	-31.59	63.22	34.85	10.29	65.95	0.00	---	PEAK	2	6432.00	46.99	78.94	-31.95	65.78	35.90	12.14	66.83	0.00	---	Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.43</td><td>74.00</td><td>-28.57</td><td>66.24</td><td>34.85</td><td>10.29</td><td>65.95</td><td>0.00</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6432.00</td><td>46.48</td><td>77.04</td><td>-30.56</td><td>65.27</td><td>35.90</td><td>12.14</td><td>66.83</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.43	74.00	-28.57	66.24	34.85	10.29	65.95	0.00	---	PEAK	2	6432.00	46.48	77.04	-30.56	65.27	35.90	12.14	66.83	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	42.41	74.00	-31.59	63.22	34.85	10.29	65.95	0.00	---	PEAK																																																																																																																			
2	6432.00	46.99	78.94	-31.95	65.78	35.90	12.14	66.83	0.00	---	Peak																																																																																																																			
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																				
1	4824.00	45.43	74.00	-28.57	66.24	34.85	10.29	65.95	0.00	---	PEAK																																																																																																																			
2	6432.00	46.48	77.04	-30.56	65.27	35.90	12.14	66.83	0.00	---	Peak																																																																																																																			



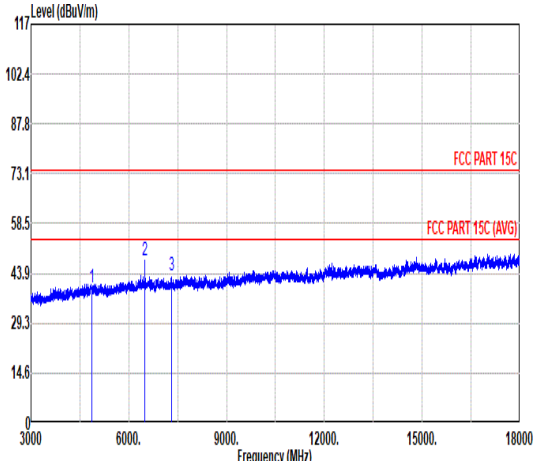
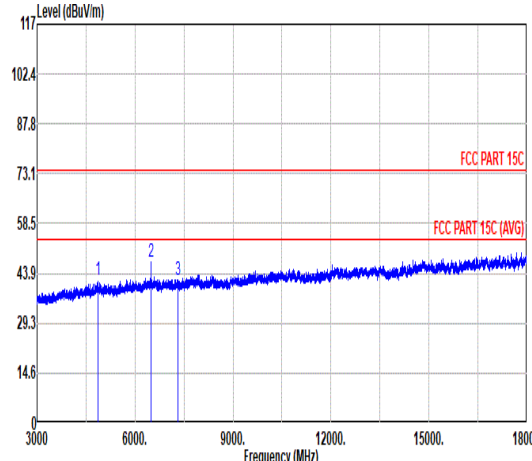


Mode	8																																																																																																																																									
	Harmonic																																																																																																																																									
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																									
ANT	1																																																																																																																																									
Pol.	Horizontal									Vertical																																																																																																																																
Peak Avg																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4874.00</td><td>39.81</td><td>74.00</td><td>-34.19</td><td>68.57</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td></tr><tr><td>2</td><td>6499.50</td><td>47.70</td><td>80.54</td><td>-32.84</td><td>66.54</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td></tr><tr><td>3</td><td>7311.00</td><td>43.07</td><td>74.00</td><td>-30.93</td><td>61.42</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4874.00	39.81	74.00	-34.19	68.57	34.90	10.34	66.00	0.00	2	6499.50	47.70	80.54	-32.84	66.54	35.90	12.16	66.90	0.00	3	7311.00	43.07	74.00	-30.93	61.42	36.42	12.78	67.55	0.00	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>4874.00</td><td>42.05</td><td>74.00</td><td>-31.95</td><td>62.81</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td></tr><tr><td>2</td><td>6498.00</td><td>47.21</td><td>79.67</td><td>-32.46</td><td>66.05</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td></tr><tr><td>3</td><td>7311.00</td><td>42.12</td><td>74.00</td><td>-31.88</td><td>60.47</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	4874.00	42.05	74.00	-31.95	62.81	34.90	10.34	66.00	0.00	2	6498.00	47.21	79.67	-32.46	66.05	35.90	12.16	66.90	0.00	3	7311.00	42.12	74.00	-31.88	60.47	36.42	12.78	67.55	0.00
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																	
1	4874.00	39.81	74.00	-34.19	68.57	34.90	10.34	66.00	0.00																																																																																																																																	
2	6499.50	47.70	80.54	-32.84	66.54	35.90	12.16	66.90	0.00																																																																																																																																	
3	7311.00	43.07	74.00	-30.93	61.42	36.42	12.78	67.55	0.00																																																																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																																																																																	
1	4874.00	42.05	74.00	-31.95	62.81	34.90	10.34	66.00	0.00																																																																																																																																	
2	6498.00	47.21	79.67	-32.46	66.05	35.90	12.16	66.90	0.00																																																																																																																																	
3	7311.00	42.12	74.00	-31.88	60.47	36.42	12.78	67.55	0.00																																																																																																																																	

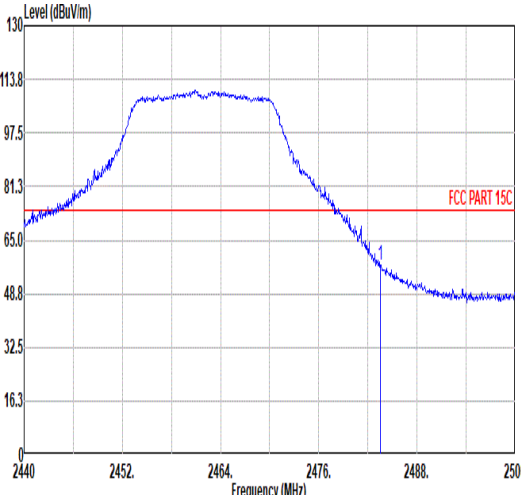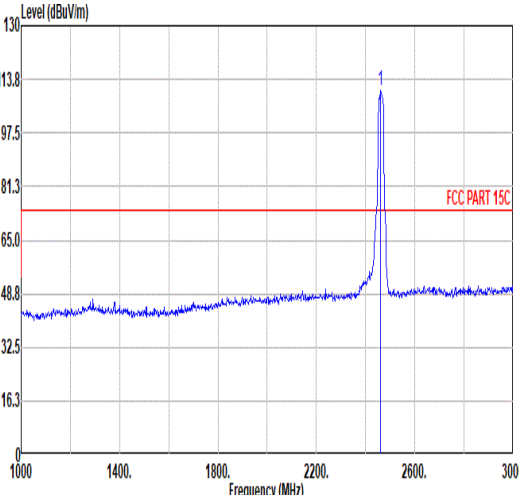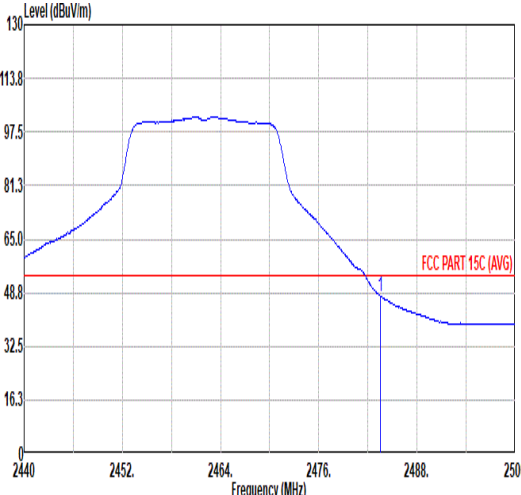
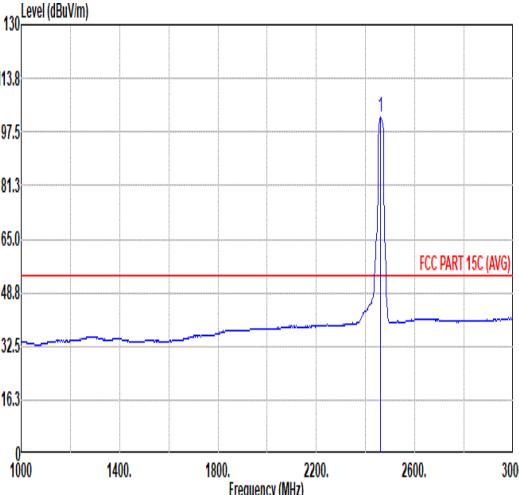


Mode	9																																																																																																					
	Band Edge																																																																																																					
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																					
ANT	1																																																																																																					
Pol.	Horizontal						Fundamental																																																																																															
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>48.87</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>303</td><td>263 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	57.43	74.00	-16.57	48.87	32.43	7.33	37.20	6.00	303	263 PEAK	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>110.47</td><td>-----</td><td>-----</td><td>102.04</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>303</td><td>263 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.47	-----	-----	102.04	32.35	7.29	37.21	6.00	303	263 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.50	57.43	74.00	-16.57	48.87	32.43	7.33	37.20	6.00	303	263 PEAK																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	110.47	-----	-----	102.04	32.35	7.29	37.21	6.00	303	263 PEAK																																																																																											
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>47.77</td><td>54.00</td><td>-6.23</td><td>39.21</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>303</td><td>263 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	47.77	54.00	-6.23	39.21	32.43	7.33	37.20	6.00	303	263 AVERAGE	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>101.81</td><td>-----</td><td>-----</td><td>93.39</td><td>32.34</td><td>7.29</td><td>37.21</td><td>6.00</td><td>303</td><td>263 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	101.81	-----	-----	93.39	32.34	7.29	37.21	6.00	303	263 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2483.56	47.77	54.00	-6.23	39.21	32.43	7.33	37.20	6.00	303	263 AVERAGE																																																																																											
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	2462.00	101.81	-----	-----	93.39	32.34	7.29	37.21	6.00	303	263 AVERAGE																																																																																											

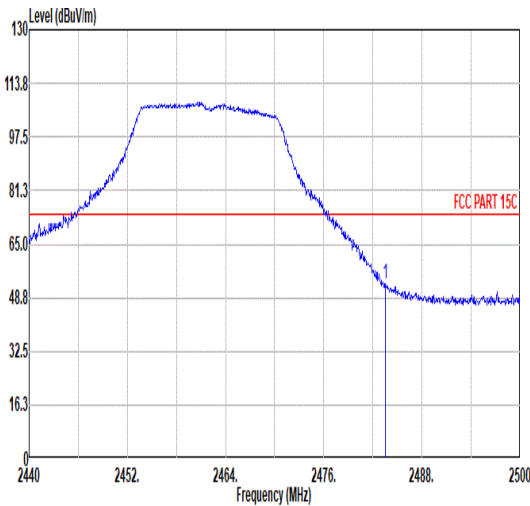
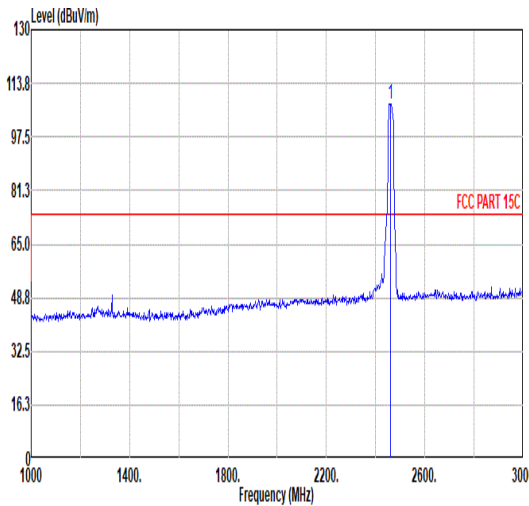
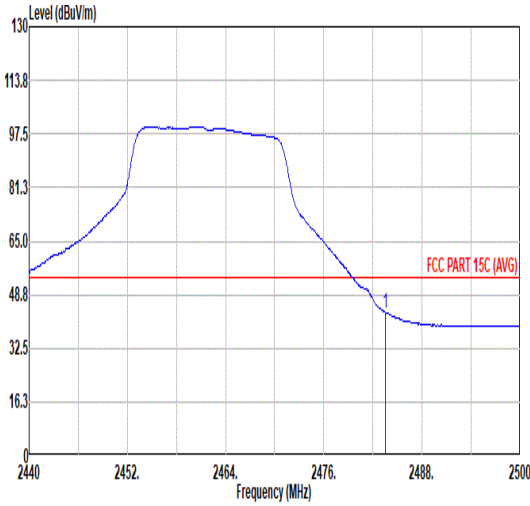
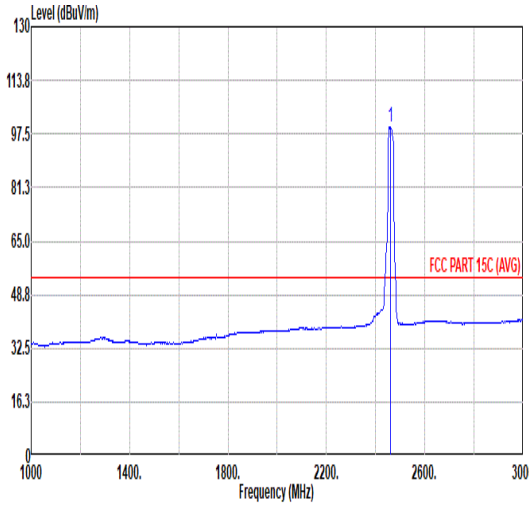


Mode	9																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>53.06</td><td>74.00</td><td>-20.94</td><td>44.50</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315 156 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	53.06	74.00	-20.94	44.50	32.43	7.33	37.20	6.00	315 156 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>107.56</td><td>-----</td><td>-----</td><td>99.13</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>315 156 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.56	-----	-----	99.13	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	53.06	74.00	-20.94	44.50	32.43	7.33	37.20	6.00	315 156 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	107.56	-----	-----	99.13	32.35	7.29	37.21	6.00	315 156 PEAK																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>43.40</td><td>54.00</td><td>-10.60</td><td>34.84</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315 156 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.40	54.00	-10.60	34.84	32.43	7.33	37.20	6.00	315 156 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>99.61</td><td>-----</td><td>-----</td><td>91.18</td><td>32.35</td><td>7.29</td><td>37.21</td><td>6.00</td><td>315 156 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	99.61	-----	-----	91.18	32.35	7.29	37.21	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2483.50	43.40	54.00	-10.60	34.84	32.43	7.33	37.20	6.00	315 156 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2462.00	99.61	-----	-----	91.18	32.35	7.29	37.21	6.00	315 156 AVERAGE																																																																																							

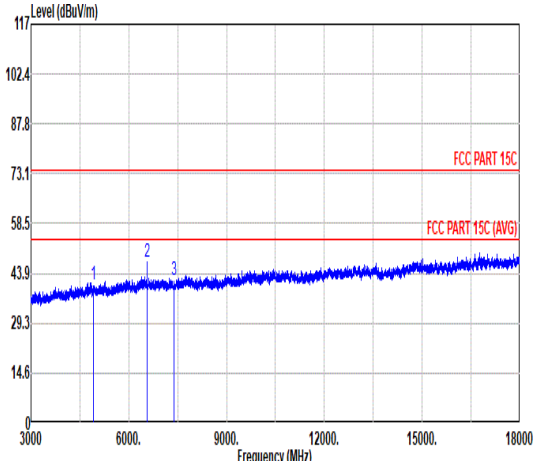
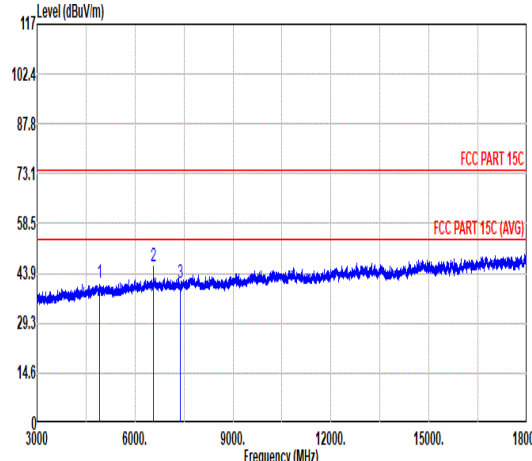


Mode	9																																																																																																																																																									
	Harmonic																																																																																																																																																									
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																									
ANT	1																																																																																																																																																									
Pol.	Horizontal								Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>40.54</td><td>74.00</td><td>-33.46</td><td>61.37</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>47.04</td><td>78.36</td><td>-31.32</td><td>65.77</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>41.76</td><td>74.00</td><td>-32.24</td><td>60.21</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	40.54	74.00	-33.46	61.37	34.85	10.40	66.08	0.00	---	--- PEAK	2	6565.50	47.04	78.36	-31.32	65.77	36.03	12.19	66.95	0.00	---	--- Peak	3	7386.00	41.76	74.00	-32.24	60.21	36.28	12.88	67.61	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>40.99</td><td>74.00</td><td>-33.01</td><td>61.82</td><td>34.85</td><td>10.40</td><td>66.08</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6565.50</td><td>46.12</td><td>78.38</td><td>-32.26</td><td>64.85</td><td>36.03</td><td>12.19</td><td>66.95</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7386.00</td><td>41.13</td><td>74.00</td><td>-32.87</td><td>59.58</td><td>36.28</td><td>12.88</td><td>67.61</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>									Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4924.00	40.99	74.00	-33.01	61.82	34.85	10.40	66.08	0.00	---	--- PEAK	2	6565.50	46.12	78.38	-32.26	64.85	36.03	12.19	66.95	0.00	---	--- Peak	3	7386.00	41.13	74.00	-32.87	59.58	36.28	12.88	67.61	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																
1	4924.00	40.54	74.00	-33.46	61.37	34.85	10.40	66.08	0.00	---	--- PEAK																																																																																																																																															
2	6565.50	47.04	78.36	-31.32	65.77	36.03	12.19	66.95	0.00	---	--- Peak																																																																																																																																															
3	7386.00	41.76	74.00	-32.24	60.21	36.28	12.88	67.61	0.00	---	--- PEAK																																																																																																																																															
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																
1	4924.00	40.99	74.00	-33.01	61.82	34.85	10.40	66.08	0.00	---	--- PEAK																																																																																																																																															
2	6565.50	46.12	78.38	-32.26	64.85	36.03	12.19	66.95	0.00	---	--- Peak																																																																																																																																															
3	7386.00	41.13	74.00	-32.87	59.58	36.28	12.88	67.61	0.00	---	--- PEAK																																																																																																																																															

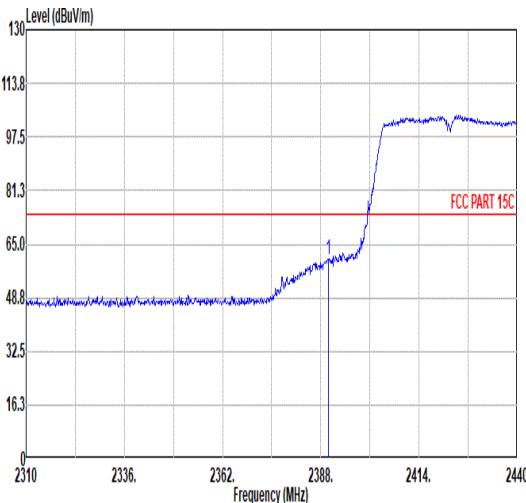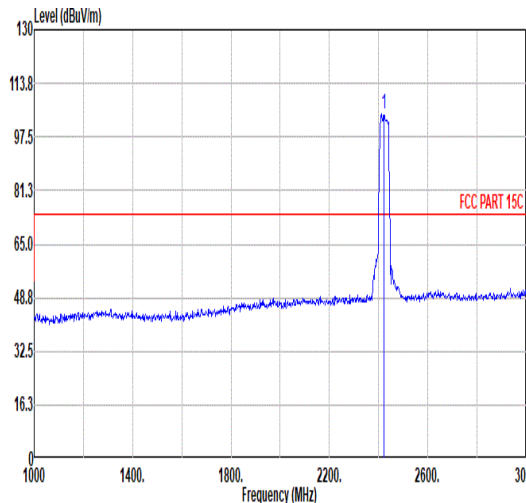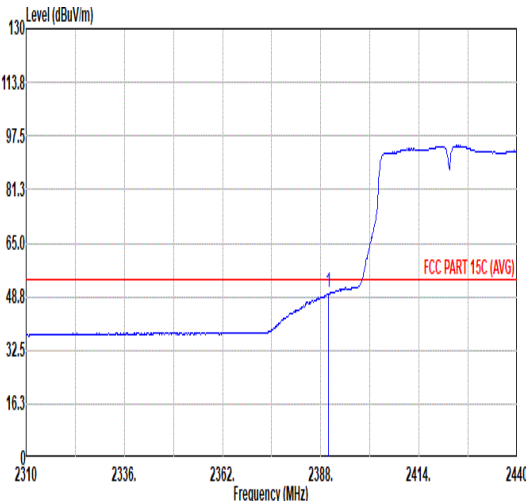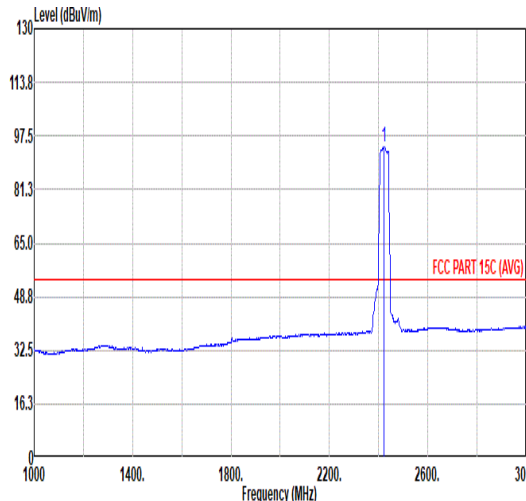

Mode	10																																																																																																
	Band Edge - L																																																																																																
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal					Fundamental																																																																																											
Peak																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>60.30</td><td>74.00</td><td>-13.70</td><td>51.89</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>317 285 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	60.30	74.00	-13.70	51.89	32.48	7.16	37.23	6.00	317 285 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>104.29</td><td>-----</td><td>-----</td><td>95.86</td><td>32.45</td><td>7.20</td><td>37.22</td><td>6.00</td><td>317 285 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	104.29	-----	-----	95.86	32.45	7.20	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	60.30	74.00	-13.70	51.89	32.48	7.16	37.23	6.00	317 285 PEAK																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2422.00	104.29	-----	-----	95.86	32.45	7.20	37.22	6.00	317 285 PEAK																																																																																							
Avg																																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.00</td><td>54.00</td><td>-3.92</td><td>41.67</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>317 285 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.00	54.00	-3.92	41.67	32.48	7.16	37.23	6.00	317 285 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>94.36</td><td>-----</td><td>-----</td><td>85.96</td><td>32.40</td><td>7.22</td><td>37.22</td><td>6.00</td><td>317 285 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	94.36	-----	-----	85.96	32.40	7.22	37.22	6.00
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	50.00	54.00	-3.92	41.67	32.48	7.16	37.23	6.00	317 285 AVERAGE																																																																																							
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																								
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2422.00	94.36	-----	-----	85.96	32.40	7.22	37.22	6.00	317 285 AVERAGE																																																																																							

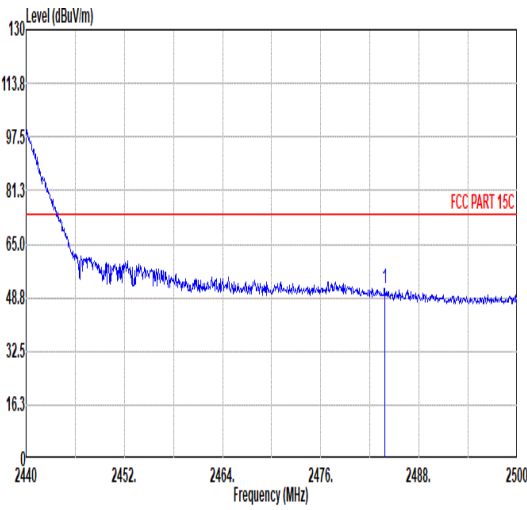
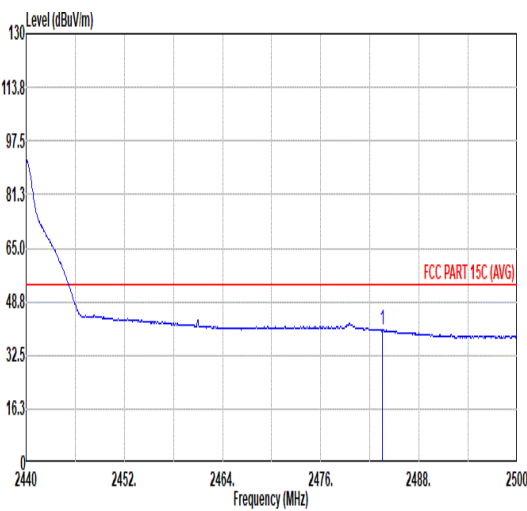


Mode	10																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.80</td><td>51.35</td><td>74.00</td><td>-22.65</td><td>42.78</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>317</td><td>285</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.80	51.35	74.00	-22.65	42.78	32.44	7.33	37.20	6.00	317	285	PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.80	51.35	74.00	-22.65	42.78	32.44	7.33	37.20	6.00	317	285	PEAK																																											
Avg	 <table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>40.02</td><td>54.00</td><td>-13.98</td><td>31.46</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>317</td><td>285</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	40.02	54.00	-13.98	31.46	32.43	7.33	37.20	6.00	317	285	AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	40.02	54.00	-13.98	31.46	32.43	7.33	37.20	6.00	317	285	AVERAGE																																											





Mode	10																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>58.58</td><td>74.00</td><td>-15.42</td><td>50.17</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>322 33 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	58.58	74.00	-15.42	50.17	32.48	7.16	37.23	6.00	322 33 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>101.75</td><td>-----</td><td>-----</td><td>93.33</td><td>32.42</td><td>7.22</td><td>37.22</td><td>6.00</td><td>322 33 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	101.75	-----	-----	93.33	32.42	7.22	37.22	6.00	322 33 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	58.58	74.00	-15.42	50.17	32.48	7.16	37.23	6.00	322 33 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	101.75	-----	-----	93.33	32.42	7.22	37.22	6.00	322 33 PEAK																																																																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>47.39</td><td>54.00</td><td>-6.61</td><td>38.98</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>322 33 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.39	54.00	-6.61	38.98	32.48	7.16	37.23	6.00	322 33 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>92.25</td><td>-----</td><td>-----</td><td>83.85</td><td>32.40</td><td>7.22</td><td>37.22</td><td>6.00</td><td>322 33 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	92.25	-----	-----	83.85	32.40	7.22	37.22	6.00	322 33 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	47.39	54.00	-6.61	38.98	32.48	7.16	37.23	6.00	322 33 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2422.00	92.25	-----	-----	83.85	32.40	7.22	37.22	6.00	322 33 AVERAGE																																																																																									



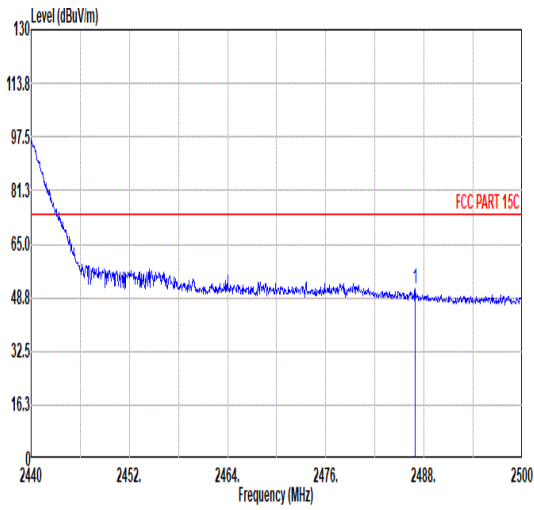
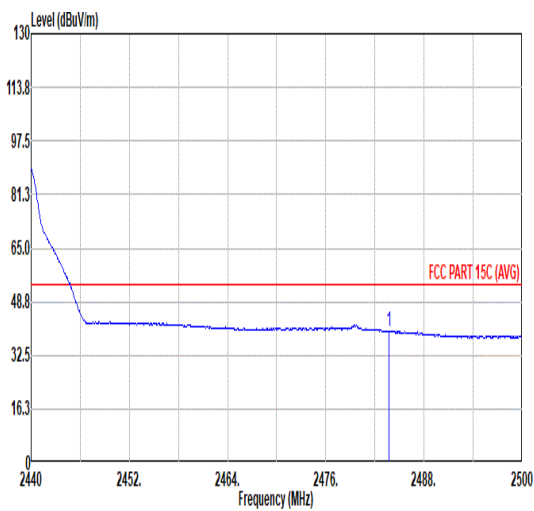


Mode	10																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2486.92</td><td>51.69</td><td>74.00</td><td>-22.31</td><td>43.10</td><td>32.45</td><td>7.34</td><td>37.20</td><td>6.00</td><td>322</td><td>33</td><td>PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.92	51.69	74.00	-22.31	43.10	32.45	7.34	37.20	6.00	322	33	PEAK	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2486.92	51.69	74.00	-22.31	43.10	32.45	7.34	37.20	6.00	322	33	PEAK																																												
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.68</td><td>39.86</td><td>54.00</td><td>-14.14</td><td>31.30</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>322</td><td>33</td><td>AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	39.86	54.00	-14.14	31.30	32.43	7.33	37.20	6.00	322	33	AVERAGE	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.68	39.86	54.00	-14.14	31.30	32.43	7.33	37.20	6.00	322	33	AVERAGE																																												

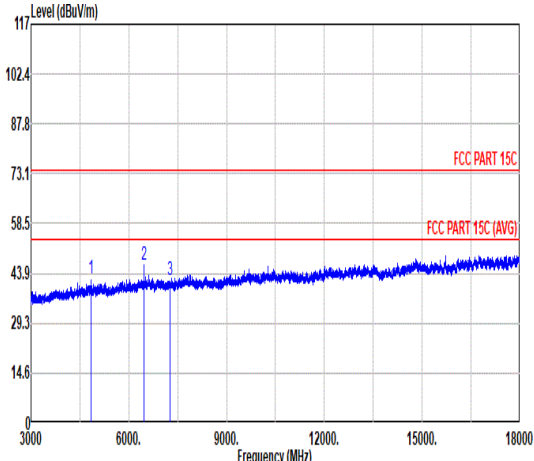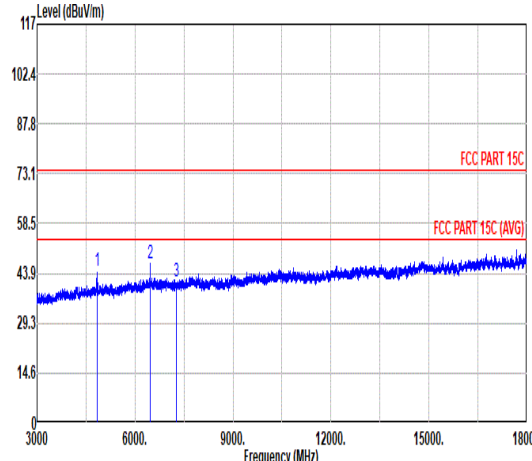

Mode	10																																																																																																																																																											
	Harmonic																																																																																																																																																											
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																																																																											
ANT	1																																																																																																																																																											
Pol.	Horizontal									Vertical																																																																																																																																																		
Peak Avg																																																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>63.17</td><td>34.89</td><td>10.31</td><td>65.91</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6459.00</td><td>46.48</td><td>74.98</td><td>-28.50</td><td>65.29</td><td>35.90</td><td>12.15</td><td>66.86</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7266.00</td><td>42.03</td><td>74.00</td><td>-31.97</td><td>60.36</td><td>36.47</td><td>12.71</td><td>67.51</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4844.00	42.46	74.00	-31.54	63.17	34.89	10.31	65.91	0.00	---	--- PEAK	2	6459.00	46.48	74.98	-28.50	65.29	35.90	12.15	66.86	0.00	---	--- Peak	3	7266.00	42.03	74.00	-31.97	60.36	36.47	12.71	67.51	0.00	---	--- PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>44.39</td><td>74.00</td><td>-29.61</td><td>65.10</td><td>34.89</td><td>10.31</td><td>65.91</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6459.00</td><td>46.91</td><td>71.32</td><td>-24.41</td><td>65.72</td><td>35.90</td><td>12.15</td><td>66.86</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7266.00</td><td>41.71</td><td>74.00</td><td>-32.29</td><td>60.04</td><td>36.47</td><td>12.71</td><td>67.51</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4844.00	44.39	74.00	-29.61	65.10	34.89	10.31	65.91	0.00	---	--- PEAK	2	6459.00	46.91	71.32	-24.41	65.72	35.90	12.15	66.86	0.00	---	--- Peak	3	7266.00	41.71	74.00	-32.29	60.04	36.47	12.71	67.51	0.00	---	--- PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																	
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4844.00	42.46	74.00	-31.54	63.17	34.89	10.31	65.91	0.00	---	--- PEAK																																																																																																																																																	
2	6459.00	46.48	74.98	-28.50	65.29	35.90	12.15	66.86	0.00	---	--- Peak																																																																																																																																																	
3	7266.00	42.03	74.00	-31.97	60.36	36.47	12.71	67.51	0.00	---	--- PEAK																																																																																																																																																	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																		
1	4844.00	44.39	74.00	-29.61	65.10	34.89	10.31	65.91	0.00	---	--- PEAK																																																																																																																																																	
2	6459.00	46.91	71.32	-24.41	65.72	35.90	12.15	66.86	0.00	---	--- Peak																																																																																																																																																	
3	7266.00	41.71	74.00	-32.29	60.04	36.47	12.71	67.51	0.00	---	--- PEAK																																																																																																																																																	

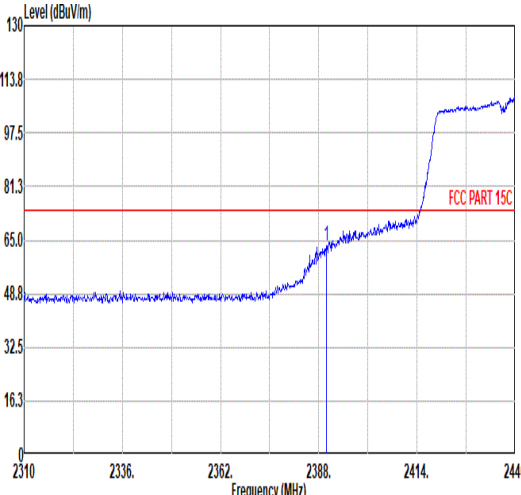
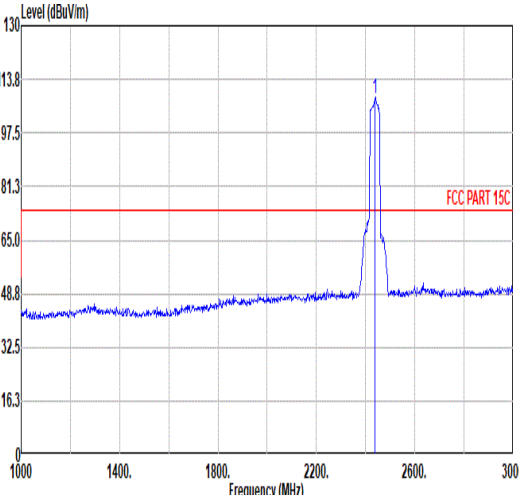
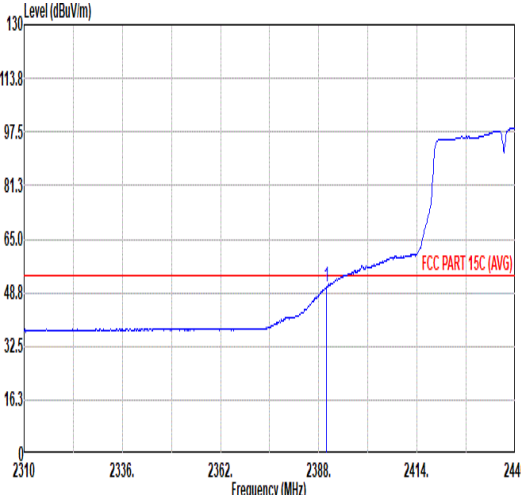
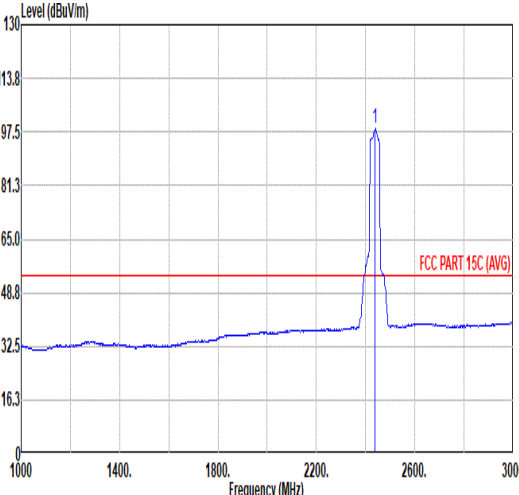


Mode	11																																																							
	Band Edge - L																																																							
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																							
ANT	1																																																							
Pol.	Horizontal																																																							
Peak	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>63.04</td><td>74.00</td><td>-10.96</td><td>54.63</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>315</td><td>281 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	63.04	74.00	-10.96	54.63	32.48	7.16	37.23	6.00	315	281 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	63.04	74.00	-10.96	54.63	32.48	7.16	37.23	6.00	315	281 PEAK																																													
Fundamental	 Level (dBuV/m) Frequency (MHz) FCC PART 15C <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>108.14</td><td>74.00</td><td>34.14</td><td>99.76</td><td>32.34</td><td>7.25</td><td>37.21</td><td>6.00</td><td>315</td><td>281 PEAK</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	108.14	74.00	34.14	99.76	32.34	7.25	37.21	6.00	315	281 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2437.00	108.14	74.00	34.14	99.76	32.34	7.25	37.21	6.00	315	281 PEAK																																													
Avg	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.32</td><td>54.00</td><td>-3.68</td><td>41.91</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>315</td><td>281 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.32	54.00	-3.68	41.91	32.48	7.16	37.23	6.00	315	281 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2389.95	50.32	54.00	-3.68	41.91	32.48	7.16	37.23	6.00	315	281 AVERAGE																																													
Fundamental	 Level (dBuV/m) Frequency (MHz) FCC PART 15C (AVG) <table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>98.51</td><td>74.00</td><td>24.51</td><td>98.13</td><td>32.34</td><td>7.25</td><td>37.21</td><td>6.00</td><td>315</td><td>281 AVERAGE</td></tr></tbody></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	98.51	74.00	24.51	98.13	32.34	7.25	37.21	6.00	315	281 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2437.00	98.51	74.00	24.51	98.13	32.34	7.25	37.21	6.00	315	281 AVERAGE																																													



Mode	11																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.68</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>50.94</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315 281 PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.68	59.50	74.00	-14.50	50.94	32.43	7.33	37.20	6.00	315 281 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.68	59.50	74.00	-14.50	50.94	32.43	7.33	37.20	6.00	315 281 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>46.27</td><td>54.00</td><td>-7.73</td><td>37.71</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315 281 AVERAGE</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	46.27	54.00	-7.73	37.71	32.43	7.33	37.20	6.00	315 281 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	46.27	54.00	-7.73	37.71	32.43	7.33	37.20	6.00	315 281 AVERAGE																																													

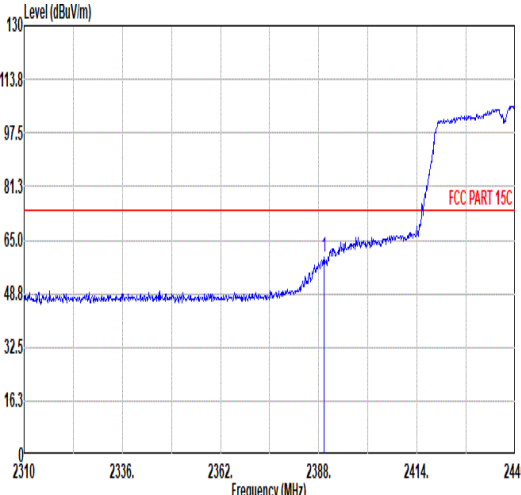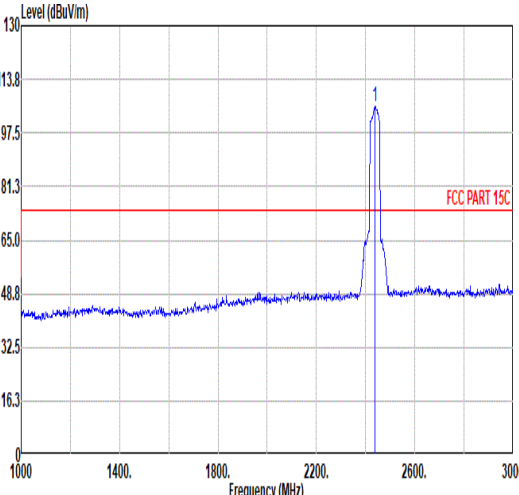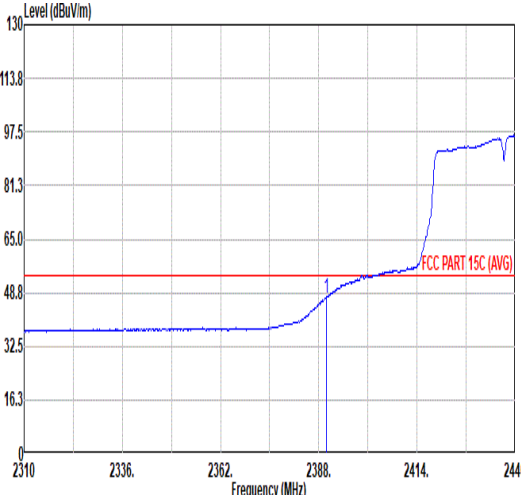
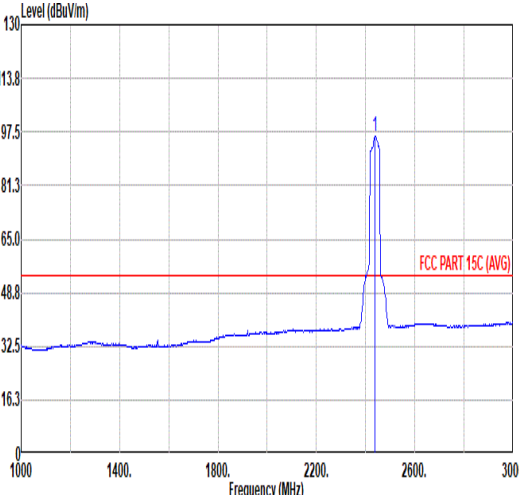


Mode	11																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Vertical						Fundamental																																																																																													
Peak																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>60.08</td><td>74.00</td><td>-13.92</td><td>51.67</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>315</td><td>32 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	60.08	74.00	-13.92	51.67	32.48	7.16	37.23	6.00	315	32 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>105.57</td><td>-----</td><td>-----</td><td>97.18</td><td>32.35</td><td>7.25</td><td>37.21</td><td>6.00</td><td>315</td><td>32 PEAK</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	105.57	-----	-----	97.18	32.35	7.25	37.21	6.00	315
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.30	60.08	74.00	-13.92	51.67	32.48	7.16	37.23	6.00	315	32 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	105.57	-----	-----	97.18	32.35	7.25	37.21	6.00	315	32 PEAK																																																																																									
Avg																																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>47.26</td><td>54.00</td><td>-6.74</td><td>38.85</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>315</td><td>32 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	47.26	54.00	-6.74	38.85	32.48	7.16	37.23	6.00	315	32 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>96.33</td><td>-----</td><td>-----</td><td>87.95</td><td>32.34</td><td>7.25</td><td>37.21</td><td>6.00</td><td>315</td><td>32 AVERAGE</td></tr></tbody></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	96.33	-----	-----	87.95	32.34	7.25	37.21	6.00	315
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	47.26	54.00	-6.74	38.85	32.48	7.16	37.23	6.00	315	32 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2437.00	96.33	-----	-----	87.95	32.34	7.25	37.21	6.00	315	32 AVERAGE																																																																																									



Mode	11																																																					
	Band Edge - R																																																					
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																					
ANT	1																																																					
Pol.	Vertical						Fundamental																																															
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.88</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>46.94</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315</td><td>32 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	55.51	74.00	-18.49	46.94	32.44	7.33	37.20	6.00	315	32 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2484.88	55.51	74.00	-18.49	46.94	32.44	7.33	37.20	6.00	315	32 PEAK																																											
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>43.41</td><td>54.00</td><td>-10.59</td><td>34.85</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>315</td><td>32 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.41	54.00	-10.59	34.85	32.43	7.33	37.20	6.00	315	32 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2483.50	43.41	54.00	-10.59	34.85	32.43	7.33	37.20	6.00	315	32 AVERAGE																																											

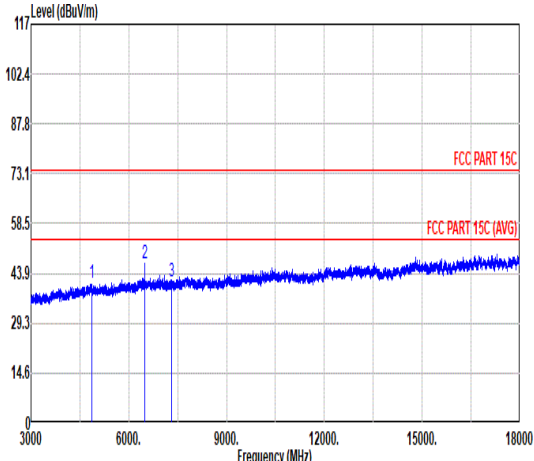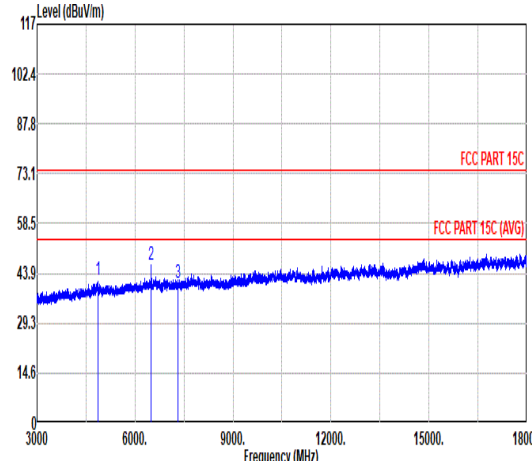

Mode	11																																																																																																																																																																	
	Harmonic																																																																																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																																																																																	
ANT	1																																																																																																																																																																	
Pol.	Horizontal											Vertical																																																																																																																																																						
Peak Avg																																																																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.17</td><td>74.00</td><td>-32.83</td><td>61.93</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>46.93</td><td>78.00</td><td>-31.07</td><td>65.77</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.39</td><td>74.00</td><td>-32.61</td><td>59.74</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	41.17	74.00	-32.83	61.93	34.90	10.34	66.00	0.00	---	---	PEAK	2	6499.50	46.93	78.00	-31.07	65.77	35.90	12.16	66.90	0.00	---	---	Peak	3	7311.00	41.39	74.00	-32.61	59.74	36.42	12.78	67.55	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>42.05</td><td>74.00</td><td>-31.95</td><td>62.81</td><td>34.90</td><td>10.34</td><td>66.00</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6499.50</td><td>46.26</td><td>75.00</td><td>-28.83</td><td>65.10</td><td>35.90</td><td>12.16</td><td>66.90</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>59.57</td><td>36.42</td><td>12.78</td><td>67.55</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	42.05	74.00	-31.95	62.81	34.90	10.34	66.00	0.00	---	---	PEAK	2	6499.50	46.26	75.00	-28.83	65.10	35.90	12.16	66.90	0.00	---	---	Peak	3	7311.00	41.22	74.00	-32.78	59.57	36.42	12.78	67.55	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																								
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	41.17	74.00	-32.83	61.93	34.90	10.34	66.00	0.00	---	---	PEAK																																																																																																																																																						
2	6499.50	46.93	78.00	-31.07	65.77	35.90	12.16	66.90	0.00	---	---	Peak																																																																																																																																																						
3	7311.00	41.39	74.00	-32.61	59.74	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4874.00	42.05	74.00	-31.95	62.81	34.90	10.34	66.00	0.00	---	---	PEAK																																																																																																																																																						
2	6499.50	46.26	75.00	-28.83	65.10	35.90	12.16	66.90	0.00	---	---	Peak																																																																																																																																																						
3	7311.00	41.22	74.00	-32.78	59.57	36.42	12.78	67.55	0.00	---	---	PEAK																																																																																																																																																						







Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal										Fundamental																																																																																								
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>52.29</td><td>74.00</td><td>-21.71</td><td>43.88</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>311 277 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	52.29	74.00	-21.71	43.88	32.48	7.16	37.23	6.00	311 277 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>106.41</td><td>-----</td><td>-----</td><td>98.03</td><td>32.33</td><td>7.26</td><td>37.21</td><td>6.00</td><td>311 277 PEAK</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	106.41	-----	-----	98.03	32.33	7.26	37.21	6.00	311 277 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.56	52.29	74.00	-21.71	43.88	32.48	7.16	37.23	6.00	311 277 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	106.41	-----	-----	98.03	32.33	7.26	37.21	6.00	311 277 PEAK																																																																																									
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>33.43</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>311 277 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.56	41.84	54.00	-12.16	33.43	32.48	7.16	37.23	6.00	311 277 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2452.00</td><td>97.02</td><td>-----</td><td>-----</td><td>88.66</td><td>32.30</td><td>7.27</td><td>37.21</td><td>6.00</td><td>311 277 AVERAGE</td></tr></tbody></table>		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	97.02	-----	-----	88.66	32.30	7.27	37.21	6.00	311 277 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.56	41.84	54.00	-12.16	33.43	32.48	7.16	37.23	6.00	311 277 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	97.02	-----	-----	88.66	32.30	7.27	37.21	6.00	311 277 AVERAGE																																																																																									





Mode	12																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>62.05</td><td>74.00</td><td>-11.95</td><td>53.49</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>311 277 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	62.05	74.00	-11.95	53.49	32.43	7.33	37.20	6.00	311 277 PEAK	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.56	62.05	74.00	-11.95	53.49	32.43	7.33	37.20	6.00	311 277 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.66</td><td>54.00</td><td>-3.34</td><td>42.10</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>311 277 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.66	54.00	-3.34	42.10	32.43	7.33	37.20	6.00	311 277 AVERAGE	Blank				
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	50.66	54.00	-3.34	42.10	32.43	7.33	37.20	6.00	311 277 AVERAGE																																													

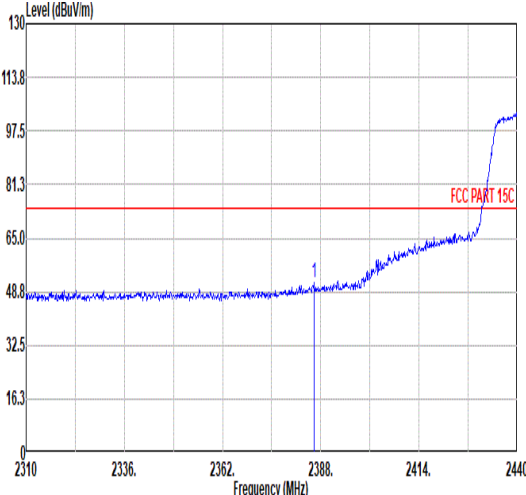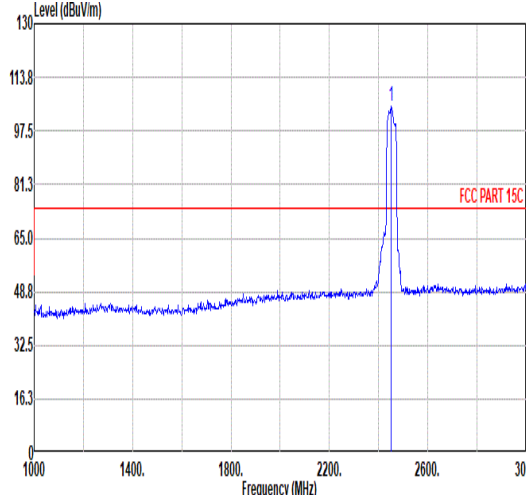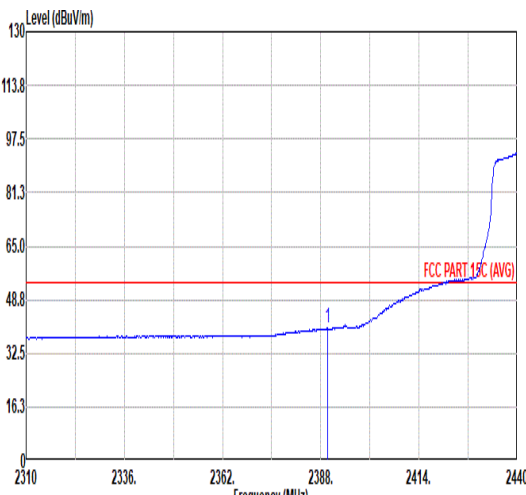
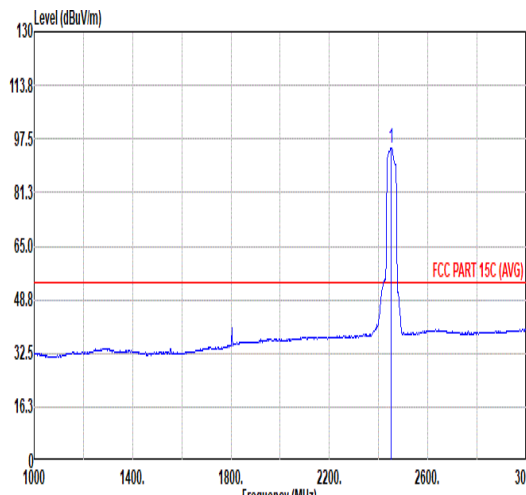


Mode	12																																																						
	Band Edge - L																																																						
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																						
ANT	1																																																						
Pol.	Vertical																																																						
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.18</td><td>51.33</td><td>74.00</td><td>-22.67</td><td>42.93</td><td>32.47</td><td>7.16</td><td>37.23</td><td>6.00</td><td>317 28 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.18	51.33	74.00	-22.67	42.93	32.47	7.16	37.23	6.00	317 28 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2386.18	51.33	74.00	-22.67	42.93	32.47	7.16	37.23	6.00	317 28 PEAK																																													
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>104.79</td><td>-----</td><td>-----</td><td>96.43</td><td>32.30</td><td>7.27</td><td>37.21</td><td>6.00</td><td>317 28 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	104.79	-----	-----	96.43	32.30	7.27	37.21	6.00	317 28 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	104.79	-----	-----	96.43	32.30	7.27	37.21	6.00	317 28 PEAK																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>40.04</td><td>54.00</td><td>-13.96</td><td>31.63</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>317 28 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	40.04	54.00	-13.96	31.63	32.48	7.16	37.23	6.00	317 28 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.82	40.04	54.00	-13.96	31.63	32.48	7.16	37.23	6.00	317 28 AVERAGE																																													
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>94.84</td><td>-----</td><td>-----</td><td>86.48</td><td>32.30</td><td>7.27</td><td>37.21</td><td>6.00</td><td>317 28 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	94.84	-----	-----	86.48	32.30	7.27	37.21	6.00	317 28 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2452.00	94.84	-----	-----	86.48	32.30	7.27	37.21	6.00	317 28 AVERAGE																																													



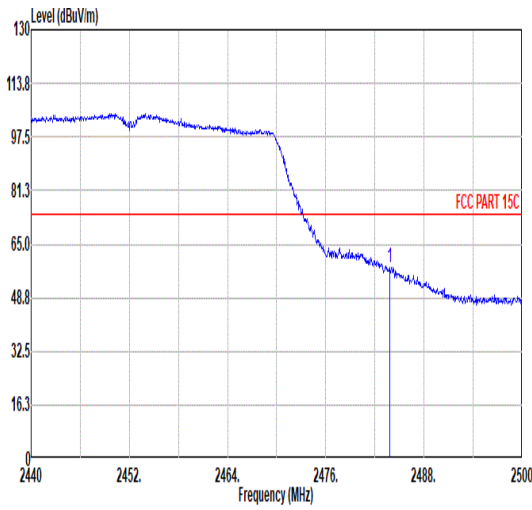
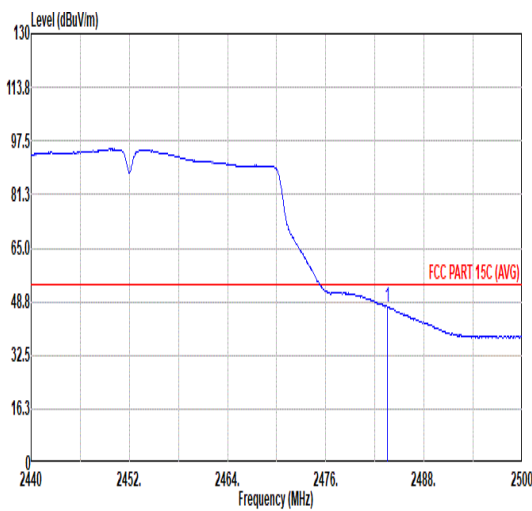


Mode	12																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.80</td><td>57.97</td><td>74.00</td><td>-16.03</td><td>49.40</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>317</td><td>28</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.80	57.97	74.00	-16.03	49.40	32.44	7.33	37.20	6.00	317	28	PEAK	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.80	57.97	74.00	-16.03	49.40	32.44	7.33	37.20	6.00	317	28	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.30</td><td>54.00</td><td>-6.70</td><td>38.74</td><td>32.43</td><td>7.33</td><td>37.20</td><td>6.00</td><td>317</td><td>28</td><td>AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.30	54.00	-6.70	38.74	32.43	7.33	37.20	6.00	317	28	AVERAGE	Blank					
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2483.50	47.30	54.00	-6.70	38.74	32.43	7.33	37.20	6.00	317	28	AVERAGE																																												

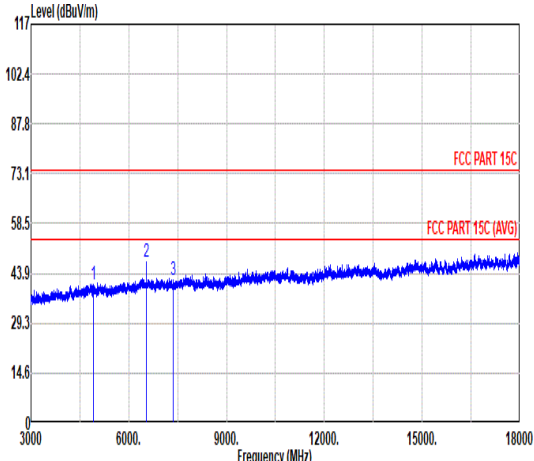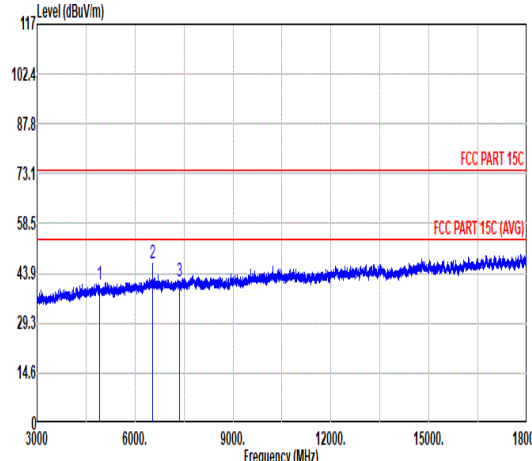

Mode	12																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																																													
ANT	1																																																																																																																																																													
Pol.	Horizontal									Vertical																																																																																																																																																				
Peak Avg																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>40.72</td><td>74.00</td><td>-33.28</td><td>61.56</td><td>34.89</td><td>10.37</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6538.50</td><td>47.42</td><td>76.30</td><td>-28.88</td><td>66.19</td><td>35.98</td><td>12.18</td><td>66.93</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7356.00</td><td>41.75</td><td>74.00</td><td>-32.25</td><td>60.03</td><td>36.46</td><td>12.84</td><td>67.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4904.00	40.72	74.00	-33.28	61.56	34.89	10.37	66.10	0.00	---	---	PEAK	2	6538.50	47.42	76.30	-28.88	66.19	35.98	12.18	66.93	0.00	---	---	Peak	3	7356.00	41.75	74.00	-32.25	60.03	36.46	12.84	67.58	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4904.00</td><td>40.82</td><td>74.00</td><td>-33.18</td><td>61.66</td><td>34.89</td><td>10.37</td><td>66.10</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6538.50</td><td>46.62</td><td>72.06</td><td>-25.44</td><td>65.39</td><td>35.98</td><td>12.18</td><td>66.93</td><td>0.00</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>7356.00</td><td>41.53</td><td>74.00</td><td>-32.47</td><td>59.81</td><td>36.46</td><td>12.84</td><td>67.58</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>										Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4904.00	40.82	74.00	-33.18	61.66	34.89	10.37	66.10	0.00	---	---	PEAK	2	6538.50	46.62	72.06	-25.44	65.39	35.98	12.18	66.93	0.00	---	---	Peak	3	7356.00	41.53	74.00	-32.47	59.81	36.46	12.84	67.58	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	4904.00	40.72	74.00	-33.28	61.56	34.89	10.37	66.10	0.00	---	---	PEAK																																																																																																																																																		
2	6538.50	47.42	76.30	-28.88	66.19	35.98	12.18	66.93	0.00	---	---	Peak																																																																																																																																																		
3	7356.00	41.75	74.00	-32.25	60.03	36.46	12.84	67.58	0.00	---	---	PEAK																																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	Remark																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																				
1	4904.00	40.82	74.00	-33.18	61.66	34.89	10.37	66.10	0.00	---	---	PEAK																																																																																																																																																		
2	6538.50	46.62	72.06	-25.44	65.39	35.98	12.18	66.93	0.00	---	---	Peak																																																																																																																																																		
3	7356.00	41.53	74.00	-32.47	59.81	36.46	12.84	67.58	0.00	---	---	PEAK																																																																																																																																																		

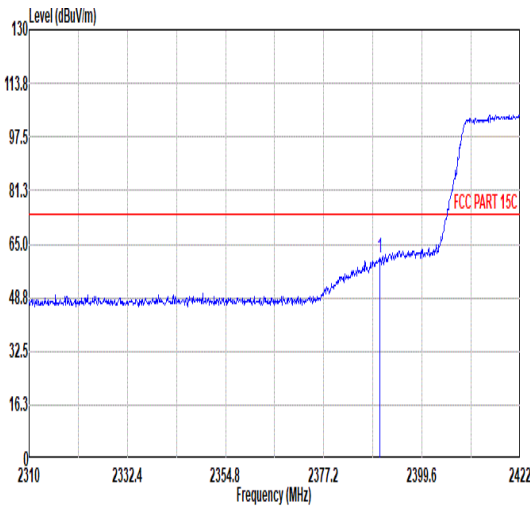
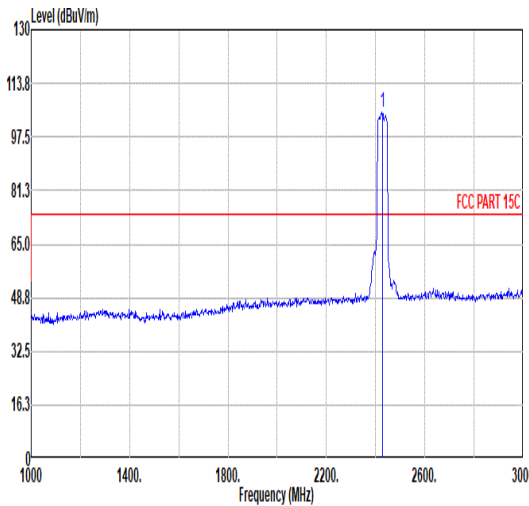
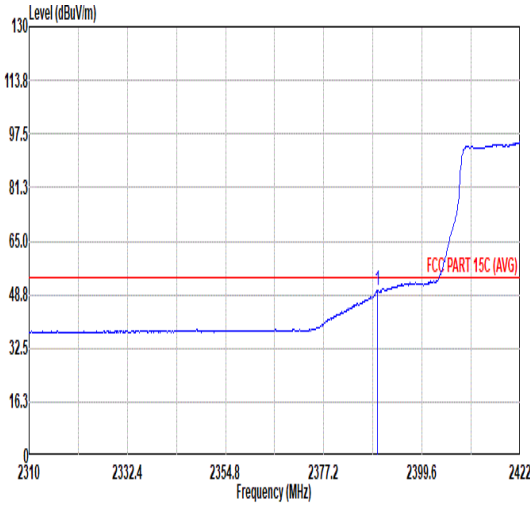
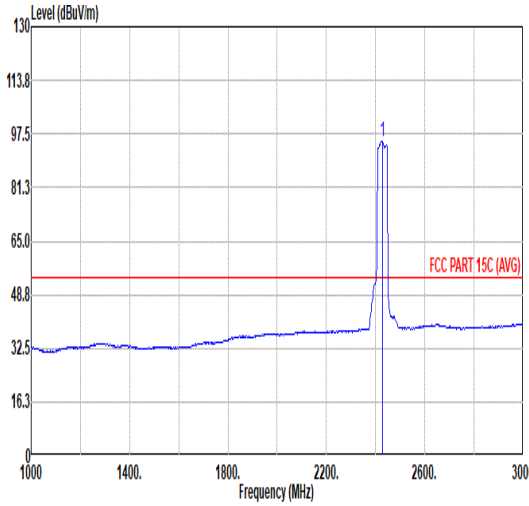


Mode	13																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.97</td><td>61.00</td><td>74.00</td><td>-13.00</td><td>52.59</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>319 274 PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.97	61.00	74.00	-13.00	52.59	32.48	7.16	37.23	6.00	319 274 PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2427.00</td><td>105.04</td><td>-----</td><td>-----</td><td>96.64</td><td>32.40</td><td>7.22</td><td>37.22</td><td>6.00</td><td>319 274 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	105.04	-----	-----	96.64	32.40	7.22	37.22	6.00	319 274 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.97	61.00	74.00	-13.00	52.59	32.48	7.16	37.23	6.00	319 274 PEAK																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2427.00	105.04	-----	-----	96.64	32.40	7.22	37.22	6.00	319 274 PEAK																																																																																									
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.52</td><td>50.00</td><td>54.00</td><td>-3.92</td><td>41.67</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>319 274 AVERAGE</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.52	50.00	54.00	-3.92	41.67	32.48	7.16	37.23	6.00	319 274 AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2427.00</td><td>95.39</td><td>-----</td><td>-----</td><td>86.99</td><td>32.40</td><td>7.22</td><td>37.22</td><td>6.00</td><td>319 274 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	95.39	-----	-----	86.99	32.40	7.22	37.22	6.00	319 274 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.52	50.00	54.00	-3.92	41.67	32.48	7.16	37.23	6.00	319 274 AVERAGE																																																																																									
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2427.00	95.39	-----	-----	86.99	32.40	7.22	37.22	6.00	319 274 AVERAGE																																																																																									



Mode	13																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																							
ANT	1																																																							
Pol.	Horizontal										Fundamental																																													
Peak	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.87</td><td>51.55</td><td>74.00</td><td>-22.45</td><td>42.98</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>319</td><td>274 PEAK</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.87	51.55	74.00	-22.45	42.98	32.44	7.33	37.20	6.00	319	274 PEAK	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.87	51.55	74.00	-22.45	42.98	32.44	7.33	37.20	6.00	319	274 PEAK																																													
Avg	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2484.32</td><td>40.51</td><td>54.00</td><td>-13.49</td><td>31.94</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>319</td><td>274 AVERAGE</td></tr></tbody></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.32	40.51	54.00	-13.49	31.94	32.44	7.33	37.20	6.00	319	274 AVERAGE	Blank
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2484.32	40.51	54.00	-13.49	31.94	32.44	7.33	37.20	6.00	319	274 AVERAGE																																													

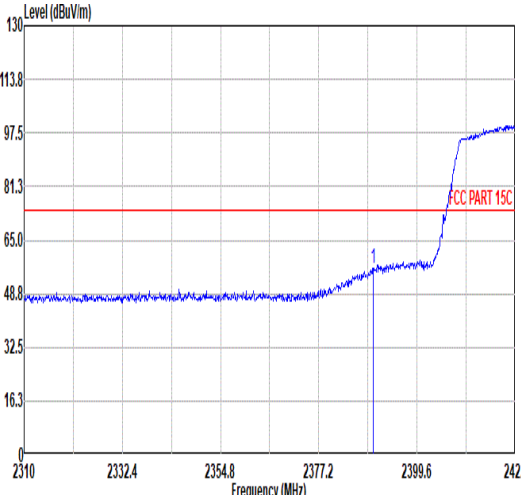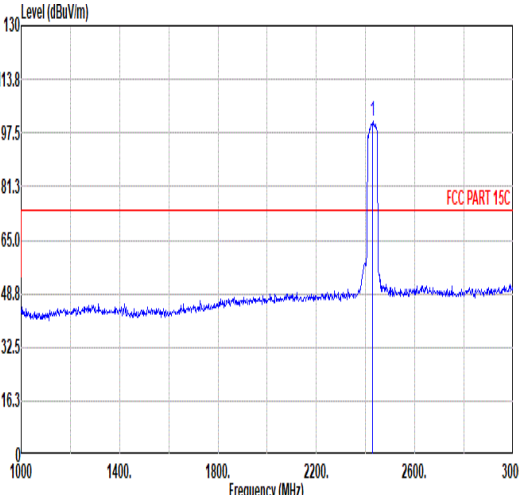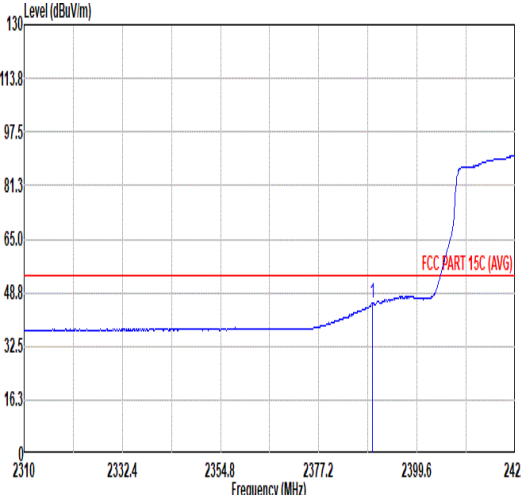
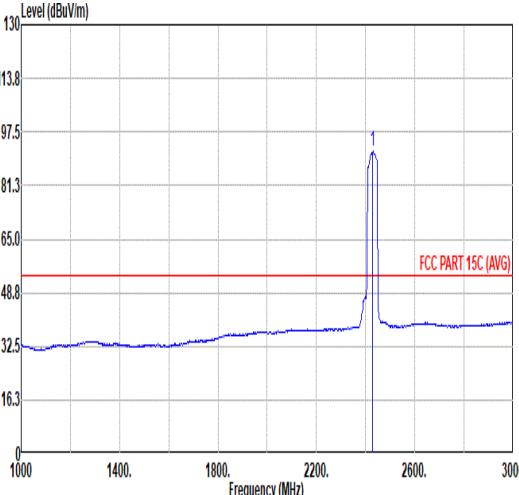


Mode	13																																																																																																				
	Band Edge - L																																																																																																				
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																																																																				
ANT	1																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.63</td><td>56.46</td><td>74.00</td><td>-17.54</td><td>48.05</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>279</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	56.46	74.00	-17.54	48.05	32.48	7.16	37.23	6.00	279	0 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>100.86</td><td>-----</td><td>-----</td><td>92.46</td><td>32.38</td><td>7.23</td><td>37.21</td><td>6.00</td><td>279</td><td>0 PEAK</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	100.86	-----	-----	92.46	32.38	7.23	37.21	6.00	279
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.63	56.46	74.00	-17.54	48.05	32.48	7.16	37.23	6.00	279	0 PEAK																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2427.00	100.86	-----	-----	92.46	32.38	7.23	37.21	6.00	279	0 PEAK																																																																																										
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.41</td><td>45.79</td><td>54.00</td><td>-8.21</td><td>37.38</td><td>32.48</td><td>7.16</td><td>37.23</td><td>6.00</td><td>279</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.41	45.79	54.00	-8.21	37.38	32.48	7.16	37.23	6.00	279	0 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2427.00</td><td>91.50</td><td>-----</td><td>-----</td><td>83.10</td><td>32.38</td><td>7.23</td><td>37.21</td><td>6.00</td><td>279</td><td>0 AVERAGE</td></tr></tbody></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2427.00	91.50	-----	-----	83.10	32.38	7.23	37.21	6.00	279
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2389.41	45.79	54.00	-8.21	37.38	32.48	7.16	37.23	6.00	279	0 AVERAGE																																																																																										
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2427.00	91.50	-----	-----	83.10	32.38	7.23	37.21	6.00	279	0 AVERAGE																																																																																										





Mode	13																																																							
	Band Edge - R																																																							
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.85</td><td>50.67</td><td>74.00</td><td>-23.33</td><td>42.07</td><td>32.46</td><td>7.34</td><td>37.20</td><td>6.00</td><td>279</td><td>0 PEAK</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2488.85	50.67	74.00	-23.33	42.07	32.46	7.34	37.20	6.00	279	0 PEAK	Blank				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2488.85	50.67	74.00	-23.33	42.07	32.46	7.34	37.20	6.00	279	0 PEAK																																													
Avg	<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2484.71</td><td>39.39</td><td>54.00</td><td>-14.61</td><td>30.82</td><td>32.44</td><td>7.33</td><td>37.20</td><td>6.00</td><td>279</td><td>0 AVERAGE</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2484.71	39.39	54.00	-14.61	30.82	32.44	7.33	37.20	6.00	279	0 AVERAGE	Blank				
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																														
1	2484.71	39.39	54.00	-14.61	30.82	32.44	7.33	37.20	6.00	279	0 AVERAGE																																													

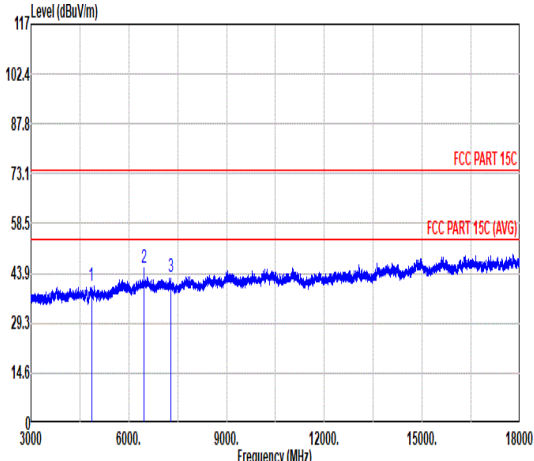
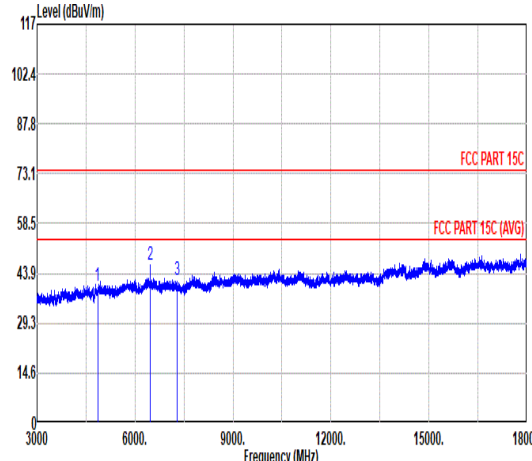


Mode	13																																																																																																																																																																
	Harmonic																																																																																																																																																																
	2400-2483.5_802.11n HT40_CH04_2427MHz																																																																																																																																																																
ANT	1																																																																																																																																																																
Pol.	Horizontal										Vertical																																																																																																																																																						
Peak Avg																																																																																																																																																																	
	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4854.00</td><td>40.23</td><td>74.00</td><td>-33.77</td><td>60.93</td><td>34.90</td><td>10.32</td><td>65.92</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6472.50</td><td>45.68</td><td>73.17</td><td>-27.49</td><td>64.50</td><td>35.90</td><td>12.15</td><td>66.87</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7281.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>61.20</td><td>36.44</td><td>12.73</td><td>67.52</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4854.00	40.23	74.00	-33.77	60.93	34.90	10.32	65.92	0.00	---	--- PEAK	2	6472.50	45.68	73.17	-27.49	64.50	35.90	12.15	66.87	0.00	---	--- Peak	3	7281.00	42.85	74.00	-31.15	61.20	36.44	12.73	67.52	0.00	---	--- PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4854.00</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>61.05</td><td>34.90</td><td>10.32</td><td>65.92</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr><tr><td>2</td><td>6472.50</td><td>46.37</td><td>72.37</td><td>-26.00</td><td>65.19</td><td>35.90</td><td>12.15</td><td>66.87</td><td>0.00</td><td>---</td><td>--- Peak</td></tr><tr><td>3</td><td>7281.00</td><td>42.09</td><td>74.00</td><td>-31.91</td><td>60.44</td><td>36.44</td><td>12.73</td><td>67.52</td><td>0.00</td><td>---</td><td>--- PEAK</td></tr></table>											Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4854.00	40.35	74.00	-33.65	61.05	34.90	10.32	65.92	0.00	---	--- PEAK	2	6472.50	46.37	72.37	-26.00	65.19	35.90	12.15	66.87	0.00	---	--- Peak	3	7281.00	42.09	74.00	-31.91	60.44	36.44	12.73	67.52	0.00	---	--- PEAK
			Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4854.00	40.23	74.00	-33.77	60.93	34.90	10.32	65.92	0.00	---	--- PEAK																																																																																																																																																						
2	6472.50	45.68	73.17	-27.49	64.50	35.90	12.15	66.87	0.00	---	--- Peak																																																																																																																																																						
3	7281.00	42.85	74.00	-31.15	61.20	36.44	12.73	67.52	0.00	---	--- PEAK																																																																																																																																																						
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																						
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																							
1	4854.00	40.35	74.00	-33.65	61.05	34.90	10.32	65.92	0.00	---	--- PEAK																																																																																																																																																						
2	6472.50	46.37	72.37	-26.00	65.19	35.90	12.15	66.87	0.00	---	--- Peak																																																																																																																																																						
3	7281.00	42.09	74.00	-31.91	60.44	36.44	12.73	67.52	0.00	---	--- PEAK																																																																																																																																																						

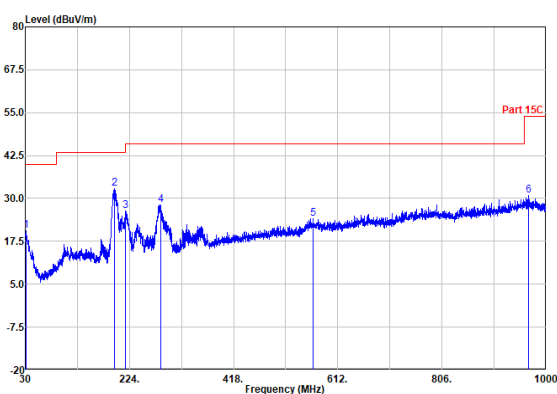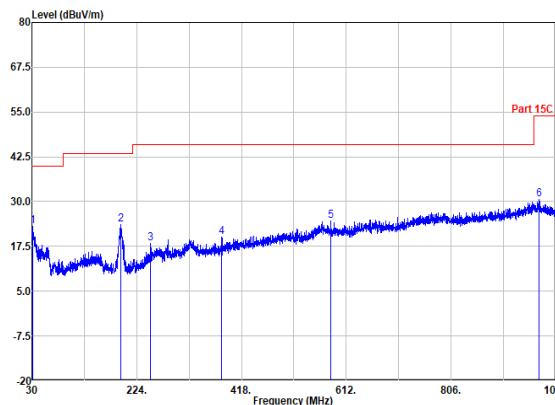

Mode	12																																																																																																																																																																																																											
	LF																																																																																																																																																																																																											
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																																																																																																																											
ANT	1																																																																																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																																																																																					
QP																																																																																																																																																																																																												
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>31.46</td><td>20.68</td><td>40.00</td><td>-19.32</td><td>28.55</td><td>24.56</td><td>0.37</td><td>32.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>196.60</td><td>32.79</td><td>43.50</td><td>-10.71</td><td>49.09</td><td>14.91</td><td>1.55</td><td>32.76</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>216.48</td><td>26.38</td><td>46.00</td><td>-19.62</td><td>42.47</td><td>15.08</td><td>1.63</td><td>32.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>281.72</td><td>28.18</td><td>46.00</td><td>-17.82</td><td>40.16</td><td>19.02</td><td>1.85</td><td>32.85</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>565.93</td><td>24.17</td><td>46.00</td><td>-21.83</td><td>28.33</td><td>26.49</td><td>2.60</td><td>33.25</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>966.54</td><td>30.99</td><td>54.00</td><td>-23.01</td><td>27.82</td><td>31.30</td><td>3.36</td><td>31.49</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	31.46	20.68	40.00	-19.32	28.55	24.56	0.37	32.80	---	---	Peak	2	196.60	32.79	43.50	-10.71	49.09	14.91	1.55	32.76	---	---	Peak	3	216.48	26.38	46.00	-19.62	42.47	15.08	1.63	32.80	---	---	Peak	4	281.72	28.18	46.00	-17.82	40.16	19.02	1.85	32.85	---	---	Peak	5	565.93	24.17	46.00	-21.83	28.33	26.49	2.60	33.25	---	---	Peak	6	966.54	30.99	54.00	-23.01	27.82	31.30	3.36	31.49	---	---	Peak	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>30.97</td><td>23.16</td><td>40.00</td><td>-16.84</td><td>30.74</td><td>24.86</td><td>0.36</td><td>32.80</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>194.17</td><td>23.73</td><td>43.50</td><td>-19.77</td><td>40.10</td><td>14.84</td><td>1.54</td><td>32.75</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>249.95</td><td>18.45</td><td>46.00</td><td>-27.55</td><td>30.90</td><td>18.70</td><td>1.74</td><td>32.89</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>381.63</td><td>19.99</td><td>46.00</td><td>-26.01</td><td>29.67</td><td>21.14</td><td>2.14</td><td>32.96</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>582.66</td><td>24.52</td><td>46.00</td><td>-21.48</td><td>29.16</td><td>26.01</td><td>2.63</td><td>33.28</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>967.99</td><td>30.59</td><td>54.00</td><td>-23.41</td><td>27.41</td><td>31.29</td><td>3.36</td><td>31.47</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	30.97	23.16	40.00	-16.84	30.74	24.86	0.36	32.80	---	---	Peak	2	194.17	23.73	43.50	-19.77	40.10	14.84	1.54	32.75	---	---	Peak	3	249.95	18.45	46.00	-27.55	30.90	18.70	1.74	32.89	---	---	Peak	4	381.63	19.99	46.00	-26.01	29.67	21.14	2.14	32.96	---	---	Peak	5	582.66	24.52	46.00	-21.48	29.16	26.01	2.63	33.28	---	---	Peak	6	967.99	30.59	54.00	-23.41	27.41	31.29	3.36	31.47	---	---	Peak
		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	31.46	20.68	40.00	-19.32	28.55	24.56	0.37	32.80	---	---	Peak																																																																																																																																																																																																	
2	196.60	32.79	43.50	-10.71	49.09	14.91	1.55	32.76	---	---	Peak																																																																																																																																																																																																	
3	216.48	26.38	46.00	-19.62	42.47	15.08	1.63	32.80	---	---	Peak																																																																																																																																																																																																	
4	281.72	28.18	46.00	-17.82	40.16	19.02	1.85	32.85	---	---	Peak																																																																																																																																																																																																	
5	565.93	24.17	46.00	-21.83	28.33	26.49	2.60	33.25	---	---	Peak																																																																																																																																																																																																	
6	966.54	30.99	54.00	-23.01	27.82	31.30	3.36	31.49	---	---	Peak																																																																																																																																																																																																	
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																		
1	30.97	23.16	40.00	-16.84	30.74	24.86	0.36	32.80	---	---	Peak																																																																																																																																																																																																	
2	194.17	23.73	43.50	-19.77	40.10	14.84	1.54	32.75	---	---	Peak																																																																																																																																																																																																	
3	249.95	18.45	46.00	-27.55	30.90	18.70	1.74	32.89	---	---	Peak																																																																																																																																																																																																	
4	381.63	19.99	46.00	-26.01	29.67	21.14	2.14	32.96	---	---	Peak																																																																																																																																																																																																	
5	582.66	24.52	46.00	-21.48	29.16	26.01	2.63	33.28	---	---	Peak																																																																																																																																																																																																	
6	967.99	30.59	54.00	-23.41	27.41	31.29	3.36	31.47	---	---	Peak																																																																																																																																																																																																	

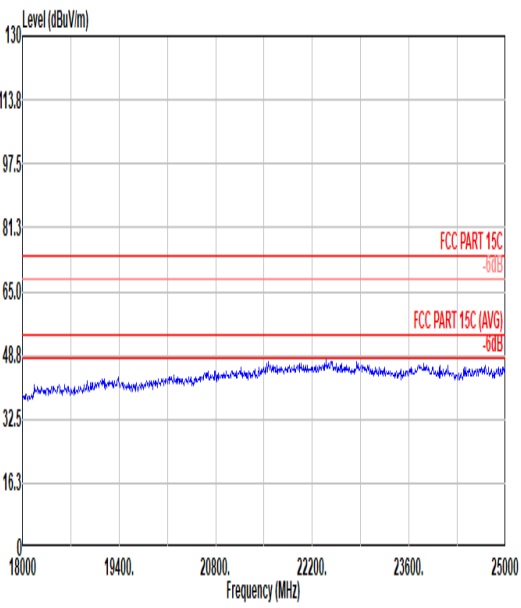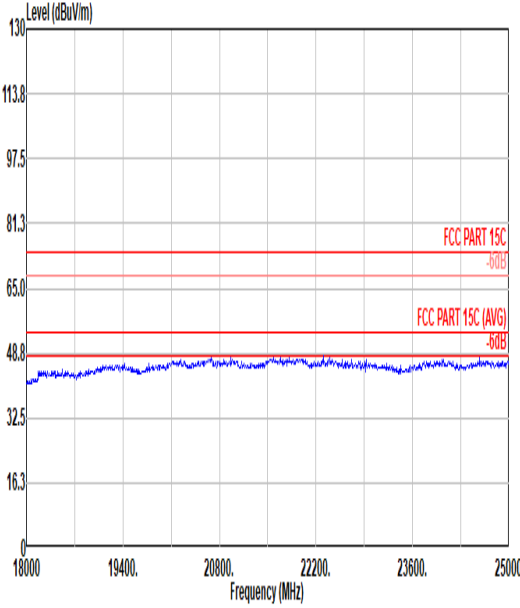


Mode	12	
	18-25G	
	2400-2483.5_802.11n HT40_CH09_2452MHz	
ANT	1	
Pol.	Horizontal	Vertical
Peak Avg		

Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.18	-	-	10Hz
802.11g	98.26	-	-	10Hz
802.11n HT20	98.14	-	-	10Hz
802.11n HT40	94.89	0.942	1.062	1.1KHz

802.11b

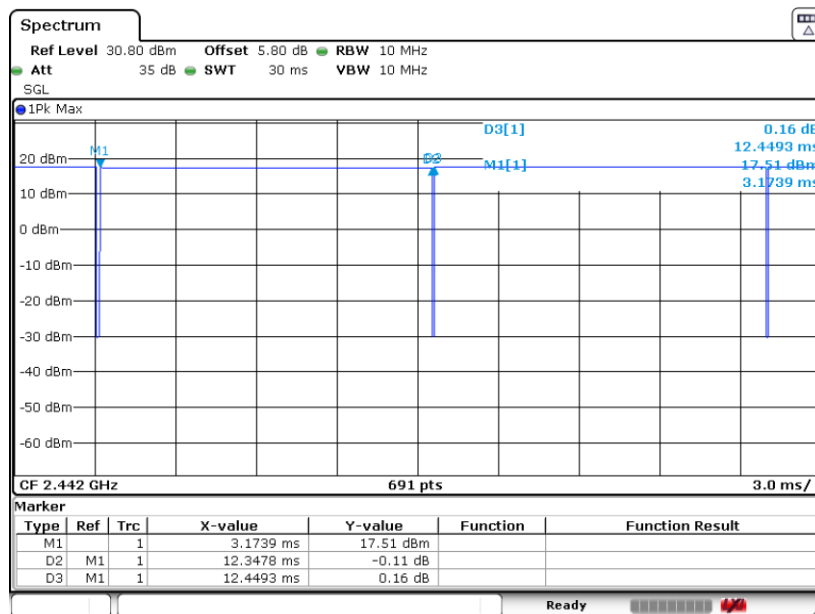




802.11g

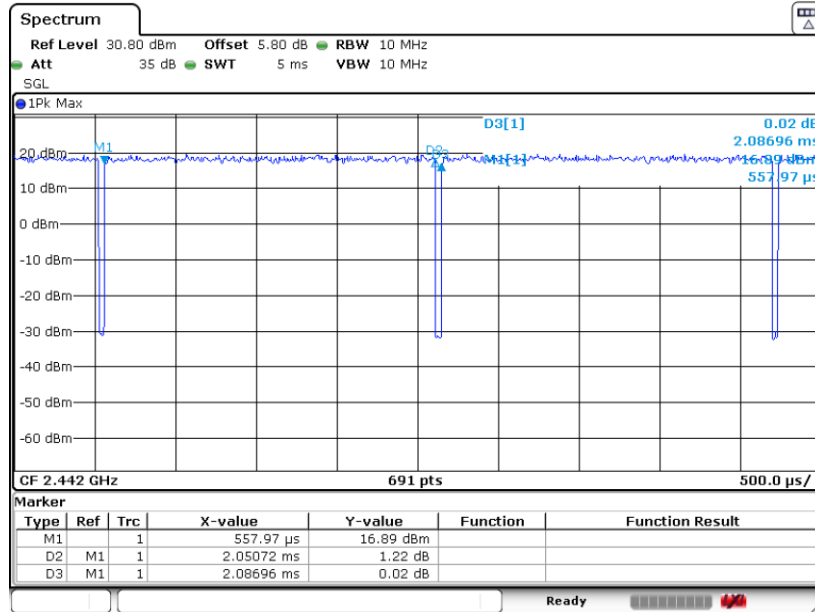

802.11n HT20

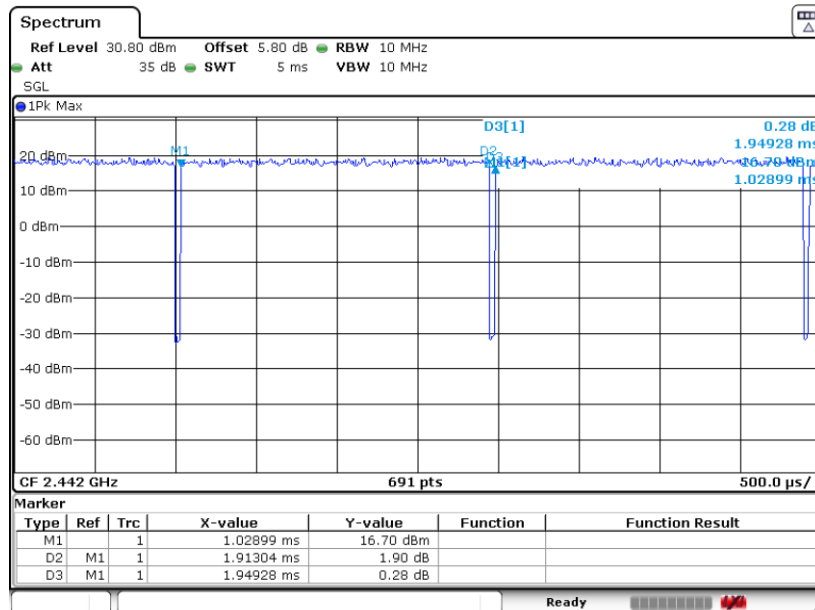

802.11n HT40

