






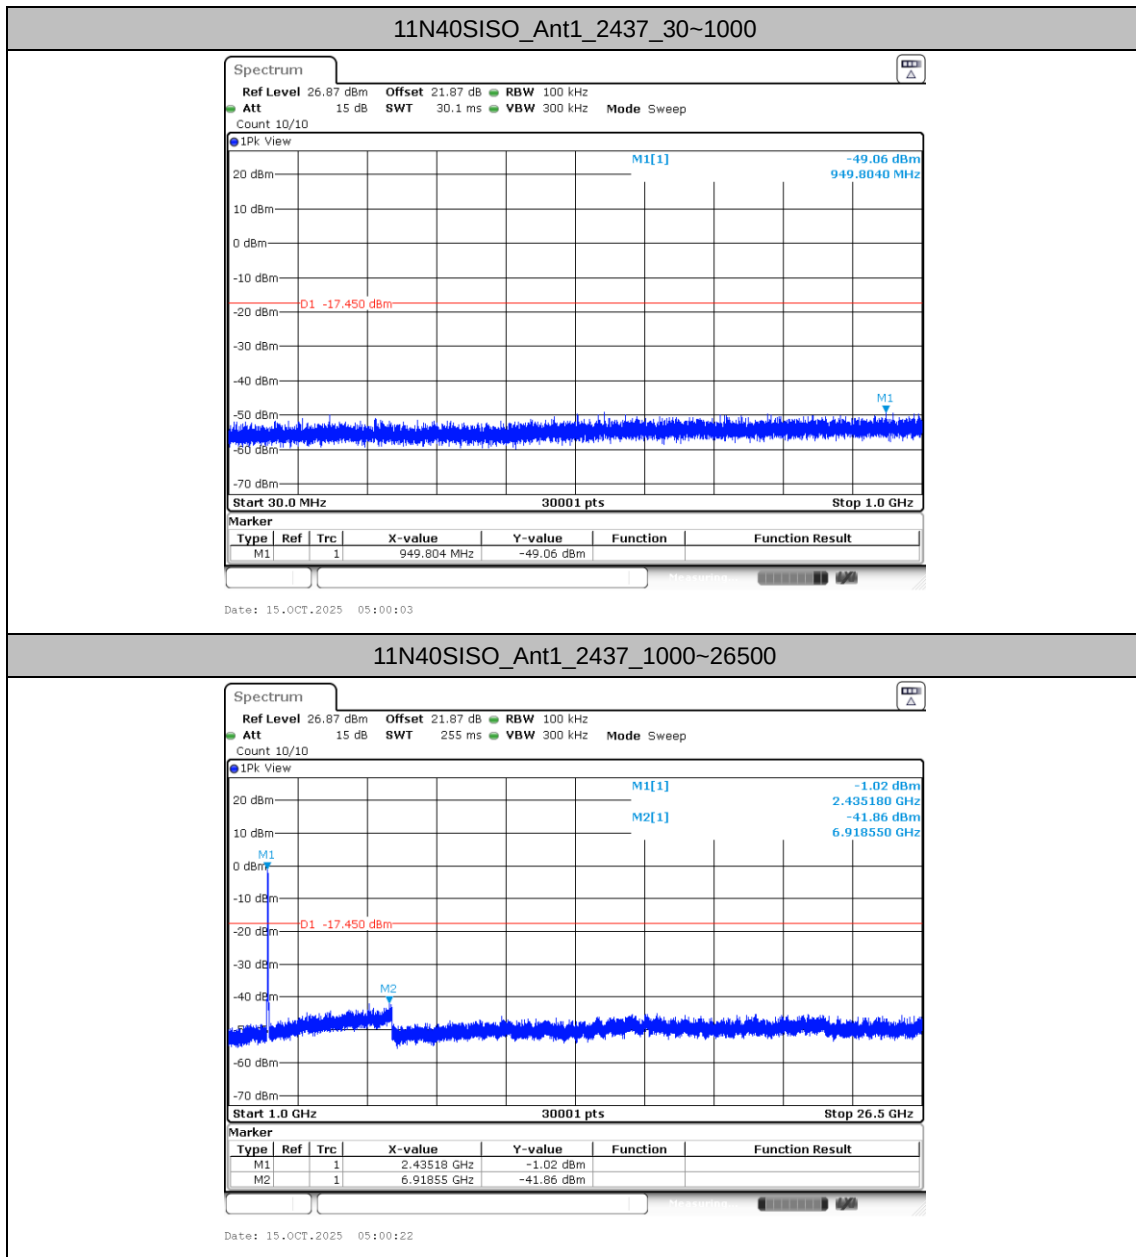

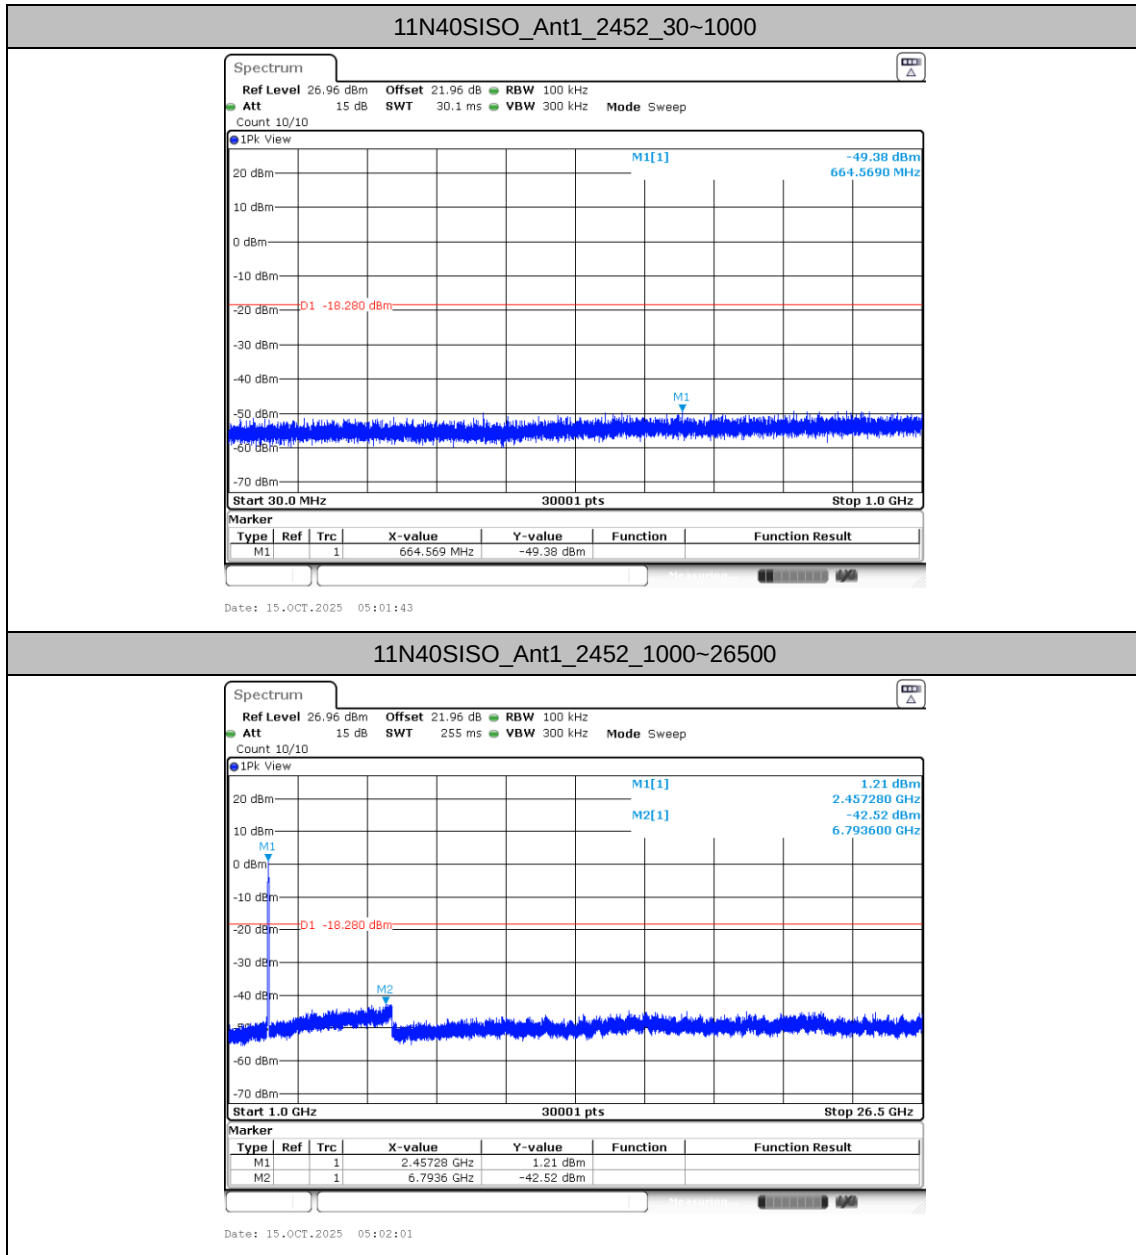

Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

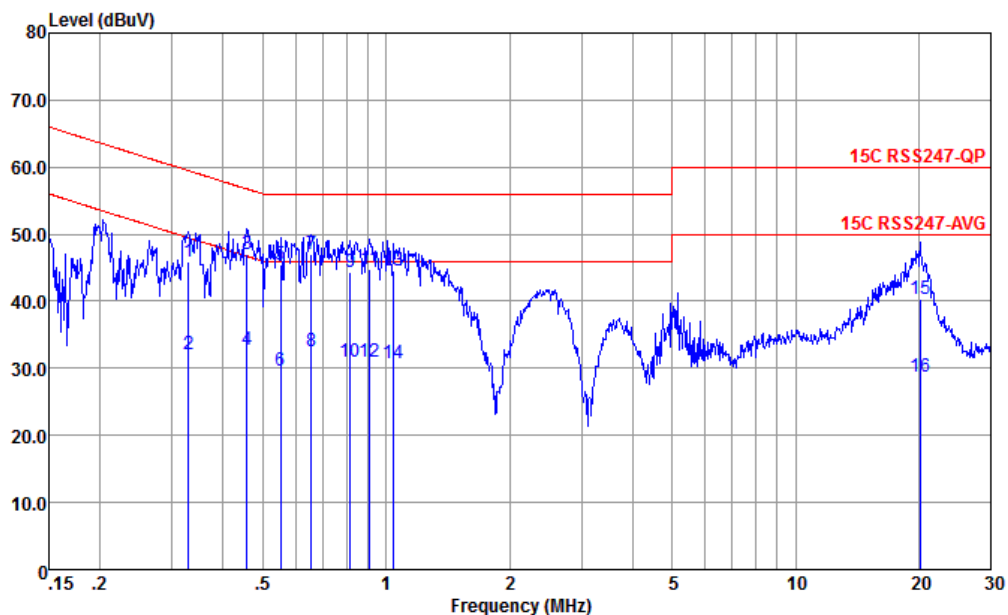


Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.329	46.01	-13.48	59.49	35.20	0.33	10.48	QP
2	0.329	32.01	-17.48	49.49	21.20	0.33	10.48	Average
3	0.456	47.00	-9.76	56.76	36.20	0.36	10.44	QP
4	0.456	32.70	-14.06	46.76	21.90	0.36	10.44	Average
5	0.552	45.35	-10.65	56.00	34.59	0.37	10.39	QP
6	0.552	29.65	-16.35	46.00	18.89	0.37	10.39	Average
7 *	0.658	46.93	-9.07	56.00	36.20	0.38	10.35	QP
8	0.658	32.63	-13.37	46.00	21.90	0.38	10.35	Average
9	0.817	44.30	-11.70	56.00	33.60	0.39	10.31	QP
10	0.817	30.90	-15.10	46.00	20.20	0.39	10.31	Average
11	0.914	44.88	-11.12	56.00	34.20	0.39	10.29	QP
12	0.914	30.88	-15.12	46.00	20.20	0.39	10.29	Average
13	1.043	44.56	-11.44	56.00	33.90	0.39	10.27	QP
14	1.043	30.86	-15.14	46.00	20.20	0.39	10.27	Average
15	20.162	40.34	-19.66	60.00	28.90	1.13	10.31	QP
16	20.162	28.74	-21.26	50.00	17.30	1.13	10.31	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

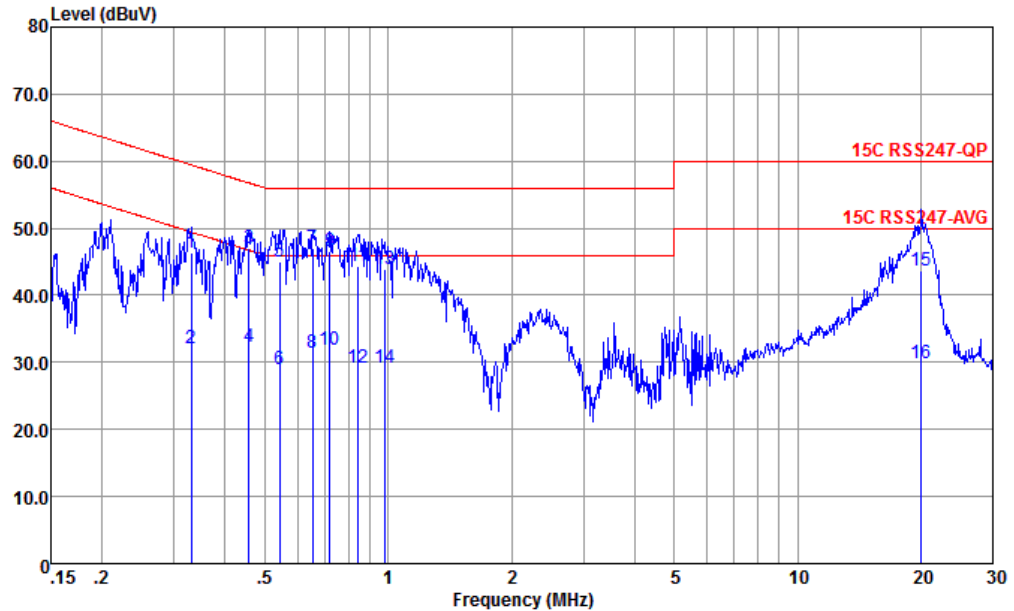

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.330	46.28	-13.16	59.44	35.50	0.30	10.48	QP
2	0.330	31.98	-17.46	49.44	21.20	0.30	10.48	Average
3	0.456	46.99	-9.77	56.76	36.21	0.34	10.44	QP
4	0.456	32.29	-14.47	46.76	21.51	0.34	10.44	Average
5	0.544	44.94	-11.06	56.00	34.20	0.35	10.39	QP
6	0.544	29.04	-16.96	46.00	18.30	0.35	10.39	Average
7 *	0.654	46.92	-9.08	56.00	36.20	0.37	10.35	QP
8	0.654	31.32	-14.68	46.00	20.60	0.37	10.35	Average
9	0.720	46.51	-9.49	56.00	35.80	0.38	10.33	QP
10	0.720	31.91	-14.09	46.00	21.20	0.38	10.33	Average
11	0.844	44.26	-11.74	56.00	33.60	0.36	10.30	QP
12	0.844	29.26	-16.74	46.00	18.60	0.36	10.30	Average
13	0.979	43.82	-12.18	56.00	33.20	0.35	10.27	QP
14	0.979	29.22	-16.78	46.00	18.60	0.35	10.27	Average
15	20.056	43.65	-16.35	60.00	32.20	1.15	10.30	QP
16	20.056	29.75	-20.25	50.00	18.30	1.15	10.30	Average

Note:

1. Level(dBuV) = Read Level(dBuV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBuV) – Limit Line(dBuV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Koi Ji	Relative Humidity :	46~48%
		Temperature :	26.2 ~27.5°C

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	1	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	1	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	1	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	1	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	1	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	1	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	1	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	1	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	1	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	1	802.11n HT40	06	2437	MCS0	-	-
Mode 12	2400-2483.5	1	802.11n HT40	09	2452	MCS0	-	-
Mode 13	2400-2483.5	1	802.11n HT20	11	2462	MCS0	-	-
	LTE B13 BW=5M							







Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.95	43.65	54.00	-10.35	V	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	48.68	54.00	-5.32	H	AVERAGE	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	46.42	74.00	-27.58	H	PEAK	Pass	Harmonic
3	802.11b	11	2483.50	44.23	54.00	-9.77	H	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	42.51	74.00	-31.49	H	PEAK	Pass	Harmonic
4	802.11g	01	2389.95	50.33	54.00	-3.67	V	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	40.39	74.00	-33.61	V	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	42.15	74.00	-31.85	V	PEAK	Pass	Harmonic
6	802.11g	11	2483.50	49.84	54.00	-4.16	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	42.31	74.00	-31.69	H	PEAK	Pass	Harmonic
7	802.11n HT20	01	2389.95	50.42	54.00	-3.58	V	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	40.94	74.00	-33.06	H	PEAK	Pass	Harmonic
8	802.11n HT20	06	-	-	-	-	-	-	-	Band Edge
8	802.11n HT20	06	7311.00	42.51	74.00	-31.49	V	PEAK	Pass	Harmonic
9	802.11n HT20	11	2483.50	50.71	54.00	-3.29	H	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	7386.00	42.08	74.00	-31.92	V	PEAK	Pass	Harmonic
10	802.11n HT40	03	2389.95	49.78	54.00	-4.22	V	AVERAGE	Pass	Band Edge
10	802.11n HT40	03	7266.00	42.04	74.00	-31.96	H	PEAK	Pass	Harmonic
11	802.11n HT40	06	2389.95	50.02	54.00	-3.98	V	AVERAGE	Pass	Band Edge
11	802.11n HT40	06	7311.00	42.57	74.00	-31.43	H	PEAK	Pass	Harmonic
12	802.11n HT40	09	2483.50	47.95	54.00	-6.05	H	AVERAGE	Pass	Band Edge
12	802.11n HT40	09	7356.00	43.11	74.00	-30.89	H	PEAK	Pass	Harmonic
13	802.11n HT20	11	2483.50	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge
	802.11n HT20	11	7386.00	41.88	74.00	-32.12	V	PEAK	Pass	Harmonic

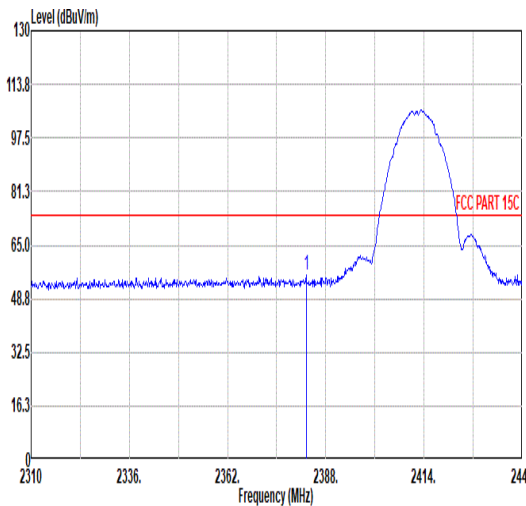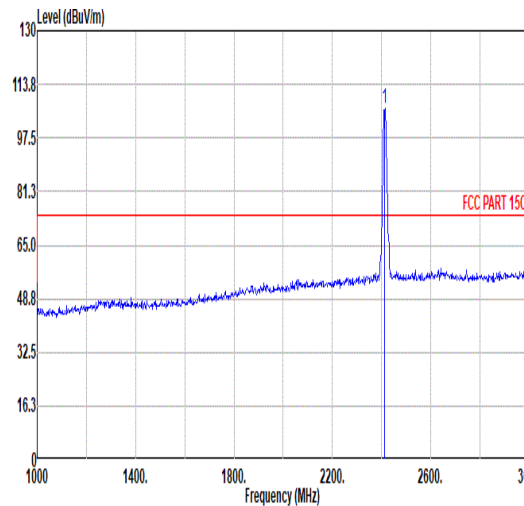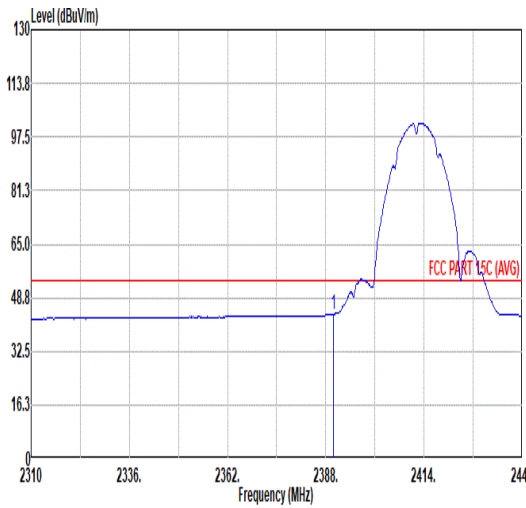
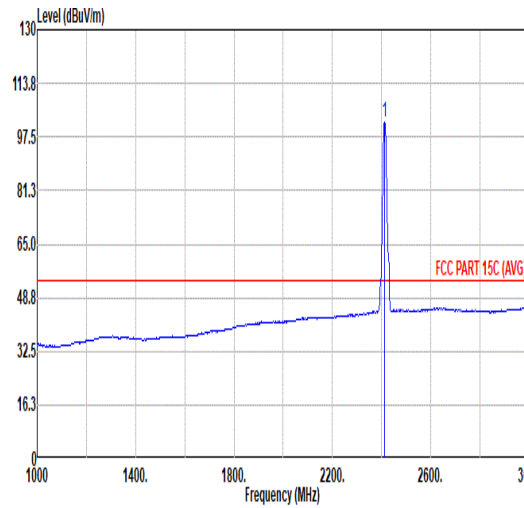


Mode	1																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.80</td><td>55.85</td><td>74.00</td><td>-18.15</td><td>38.97</td><td>32.47</td><td>9.10</td><td>30.69</td><td>6.00</td><td>252</td><td>132</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2382.80	55.85	74.00	-18.15	38.97	32.47	9.10	30.69	6.00	252	132	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.26</td><td>-----</td><td>-----</td><td>89.36</td><td>32.42</td><td>9.16</td><td>30.68</td><td>6.00</td><td>252</td><td>132</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.26	-----	-----	89.36	32.42	9.16	30.68	6.00	252	132
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2382.80	55.85	74.00	-18.15	38.97	32.47	9.10	30.69	6.00	252	132	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	106.26	-----	-----	89.36	32.42	9.16	30.68	6.00	252	132	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.58</td><td>54.00</td><td>-10.42</td><td>26.67</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>252</td><td>132</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.58	54.00	-10.42	26.67	32.48	9.12	30.69	6.00	252	132	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>101.81</td><td>-----</td><td>-----</td><td>84.90</td><td>32.43</td><td>9.16</td><td>30.68</td><td>6.00</td><td>252</td><td>132</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	101.81	-----	-----	84.90	32.43	9.16	30.68	6.00	252	132
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	43.58	54.00	-10.42	26.67	32.48	9.12	30.69	6.00	252	132	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2412.00	101.81	-----	-----	84.90	32.43	9.16	30.68	6.00	252	132	AVERAGE																																																																																							

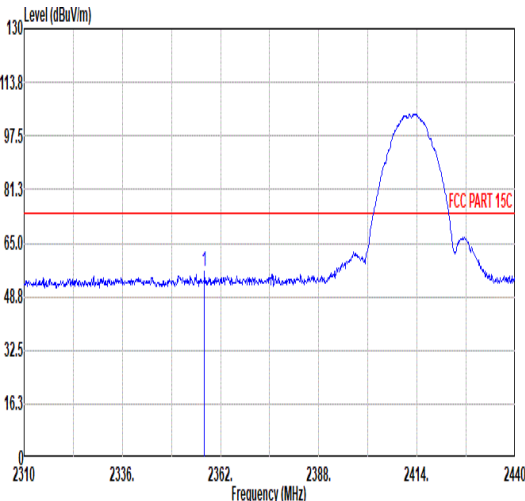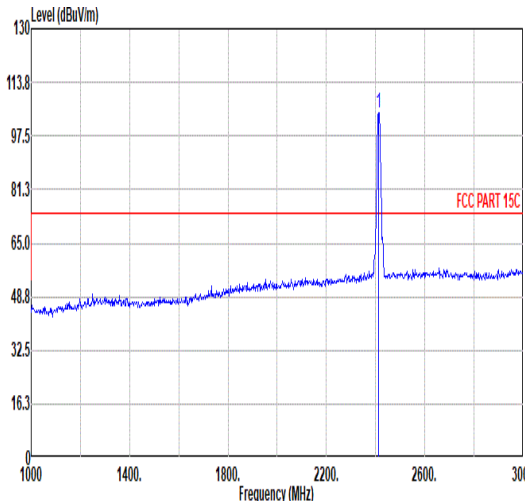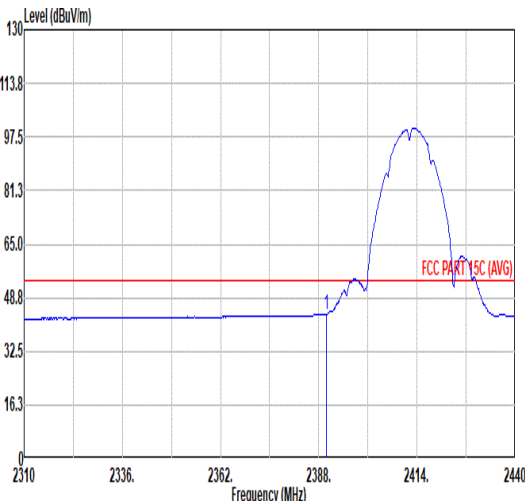
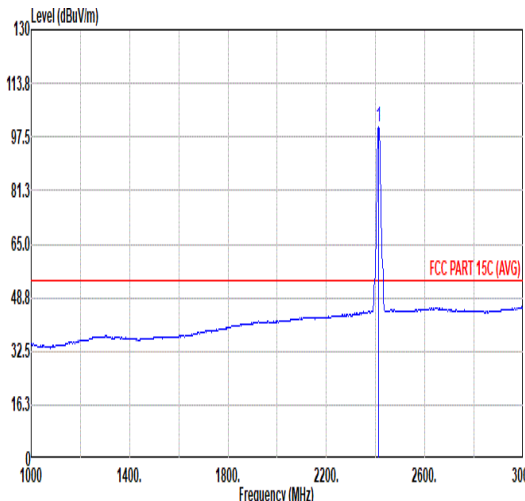


Mode	1																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2357.71</td><td>56.58</td><td>74.00</td><td>-17.42</td><td>39.83</td><td>32.42</td><td>9.03</td><td>30.70</td><td>6.00</td><td>300</td><td>231 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2357.71	56.58	74.00	-17.42	39.83	32.42	9.03	30.70	6.00	300	231 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>104.72</td><td>-----</td><td>-----</td><td>87.82</td><td>32.42</td><td>9.16</td><td>30.68</td><td>6.00</td><td>300</td><td>231 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.72	-----	-----	87.82	32.42	9.16	30.68	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2357.71	56.58	74.00	-17.42	39.83	32.42	9.03	30.70	6.00	300	231 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	104.72	-----	-----	87.82	32.42	9.16	30.68	6.00	300	231 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>43.65</td><td>54.00</td><td>-10.35</td><td>26.74</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>300</td><td>231 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	43.65	54.00	-10.35	26.74	32.48	9.12	30.69	6.00	300	231 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>100.34</td><td>-----</td><td>-----</td><td>83.43</td><td>32.43</td><td>9.16</td><td>30.68</td><td>6.00</td><td>300</td><td>231 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	100.34	-----	-----	83.43	32.43	9.16	30.68	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	43.65	54.00	-10.35	26.74	32.48	9.12	30.69	6.00	300	231 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	100.34	-----	-----	83.43	32.43	9.16	30.68	6.00	300	231 AVERAGE																																																																																						



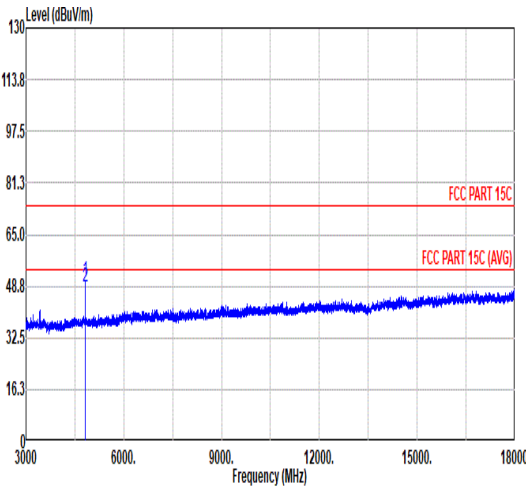
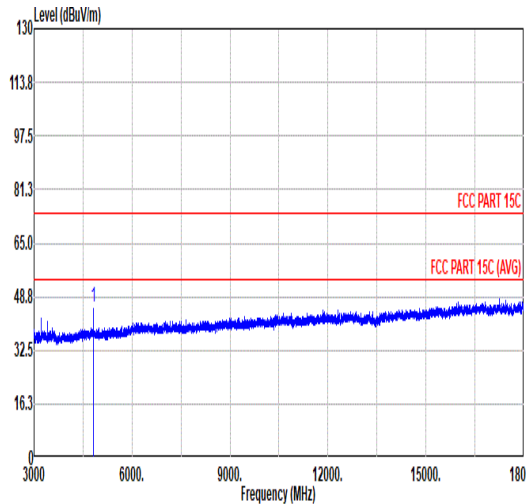


Mode	1																																																																																																															
	Harmonic																																																																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																															
ANT	1																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg																																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>50.71</td><td>74.00</td><td>-23.29</td><td>69.00</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>166</td><td>130</td><td>PEAK</td></tr><tr><td>2</td><td>4824.00</td><td>48.68</td><td>54.00</td><td>-5.32</td><td>66.97</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>166</td><td>130</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	50.71	74.00	-23.29	69.00	34.40	11.43	64.12	0.00	166	130	PEAK	2	4824.00	48.68	54.00	-5.32	66.97	34.40	11.43	64.12	0.00	166	130	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>45.39</td><td>74.00</td><td>-28.61</td><td>63.68</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	45.39	74.00	-28.61	63.68	34.40	11.43	64.12	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	50.71	74.00	-23.29	69.00	34.40	11.43	64.12	0.00	166	130	PEAK																																																																																																				
2	4824.00	48.68	54.00	-5.32	66.97	34.40	11.43	64.12	0.00	166	130	AVERAGE																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																						
1	4824.00	45.39	74.00	-28.61	63.68	34.40	11.43	64.12	0.00	--	--	PEAK																																																																																																				



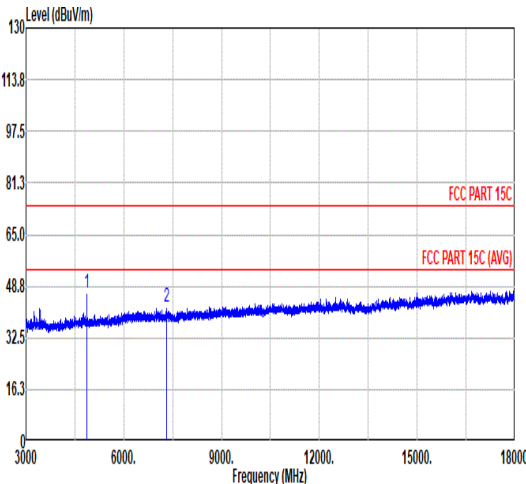
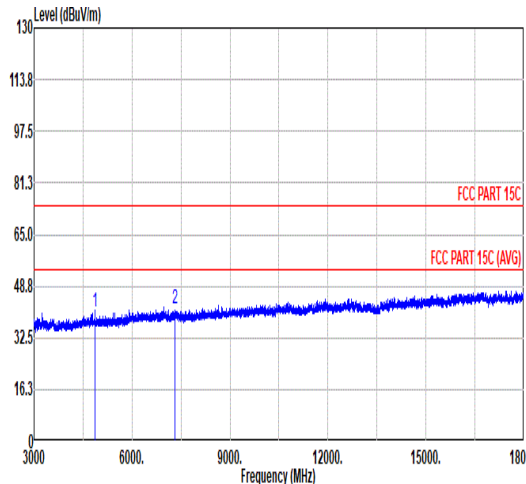


Mode	2																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>46.42</td><td>74.00</td><td>-27.58</td><td>64.77</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.11</td><td>74.00</td><td>-31.89</td><td>56.12</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	46.42	74.00	-27.58	64.77	34.40	11.54	64.29	0.00	--	--	PEAK	2	7311.00	42.11	74.00	-31.89	56.12	35.82	14.18	64.01	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>40.59</td><td>74.00</td><td>-33.41</td><td>58.94</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>41.93</td><td>74.00</td><td>-32.07</td><td>55.94</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	40.59	74.00	-33.41	58.94	34.40	11.54	64.29	0.00	--	--	PEAK	2	7311.00	41.93	74.00	-32.07	55.94	35.82	14.18	64.01	0.00	--	--	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4874.00	46.42	74.00	-27.58	64.77	34.40	11.54	64.29	0.00	--	--	PEAK																																																																																																																																
2	7311.00	42.11	74.00	-31.89	56.12	35.82	14.18	64.01	0.00	--	--	PEAK																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4874.00	40.59	74.00	-33.41	58.94	34.40	11.54	64.29	0.00	--	--	PEAK																																																																																																																																
2	7311.00	41.93	74.00	-32.07	55.94	35.82	14.18	64.01	0.00	--	--	PEAK																																																																																																																																

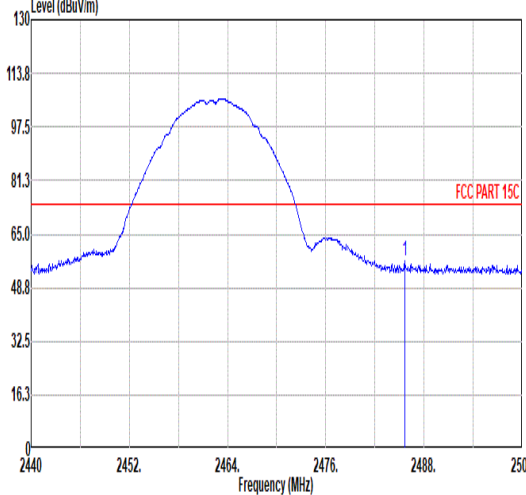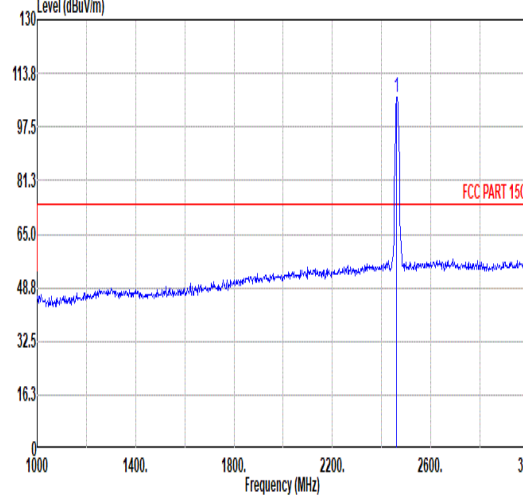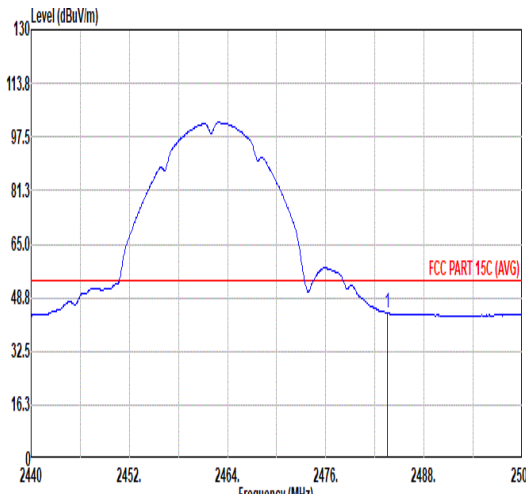
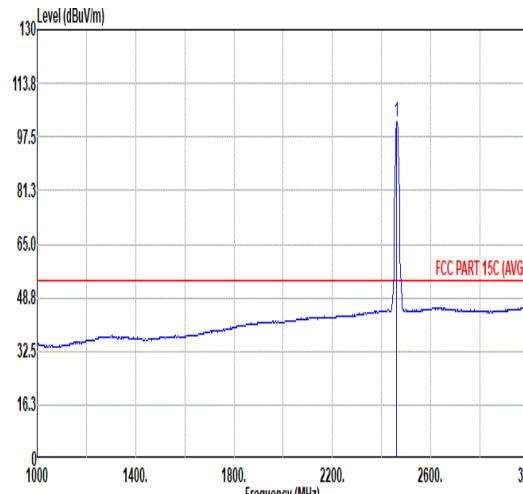


Mode	3																																																						
	Band Edge																																																						
	2400-2483.5_802.11b_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.66</td><td>56.77</td><td>74.00</td><td>-17.23</td><td>39.85</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>269</td><td>126</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.66	56.77	74.00	-17.23	39.85	32.34	9.23	30.65	6.00	269	126
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.66	56.77	74.00	-17.23	39.85	32.34	9.23	30.65	6.00	269	126	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.44</td><td>-----</td><td>-----</td><td>89.63</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>269</td><td>126</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.44	-----	-----	89.63	32.26	9.21	30.66	6.00	269	126
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	106.44	-----	-----	89.63	32.26	9.21	30.66	6.00	269	126	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>27.32</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>269</td><td>126</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.23	54.00	-9.77	27.32	32.33	9.23	30.65	6.00	269	126
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	44.23	54.00	-9.77	27.32	32.33	9.23	30.65	6.00	269	126	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>102.28</td><td>-----</td><td>-----</td><td>85.48</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>269</td><td>126</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.28	-----	-----	85.48	32.25	9.21	30.66	6.00	269	126
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	102.28	-----	-----	85.48	32.25	9.21	30.66	6.00	269	126	AVERAGE																																											

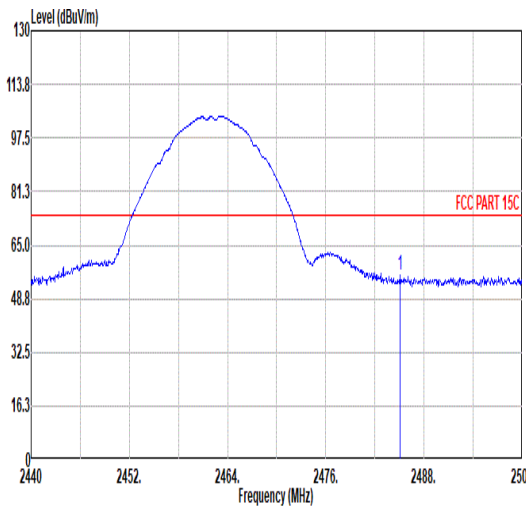
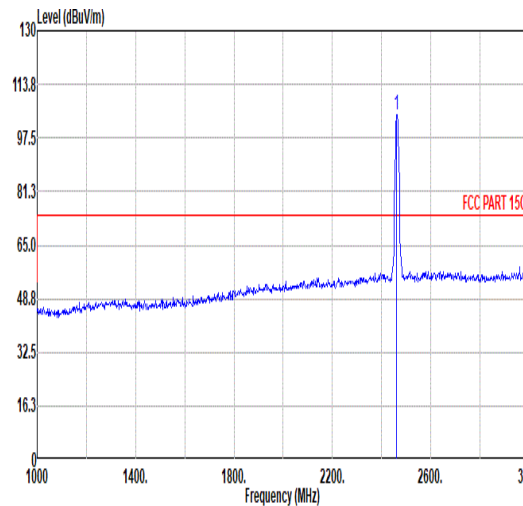
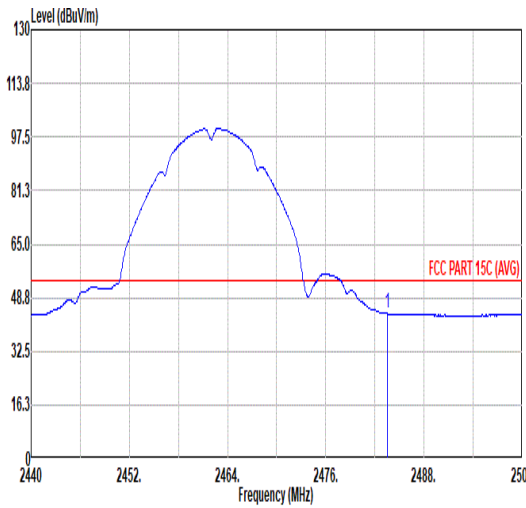
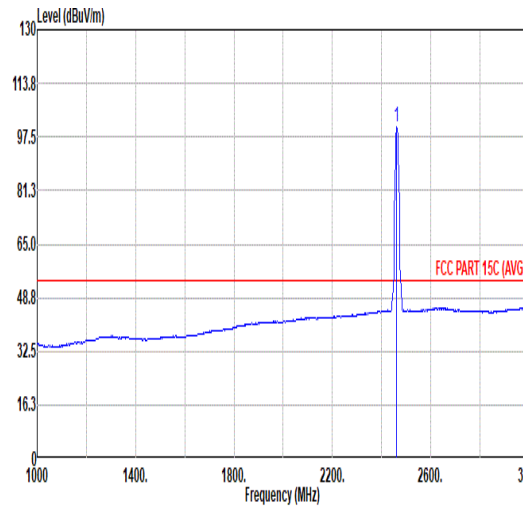


Mode	3																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.12</td><td>56.09</td><td>74.00</td><td>-17.91</td><td>39.17</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>222</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.12	56.09	74.00	-17.91	39.17	32.34	9.23	30.65	6.00	270	222	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>104.55</td><td>-----</td><td>-----</td><td>87.75</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>222</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.55	-----	-----	87.75	32.25	9.21	30.66	6.00	270	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2485.12	56.09	74.00	-17.91	39.17	32.34	9.23	30.65	6.00	270	222	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	104.55	-----	-----	87.75	32.25	9.21	30.66	6.00	270	222	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>43.94</td><td>54.00</td><td>-10.06</td><td>27.03</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	43.94	54.00	-10.06	27.03	32.33	9.23	30.65	6.00	270	222	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.42</td><td>-----</td><td>-----</td><td>83.62</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.42	-----	-----	83.62	32.25	9.21	30.66	6.00	270	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	43.94	54.00	-10.06	27.03	32.33	9.23	30.65	6.00	270	222	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	100.42	-----	-----	83.62	32.25	9.21	30.66	6.00	270	222	AVERAGE																																																																																																			



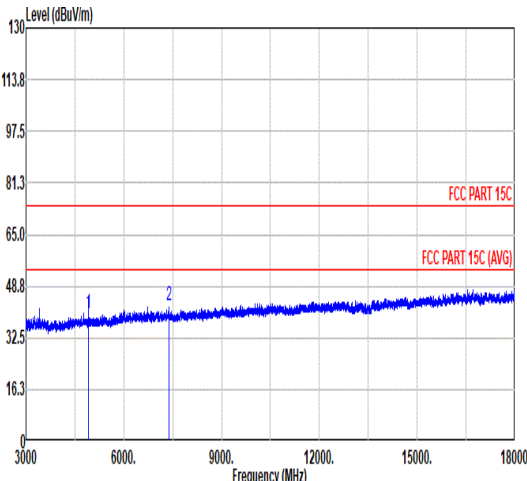
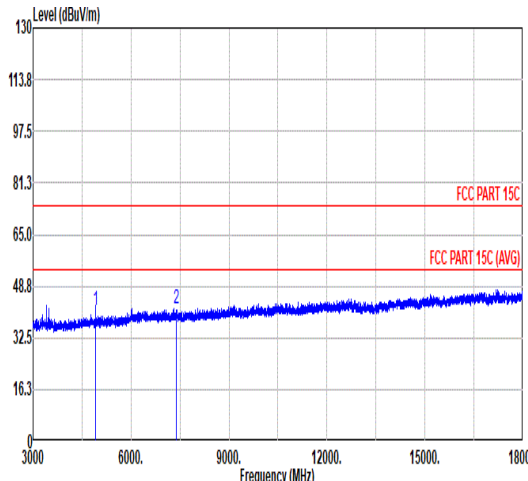


Mode	3																																																																																																																											
	Harmonic																																																																																																																											
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg																																																																																																																												
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>40.40</td><td>74.00</td><td>-33.60</td><td>58.71</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.51</td><td>74.00</td><td>-31.49</td><td>56.52</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	40.40	74.00	-33.60	58.71	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	42.51	74.00	-31.49	56.52	35.76	14.27	64.04	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>41.33</td><td>74.00</td><td>-32.67</td><td>59.64</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.48</td><td>74.00</td><td>-32.52</td><td>55.49</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4924.00	41.33	74.00	-32.67	59.64	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	41.48	74.00	-32.52	55.49	35.76	14.27	64.04	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4924.00	40.40	74.00	-33.60	58.71	34.40	11.65	64.36	0.00	--	PEAK																																																																																																																	
2	7386.00	42.51	74.00	-31.49	56.52	35.76	14.27	64.04	0.00	--	PEAK																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4924.00	41.33	74.00	-32.67	59.64	34.40	11.65	64.36	0.00	--	PEAK																																																																																																																	
2	7386.00	41.48	74.00	-32.52	55.49	35.76	14.27	64.04	0.00	--	PEAK																																																																																																																	

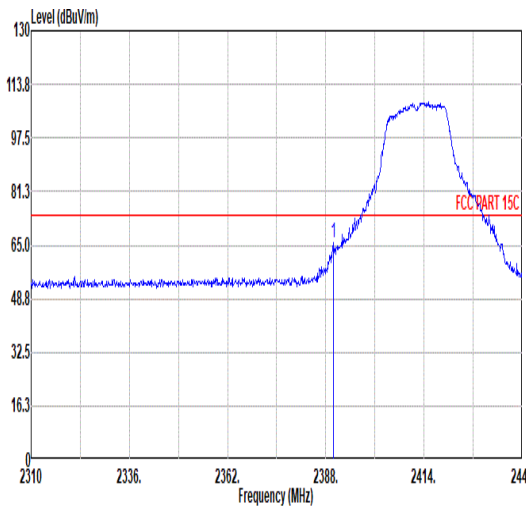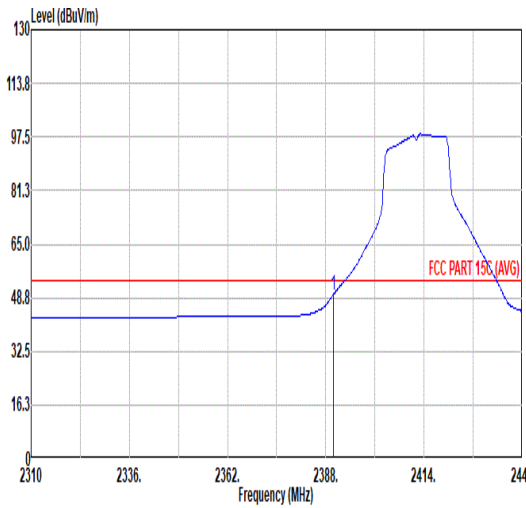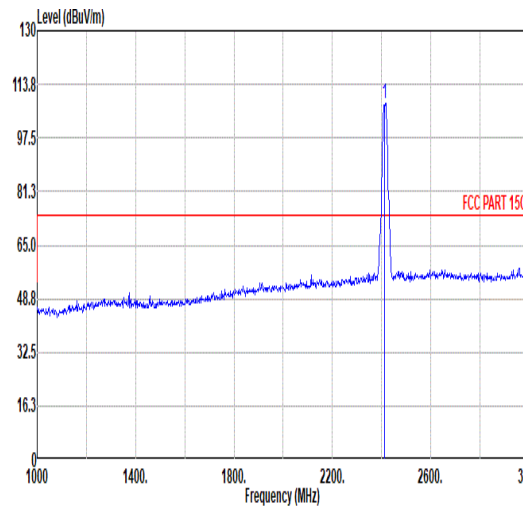
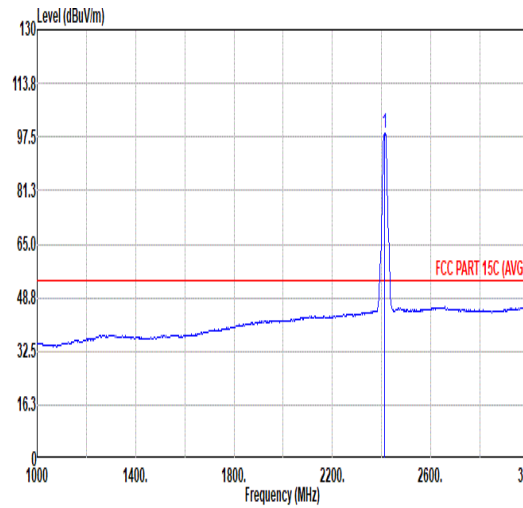


Mode	4																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>65.72</td><td>74.00</td><td>-8.28</td><td>48.81</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>369</td><td>130</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	65.72	74.00	-8.28	48.81	32.48	9.12	30.69	6.00	369	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	65.72	74.00	-8.28	48.81	32.48	9.12	30.69	6.00	369	130	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.57</td><td>54.00</td><td>-4.43</td><td>32.66</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>369</td><td>130</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.57	54.00	-4.43	32.66	32.48	9.12	30.69	6.00	369	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	49.57	54.00	-4.43	32.66	32.48	9.12	30.69	6.00	369	130	AVERAGE																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.95</td><td>-----</td><td>-----</td><td>91.06</td><td>32.39</td><td>9.17</td><td>30.67</td><td>6.00</td><td>369</td><td>130</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.95	-----	-----	91.06	32.39	9.17	30.67	6.00	369	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	107.95	-----	-----	91.06	32.39	9.17	30.67	6.00	369	130	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>98.72</td><td>-----</td><td>-----</td><td>81.81</td><td>32.43</td><td>9.16</td><td>30.68</td><td>6.00</td><td>369</td><td>130</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.72	-----	-----	81.81	32.43	9.16	30.68	6.00	369	130
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	98.72	-----	-----	81.81	32.43	9.16	30.68	6.00	369	130	AVERAGE																																											

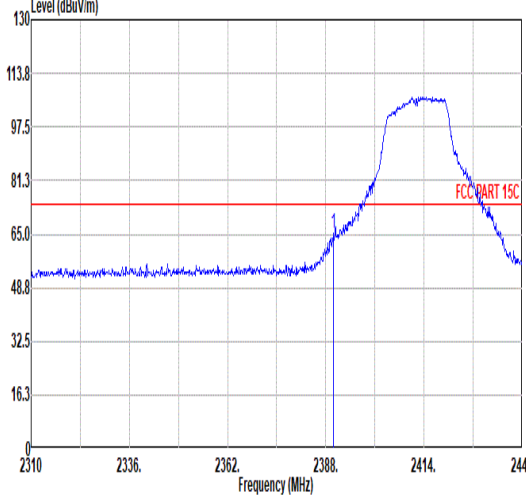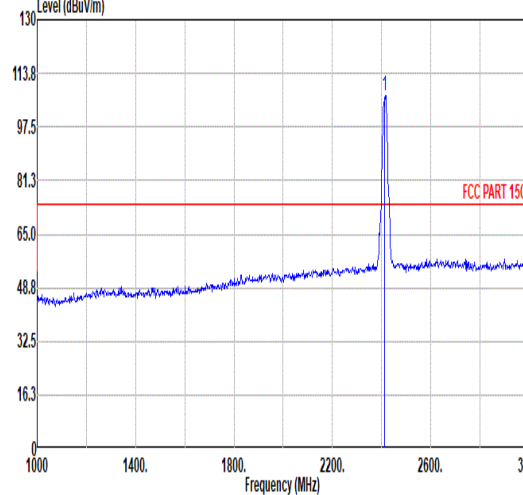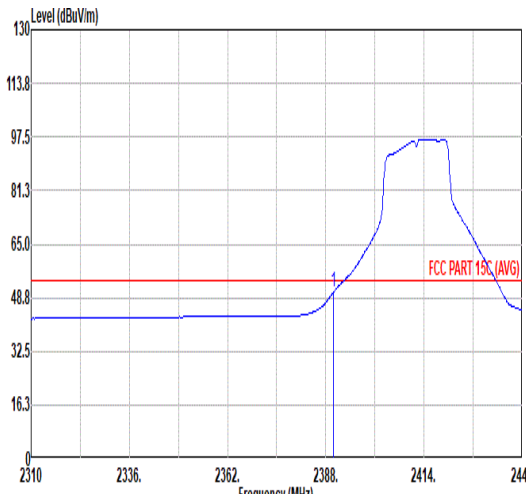
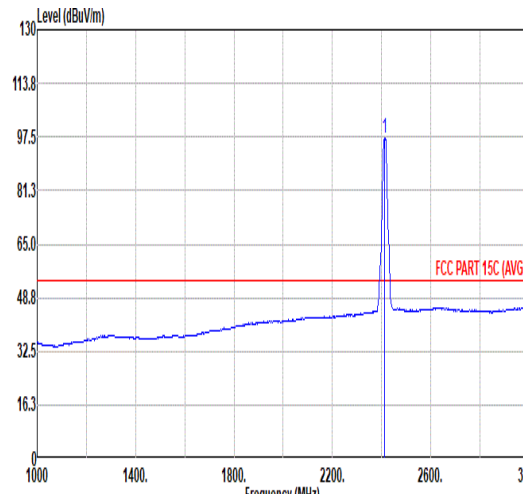


Mode	4																																																					
	Band Edge																																																					
	2400-2483.5_802.11g_CH01_2412MHz																																																					
ANT	1																																																					
Pol.	Vertical						Fundamental																																															
Peak																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>65.05</td><td>74.00</td><td>-8.95</td><td>48.14</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>300</td><td>230 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	65.05	74.00	-8.95	48.14	32.48	9.12	30.69	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	65.05	74.00	-8.95	48.14	32.48	9.12	30.69	6.00	300	230 PEAK																																											
Fundamental																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.91</td><td>-----</td><td>-----</td><td>90.02</td><td>32.39</td><td>9.17</td><td>30.67</td><td>6.00</td><td>300</td><td>230 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.91	-----	-----	90.02	32.39	9.17	30.67	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	106.91	-----	-----	90.02	32.39	9.17	30.67	6.00	300	230 PEAK																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.33</td><td>54.00</td><td>-3.67</td><td>33.42</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>300</td><td>230 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.33	54.00	-3.67	33.42	32.48	9.12	30.69	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2389.95	50.33	54.00	-3.67	33.42	32.48	9.12	30.69	6.00	300	230 AVERAGE																																											
Avg																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.09</td><td>-----</td><td>-----</td><td>80.18</td><td>32.43</td><td>9.16</td><td>30.68</td><td>6.00</td><td>300</td><td>230 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.09	-----	-----	80.18	32.43	9.16	30.68	6.00	300
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	2412.00	97.09	-----	-----	80.18	32.43	9.16	30.68	6.00	300	230 AVERAGE																																											



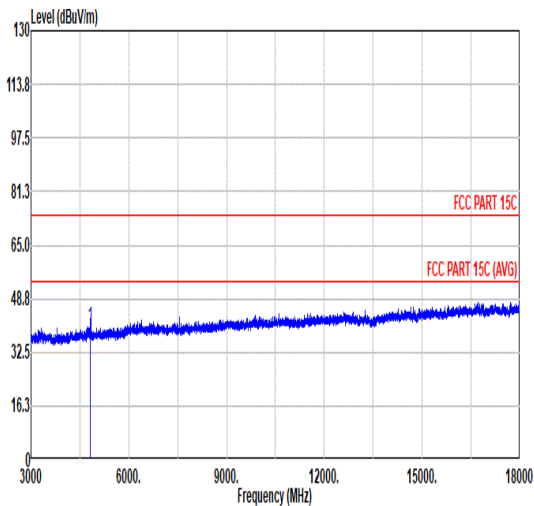
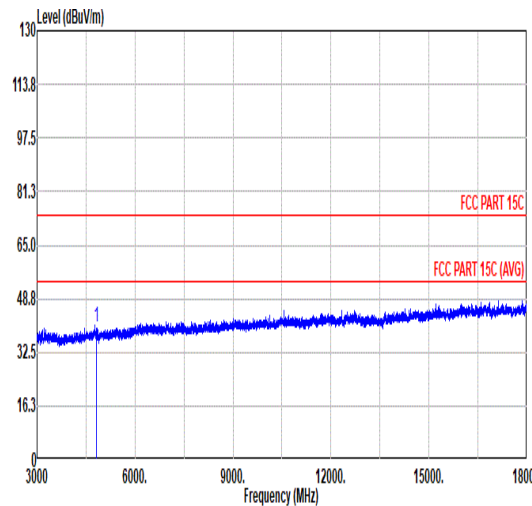


Mode	4																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																									
ANT	1																																																																																																									
Pol.	Horizontal						Vertical																																																																																																			
Peak Avg																																																																																																										
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.47</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	40.18	74.00	-33.82	58.47	34.40	11.43	64.12	0.00	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>40.39</td><td>74.00</td><td>-33.61</td><td>58.68</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4824.00	40.39	74.00	-33.61	58.68	34.40	11.43	64.12	0.00	--	PEAK
			Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4824.00	40.18	74.00	-33.82	58.47	34.40	11.43	64.12	0.00	--	PEAK																																																																																															
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																
1	4824.00	40.39	74.00	-33.61	58.68	34.40	11.43	64.12	0.00	--	PEAK																																																																																															



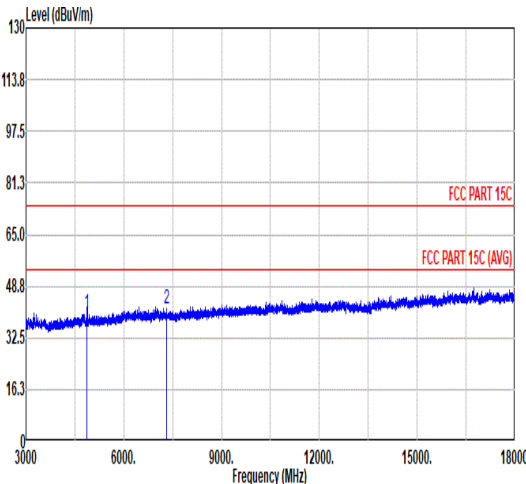
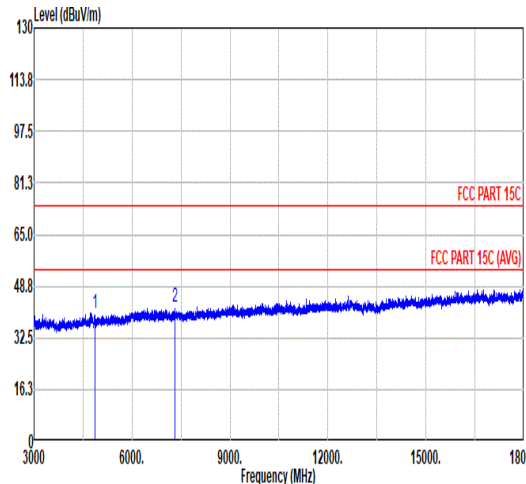


Mode	5																																																																																																																																
	Harmonic																																																																																																																																
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg																																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>40.25</td><td>74.00</td><td>-33.75</td><td>58.60</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>41.92</td><td>74.00</td><td>-32.08</td><td>55.93</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4874.00	40.25	74.00	-33.75	58.60	34.40	11.54	64.29	0.00	--	--	PEAK	2	7311.00	41.92	74.00	-32.08	55.93	35.82	14.18	64.01	0.00	--	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>40.29</td><td>74.00</td><td>-33.71</td><td>58.64</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.15</td><td>74.00</td><td>-31.85</td><td>56.16</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4874.00	40.29	74.00	-33.71	58.64	34.40	11.54	64.29	0.00	--	--	PEAK	2	7311.00	42.15	74.00	-31.85	56.16	35.82	14.18	64.01	0.00	--	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	4874.00	40.25	74.00	-33.75	58.60	34.40	11.54	64.29	0.00	--	--	PEAK																																																																																																																					
2	7311.00	41.92	74.00	-32.08	55.93	35.82	14.18	64.01	0.00	--	--	PEAK																																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	4874.00	40.29	74.00	-33.71	58.64	34.40	11.54	64.29	0.00	--	--	PEAK																																																																																																																					
2	7311.00	42.15	74.00	-31.85	56.16	35.82	14.18	64.01	0.00	--	--	PEAK																																																																																																																					

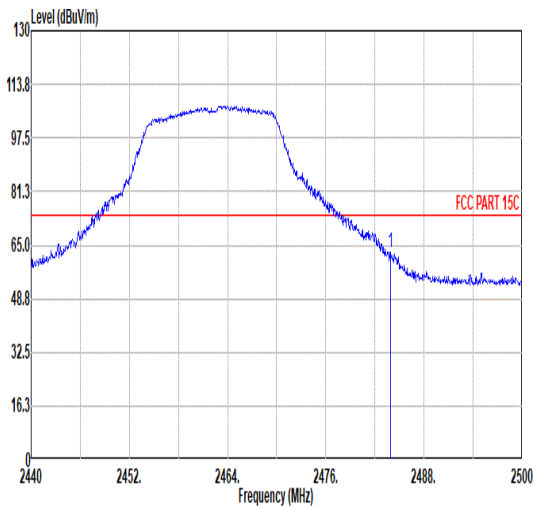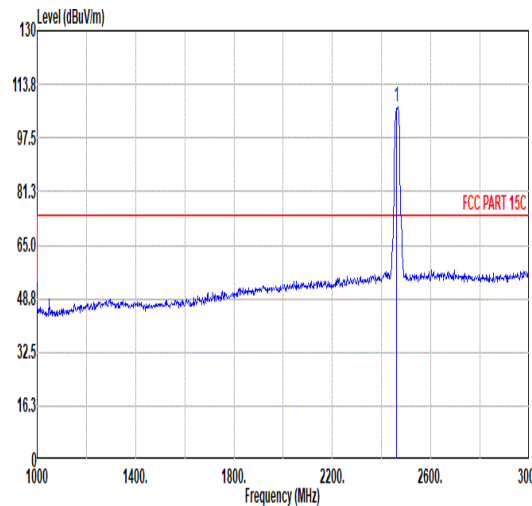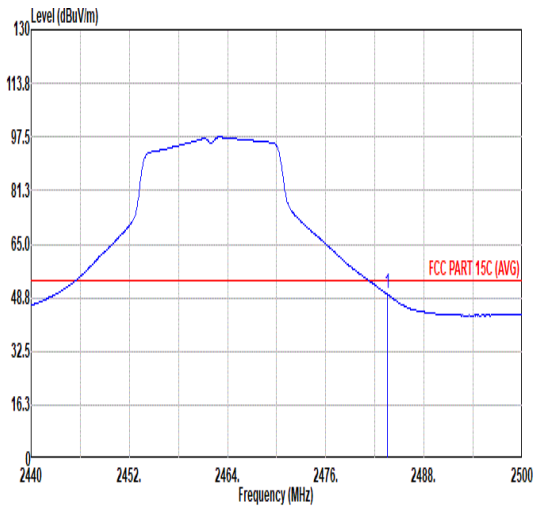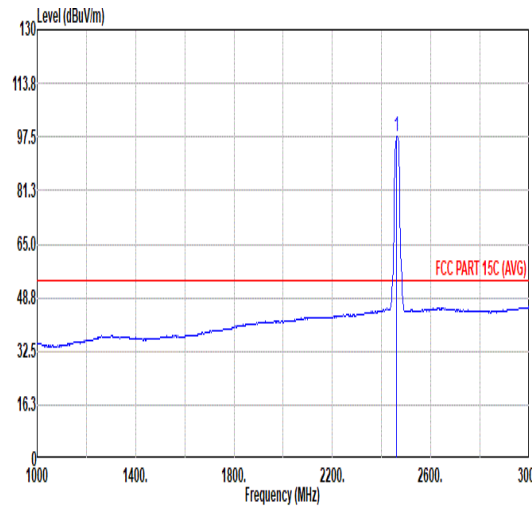

Mode	6																																																						
	Band Edge																																																						
	2400-2483.5_802.11g_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.92</td><td>63.02</td><td>74.00</td><td>-10.98</td><td>46.10</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>268</td><td>124</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.92	63.02	74.00	-10.98	46.10	32.34	9.23	30.65	6.00	268	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.92	63.02	74.00	-10.98	46.10	32.34	9.23	30.65	6.00	268	124	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>107.01</td><td>-----</td><td>-----</td><td>90.20</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>268</td><td>124</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	107.01	-----	-----	90.20	32.26	9.21	30.66	6.00	268	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	107.01	-----	-----	90.20	32.26	9.21	30.66	6.00	268	124	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>49.84</td><td>54.00</td><td>-4.16</td><td>32.93</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>268</td><td>124</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.84	54.00	-4.16	32.93	32.33	9.23	30.65	6.00	268	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	49.84	54.00	-4.16	32.93	32.33	9.23	30.65	6.00	268	124	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.71</td><td>-----</td><td>-----</td><td>80.91</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>268</td><td>124</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.71	-----	-----	80.91	32.25	9.21	30.66	6.00	268	124
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	97.71	-----	-----	80.91	32.25	9.21	30.66	6.00	268	124	AVERAGE																																											

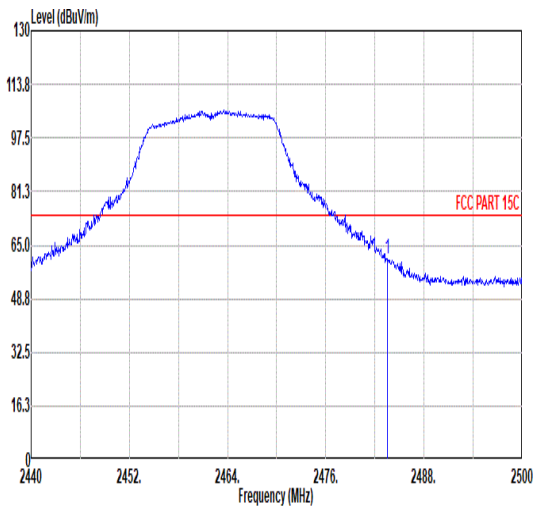
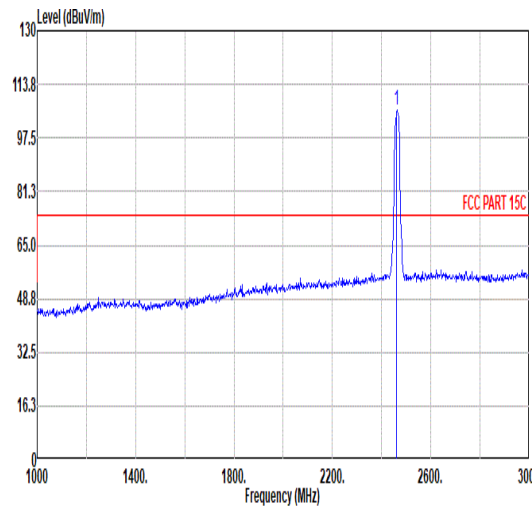
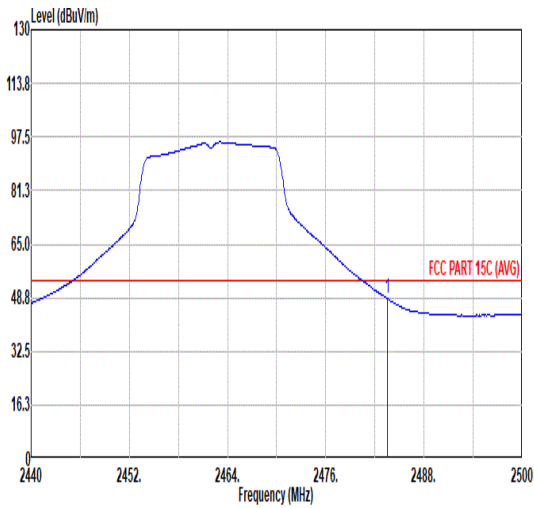
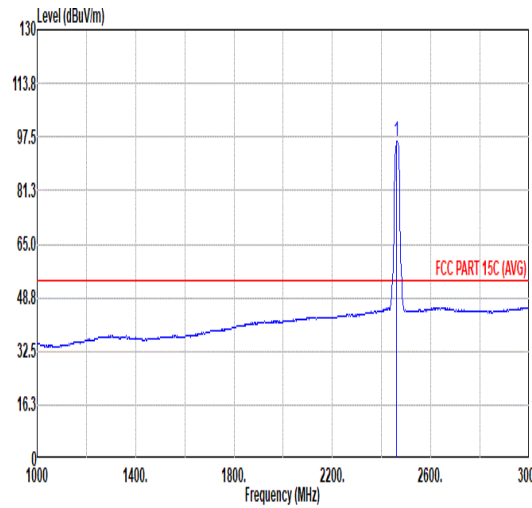


Mode	6																																																																																																												
	Band Edge																																																																																																												
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																												
ANT	1																																																																																																												
Pol.	Vertical						Fundamental																																																																																																						
Peak																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>60.75</td><td>74.00</td><td>-13.25</td><td>43.84</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>308</td><td>231 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	60.75	74.00	-13.25	43.84	32.33	9.23	30.65	6.00	308	231 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.76</td><td>-----</td><td>-----</td><td>88.95</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>308</td><td>231 PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.76	-----	-----	88.95	32.26	9.21	30.66	6.00	308
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.56	60.75	74.00	-13.25	43.84	32.33	9.23	30.65	6.00	308	231 PEAK																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2462.00	105.76	-----	-----	88.95	32.26	9.21	30.66	6.00	308	231 PEAK																																																																																																		
Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>48.50</td><td>54.00</td><td>-5.50</td><td>31.59</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>308</td><td>231 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	48.50	54.00	-5.50	31.59	32.33	9.23	30.65	6.00	308	231 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.37</td><td>-----</td><td>-----</td><td>79.56</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>308</td><td>231 AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.37	-----	-----	79.56	32.26	9.21	30.66	6.00	308
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2483.50	48.50	54.00	-5.50	31.59	32.33	9.23	30.65	6.00	308	231 AVERAGE																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																			
1	2462.00	96.37	-----	-----	79.56	32.26	9.21	30.66	6.00	308	231 AVERAGE																																																																																																		







Mode	6																																																																																																																											
	Harmonic																																																																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																											
ANT	1																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																					
Peak Avg																																																																																																																												
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.23</td><td>74.00</td><td>-33.77</td><td></td><td>58.54</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.31</td><td>74.00</td><td>-31.69</td><td></td><td>56.32</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		Level	Factor	Loss	Factor	Factor				1	4924.00	40.23	74.00	-33.77		58.54	34.40	11.65	64.36	0.00	--	--	PEAK	2	7386.00	42.31	74.00	-31.69		56.32	35.76	14.27	64.04	0.00	--	--	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>40.24</td><td>74.00</td><td>-33.76</td><td></td><td>58.55</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.18</td><td>74.00</td><td>-31.82</td><td></td><td>56.19</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		Level	Factor	Loss	Factor	Factor				1	4924.00	40.24	74.00	-33.76		58.55	34.40	11.65	64.36	0.00	--	--	PEAK	2	7386.00	42.18	74.00	-31.82		56.19	35.76	14.27	64.04	0.00	--	--	PEAK
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																														
	MHz	dBuV/m	dBuV/m	dB		Level	Factor	Loss	Factor	Factor																																																																																																																		
1	4924.00	40.23	74.00	-33.77		58.54	34.40	11.65	64.36	0.00	--	--	PEAK																																																																																																															
2	7386.00	42.31	74.00	-31.69		56.32	35.76	14.27	64.04	0.00	--	--	PEAK																																																																																																															
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
	MHz	dBuV/m	dBuV/m	dB		Level	Factor	Loss	Factor	Factor																																																																																																																		
1	4924.00	40.24	74.00	-33.76		58.55	34.40	11.65	64.36	0.00	--	--	PEAK																																																																																																															
2	7386.00	42.18	74.00	-31.82		56.19	35.76	14.27	64.04	0.00	--	--	PEAK																																																																																																															

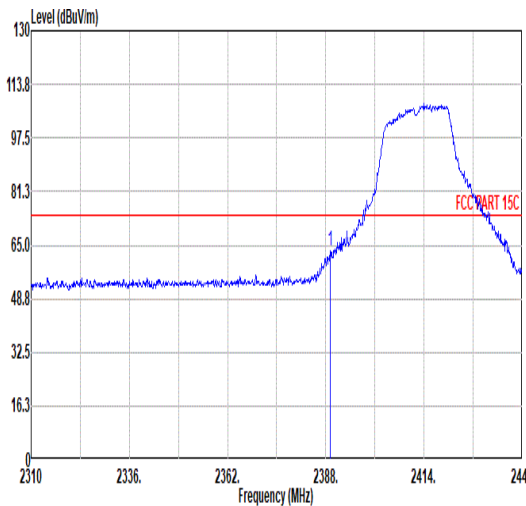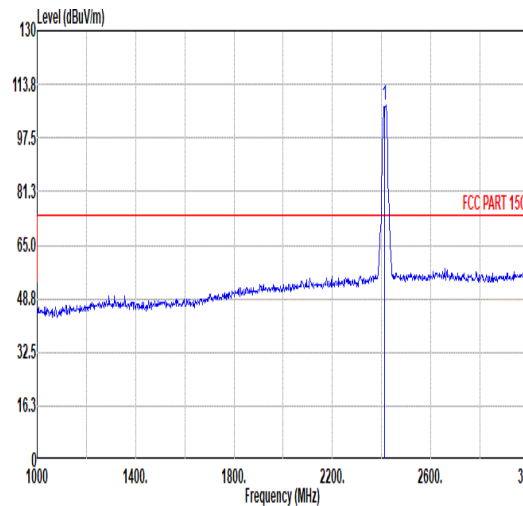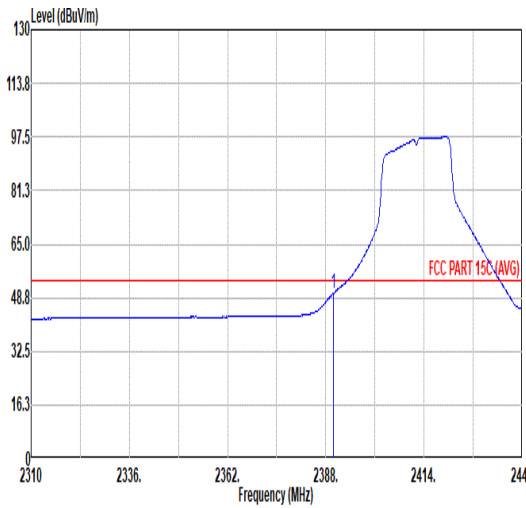
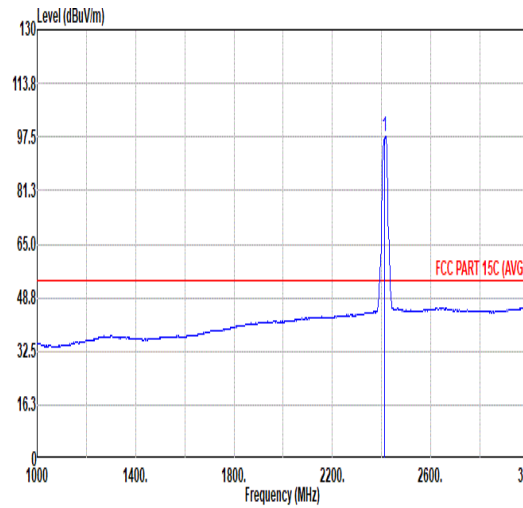


Mode	7																																																						
	Band Edge																																																						
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>63.11</td><td>74.00</td><td>-10.89</td><td>46.20</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>253</td><td>129</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	63.11	74.00	-10.89	46.20	32.48	9.12	30.69	6.00	253	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.17	63.11	74.00	-10.89	46.20	32.48	9.12	30.69	6.00	253	129	PEAK																																											
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.23</td><td>-----</td><td>-----</td><td>90.35</td><td>32.38</td><td>9.17</td><td>30.67</td><td>6.00</td><td>253</td><td>129</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.23	-----	-----	90.35	32.38	9.17	30.67	6.00	253	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	107.23	-----	-----	90.35	32.38	9.17	30.67	6.00	253	129	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.00</td><td>54.00</td><td>-4.00</td><td>33.09</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>253</td><td>129</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.00	54.00	-4.00	33.09	32.48	9.12	30.69	6.00	253	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2389.95	50.00	54.00	-4.00	33.09	32.48	9.12	30.69	6.00	253	129	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.63</td><td>-----</td><td>-----</td><td>80.75</td><td>32.38</td><td>9.17</td><td>30.67</td><td>6.00</td><td>253</td><td>129</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	97.63	-----	-----	80.75	32.38	9.17	30.67	6.00	253	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2412.00	97.63	-----	-----	80.75	32.38	9.17	30.67	6.00	253	129	AVERAGE																																											

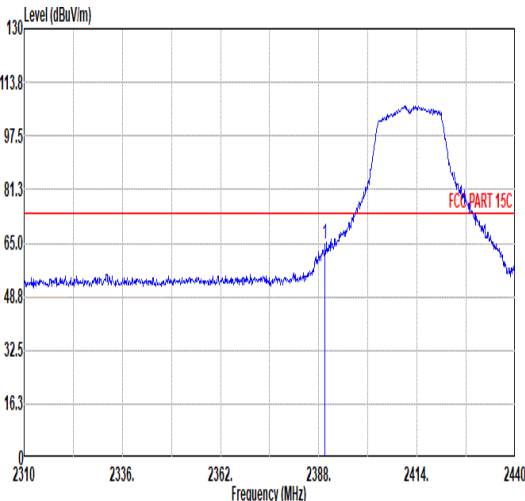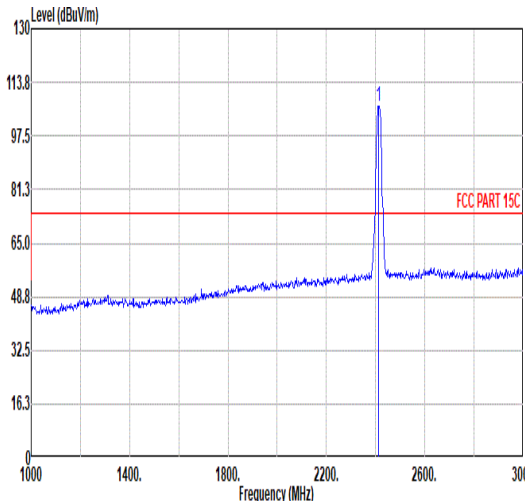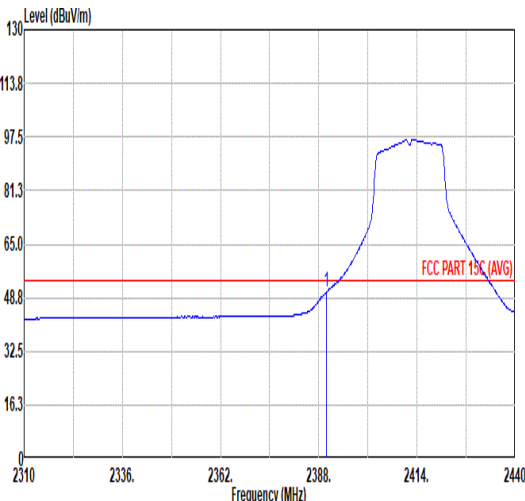
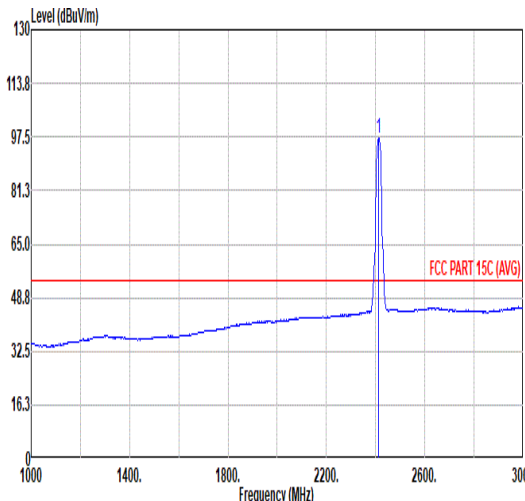


Mode	7																																																																																																
	Band Edge																																																																																																
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																
ANT	1																																																																																																
Pol.	Vertical						Fundamental																																																																																										
Peak																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.69</td><td>64.83</td><td>74.00</td><td>-9.17</td><td>47.92</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>257</td><td>231 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	64.83	74.00	-9.17	47.92	32.48	9.12	30.69	6.00	257	231 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>106.43</td><td>-----</td><td>-----</td><td>89.51</td><td>32.44</td><td>9.16</td><td>30.68</td><td>6.00</td><td>257</td><td>231 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	106.43	-----	-----	89.51	32.44	9.16	30.68	6.00	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.69	64.83	74.00	-9.17	47.92	32.48	9.12	30.69	6.00	257	231 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	106.43	-----	-----	89.51	32.44	9.16	30.68	6.00	257	231 PEAK																																																																																						
Avg																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>50.42</td><td>54.00</td><td>-3.58</td><td>33.51</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>257</td><td>231 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.42	54.00	-3.58	33.51	32.48	9.12	30.69	6.00	257	231 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.97</td><td>-----</td><td>-----</td><td>80.06</td><td>32.43</td><td>9.16</td><td>30.68</td><td>6.00</td><td>257</td><td>231 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.97	-----	-----	80.06	32.43	9.16	30.68	6.00	257
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2389.95	50.42	54.00	-3.58	33.51	32.48	9.12	30.69	6.00	257	231 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	2412.00	96.97	-----	-----	80.06	32.43	9.16	30.68	6.00	257	231 AVERAGE																																																																																						



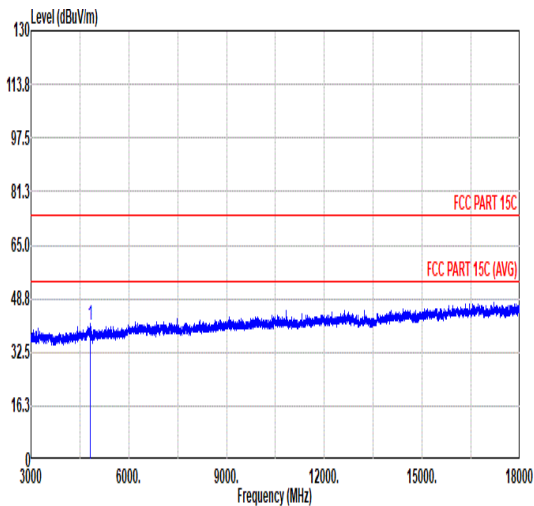
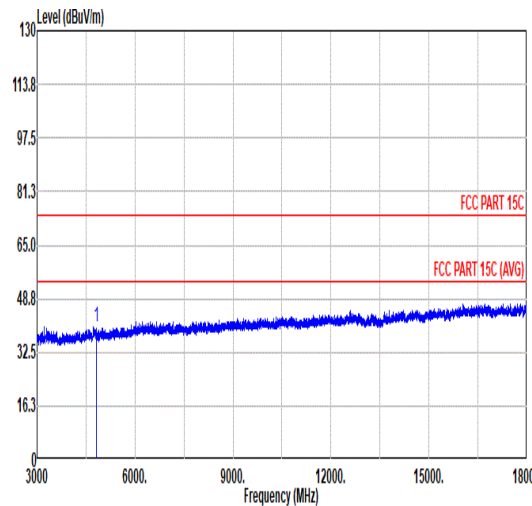


Mode	7																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>40.94</td><td>74.00</td><td>-33.06</td><td>59.23</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.94	74.00	-33.06	59.23	34.40	11.43	64.12	0.00	--	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>40.37</td><td>74.00</td><td>-33.63</td><td>58.66</td><td>34.40</td><td>11.43</td><td>64.12</td><td>0.00</td><td>--</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.37	74.00	-33.63	58.66	34.40	11.43	64.12	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.94	74.00	-33.06	59.23	34.40	11.43	64.12	0.00	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	4824.00	40.37	74.00	-33.63	58.66	34.40	11.43	64.12	0.00	--	PEAK																																																																																							



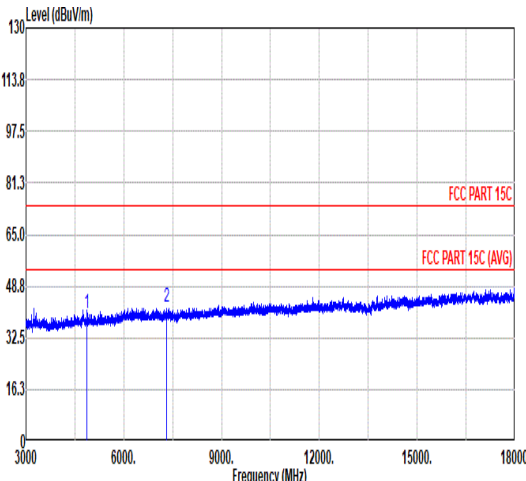
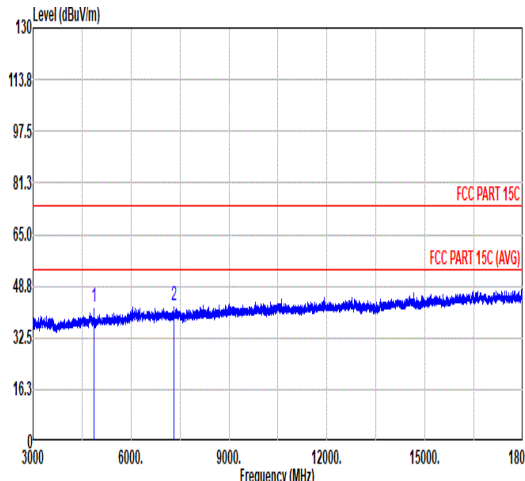


Mode	8																																																																		
	Harmonic																																																																		
	2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																		
ANT	1																																																																		
Pol.	Horizontal						Vertical																																																												
Peak Avg																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>40.39</td><td>74.00</td><td>-33.61</td><td>58.74</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.32</td><td>74.00</td><td>-31.68</td><td>56.33</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.39	74.00	-33.61	58.74	34.40	11.54	64.29	0.00	--	PEAK	2	7311.00	42.32	74.00	-31.68	56.33	35.82	14.18	64.01	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	4874.00	40.39	74.00	-33.61	58.74	34.40	11.54	64.29	0.00	--	PEAK																																																								
2	7311.00	42.32	74.00	-31.68	56.33	35.82	14.18	64.01	0.00	--	PEAK																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>60.35</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7311.00</td><td>42.51</td><td>74.00</td><td>-31.49</td><td>56.52</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	42.00	74.00	-32.00	60.35	34.40	11.54	64.29	0.00	--	PEAK	2	7311.00	42.51	74.00	-31.49	56.52	35.82	14.18	64.01	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																									
1	4874.00	42.00	74.00	-32.00	60.35	34.40	11.54	64.29	0.00	--	PEAK																																																								
2	7311.00	42.51	74.00	-31.49	56.52	35.82	14.18	64.01	0.00	--	PEAK																																																								

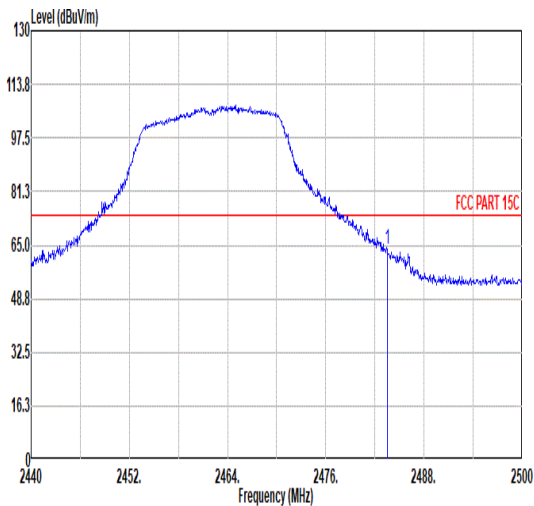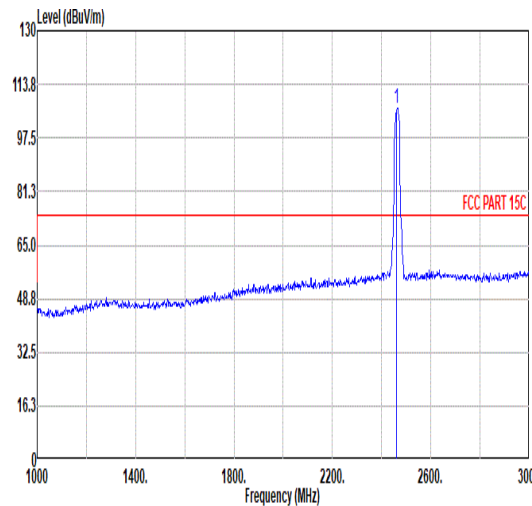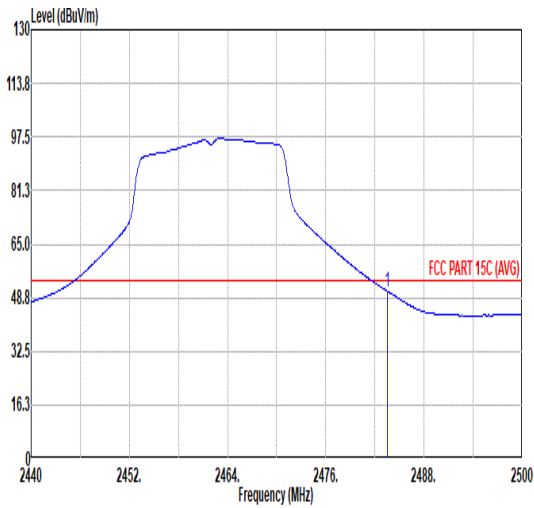
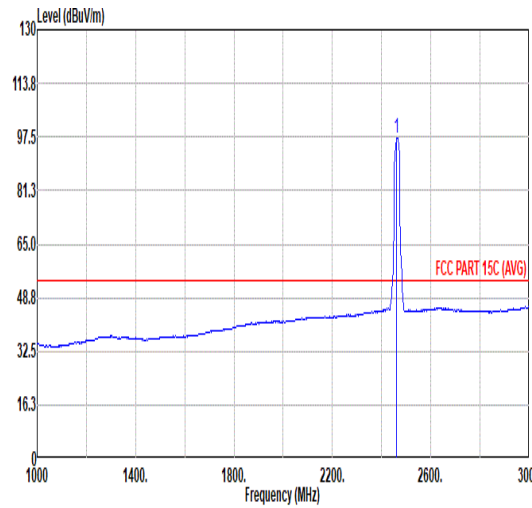


Mode	9																																																																																																														
	Band Edge																																																																																																														
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>63.60</td><td>74.00</td><td>-10.40</td><td>46.69</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>123</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	63.60	74.00	-10.40	46.69	32.33	9.23	30.65	6.00	270	123	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.50</td><td>-----</td><td>-----</td><td>89.69</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>123</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.50	-----	-----	89.69	32.26	9.21	30.66	6.00	270	123
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	63.60	74.00	-10.40	46.69	32.33	9.23	30.65	6.00	270	123	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	106.50	-----	-----	89.69	32.26	9.21	30.66	6.00	270	123	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.71</td><td>54.00</td><td>-3.29</td><td>33.80</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>123</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.71	54.00	-3.29	33.80	32.33	9.23	30.65	6.00	270	123	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.33</td><td>-----</td><td>-----</td><td>80.53</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>123</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.33	-----	-----	80.53	32.25	9.21	30.66	6.00	270	123
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2483.50	50.71	54.00	-3.29	33.80	32.33	9.23	30.65	6.00	270	123	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2462.00	97.33	-----	-----	80.53	32.25	9.21	30.66	6.00	270	123	AVERAGE																																																																																																			

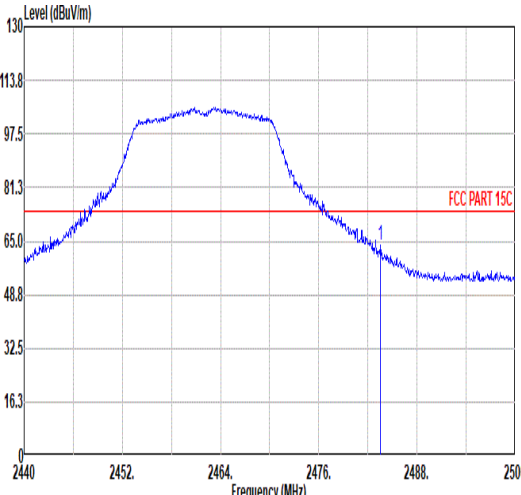
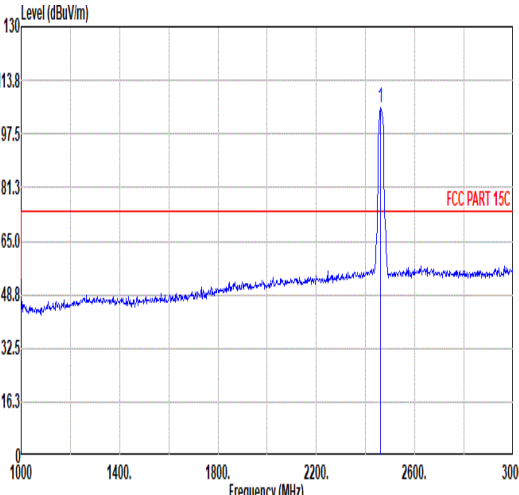
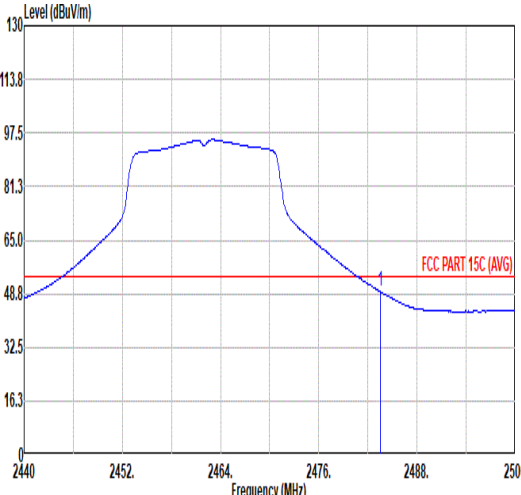
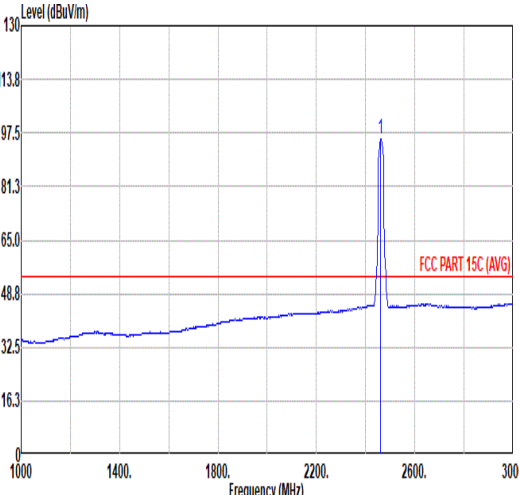


Mode	9																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>63.56</td><td>74.00</td><td>-10.44</td><td>46.65</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>272</td><td>232</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.56	63.56	74.00	-10.44	46.65	32.33	9.23	30.65	6.00	272	232	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.54</td><td>-----</td><td>-----</td><td>88.74</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>272</td><td>232</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.54	-----	-----	88.74	32.25	9.21	30.66	6.00	272	232
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.56	63.56	74.00	-10.44	46.65	32.33	9.23	30.65	6.00	272	232	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	105.54	-----	-----	88.74	32.25	9.21	30.66	6.00	272	232	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>49.36</td><td>54.00</td><td>-4.64</td><td>32.45</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>272</td><td>232</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.36	54.00	-4.64	32.45	32.33	9.23	30.65	6.00	272	232	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>95.71</td><td>-----</td><td>-----</td><td>78.91</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>272</td><td>232</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.71	-----	-----	78.91	32.25	9.21	30.66	6.00	272	232
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	49.36	54.00	-4.64	32.45	32.33	9.23	30.65	6.00	272	232	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	95.71	-----	-----	78.91	32.25	9.21	30.66	6.00	272	232	AVERAGE																																																																																							

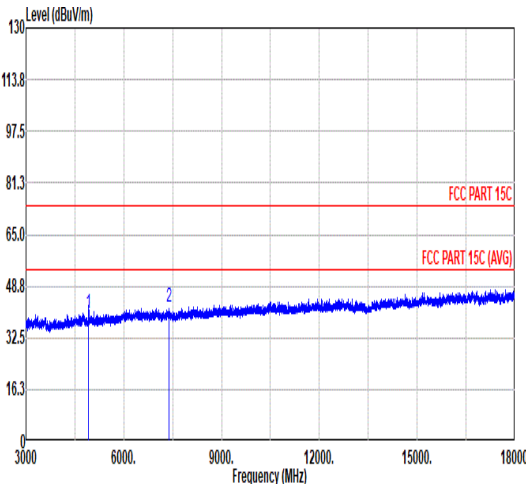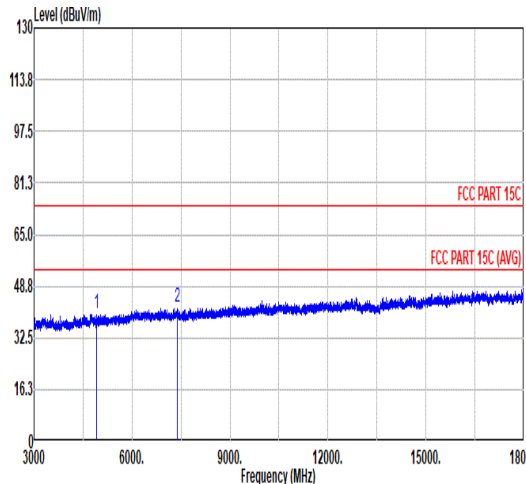

Mode	9																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.41</td><td>74.00</td><td>-33.59</td><td>58.72</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.95</td><td>74.00</td><td>-32.05</td><td>55.96</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.41	74.00	-33.59	58.72	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	41.95	74.00	-32.05	55.96	35.76	14.27	64.04	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.31</td><td>74.00</td><td>-33.69</td><td>58.62</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>42.08</td><td>74.00</td><td>-31.92</td><td>56.09</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.31	74.00	-33.69	58.62	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	42.08	74.00	-31.92	56.09	35.76	14.27	64.04	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.41	74.00	-33.59	58.72	34.40	11.65	64.36	0.00	--	PEAK																																																																																																															
2	7386.00	41.95	74.00	-32.05	55.96	35.76	14.27	64.04	0.00	--	PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.31	74.00	-33.69	58.62	34.40	11.65	64.36	0.00	--	PEAK																																																																																																															
2	7386.00	42.08	74.00	-31.92	56.09	35.76	14.27	64.04	0.00	--	PEAK																																																																																																															

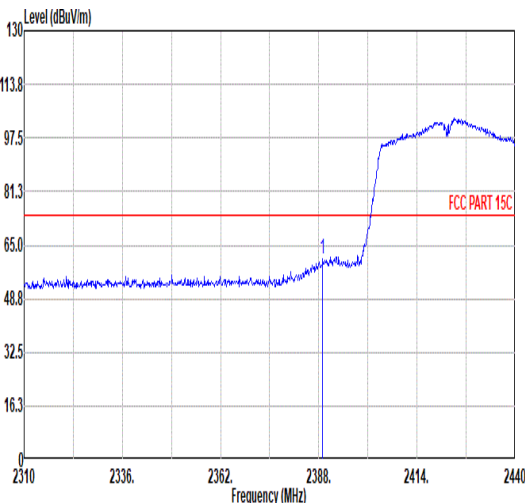
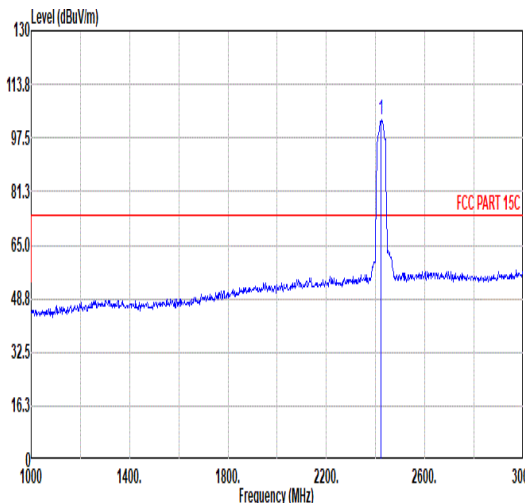
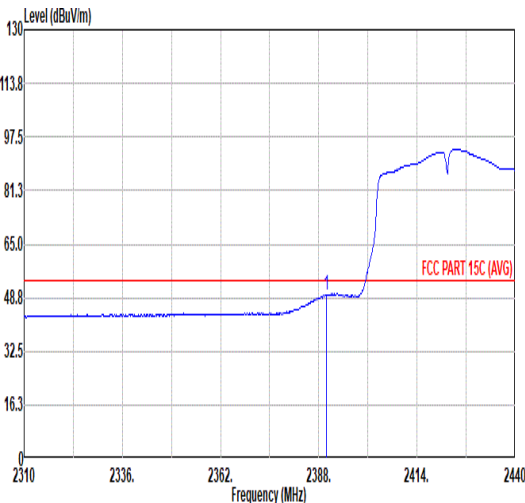
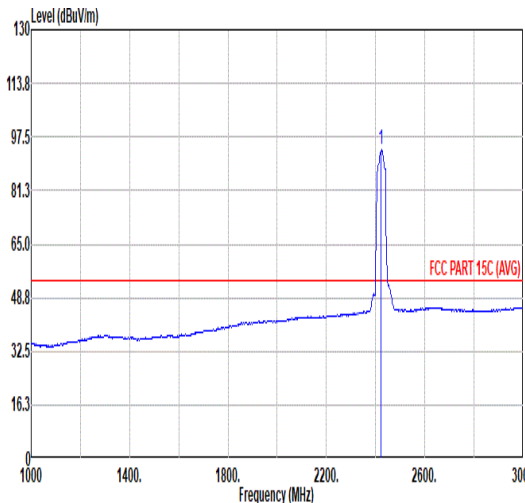


Mode	10																																																																																																			
	Band Edge - L																																																																																																			
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																																			
ANT	1																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.04</td><td>60.63</td><td>74.00</td><td>-13.37</td><td>43.72</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>253</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	60.63	74.00	-13.37	43.72	32.48	9.12	30.69	6.00	253	128	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>103.15</td><td>-----</td><td>-----</td><td>86.31</td><td>32.34</td><td>9.17</td><td>30.67</td><td>6.00</td><td>253</td><td>128</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	103.15	-----	-----	86.31	32.34	9.17	30.67	6.00	253	128	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.04	60.63	74.00	-13.37	43.72	32.48	9.12	30.69	6.00	253	128	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	103.15	-----	-----	86.31	32.34	9.17	30.67	6.00	253	128	PEAK																																																																																								
Avg																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>49.42</td><td>54.00</td><td>-4.58</td><td>32.51</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>253</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.42	54.00	-4.58	32.51	32.48	9.12	30.69	6.00	253	128	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2422.00</td><td>93.75</td><td>-----</td><td>-----</td><td>76.89</td><td>32.36</td><td>9.17</td><td>30.67</td><td>6.00</td><td>253</td><td>128</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	93.75	-----	-----	76.89	32.36	9.17	30.67	6.00	253	128	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	49.42	54.00	-4.58	32.51	32.48	9.12	30.69	6.00	253	128	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2422.00	93.75	-----	-----	76.89	32.36	9.17	30.67	6.00	253	128	AVERAGE																																																																																								





Mode	10																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																						
ANT	1																																																						
Pol.	Horizontal					Fundamental																																																	
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2486.86</td><td>55.68</td><td>74.00</td><td>-18.32</td><td>38.75</td><td>32.35</td><td>9.23</td><td>30.65</td><td>6.00</td><td>253</td><td>128</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2486.86	55.68	74.00	-18.32	38.75	32.35	9.23	30.65	6.00	253	128	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2486.86	55.68	74.00	-18.32	38.75	32.35	9.23	30.65	6.00	253	128	PEAK																																											
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.36</td><td>44.87</td><td>54.00</td><td>-9.13</td><td>27.95</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>253</td><td>128</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2485.36	44.87	54.00	-9.13	27.95	32.34	9.23	30.65	6.00	253	128	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2485.36	44.87	54.00	-9.13	27.95	32.34	9.23	30.65	6.00	253	128	AVERAGE																																											

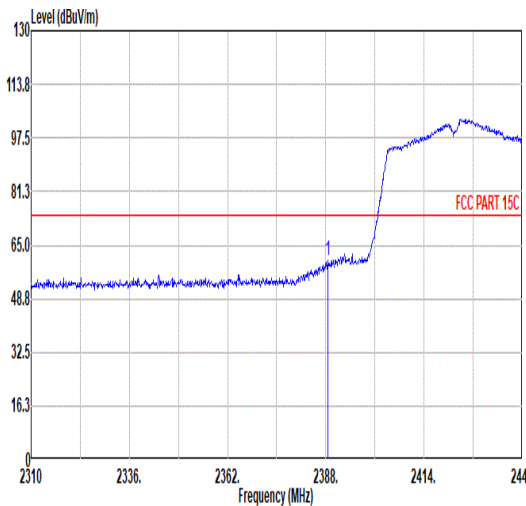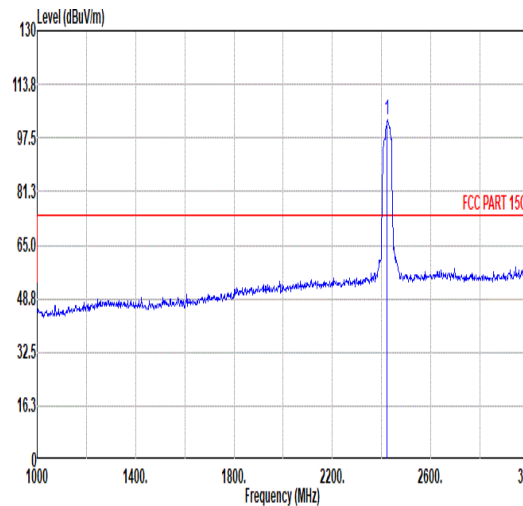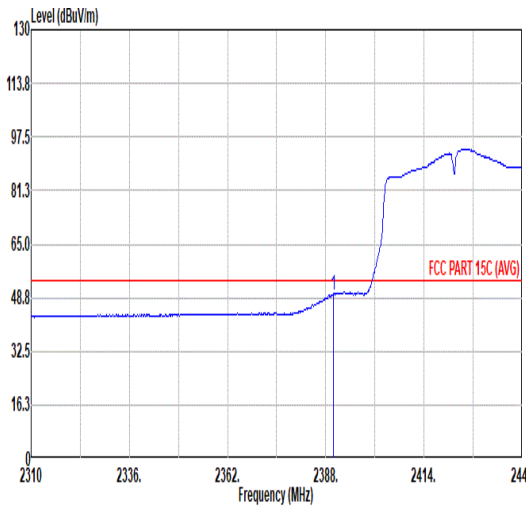
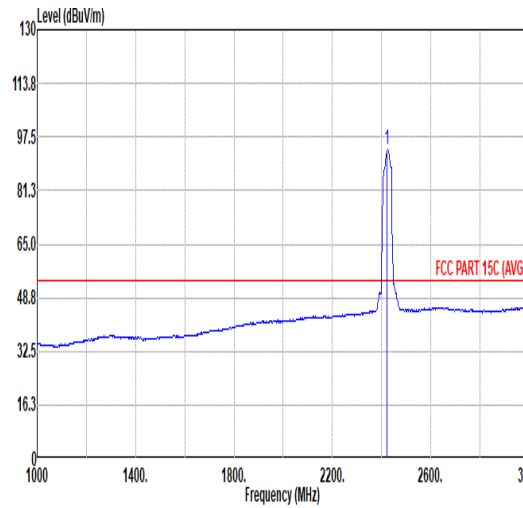


Mode	10																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																																																								
ANT	1																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2388.65</td><td>60.17</td><td>74.00</td><td>-13.83</td><td>43.26</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>317 225 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2388.65	60.17	74.00	-13.83	43.26	32.48	9.12	30.69	6.00	317 225 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>102.79</td><td>-----</td><td>-----</td><td>85.93</td><td>32.36</td><td>9.17</td><td>30.67</td><td>6.00</td><td>317 225 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	102.79	-----	-----	85.93	32.36	9.17	30.67	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2388.65	60.17	74.00	-13.83	43.26	32.48	9.12	30.69	6.00	317 225 PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	102.79	-----	-----	85.93	32.36	9.17	30.67	6.00	317 225 PEAK																																																																																
Avg																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.95</td><td>49.78</td><td>54.00</td><td>-4.22</td><td>32.87</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>317 225 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	49.78	54.00	-4.22	32.87	32.48	9.12	30.69	6.00	317 225 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2422.00</td><td>93.53</td><td>-----</td><td>-----</td><td>76.67</td><td>32.36</td><td>9.17</td><td>30.67</td><td>6.00</td><td>317 225 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2422.00	93.53	-----	-----	76.67	32.36	9.17	30.67	6.00
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.95	49.78	54.00	-4.22	32.87	32.48	9.12	30.69	6.00	317 225 AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2422.00	93.53	-----	-----	76.67	32.36	9.17	30.67	6.00	317 225 AVERAGE																																																																																

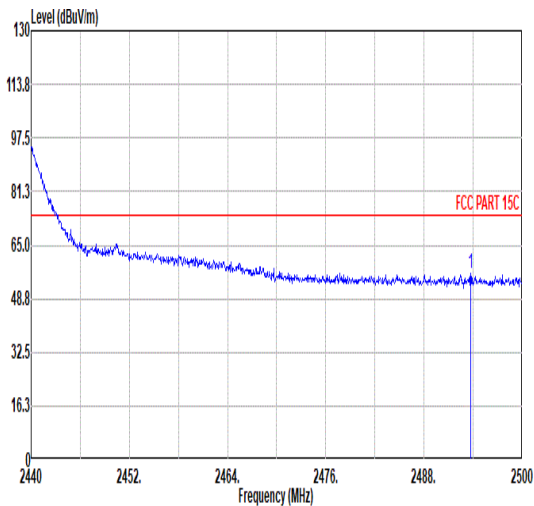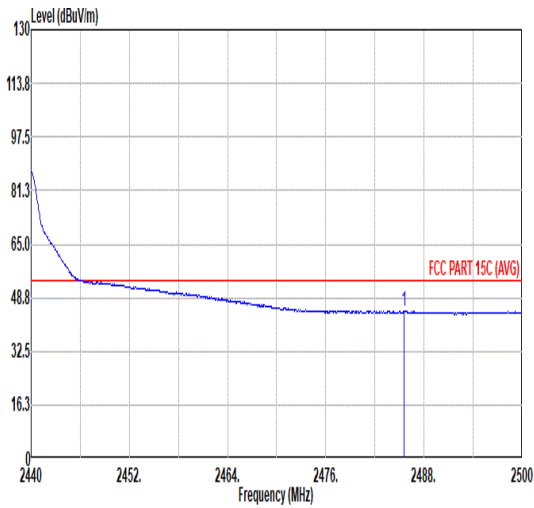

Mode	10																																																
	Band Edge - R																																																
	2400-2483.5_802.11n HT40_CH03_2422MHz																																																
ANT	1																																																
Pol.	Vertical						Fundamental																																										
Peak							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2493.70</td><td>56.27</td><td>74.00</td><td>-17.73</td><td>39.31</td><td>32.37</td><td>9.24</td><td>30.65</td><td>6.00</td><td>317</td><td>225</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2493.70	56.27	74.00	-17.73	39.31	32.37
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																							
1	2493.70	56.27	74.00	-17.73	39.31	32.37	9.24	30.65	6.00	317	225	PEAK																																					
Avg							Blank																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.60</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>27.68</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>317</td><td>225</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.60	44.60	54.00	-9.40	27.68	32.34
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																							
1	2485.60	44.60	54.00	-9.40	27.68	32.34	9.23	30.65	6.00	317	225	AVERAGE																																					

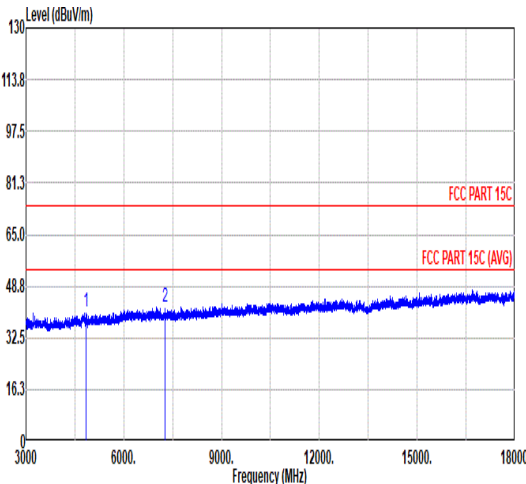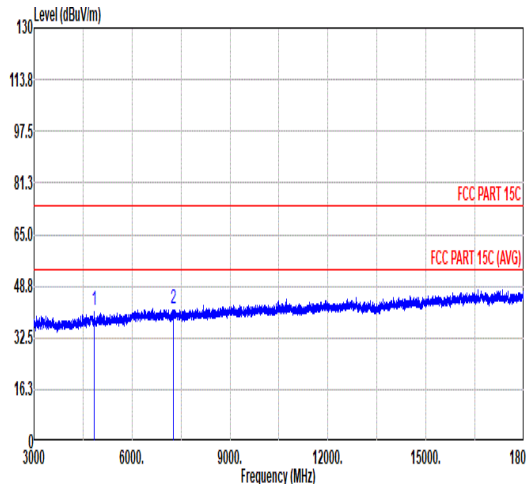

Mode	10																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>40.48</td><td>74.00</td><td>-33.52</td><td>58.80</td><td>34.40</td><td>11.47</td><td>64.19</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>42.04</td><td>74.00</td><td>-31.96</td><td>56.04</td><td>35.87</td><td>14.13</td><td>64.00</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	40.48	74.00	-33.52	58.80	34.40	11.47	64.19	0.00	--	PEAK	2	7266.00	42.04	74.00	-31.96	56.04	35.87	14.13	64.00	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4844.00</td><td>41.01</td><td>74.00</td><td>-32.99</td><td>59.33</td><td>34.40</td><td>11.47</td><td>64.19</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7266.00</td><td>41.93</td><td>74.00</td><td>-32.07</td><td>55.93</td><td>35.87</td><td>14.13</td><td>64.00</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4844.00	41.01	74.00	-32.99	59.33	34.40	11.47	64.19	0.00	--	PEAK	2	7266.00	41.93	74.00	-32.07	55.93	35.87	14.13	64.00	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4844.00	40.48	74.00	-33.52	58.80	34.40	11.47	64.19	0.00	--	PEAK																																																																																																															
2	7266.00	42.04	74.00	-31.96	56.04	35.87	14.13	64.00	0.00	--	PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4844.00	41.01	74.00	-32.99	59.33	34.40	11.47	64.19	0.00	--	PEAK																																																																																																															
2	7266.00	41.93	74.00	-32.07	55.93	35.87	14.13	64.00	0.00	--	PEAK																																																																																																															







Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>62.83</td><td>74.00</td><td>-11.17</td><td>45.92</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>313</td><td>129</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	62.83	74.00	-11.17	45.92	32.48	9.12	30.69	6.00	313	129	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>104.71</td><td>-----</td><td>-----</td><td>87.87</td><td>32.33</td><td>9.18</td><td>30.67</td><td>6.00</td><td>313</td><td>129</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.71	-----	-----	87.87	32.33	9.18	30.67	6.00	313	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	62.83	74.00	-11.17	45.92	32.48	9.12	30.69	6.00	313	129	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	104.71	-----	-----	87.87	32.33	9.18	30.67	6.00	313	129	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>31.80</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>313</td><td>129</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	48.71	54.00	-5.29	31.80	32.48	9.12	30.69	6.00	313	129	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>95.13</td><td>-----</td><td>-----</td><td>78.29</td><td>32.34</td><td>9.17</td><td>30.67</td><td>6.00</td><td>313</td><td>129</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.13	-----	-----	78.29	32.34	9.17	30.67	6.00	313	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	48.71	54.00	-5.29	31.80	32.48	9.12	30.69	6.00	313	129	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2437.00	95.13	-----	-----	78.29	32.34	9.17	30.67	6.00	313	129	AVERAGE																																																																																							



Mode	11																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Horizontal										Fundamental																																												
Peak	<table><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.58</td><td>59.51</td><td>74.00</td><td>-14.49</td><td>42.59</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>313 129 PEAK</td></tr></table>										Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2484.58	59.51	74.00	-14.49	42.59	32.34	9.23	30.65	6.00	313 129 PEAK	Blank
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2484.58	59.51	74.00	-14.49	42.59	32.34	9.23	30.65	6.00	313 129 PEAK																																													
Avg	<table><tr><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.25</td><td>54.00</td><td>-6.75</td><td>30.34</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>313 129 AVERAGE</td></tr></table>										Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.56	47.25	54.00	-6.75	30.34	32.33	9.23	30.65	6.00	313 129 AVERAGE	Blank
Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1	2483.56	47.25	54.00	-6.75	30.34	32.33	9.23	30.65	6.00	313 129 AVERAGE																																													

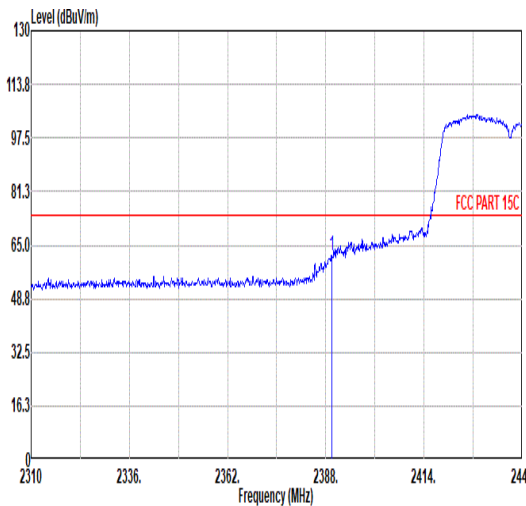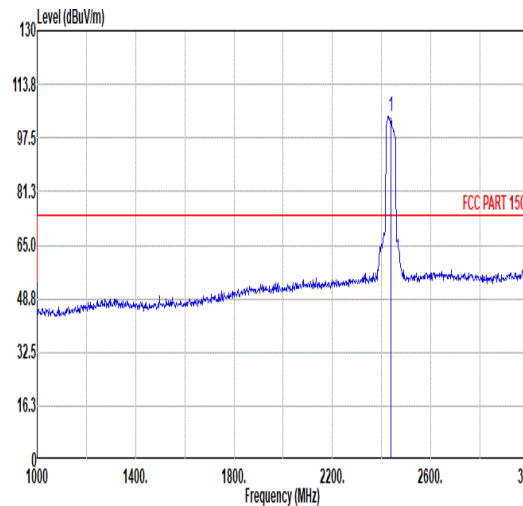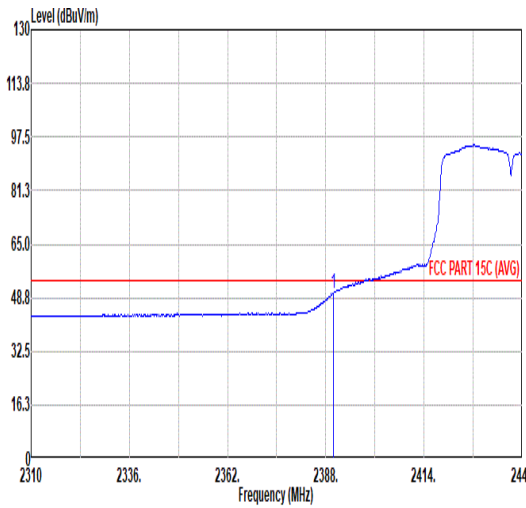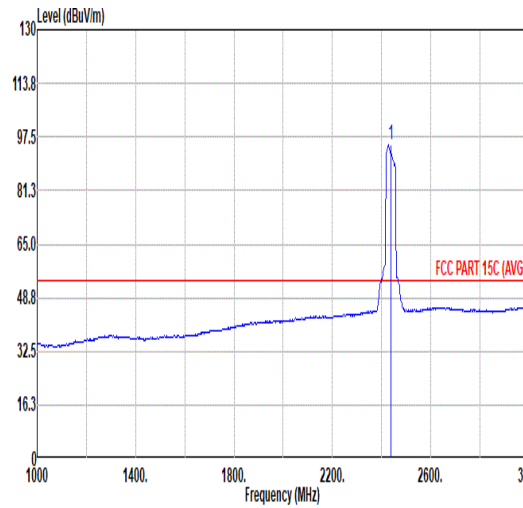


Mode	11																																																																																																	
	Band Edge - L																																																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																																	
ANT	1																																																																																																	
Pol.	Vertical						Fundamental																																																																																											
Peak																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>62.03</td><td>74.00</td><td>-11.97</td><td>45.12</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>319</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	62.03	74.00	-11.97	45.12	32.48	9.12	30.69	6.00	319	222	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>104.07</td><td>-----</td><td>-----</td><td>87.23</td><td>32.33</td><td>9.18</td><td>30.67</td><td>6.00</td><td>319</td><td>222</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	104.07	-----	-----	87.23	32.33	9.18	30.67	6.00	319	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.69	62.03	74.00	-11.97	45.12	32.48	9.12	30.69	6.00	319	222	PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	104.07	-----	-----	87.23	32.33	9.18	30.67	6.00	319	222	PEAK																																																																																						
Avg																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>50.02</td><td>54.00</td><td>-3.98</td><td>33.11</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>319</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.02	54.00	-3.98	33.11	32.48	9.12	30.69	6.00	319	222	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2437.00</td><td>94.98</td><td>-----</td><td>-----</td><td>78.14</td><td>32.33</td><td>9.18</td><td>30.67</td><td>6.00</td><td>319</td><td>222</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	94.98	-----	-----	78.14	32.33	9.18	30.67	6.00	319	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2389.95	50.02	54.00	-3.98	33.11	32.48	9.12	30.69	6.00	319	222	AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2437.00	94.98	-----	-----	78.14	32.33	9.18	30.67	6.00	319	222	AVERAGE																																																																																						







Mode	11																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.88</td><td>57.04</td><td>74.00</td><td>-16.96</td><td>40.12</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>319 222 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	57.04	74.00	-16.96	40.12	32.34	9.23	30.65	6.00	319 222 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.88	57.04	74.00	-16.96	40.12	32.34	9.23	30.65	6.00	319 222 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.76</td><td>45.96</td><td>54.00</td><td>-8.04</td><td>29.04</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>319 222 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.76	45.96	54.00	-8.04	29.04	32.34	9.23	30.65	6.00	319 222 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.76	45.96	54.00	-8.04	29.04	32.34	9.23	30.65	6.00	319 222 AVERAGE																																													


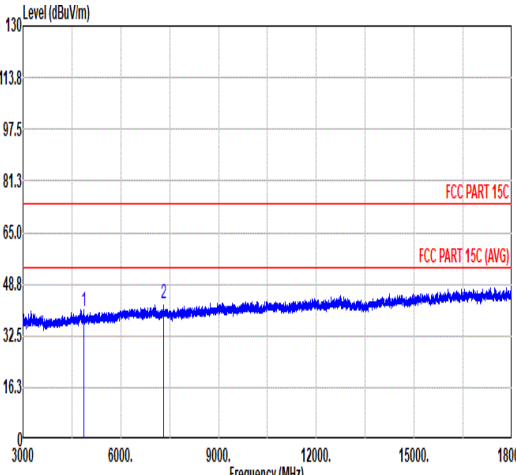


Mode	11																																																																	
	Harmonic																																																																	
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																	
ANT	1																																																																	
Pol.	Horizontal																																																																	
Peak Avg																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																									
	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>4874.00</td><td>40.18</td><td>74.00</td><td>-33.82</td><td>58.53</td><td>34.40</td><td>11.54</td><td>64.29</td><td>0.00</td><td>--</td></tr><tr><td>2</td><td>7311.00</td><td>42.57</td><td>74.00</td><td>-31.43</td><td>56.58</td><td>35.82</td><td>14.18</td><td>64.01</td><td>0.00</td><td>--</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--	2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB																																																								
1	4874.00	40.18	74.00	-33.82	58.53	34.40	11.54	64.29	0.00	--																																																								
2	7311.00	42.57	74.00	-31.43	56.58	35.82	14.18	64.01	0.00	--																																																								
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</</th></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB</																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			cm	deg																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB</																																																								

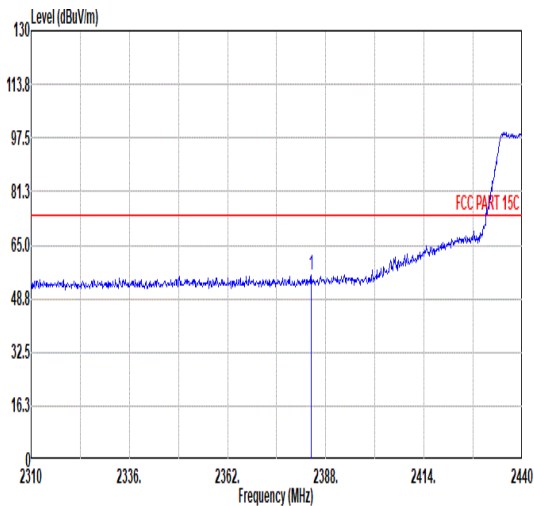
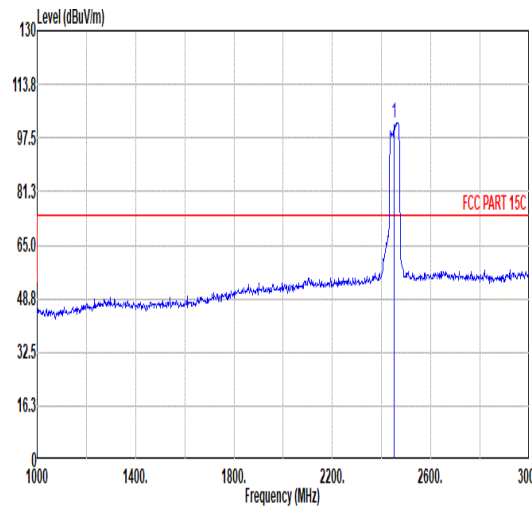
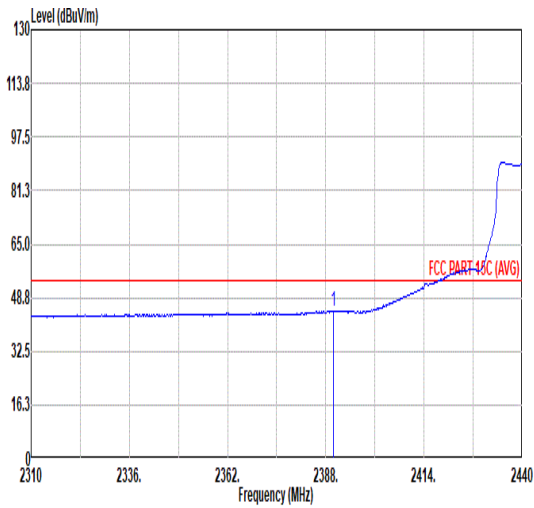
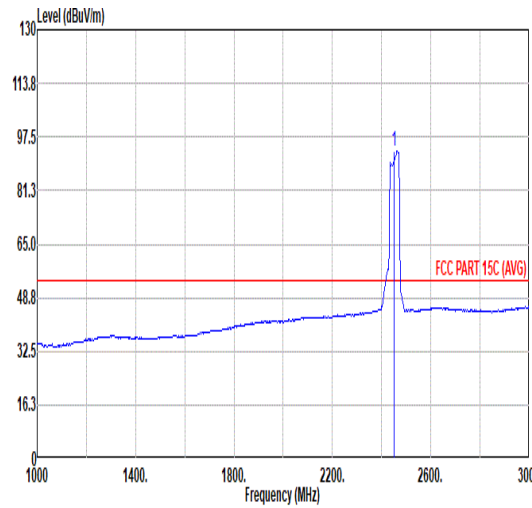


Mode	12																																																																																																														
	Band Edge - L																																																																																																														
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																																														
ANT	1																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2384.23</td><td>55.69</td><td>74.00</td><td>-18.31</td><td>38.80</td><td>32.47</td><td>9.11</td><td>30.69</td><td>6.00</td><td>270</td><td>129</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2384.23	55.69	74.00	-18.31	38.80	32.47	9.11	30.69	6.00	270	129	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>102.16</td><td>-----</td><td>-----</td><td>85.35</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>129</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	102.16	-----	-----	85.35	32.26	9.21	30.66	6.00	270	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2384.23	55.69	74.00	-18.31	38.80	32.47	9.11	30.69	6.00	270	129	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	102.16	-----	-----	85.35	32.26	9.21	30.66	6.00	270	129	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.77</td><td>54.00</td><td>-9.23</td><td>27.86</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>270</td><td>129</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.77	54.00	-9.23	27.86	32.48	9.12	30.69	6.00	270	129	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>93.10</td><td>-----</td><td>-----</td><td>76.29</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>270</td><td>129</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	93.10	-----	-----	76.29	32.26	9.21	30.66	6.00	270	129
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2389.95	44.77	54.00	-9.23	27.86	32.48	9.12	30.69	6.00	270	129	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	2452.00	93.10	-----	-----	76.29	32.26	9.21	30.66	6.00	270	129	AVERAGE																																																																																																			

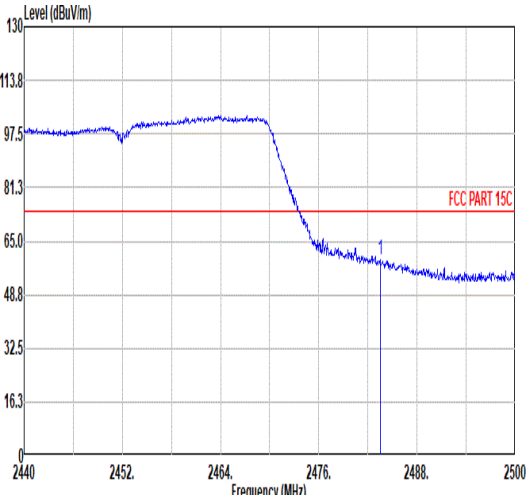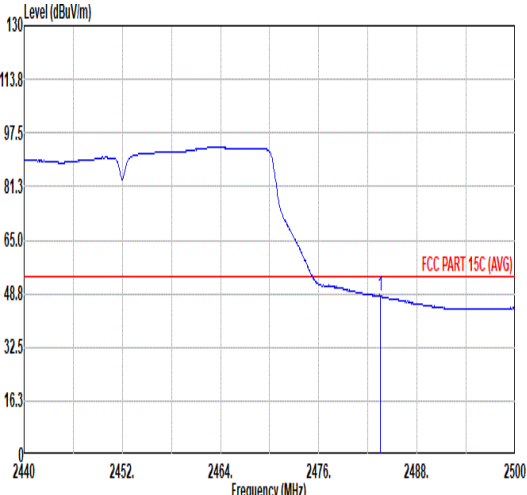

Mode	12																																															
	Band Edge - R																																															
	2400-2483.5_802.11n HT40_CH09_2452MHz																																															
ANT	1																																															
Pol.	Horizontal						Fundamental																																									
Peak							Blank																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>59.54</td><td>74.00</td><td>-14.46</td><td>42.63</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>129 PEAK</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	59.54	74.00	-14.46	42.63
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	2483.50	59.54	74.00	-14.46	42.63	32.33	9.23	30.65	6.00	270	129 PEAK																																					
Avg							Blank																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>47.95</td><td>54.00</td><td>-6.05</td><td>31.04</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>270</td><td>129 AVERAGE</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.95	54.00	-6.05	31.04
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																						
1	2483.50	47.95	54.00	-6.05	31.04	32.33	9.23	30.65	6.00	270	129 AVERAGE																																					

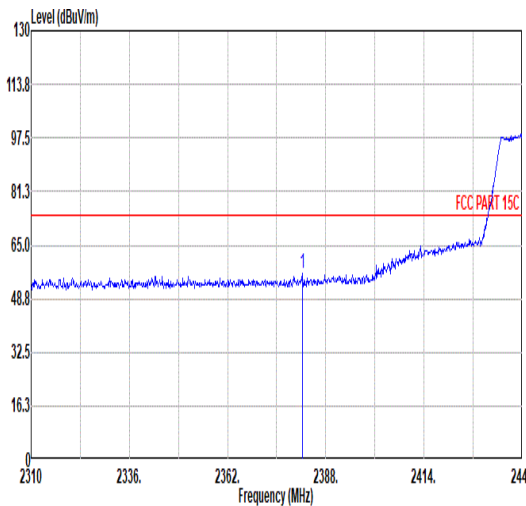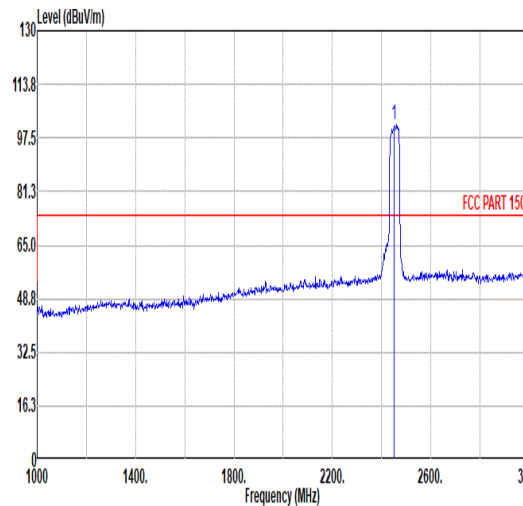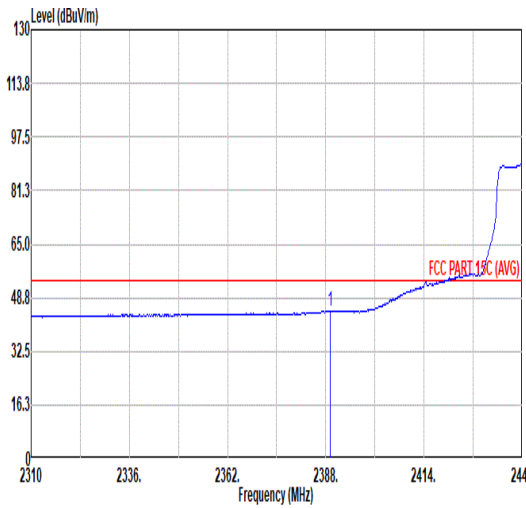
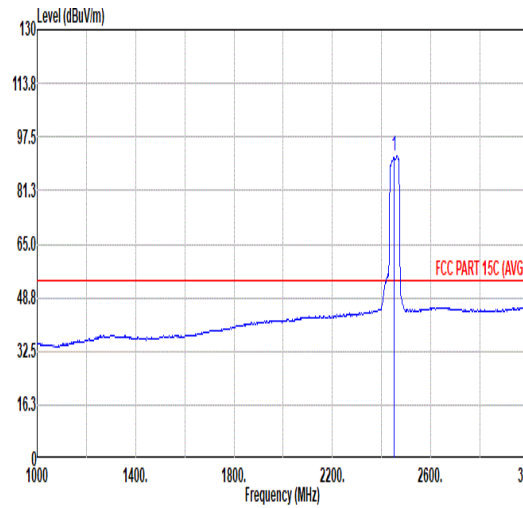



Mode	12																																																																																																		
	Band Edge - L																																																																																																		
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2381.76</td><td>56.48</td><td>74.00</td><td>-17.52</td><td>39.61</td><td>32.46</td><td>9.10</td><td>30.69</td><td>6.00</td><td>273</td><td>229</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2381.76	56.48	74.00	-17.52	39.61	32.46	9.10	30.69	6.00	273	229	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>101.46</td><td>-----</td><td>-----</td><td>84.66</td><td>32.25</td><td>9.21</td><td>30.66</td><td>6.00</td><td>273</td><td>229</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	101.46	-----	-----	84.66	32.25	9.21	30.66	6.00	273	229
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2381.76	56.48	74.00	-17.52	39.61	32.46	9.10	30.69	6.00	273	229	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	101.46	-----	-----	84.66	32.25	9.21	30.66	6.00	273	229	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.17</td><td>44.80</td><td>54.00</td><td>-9.20</td><td>27.89</td><td>32.48</td><td>9.12</td><td>30.69</td><td>6.00</td><td>273</td><td>229</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.17	44.80	54.00	-9.20	27.89	32.48	9.12	30.69	6.00	273	229	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>91.76</td><td>-----</td><td>-----</td><td>74.95</td><td>32.26</td><td>9.21</td><td>30.66</td><td>6.00</td><td>273</td><td>229</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2452.00	91.76	-----	-----	74.95	32.26	9.21	30.66	6.00	273	229
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.17	44.80	54.00	-9.20	27.89	32.48	9.12	30.69	6.00	273	229	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2452.00	91.76	-----	-----	74.95	32.26	9.21	30.66	6.00	273	229	AVERAGE																																																																																							







Mode	12																																																						
	Band Edge - R																																																						
	2400-2483.5_802.11n HT40_CH09_2452MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.10</td><td>59.15</td><td>74.00</td><td>-14.85</td><td>42.23</td><td>32.34</td><td>9.23</td><td>30.65</td><td>6.00</td><td>273 229 PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.10	59.15	74.00	-14.85	42.23	32.34	9.23	30.65	6.00	273 229 PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.10	59.15	74.00	-14.85	42.23	32.34	9.23	30.65	6.00	273 229 PEAK																																													
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="2">Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>47.13</td><td>54.00</td><td>-6.87</td><td>30.22</td><td>32.33</td><td>9.23</td><td>30.65</td><td>6.00</td><td>273 229 AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	47.13	54.00	-6.87	30.22	32.33	9.23	30.65	6.00	273 229 AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	47.13	54.00	-6.87	30.22	32.33	9.23	30.65	6.00	273 229 AVERAGE																																													

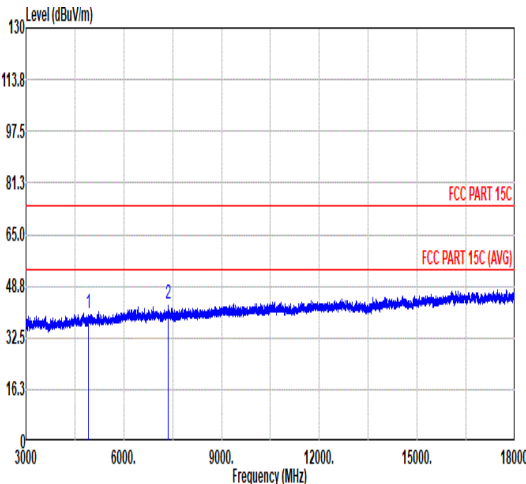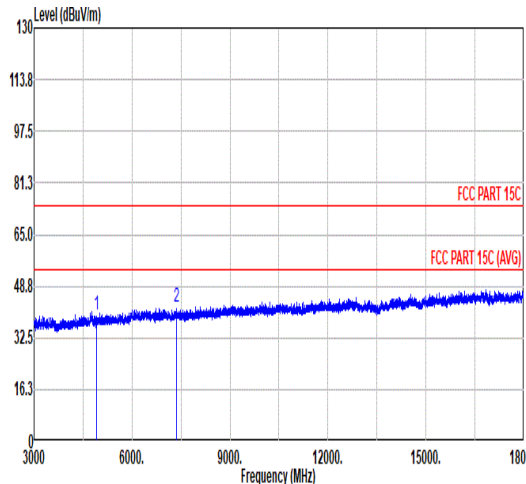





Mode	12																																																																																																																																											
	Harmonic																																																																																																																																											
	2400-2483.5_802.11n_HT40_CH09_2452MHz																																																																																																																																											
ANT	1																																																																																																																																											
Pol.	Horizontal						Vertical																																																																																																																																					
Peak Avg																																																																																																																																												
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4904.00</td><td>40.26</td><td>74.00</td><td>-33.74</td><td>58.64</td><td>34.40</td><td>11.60</td><td>64.38</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>43.11</td><td>74.00</td><td>-30.89</td><td>57.02</td><td>35.88</td><td>14.24</td><td>64.03</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	40.26	74.00	-33.74	58.64	34.40	11.60	64.38	0.00	--	--	PEAK	2	7356.00	43.11	74.00	-30.89	57.02	35.88	14.24	64.03	0.00	--	--	PEAK	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4904.00</td><td>39.96</td><td>74.00</td><td>-34.04</td><td>58.34</td><td>34.40</td><td>11.60</td><td>64.38</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7356.00</td><td>42.43</td><td>74.00</td><td>-31.57</td><td>56.34</td><td>35.88</td><td>14.24</td><td>64.03</td><td>0.00</td><td>--</td><td>--</td><td>PEAK</td></tr></table>								Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	4904.00	39.96	74.00	-34.04	58.34	34.40	11.60	64.38	0.00	--	--	PEAK	2	7356.00	42.43	74.00	-31.57	56.34	35.88	14.24	64.03	0.00	--	--	PEAK
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4904.00	40.26	74.00	-33.74	58.64	34.40	11.60	64.38	0.00	--	--	PEAK																																																																																																																																
2	7356.00	43.11	74.00	-30.89	57.02	35.88	14.24	64.03	0.00	--	--	PEAK																																																																																																																																
		Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																	
1	4904.00	39.96	74.00	-34.04	58.34	34.40	11.60	64.38	0.00	--	--	PEAK																																																																																																																																
2	7356.00	42.43	74.00	-31.57	56.34	35.88	14.24	64.03	0.00	--	--	PEAK																																																																																																																																

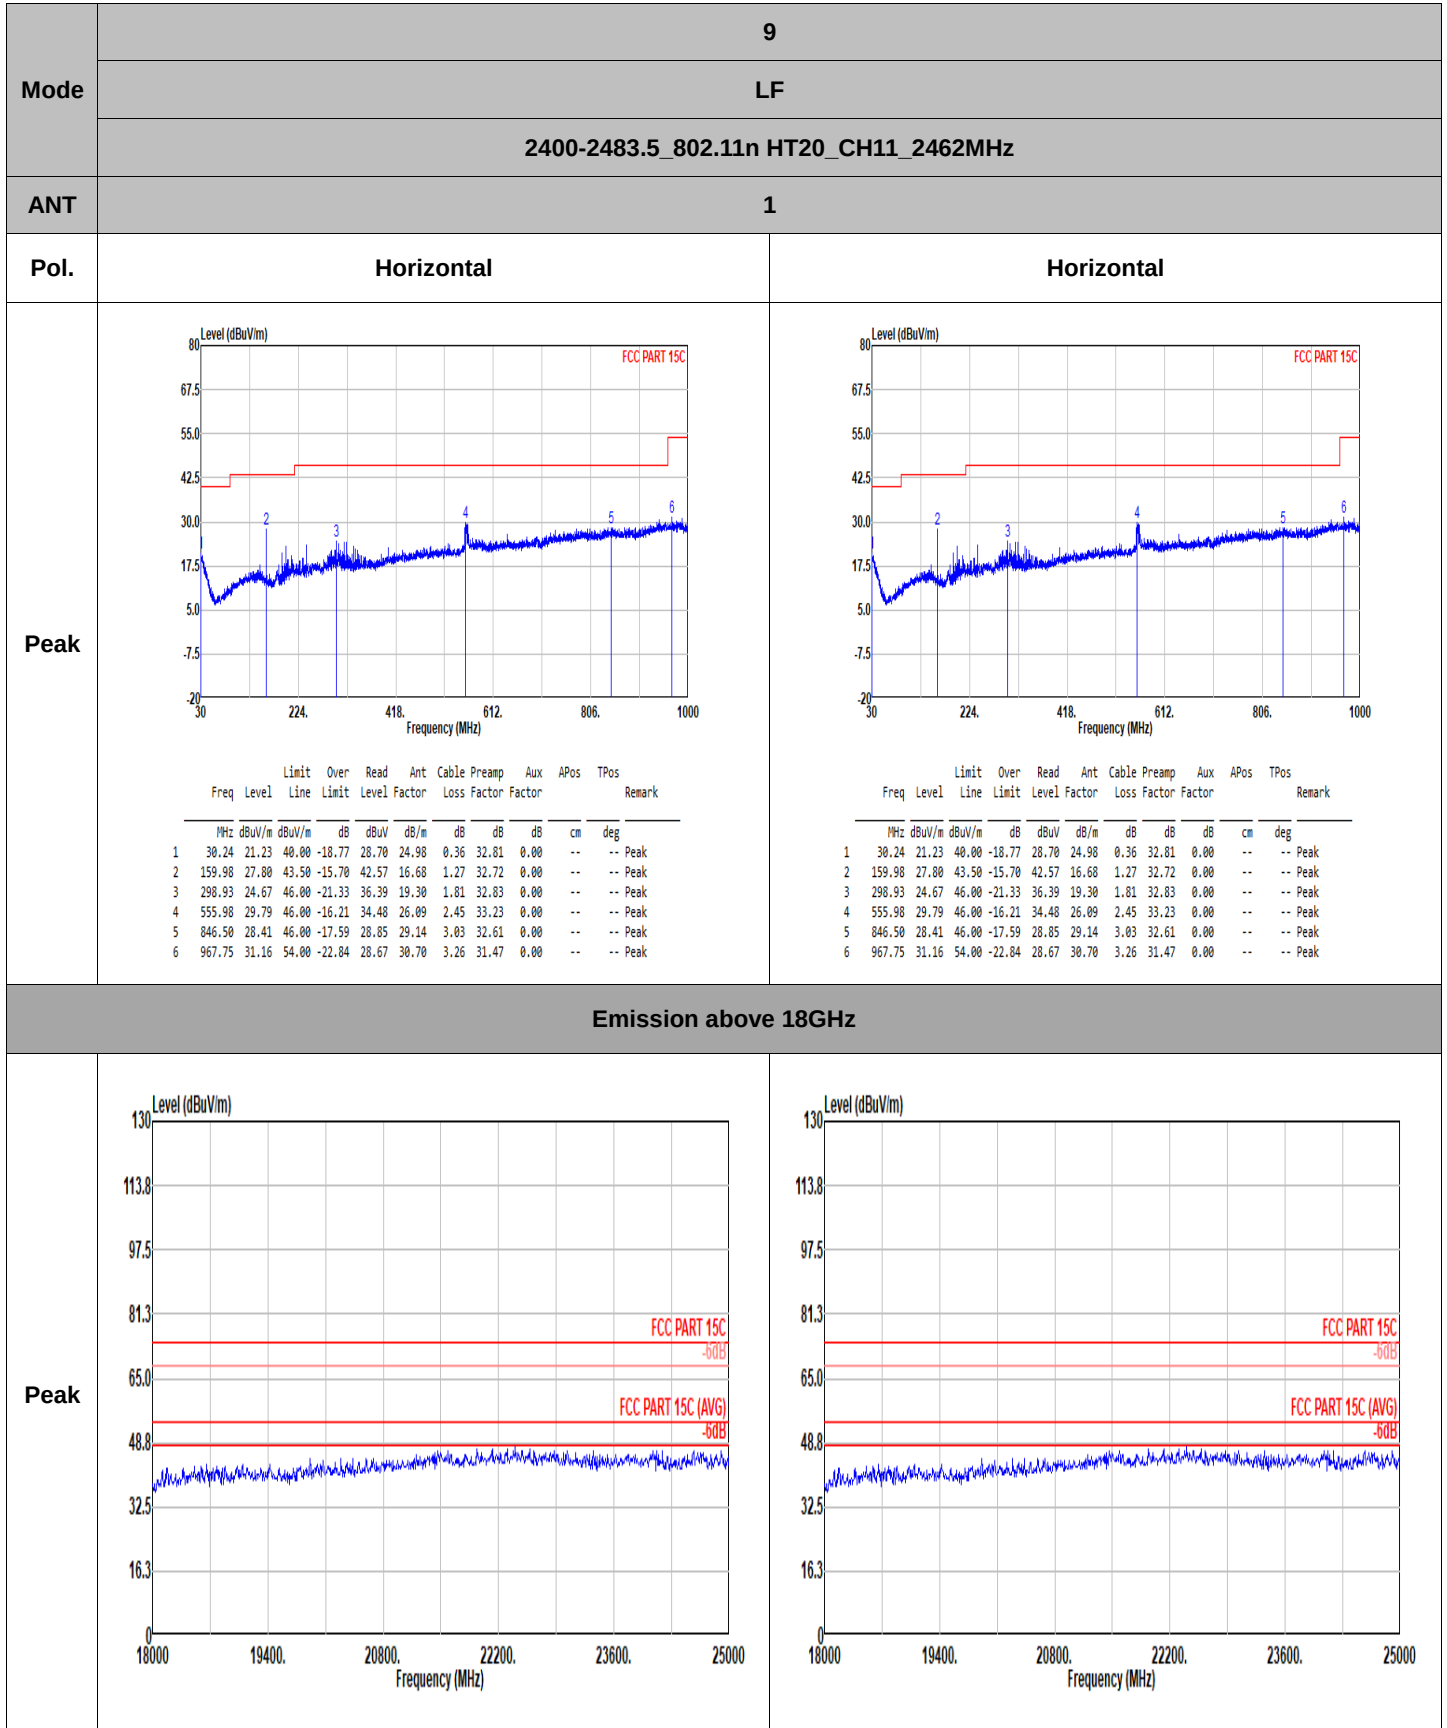

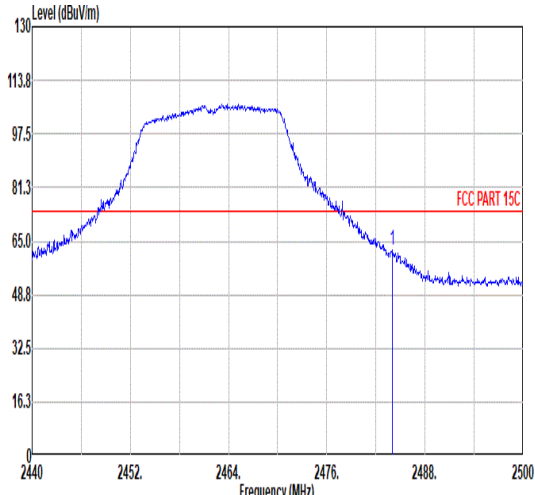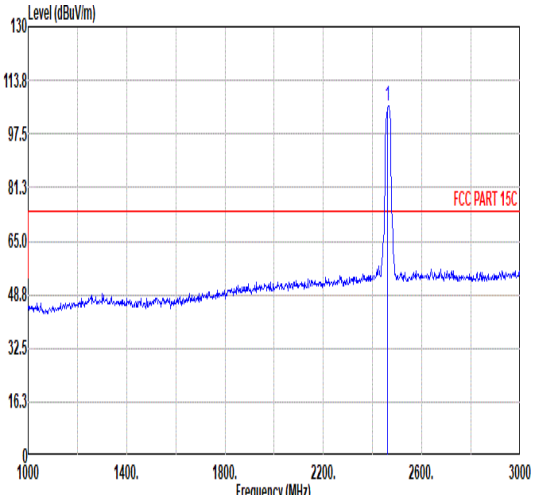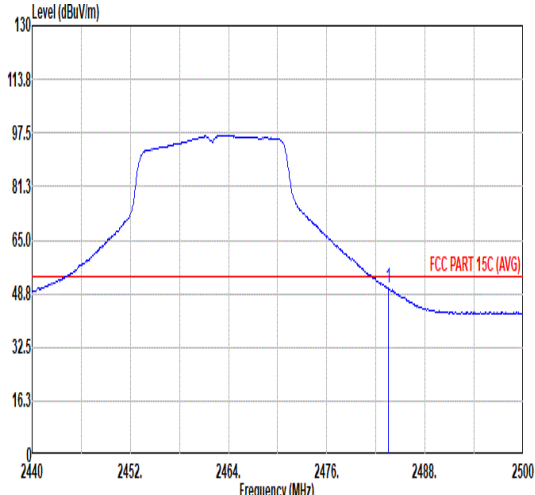
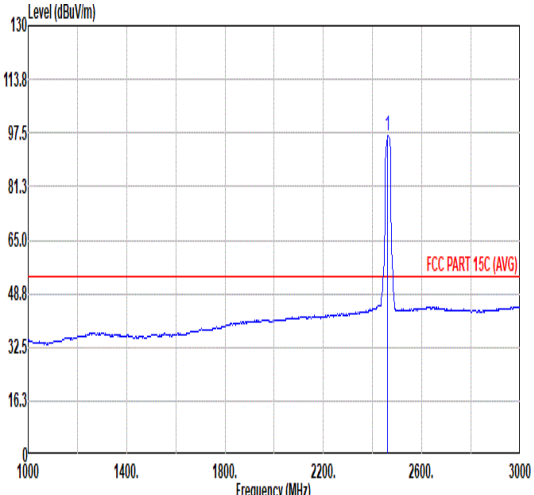


Mode	13																																																						
	Band Edge																																																						
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.04</td><td>62.17</td><td>74.00</td><td>-11.83</td><td>47.18</td><td>32.34</td><td>9.23</td><td>32.58</td><td>6.00</td><td>200</td><td>131</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.04	62.17	74.00	-11.83	47.18	32.34	9.23	32.58	6.00	200	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2484.04	62.17	74.00	-11.83	47.18	32.34	9.23	32.58	6.00	200	131	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.99</td><td>-----</td><td>-----</td><td>91.14</td><td>32.26</td><td>9.21</td><td>32.62</td><td>6.00</td><td>200</td><td>131</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.99	-----	-----	91.14	32.26	9.21	32.62	6.00	200	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	105.99	-----	-----	91.14	32.26	9.21	32.62	6.00	200	131	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.50</td><td>50.47</td><td>54.00</td><td>-3.53</td><td>35.49</td><td>32.33</td><td>9.23</td><td>32.58</td><td>6.00</td><td>200</td><td>131</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	50.47	54.00	-3.53	35.49	32.33	9.23	32.58	6.00	200	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2483.50	50.47	54.00	-3.53	35.49	32.33	9.23	32.58	6.00	200	131	AVERAGE																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.66</td><td>-----</td><td>-----</td><td>81.83</td><td>32.25</td><td>9.21</td><td>32.63</td><td>6.00</td><td>200</td><td>131</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.66	-----	-----	81.83	32.25	9.21	32.63	6.00	200	131
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	2462.00	96.66	-----	-----	81.83	32.25	9.21	32.63	6.00	200	131	AVERAGE																																											

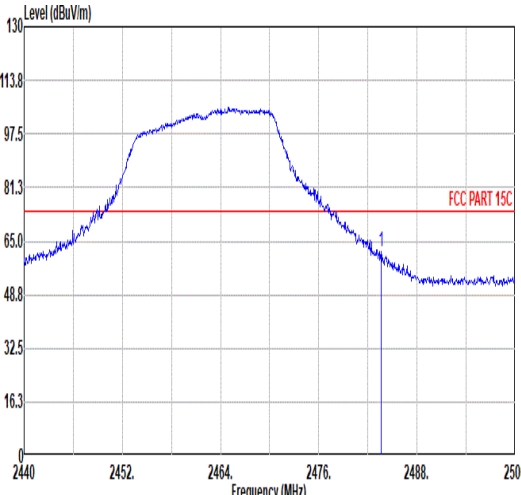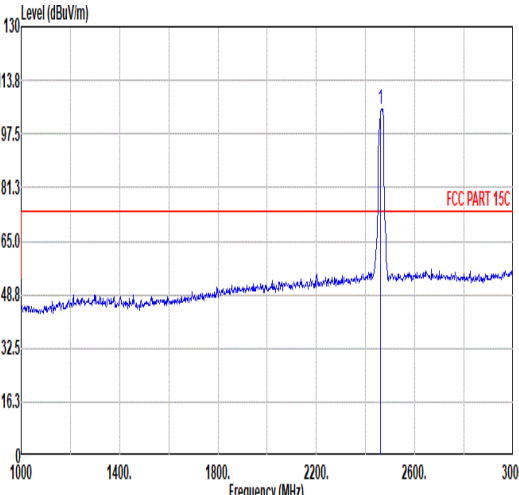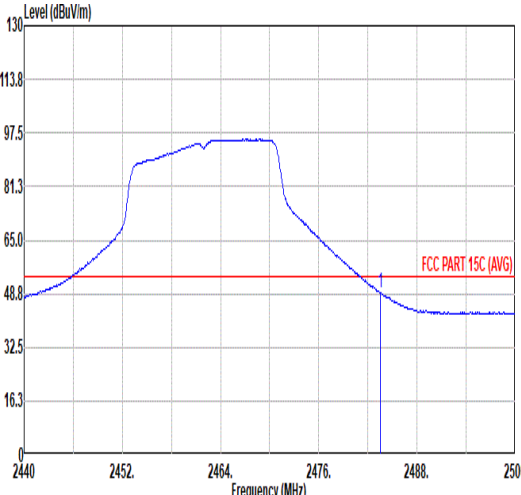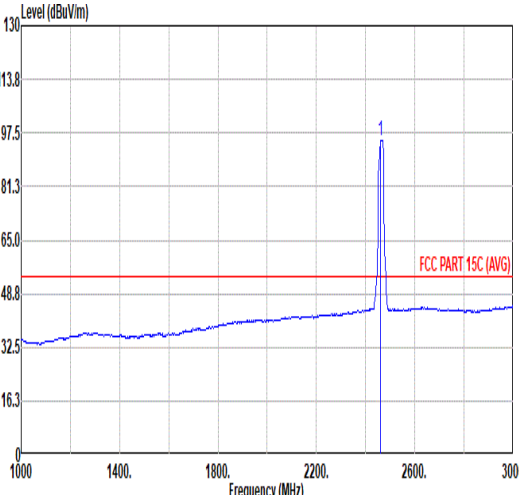

Mode	13																																																																																																		
	Band Edge																																																																																																		
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>61.75</td><td>74.00</td><td>-12.25</td><td>46.77</td><td>32.33</td><td>9.23</td><td>32.58</td><td>6.00</td><td>100</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.62	61.75	74.00	-12.25	46.77	32.33	9.23	32.58	6.00	100	169	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>105.03</td><td>-----</td><td>-----</td><td>90.18</td><td>32.26</td><td>9.21</td><td>32.62</td><td>6.00</td><td>100</td><td>169</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.03	-----	-----	90.18	32.26	9.21	32.62	6.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.62	61.75	74.00	-12.25	46.77	32.33	9.23	32.58	6.00	100	169	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	105.03	-----	-----	90.18	32.26	9.21	32.62	6.00	100	169	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.50</td><td>49.00</td><td>54.00</td><td>-4.92</td><td>34.10</td><td>32.33</td><td>9.23</td><td>32.58</td><td>6.00</td><td>100</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	49.00	54.00	-4.92	34.10	32.33	9.23	32.58	6.00	100	169	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>95.37</td><td>-----</td><td>-----</td><td>80.50</td><td>32.27</td><td>9.21</td><td>32.61</td><td>6.00</td><td>100</td><td>169</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.37	-----	-----	80.50	32.27	9.21	32.61	6.00	100	169
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.50	49.00	54.00	-4.92	34.10	32.33	9.23	32.58	6.00	100	169	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2462.00	95.37	-----	-----	80.50	32.27	9.21	32.61	6.00	100	169	AVERAGE																																																																																							

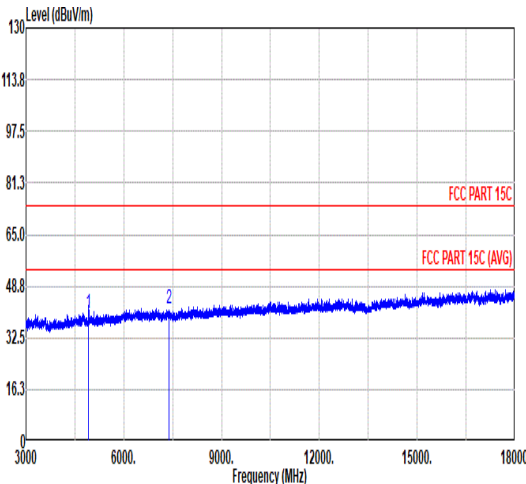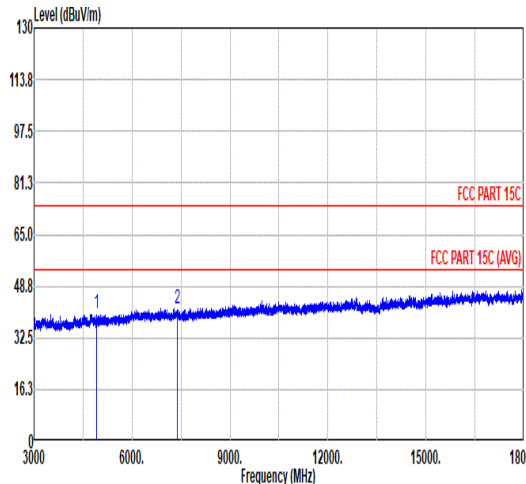


Mode	13																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg																																																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.31</td><td>74.00</td><td>-33.69</td><td>58.62</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.85</td><td>74.00</td><td>-32.15</td><td>55.86</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.31	74.00	-33.69	58.62	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	41.85	74.00	-32.15	55.86	35.76	14.27	64.04	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>40.11</td><td>74.00</td><td>-33.89</td><td>58.42</td><td>34.40</td><td>11.65</td><td>64.36</td><td>0.00</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>7386.00</td><td>41.88</td><td>74.00</td><td>-32.12</td><td>55.89</td><td>35.76</td><td>14.27</td><td>64.04</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	40.11	74.00	-33.89	58.42	34.40	11.65	64.36	0.00	--	PEAK	2	7386.00	41.88	74.00	-32.12	55.89	35.76	14.27	64.04	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.31	74.00	-33.69	58.62	34.40	11.65	64.36	0.00	--	PEAK																																																																																																															
2	7386.00	41.85	74.00	-32.15	55.86	35.76	14.27	64.04	0.00	--	PEAK																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			Remark																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	40.11	74.00	-33.89	58.42	34.40	11.65	64.36	0.00	--	PEAK																																																																																																															
2	7386.00	41.88	74.00	-32.12	55.89	35.76	14.27	64.04	0.00	--	PEAK																																																																																																															



Appendix D. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	100	-	-	10Hz
802.11g	98.09	-	-	10Hz
802.11n HT20	98.45	-	-	10Hz
802.11n HT40	94.95	0.940	1.064	1.1KHz

802.11b

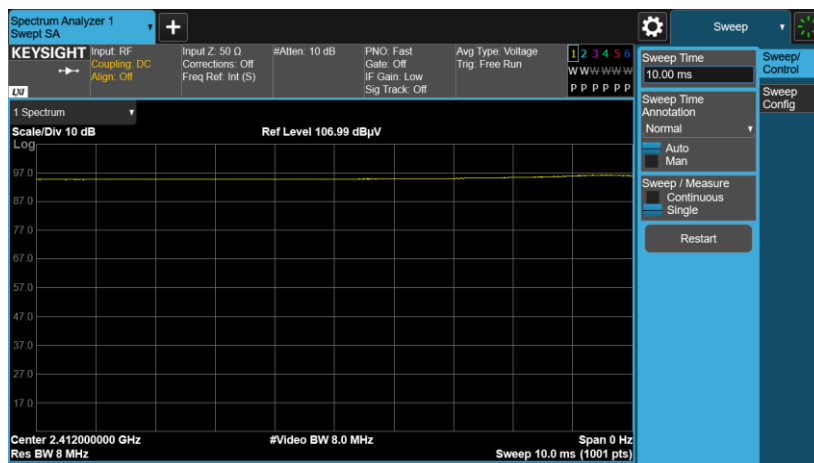




802.11g

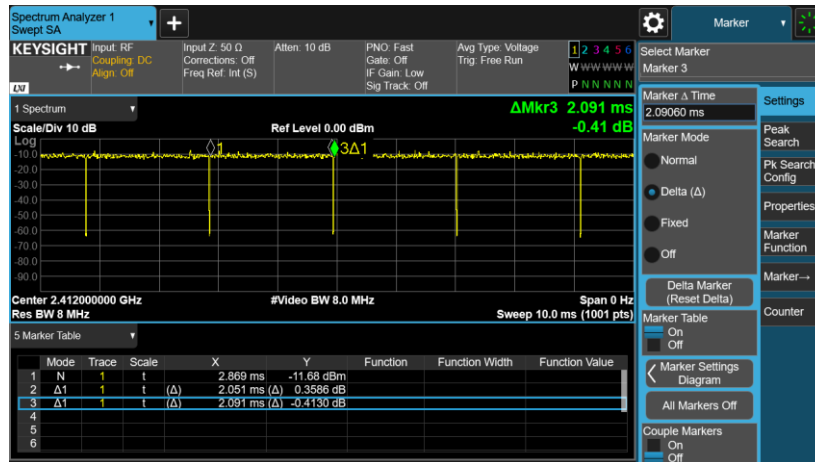

802.11n HT20

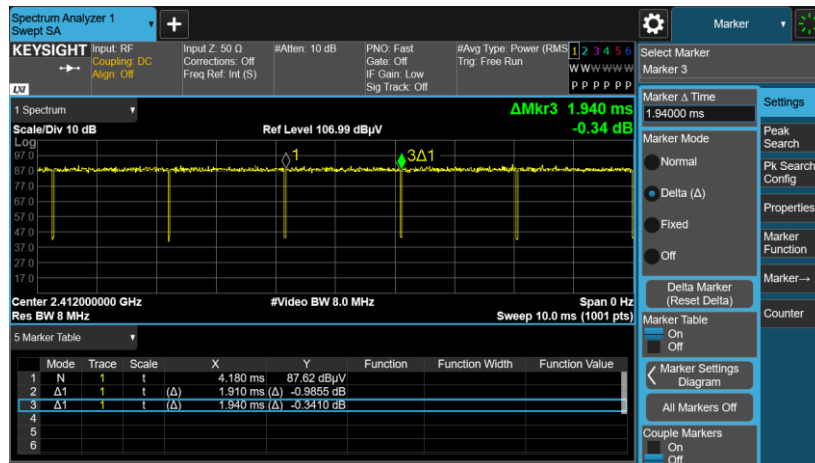



802.11n HT40

