

Appendix D Calibration certificate

Appendix D.1 Calibration certificate for Probe(SN 3986)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

SGC-MRA

Schweizerischer Kalibrierdienst
Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 0108

Client: **SGS Korea (Dymtec)** Certificate No: **EX-3986_Jan23**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3986**


Calibration procedure(s): **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes**

Calibration date: **January 26, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility, environment temperature (22 ± 3) °C and humidity < 70%.
Calibration Equipment used (M&E critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP	SN: 104778	04-Apr-22 (No. 217-23525/03534)	Apr-23
Power sensor NRP-Z91	SN: 103344	04-Apr-22 (No. 217-23524)	Apr-23
CCP DAK-3.5 (weight)	SN: 1249	20-Oct-22 (CCP-DAK3.5-1345_Oct22)	Oct-23
CCP DAK-12	SN: 1018	20-Oct-22 (CCP-DAK12-1016_Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20v)	04-Apr-22 (No. 217-23527)	Apr-23
DAE4	SN: 660	10-Oct-22 (No. DAE4-660_Oct22)	Oct-23
Reference Probe ES3DV2	SN: 3013	06-Jan-23 (No. ESS 3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: D641293674	06-Apr-18 (in house check Jun-22)	In house check: Jun-24
Power sensor E4413A	SN: MY41496067	06-Apr-18 (in house check Jun-22)	In house check: Jun-24
Power sensor E4413A	SN: 600110210	06-Apr-18 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: U83643J01700	04-Aug-99 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E6355A	SN: U541080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

	Name	Function	Signature
Calibrated by	Jelini Kainadi	Laboratory Technician	
Approved by	Sven Kohn	Technical Manager	

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Issued: January 31, 2023

Certificate No: EX-3986_Jan23 Page 1 of 23

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zauggstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Glossary

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1526, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices - Part 1:526: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865694, "SAR Measurement Requirements for 100MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-co; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM₀_{x,y,z} = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 100$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setup are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 - SN:3986

January 26, 2023

Parameters of Probe: EX3DV4 - SN:3986

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm $\mu V/(V/m)^2$ ^A	0.50	0.51	0.48	$\pm 10.1\%$
DCP (mV) ^B	98.5	100.9	103.5	$\pm 4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name	A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Max dev.	Max Unc ^C k = 2
0	CW	X 0.00	0.00	1.00	0.00	158.1	$\pm 3.3\%$	$\pm 4.7\%$
		Y 0.00	0.00	1.00		142.8		
		Z 0.00	0.00	1.00		155.7		
10352	Pulse Waveform (200Hz, 10%)	X 20.00	91.89	21.45	10.00	90.0	$\pm 3.3\%$	$\pm 9.6\%$
		Y 20.00	88.73	20.11		90.0		
		Z 20.00	90.02	20.11		90.0		
10353	Pulse Waveform (200Hz, 20%)	X 20.00	93.18	20.88	8.99	90.0	$\pm 1.7\%$	$\pm 9.6\%$
		Y 20.00	89.78	19.32		90.0		
		Z 20.00	90.64	19.19		90.0		
10354	Pulse Waveform (200Hz, 40%)	X 20.00	95.73	20.55	9.98	95.0	$\pm 1.1\%$	$\pm 9.6\%$
		Y 20.00	91.54	19.03		95.0		
		Z 20.00	91.91	18.14		95.0		
10355	Pulse Waveform (200Hz, 60%)	X 20.00	96.09	19.18	2.22	120.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y 20.00	89.98	19.00		120.0		
		Z 20.00	90.19	15.94		120.0		
10387	QPSK Waveform, 1 MHz	X 1.81	65.73	-14.51	1.00	150.0	$\pm 2.7\%$	$\pm 9.5\%$
		Y 1.86	85.83	14.74		150.0		
		Z 1.85	86.04	14.48		150.0		
10388	QPSK Waveform, 10 MHz	X 2.17	67.74	15.32	0.00	150.0	$\pm 0.8\%$	$\pm 9.6\%$
		Y 2.21	67.74	15.47		150.0		
		Z 2.09	67.66	15.33		150.0		
10396	64-QAM Waveform, 100 kHz	X 2.77	68.88	17.30	3.01	150.0	$\pm 0.7\%$	$\pm 9.6\%$
		Y 3.08	71.15	19.87		150.0		
		Z 2.78	70.29	18.62		150.0		
10399	64-QAM Waveform, 40 MHz	X 3.49	67.14	15.64	0.00	150.0	$\pm 2.0\%$	$\pm 9.6\%$
		Y 3.50	67.32	15.66		150.0		
		Z 3.42	67.36	15.81		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X 4.90	68.81	15.55	0.00	150.0	$\pm 4.0\%$	$\pm 9.6\%$
		Y 4.90	68.82	15.49		150.0		
		Z 4.78	68.73	15.49		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X, Y, Z do not affect the E²-field uncertainty inside TSL (see Pages 5 to 7).

^B Limitation parameter uncertainty for maximum specified field strength.

^C Uncertainty is determined using the rms deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 - SN:3986

January 26, 2023

Parameters of Probe: EX3DV4 - SN:3986

Sensor Model Parameters

	C1 IF	C2 IF	a V ⁻¹	T1 ms V ⁻²	T2 ms V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
x	47.2	353.26	35.57	14.71	0.45	5.10	0.00	0.55	1.01
y	50.3	376.01	35.55	25.67	0.04	5.15	1.17	0.29	1.01
z	41.1	304.66	34.88	10.27	0.35	5.08	0.80	0.28	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	133.8°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	357 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

EX3DV4 - SN:3986

January 26, 2023

Parameters of Probe: EX3DV4 - SN:3986

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^E	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
150	52.3	0.76	14.25	14.25	14.25	0.00	1.00	±13.3%
300	45.3	0.67	13.15	13.15	13.15	0.09	1.00	±13.3%
450	43.5	0.67	11.93	11.93	11.93	0.16	1.30	±13.3%
600	42.7	0.68	11.34	11.34	11.34	0.10	1.25	±13.3%
750	41.9	0.69	10.76	10.76	10.76	0.36	1.04	±12.0%
900	41.5	0.90	10.52	10.52	10.52	0.49	0.83	±12.0%
1050	41.5	0.97	10.35	10.35	10.35	0.30	1.05	±12.0%
1200	40.5	1.20	9.72	9.72	9.72	0.52	0.89	±12.0%
1350	40.2	1.31	9.32	9.32	9.32	0.42	0.96	±12.0%
1500	40.1	1.37	8.25	8.25	8.25	0.31	0.88	±12.0%
1650	40.0	1.40	8.75	8.75	8.75	0.32	0.88	±12.0%
1800	40.0	1.40	8.67	8.67	8.67	0.29	0.86	±12.0%
1950	39.5	1.67	8.44	8.44	8.44	0.26	0.90	±12.0%
2100	39.2	1.80	8.30	8.30	8.30	0.23	0.90	±12.0%
2250	39.0	1.96	8.01	8.01	8.01	0.37	0.90	±12.0%
2400	38.2	2.71	7.58	7.58	7.58	0.30	1.30	±14.0%
2550	37.9	2.91	7.51	7.51	7.51	0.30	1.30	±14.0%
2700	37.7	3.12	7.37	7.37	7.37	0.30	1.30	±14.0%
2850	37.5	3.32	7.04	7.04	7.04	0.30	1.60	±14.0%
3000	37.2	3.53	6.97	6.97	6.97	0.30	1.60	±14.0%
3150	36.9	3.84	6.76	6.76	6.76	0.30	1.70	±14.0%
3300	36.7	4.04	6.43	6.43	6.43	0.40	1.80	±14.0%
3450	36.4	4.25	6.19	6.19	6.19	0.40	1.80	±14.0%
3600	36.3	4.40	6.15	6.15	6.15	0.40	1.80	±14.0%
3750	36.0	4.66	5.28	5.28	5.28	0.40	1.80	±14.0%
3900	35.9	4.76	5.12	5.12	5.12	0.40	1.80	±14.0%
4050	35.6	4.98	5.06	5.06	5.06	0.40	1.80	±14.0%
4200	35.5	5.07	4.82	4.82	4.82	0.40	1.80	±14.0%

^E Frequency validity above 300 MHz of ±100 MHz only applies for DASY v4.4 and higher (see Page 2); else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±15, 30, 40, 50 and 70 MHz for ConvF assessments at 30, 60, 100, 150 and 200 MHz respectively. Validity of ConvF assessed at 6 MHz to 4-8 MHz, and ConvF assessed at 13 MHz is 8-19 MHz. Above 6 GHz frequency validity can be extended to ±10 MHz.

^F The probe is calibrated using tissue simulating media (TSM) that deviate for ϵ and σ by less than ±5% from the target values, typically better than ±3% and are valid for TSM with deviations of up to ±10%. If TSM with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7 - 3 GHz and 13.1% for 3 - 6 GHz.

^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3-6 GHz at any distance larger than that fall the probe tip diameter from the boundary.

Certificate No: EX-3986_jhm23

Page 5 of 23

EX3DV4 - SN:3986

January 26, 2023

Parameters of Probe: EX3DV4 - SN:3986

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ¹	Relative Permittivity ²	Conductivity ² (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ³	Depth ³ (mm)	Unc (k = 2)
5800	35.3	5.27	4.77	4.77	4.77	0.40	1.80	±14.0%

¹ Frequency validity above 300 MHz of ±100 MHz only applies for DA2V v4.4 and higher (see Page 2), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 20, 40, 80 and 70 MHz for ConvF assessments at 30, 60, 120, 150 and 200 MHz respectively. Validity of ConvF assessed at 8 MHz is 4–8 MHz, and ConvF assessed at 10 MHz is 5–10 MHz. Above 5 GHz frequency validity can be extended to ±150 MHz.

² The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than ±3% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7–3 GHz and 13.1% for 3–6 GHz.

³ Alpha/Depth are determined during calibration. SPGAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±8% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4 - SN:3986

January 26, 2023

Parameters of Probe: EX3DV4 - SN:3986

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
6500	34.5	6.07	5.70	5.70	5.70	0.25	2.50	±18.6%
7000	33.9	6.65	5.90	5.90	5.90	0.25	2.50	±18.6%


^C Frequency validity of 6.5GHz is +400/-700MHz, and ±700MHz at or above 7GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ and σ by less than ±10% from the target values (typically better than ±5%) and are valid for TSL with deviations of up to ±10%.

^G Alpha/Depth are determined during calibration. SPFAO warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3GHz; below ±2% for frequencies between 3-6GHz; and below ±4% for frequencies between 6-18GHz at any distance larger than half the probe tip diameter from the boundary.


EX30V4-SN3985

January 25, 2023

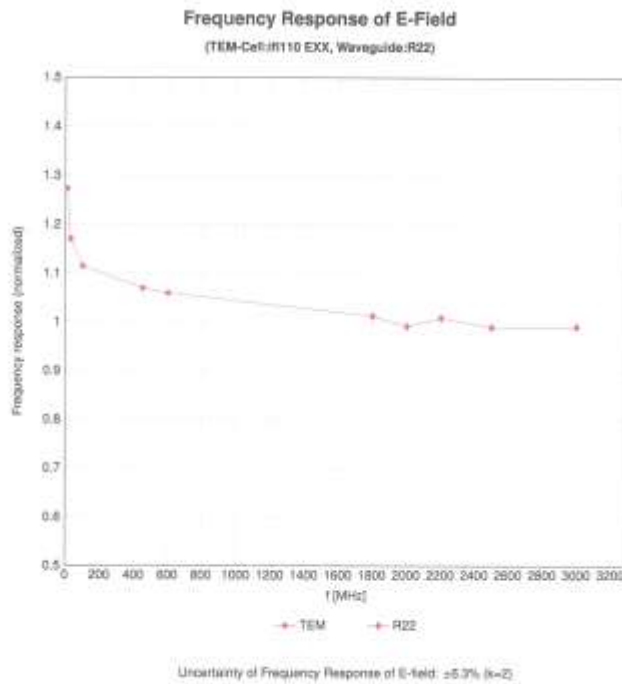

EX3DV4 - SN 3988

January 26, 2023

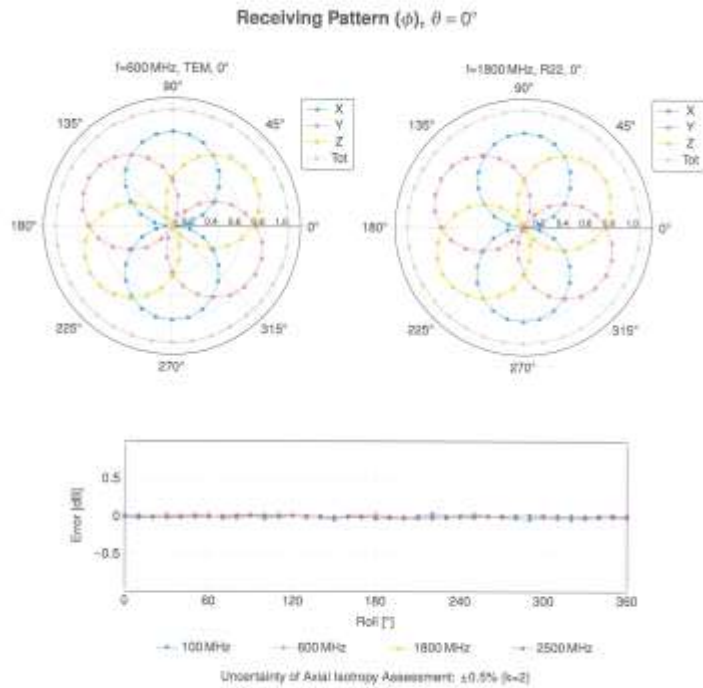


Certificate No. EX-3986_Jan23

Page 9 of 23

EX3DV4 - SN:3986

January 26, 2023

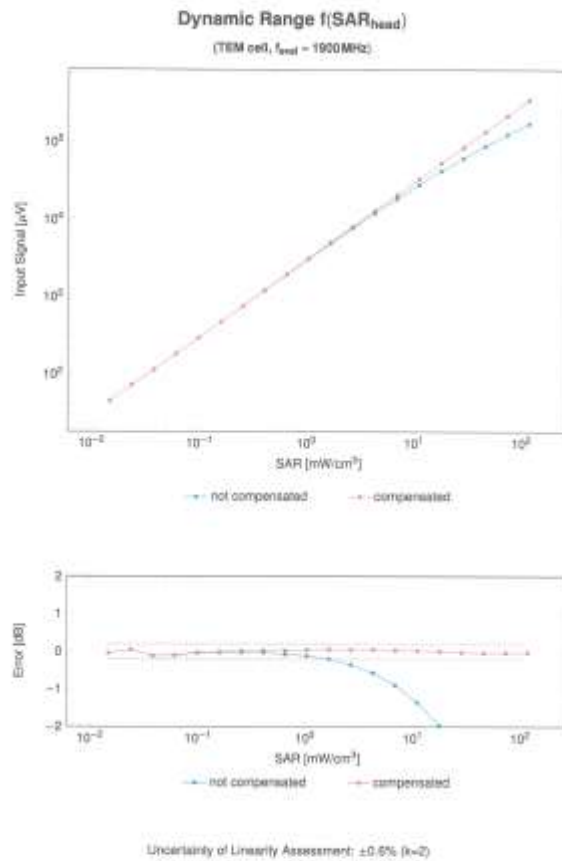


Certificate No. EX-3986_Jan23

Page 10 of 23

EX30V4 - SN:3986


January 28, 2023

Conversion Factor Assessment

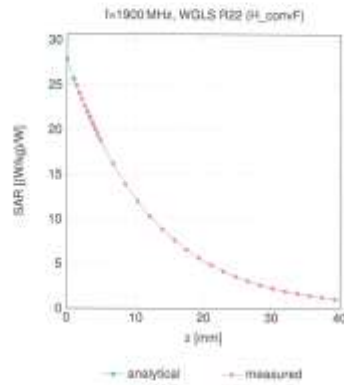

Deviation from Isotropy in Liquid

Emmr (φ, θ), f = 900 MHz

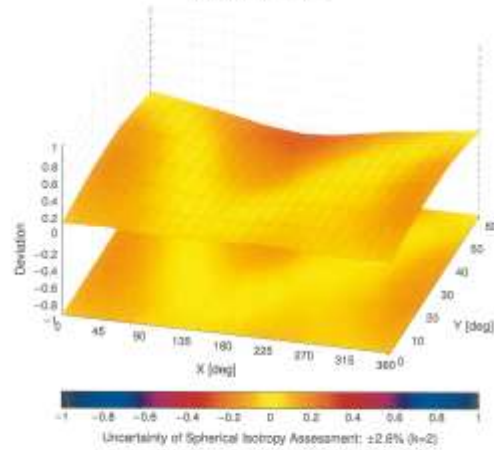

Certificate No: EX-3986_Jan23

Page 11 of 23

EX3DV4 - SN3986

January 26, 2023

Appendix: Modulation Calibration Parameters

Lib	Rev	Communication System Name	Group	PRF (dB)	Qm ² s = 2
0		CW	CW	0.00	+4.7
10100	CAD	SAR Validation (Square, 150 mm, 10 m/s)	Test	10.00	+5.8
10111	CAC	UMTS-FDD (WCDMA)	WCDMA	2.81	+5.8
10112	CAR	IEEE 802.11g WFI 2.4 GHz (20SS, 1 Mbps)	WLAN	1.87	+5.9
10113	CAR	IEEE 802.11g WFI 2.4 GHz (20SS-CFDM, 6 Mbps)	WLAN	9.48	+5.9
10121	DAC	QPSK-FDD (TDMA, GMSK)	QPSK	9.38	+5.8
10122	DAC	QPSK-FDD (TDMA, GMSK, TN 0)	QPSK	9.37	+5.8
10123	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1)	QPSK	9.38	+5.8
10124	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1)	QPSK	10.42	+5.8
10125	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1)	QPSK	9.38	+5.8
10126	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1-2)	QPSK	4.82	+5.8
10127	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1-2-3)	QPSK	3.58	+5.8
10128	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1-2-3)	QPSK	7.78	+5.8
10129	DAC	QPSK-FDD (TDMA, GMSK, TN 0-1-2)	QPSK	9.39	+5.8
10130	CAR	IEEE 802.15.1 Bluetooth (QPSK, D4H)	Bluetooth	1.87	+5.8
10131	CAR	IEEE 802.15.1 Bluetooth (QPSK, D4H)	Bluetooth	1.16	+5.8
10132	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	7.78	+5.8
10133	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	2.53	+5.8
10134	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	9.33	+5.8
10135	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	9.31	+5.8
10136	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.77	+5.8
10137	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.10	+5.8
10138	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10139	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10140	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10141	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10142	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10143	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10144	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10145	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10146	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10147	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10148	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10149	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10150	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10151	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10152	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10153	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10154	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10155	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10156	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10157	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10158	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10159	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10160	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10161	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10162	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10163	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10164	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10165	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10166	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10167	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10168	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10169	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10170	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10171	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10172	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10173	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10174	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10175	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10176	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10177	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10178	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10179	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10180	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10181	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10182	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10183	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10184	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10185	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10186	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10187	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10188	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10189	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10190	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10191	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10192	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10193	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10194	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10195	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10196	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10197	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10198	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10199	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10200	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10201	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10202	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10203	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10204	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10205	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10206	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10207	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10208	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10209	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10210	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8
10211	CAR	IEEE 802.15.1 Bluetooth (PSK, D4H)	Bluetooth	4.87	+5.8

Certificate No: EX-3986_Jan23

Page 12 of 23

EX00V4 - SN:3996

January 26, 2023

OID	Rev	Communication System Name	Device	RAH (dB)	Utra ² A = 3
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.59	+0.5
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.62	+0.5
10114	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.15	+0.5
10115	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.48	+0.5
10116	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.15	+0.5
10117	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.27	+0.5
10118	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.59	+0.5
10119	CAD	IEEE 802.11n (HT Greenfield, 30 Mbps, 64-QAM)	WLAN	8.15	+0.5
10120	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.49	+0.5
10121	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.53	+0.5
10122	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.73	+0.5
10123	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.35	+0.5
10124	CAF	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-FDD	5.49	+0.5
10125	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.78	+0.5
10126	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.41	+0.5
10127	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.72	+0.5
10128	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-FDD	5.42	+0.5
10129	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	9.85	+0.5
10130	CAF	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM)	LTE-FDD	9.28	+0.5
10131	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.69	+0.5
10132	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	9.69	+0.5
10133	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	10.45	+0.5
10134	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.78	+0.5
10135	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.40	+0.5
10136	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.73	+0.5
10137	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.49	+0.5
10138	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10139	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10140	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10141	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10142	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10143	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10144	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10145	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10146	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10147	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10148	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10149	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10150	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10154	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10155	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10156	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10157	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10158	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10159	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10160	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10161	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10162	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10163	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10164	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10165	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10166	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10167	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10168	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10169	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10170	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10171	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10172	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10173	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10174	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10175	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10176	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10177	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10178	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10179	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10180	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10181	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10182	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10183	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10184	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10185	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10186	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10187	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10188	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10189	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10190	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10191	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10192	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10193	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10194	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10195	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10196	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10197	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10198	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10199	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10200	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10201	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10202	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10203	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5
10204	CAH	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-TDD	5.88	+0.5

Certificate No: EX-3996_Jan23

Page 13 of 23

EX30M4 - SN:3985

January 26, 2023

Ref	Rev	Communication System Name	Group	PAR (dB)	Unit# 3 = 2
10225	CAC	UMTS-FDD (HSPA+)	WCDMA	6.97	+0.0
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, 18-QAM)	LTE-TDD	9.49	+0.0
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM)	LTE-TDD	10.00	+0.0
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, QPSK)	LTE-TDD	9.22	+0.0
10229	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 18-QAM)	LTE-TDD	8.48	+0.0
10230	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-TDD	10.25	+0.0
10231	CAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-TDD	9.19	+0.0
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 18-QAM)	LTE-TDD	9.48	+0.0
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, 64-QAM)	LTE-TDD	10.95	+0.0
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK)	LTE-TDD	9.91	+0.0
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10MHz, 18-QAM)	LTE-TDD	9.48	+0.0
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)	LTE-TDD	10.25	+0.0
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10MHz, QPSK)	LTE-TDD	9.21	+0.0
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15MHz, 18-QAM)	LTE-TDD	9.48	+0.0
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-TDD	10.25	+0.0
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-TDD	9.21	+0.0
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4MHz, 18-QAM)	LTE-TDD	9.22	+0.0
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-TDD	9.48	+0.0
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4MHz, QPSK)	LTE-TDD	9.48	+0.0
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3MHz, 18-QAM)	LTE-TDD	10.06	+0.0
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3MHz, 64-QAM)	LTE-TDD	10.06	+0.0
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3MHz, QPSK)	LTE-TDD	9.20	+0.0
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 18-QAM)	LTE-TDD	9.91	+0.0
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-TDD	10.95	+0.0
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5MHz, QPSK)	LTE-TDD	9.28	+0.0
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10MHz, 18-QAM)	LTE-TDD	9.21	+0.0
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10MHz, 64-QAM)	LTE-TDD	10.17	+0.0
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10MHz, QPSK)	LTE-TDD	9.24	+0.0
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 18-QAM)	LTE-TDD	9.48	+0.0
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-TDD	10.14	+0.0
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-TDD	9.20	+0.0
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, 18-QAM)	LTE-TDD	9.46	+0.0
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-TDD	10.38	+0.0
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4MHz, QPSK)	LTE-TDD	9.34	+0.0
10259	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 18-QAM)	LTE-TDD	9.99	+0.0
10260	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-TDD	9.27	+0.0
10261	CAE	LTE-TDD (SC-FDMA, 100% RB, 3MHz, QPSK)	LTE-TDD	9.24	+0.0
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 18-QAM)	LTE-TDD	9.97	+0.0
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-TDD	10.16	+0.0
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-TDD	9.23	+0.0
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 18-QAM)	LTE-TDD	9.92	+0.0
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-TDD	10.07	+0.0
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10MHz, QPSK)	LTE-TDD	9.30	+0.0
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, 18-QAM)	LTE-TDD	10.08	+0.0
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-TDD	10.13	+0.0
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15MHz, QPSK)	LTE-TDD	9.98	+0.0
10271	CAC	UMTS-FDD (HSPA, 5.4MHz, 5, 32PPM Rate 1)	WCDMA	4.87	+0.0
10272	CAC	UMTS-FDD (HSPA, 5.4MHz, 5, 32PPM Rate 1)	WCDMA	5.36	+0.0
10273	CAA	PHS (QPSK)	PHS	11.91	+0.0
10274	CAA	PHS (QPSK, BW 800MHz, Roll-off 0.5)	PHS	11.91	+0.0
10275	CAA	PHS (QPSK, BW 800MHz, Roll-off 0.38)	PHS	12.18	+0.0
10290	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	3.91	+0.0
10291	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	3.46	+0.0
10292	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	3.26	+0.0
10293	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	3.60	+0.0
10294	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	12.48	+0.0
10295	AAB	CDMA2000, PC1, 3.1MHz, Full Rate	CDMA2000	9.81	+0.0
10296	AAB	LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)	LTE-FDD	9.73	+0.0
10297	AAB	LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)	LTE-FDD	9.73	+0.0
10298	AAB	LTE-FDD (SC-FDMA, 50% RB, 3MHz, QPSK)	LTE-FDD	9.73	+0.0
10299	AAB	LTE-FDD (SC-FDMA, 50% RB, 3MHz, 18-QAM)	LTE-FDD	9.73	+0.0
10300	AAB	LTE-FDD (SC-FDMA, 50% RB, 3MHz, 64-QAM)	LTE-FDD	9.73	+0.0
10301	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, QPSK, PUSC)	WLAN	12.05	+0.0
10302	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, QPSK, PUSC, 3 CTR symbols)	WLAN	12.57	+0.0
10303	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, 16-QAM, PUSC)	WLAN	12.52	+0.0
10304	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, 16-QAM, PUSC)	WLAN	11.66	+0.0
10305	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, 16-QAM, PUSC, 15 symbols)	WLAN	15.24	+0.0
10306	AAA	IEEE 802.11a WLAN (20 MHz, 5.4MHz, 16-QAM, PUSC, 15 symbols)	WLAN	14.67	+0.0

Certificate No. EX-3985_Inv23

Page 14 of 23

EX3DV4 - SN:3888

January 26, 2023

ID	Rev	Communication Spec Name	Group	Rate (kbps)	Str. #
10307	AAA	IEEE 802.16e WMAN (20.78, 10.1ms, 10MHz, QPSK, PLSC, 18 symbols)	WMAN	14.40	+0.0
10308	AAA	IEEE 802.16e WMAN (20.78, 10.1ms, 10MHz, 16QAM, PLSC)	WMAN	14.40	+0.0
10309	AAA	IEEE 802.16e WMAN (20.78, 10.1ms, 10MHz, 16QAM, AMC 2x3, 18 symbols)	WMAN	14.40	+0.0
10310	AAA	IEEE 802.16e WMAN (20.78, 10.1ms, 10MHz, QPSK, AMC 2x3, 18 symbols)	WMAN	14.40	+0.0
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 18 MHz, QPSK)	LTE-FDD	6.00	+0.0
10313	AAA	ETEN 1.0	ETEN	10.01	+0.0
10314	AAA	ETEN 1.0	ETEN	10.01	+0.0
10315	AAS	IEEE 802.11a WEP 2.4GHz (60Mbps, 1 Mbps, 8000 duty cycle)	WLAN	1.71	+0.0
10316	AAS	IEEE 802.11a WEP 2.4GHz (60Mbps, 1 Mbps, 8000 duty cycle)	WLAN	9.98	+0.0
10317	AAD	IEEE 802.11a WEP 2.4GHz (60Mbps, 9 Mbps, 8000 duty cycle)	WLAN	10.00	+0.0
10364	AAA	Pulse Waveform (200Hz, 32%)	Generic	0.09	+0.0
10365	AAA	Pulse Waveform (200Hz, 25%)	Generic	0.09	+0.0
10366	AAA	Pulse Waveform (200Hz, 43%)	Generic	0.09	+0.0
10367	AAA	Pulse Waveform (200Hz, 89%)	Generic	0.09	+0.0
10368	AAA	Pulse Waveform (200Hz, 95%)	Generic	0.09	+0.0
10369	AAA	QPSK Waveform, 1 MHz	Generic	1.00	+0.0
10388	AAA	QPSK Waveform, 10 MHz	Generic	9.98	+0.0
10388	AAA	64-QAM Waveform, 100 kHz	Generic	6.00	+0.0
10388	AAA	64-QAM Waveform, 40 MHz	Generic	6.00	+0.0
10400	AAC	IEEE 802.11ac WEP (20MHz, 64-QAM, 8000 duty cycle)	WLAN	8.37	+0.0
10401	AAC	IEEE 802.11ac WEP (40MHz, 64-QAM, 8000 duty cycle)	WLAN	8.00	+0.0
10402	AAC	IEEE 802.11ac WEP (80MHz, 64-QAM, 8000 duty cycle)	WLAN	8.53	+0.0
10403	AAC	CDMA2000 1xEV-DO Rev. 3	CDMA2000	3.76	+0.0
10404	AAB	CDMA2000 1xEV-DO Rev. 3	CDMA2000	17.77	+0.0
10406	AAB	CDMA2000 3C, 3C3.2 SC-FS, Full Rate	CDMA2000	5.32	+0.0
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,8, Subframe Cont'd)	LTE-TDD	7.62	+0.0
10414	AAA	WLAN COC, 64-QAM, 40MHz	WLAN	0.54	+0.0
10416	AAA	IEEE 802.11b WEP 2.4GHz (55Mbps, 1 Mbps, 8000 duty cycle)	WLAN	1.94	+0.0
10418	AAA	IEEE 802.11g WEP 2.4GHz (55Mbps, 9 Mbps, 8000 duty cycle)	WLAN	9.20	+0.0
10417	AAC	IEEE 802.11ach WEP 5.8GHz (50Mbps, 0 Mbps, 8000 duty cycle)	WLAN	8.20	+0.0
10418	AAA	IEEE 802.11g WEP 2.4GHz (55Mbps, 0 Mbps, 8000 duty cycle, Long preamble)	WLAN	1.80	+0.0
10419	AAB	IEEE 802.11g WEP 2.4GHz (55Mbps, 0 Mbps, 8000 duty cycle, Short preamble)	WLAN	8.10	+0.0
10420	AAC	IEEE 802.11n HT Greenfield, 7.2 Mbps, BPSK	WLAN	6.19	+0.0
10429	AAC	IEEE 802.11n HT Greenfield, 43.3 Mbps, 16-QAM	WLAN	8.47	+0.0
10429	AAC	IEEE 802.11n HT Greenfield, 72.3 Mbps, 64-QAM	WLAN	8.40	+0.0
10430	AAC	IEEE 802.11n HT Greenfield, 15 Mbps, BPSK	WLAN	6.41	+0.0
10430	AAC	IEEE 802.11n HT Greenfield, 30 Mbps, 16-QAM	WLAN	6.41	+0.0
10431	AAC	IEEE 802.11n HT Greenfield, 50 Mbps, 64-QAM	WLAN	6.41	+0.0
10432	AAE	LTE-FDD (OFDMA, 5MHz, 6-TM 3.1)	LTE-FDD	0.28	+0.0
10431	AAE	LTE-FDD (OFDMA, 10MHz, 6-TM 3.1)	LTE-FDD	0.28	+0.0
10432	AAE	LTE-FDD (OFDMA, 15MHz, 6-TM 3.1)	LTE-FDD	0.34	+0.0
10433	AAE	LTE-FDD (OFDMA, 20MHz, 6-TM 3.1)	LTE-FDD	0.34	+0.0
10434	AAE	WCDMA R6 Test Mode 1, 64 DPCCH	WCDMA	8.66	+0.0
10438	AAE	LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-FDD	7.60	+0.0
10447	AAE	LTE-FDD (OFDMA, 2MHz, 6-TM 3.1, Cyclic 44%)	LTE-FDD	7.60	+0.0
10448	AAE	LTE-FDD (OFDMA, 10MHz, 6-TM 3.1, Cyclic 44%)	LTE-FDD	7.53	+0.0
10448	AAE	LTE-FDD (OFDMA, 15MHz, 6-TM 3.1, Cyclic 44%)	LTE-FDD	7.51	+0.0
10449	AAE	LTE-FDD (OFDMA, 20MHz, 6-TM 3.1, Cyclic 44%)	LTE-FDD	7.48	+0.0
10451	AAB	WCDMA R5 Test Mode 1, 64 DPCCH (Cyclic 44%)	WCDMA	7.88	+0.0
10452	AAT	Validation (Spectrum, 10 ms, 1 ms)	Test	10.00	+0.0
10458	AAE	IEEE 802.11ac WEP (160 MHz, 64-QAM, 8000 duty cycle)	WLAN	8.60	+0.0
10457	AAE	UMTS FDD (SC-FSSS)	WCDMA	6.62	+0.0
10458	AAA	CDMA2000 1xEV-DO Rev. 3, 2 channels	CDMA2000	0.00	+0.0
10459	AAA	CDMA2000 1xEV-DO Rev. 3, 3 channels	CDMA2000	0.28	+0.0
10460	AAE	UMTS-FDD (WCDMA, AMR)	WCDMA	0.39	+0.0
10481	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.62	+0.0
10482	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10483	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.66	+0.0
10484	AAE	LTE-TDD (OFDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10484	AAE	LTE-TDD (OFDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10485	AAE	LTE-TDD (OFDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10487	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10488	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10489	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10490	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10491	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10492	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10493	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10494	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10495	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10496	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10497	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10498	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10499	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10500	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10501	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10502	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10503	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10504	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10505	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10506	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10507	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10508	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10509	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10510	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10511	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10512	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10513	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10514	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10515	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10516	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10517	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10518	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10519	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10520	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10521	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10522	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10523	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10524	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10525	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10526	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10527	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10528	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10529	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10530	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10531	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10532	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10533	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10534	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10535	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10536	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10537	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10538	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10539	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10540	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10541	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10542	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10543	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10544	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10545	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10546	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10547	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10548	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10549	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10550	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10551	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10552	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10553	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10554	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10555	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10556	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10557	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10558	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10559	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10560	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10561	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10562	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10563	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10564	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10565	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10566	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10567	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10568	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10569	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10570	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10571	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10572	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10573	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 64-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.62	+0.0
10574	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, QPSK, UL Subframe=2,3,4,7,8,8)	LTE-TDD	7.84	+0.0
10575	AAE	LTE-TDD (SC-FDMA, 1 RB, 3MHz, 16-QAM, UL Subframe=2,3,4,7,8,8)	LTE-TDD	8.00	+0.0
10576	AAE				

Certificate No: EX-3986 Jan23

Page 18 of 23

EX3DFA - SN:3966

January 26, 2023

REF	Rev	Communication System Name	Group	RFUT (dB)	Utra [®] 6 x 3
10470	AAG	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, 84-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.57	-29.8
10471	AAG	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.82	-29.8
10473	AAP	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.32	-29.8
10479	AAP	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.37	-29.8
10477	AAG	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.32	-29.8
10478	AAG	LTE-TDD (SC-FDMA, 1 RB, 30 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.37	-29.8
10479	AAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.74	-29.8
10480	AAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.16	-29.8
10481	AAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.42	-29.8
10482	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.71	-29.8
10483	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.36	-29.8
10484	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.47	-29.8
10485	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.59	-29.8
10486	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.38	-29.8
10487	AAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.40	-29.8
10488	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.70	-29.8
10489	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.31	-29.8
10490	AAG	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.54	-29.8
10491	AAP	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.74	-29.8
10492	AAP	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.41	-29.8
10493	AAP	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.55	-29.8
10494	AAG	LTE-TDD (SC-FDMA, 50% RB, 30 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.74	-29.8
10495	AAG	LTE-TDD (SC-FDMA, 50% RB, 30 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.37	-29.8
10496	AAG	LTE-TDD (SC-FDMA, 50% RB, 30 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.54	-29.8
10497	AAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.67	-29.8
10498	AAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.40	-29.8
10499	AAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.48	-29.8
10500	AAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.67	-29.8
10501	AAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.44	-29.8
10502	AAG	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.62	-29.8
10503	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.72	-29.8
10504	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.31	-29.8
10505	AAG	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.54	-29.8
10506	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.74	-29.8
10507	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.38	-29.8
10508	AAG	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.55	-29.8
10509	AAP	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.73	-29.8
10510	AAP	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.49	-29.8
10511	AAP	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.51	-29.8
10512	AAG	LTE-TDD (SC-FDMA, 100% RB, 30 MHz, QPSK, UL Subframe=2.3.4.7.8.9)	LTE-TDD	7.76	-29.8
10513	AAG	LTE-TDD (SC-FDMA, 100% RB, 30 MHz, 16-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.42	-29.8
10514	AAG	LTE-TDD (SC-FDMA, 100% RB, 30 MHz, 64-QAM, UL Subframe=2.3.4.7.8.9)	LTE-TDD	6.45	-29.8
10515	AAA	IEEE 802.11a WFI 2.4 GHz (2SSS, 8 Mbps, 90% duty cycle)	WLAN	1.58	-29.8
10516	AAA	IEEE 802.11a WFI 2.4 GHz (2SSS, 5.5 Mbps, 90% duty cycle)	WLAN	1.27	-29.8
10517	AAA	IEEE 802.11a WFI 2.4 GHz (2SSS, 11 Mbps, 90% duty cycle)	WLAN	1.58	-29.8
10518	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 8 Mbps, 90% duty cycle)	WLAN	6.23	-29.8
10519	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 12 Mbps, 90% duty cycle)	WLAN	6.39	-29.8
10520	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 18 Mbps, 90% duty cycle)	WLAN	6.12	-29.8
10521	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 24 Mbps, 90% duty cycle)	WLAN	7.27	-29.8
10522	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 36 Mbps, 90% duty cycle)	WLAN	6.45	-29.8
10523	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 48 Mbps, 90% duty cycle)	WLAN	6.08	-29.8
10524	AAG	IEEE 802.11a WFI 5 GHz (OFDM, 54 Mbps, 90% duty cycle)	WLAN	6.27	-29.8
10525	AAG	IEEE 802.11ac WFI 20 MHz, MCS0, 90% duty cycle)	WLAN	6.30	-29.8
10526	AAG	IEEE 802.11ac WFI 20 MHz, MCS1, 90% duty cycle)	WLAN	6.40	-29.8
10527	AAG	IEEE 802.11ac WFI 20 MHz, MCS2, 90% duty cycle)	WLAN	6.21	-29.8
10528	AAG	IEEE 802.11ac WFI 20 MHz, MCS3, 90% duty cycle)	WLAN	6.38	-29.8
10529	AAG	IEEE 802.11ac WFI 20 MHz, MCS4, 90% duty cycle)	WLAN	6.35	-29.8
10530	AAG	IEEE 802.11ac WFI 20 MHz, MCS5, 90% duty cycle)	WLAN	6.43	-29.8
10531	AAG	IEEE 802.11ac WFI 20 MHz, MCS6, 90% duty cycle)	WLAN	6.25	-29.8
10532	AAG	IEEE 802.11ac WFI 20 MHz, MCS7, 90% duty cycle)	WLAN	6.25	-29.8
10533	AAG	IEEE 802.11ac WFI 20 MHz, MCS8, 90% duty cycle)	WLAN	6.38	-29.8
10534	AAG	IEEE 802.11ac WFI 40 MHz, MCS0, 90% duty cycle)	WLAN	6.45	-29.8
10535	AAG	IEEE 802.11ac WFI 40 MHz, MCS1, 90% duty cycle)	WLAN	6.45	-29.8
10536	AAG	IEEE 802.11ac WFI 40 MHz, MCS2, 90% duty cycle)	WLAN	6.38	-29.8
10537	AAG	IEEE 802.11ac WFI 40 MHz, MCS3, 90% duty cycle)	WLAN	6.44	-29.8
10538	AAG	IEEE 802.11ac WFI 40 MHz, MCS4, 90% duty cycle)	WLAN	6.24	-29.8
10539	AAG	IEEE 802.11ac WFI 40 MHz, MCS5, 90% duty cycle)	WLAN	6.28	-29.8

Certificate No: EX-3966_1ar23

Page 16 of 23

EX30N4 - SN3995

January 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² A = 3
10541	AAC	IEEE 802.11ac WFI (40 MHz, MCS7, 80ps duty cycle)	WLAN	8.45	-0.0
10542	AAC	IEEE 802.11ac WFI (40 MHz, MCS8, 80ps duty cycle)	WLAN	8.45	-0.0
10543	AAC	IEEE 802.11ac WFI (40 MHz, MCS9, 80ps duty cycle)	WLAN	8.45	-0.0
10544	AAC	IEEE 802.11ac WFI (40 MHz, MCS10, 80ps duty cycle)	WLAN	8.47	-0.0
10545	AAC	IEEE 802.11ac WFI (40 MHz, MCS11, 80ps duty cycle)	WLAN	8.55	-0.0
10546	AAC	IEEE 802.11ac WFI (40 MHz, MCS12, 80ps duty cycle)	WLAN	8.55	-0.0
10547	AAC	IEEE 802.11ac WFI (40 MHz, MCS13, 80ps duty cycle)	WLAN	8.48	-0.0
10548	AAC	IEEE 802.11ac WFI (40 MHz, MCS14, 80ps duty cycle)	WLAN	8.37	-0.0
10550	AAC	IEEE 802.11ac WFI (40 MHz, MCS15, 80ps duty cycle)	WLAN	8.38	-0.0
10551	AAC	IEEE 802.11ac WFI (40 MHz, MCS16, 80ps duty cycle)	WLAN	8.53	-0.0
10552	AAC	IEEE 802.11ac WFI (40 MHz, MCS17, 80ps duty cycle)	WLAN	8.42	-0.0
10553	AAC	IEEE 802.11ac WFI (40 MHz, MCS18, 80ps duty cycle)	WLAN	8.45	-0.0
10554	AAC	IEEE 802.11ac WFI (40 MHz, MCS19, 80ps duty cycle)	WLAN	8.48	-0.0
10555	AAC	IEEE 802.11ac WFI (40 MHz, MCS20, 80ps duty cycle)	WLAN	8.47	-0.0
10556	AAC	IEEE 802.11ac WFI (40 MHz, MCS21, 80ps duty cycle)	WLAN	8.50	-0.0
10557	AAC	IEEE 802.11ac WFI (40 MHz, MCS22, 80ps duty cycle)	WLAN	8.52	-0.0
10558	AAC	IEEE 802.11ac WFI (40 MHz, MCS23, 80ps duty cycle)	WLAN	8.61	-0.0
10559	AAC	IEEE 802.11ac WFI (40 MHz, MCS24, 80ps duty cycle)	WLAN	8.73	-0.0
10561	AAC	IEEE 802.11ac WFI (40 MHz, MCS25, 80ps duty cycle)	WLAN	8.56	-0.0
10562	AAC	IEEE 802.11ac WFI (40 MHz, MCS26, 80ps duty cycle)	WLAN	8.60	-0.0
10563	AAC	IEEE 802.11ac WFI (40 MHz, MCS27, 80ps duty cycle)	WLAN	8.77	-0.0
10564	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 9 Mbps, 80ps duty cycle)	WLAN	8.25	-0.0
10565	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 12 Mbps, 80ps duty cycle)	WLAN	8.45	-0.0
10566	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 18 Mbps, 80ps duty cycle)	WLAN	8.13	-0.0
10567	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 24 Mbps, 80ps duty cycle)	WLAN	8.00	-0.0
10568	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 36 Mbps, 80ps duty cycle)	WLAN	8.37	-0.0
10569	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 48 Mbps, 80ps duty cycle)	WLAN	8.10	-0.0
10570	AAA	IEEE 802.11g WFI (2.4 GHz, DSSS-OFDM, 54 Mbps, 80ps duty cycle)	WLAN	8.20	-0.0
10571	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS, 1 Mbps, 80ps duty cycle)	WLAN	1.20	-0.0
10572	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS, 2 Mbps, 80ps duty cycle)	WLAN	1.50	-0.0
10573	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS, 3.5 Mbps, 80ps duty cycle)	WLAN	1.90	-0.0
10574	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS, 11 Mbps, 80ps duty cycle)	WLAN	1.90	-0.0
10575	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS, 6 Mbps, 80ps duty cycle)	WLAN	1.50	-0.0
10576	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 9 Mbps, 80ps duty cycle)	WLAN	1.60	-0.0
10577	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 12 Mbps, 80ps duty cycle)	WLAN	1.70	-0.0
10578	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 18 Mbps, 80ps duty cycle)	WLAN	1.48	-0.0
10579	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 24 Mbps, 80ps duty cycle)	WLAN	1.36	-0.0
10580	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 36 Mbps, 80ps duty cycle)	WLAN	1.70	-0.0
10581	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 48 Mbps, 80ps duty cycle)	WLAN	1.35	-0.0
10582	AAA	IEEE 802.11n WFI (4.0 GHz, DSSS-OFDM, 54 Mbps, 80ps duty cycle)	WLAN	1.67	-0.0
10583	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 6 Mbps, 80ps duty cycle)	WLAN	1.58	-0.0
10584	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 9 Mbps, 80ps duty cycle)	WLAN	1.50	-0.0
10585	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 12 Mbps, 80ps duty cycle)	WLAN	1.70	-0.0
10586	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 18 Mbps, 80ps duty cycle)	WLAN	1.49	-0.0
10587	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 24 Mbps, 80ps duty cycle)	WLAN	1.38	-0.0
10588	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 36 Mbps, 80ps duty cycle)	WLAN	1.78	-0.0
10589	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 48 Mbps, 80ps duty cycle)	WLAN	1.35	-0.0
10590	AAC	IEEE 802.11ah WFI (5 GHz, OFDM, 54 Mbps, 80ps duty cycle)	WLAN	1.67	-0.0
10591	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS1, 80ps duty cycle	WLAN	8.03	-0.0
10592	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS2, 80ps duty cycle	WLAN	8.70	-0.0
10593	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS3, 80ps duty cycle	WLAN	8.64	-0.0
10594	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS4, 80ps duty cycle	WLAN	8.74	-0.0
10595	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS5, 80ps duty cycle	WLAN	8.74	-0.0
10596	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS6, 80ps duty cycle	WLAN	8.71	-0.0
10597	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS7, 80ps duty cycle	WLAN	8.72	-0.0
10598	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS8, 80ps duty cycle	WLAN	8.68	-0.0
10599	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS9, 80ps duty cycle	WLAN	8.79	-0.0
10600	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS10, 80ps duty cycle	WLAN	8.88	-0.0
10601	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS11, 80ps duty cycle	WLAN	8.82	-0.0
10602	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS12, 80ps duty cycle	WLAN	8.84	-0.0
10603	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS13, 80ps duty cycle	WLAN	8.83	-0.0
10604	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS14, 80ps duty cycle	WLAN	8.78	-0.0
10605	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS15, 80ps duty cycle	WLAN	8.87	-0.0
10606	AAC	IEEE 802.11n (HT MIMO), 20 MHz, MCS16, 80ps duty cycle	WLAN	8.83	-0.0
10607	AAC	IEEE 802.11ac WFI (25 MHz, MCS5, 80ps duty cycle)	WLAN	8.84	-0.0
10608	AAC	IEEE 802.11ac WFI (25 MHz, MCS7, 80ps duty cycle)	WLAN	8.77	-0.0

Certificate No: EX-3986_jar23

Page 17 of 23

EX0204-SN3886

January 26, 2023

UID	Rev	Communication System Name	Group	RAI (dB)	Unc. A = 2
10609	AAC	IEEE 802.11ac WiFi (30 MHz, MCS2, 80pc duty cycle)	WLAN	8.57	+0.5
10610	AAC	IEEE 802.11ac WiFi (30 MHz, MCS3, 80pc duty cycle)	WLAN	8.78	+0.4
10611	AAC	IEEE 802.11ac WiFi (30 MHz, MCS4, 80pc duty cycle)	WLAN	8.70	+0.0
10612	AAC	IEEE 802.11ac WiFi (30 MHz, MCS5, 80pc duty cycle)	WLAN	8.77	+0.0
10613	AAC	IEEE 802.11ac WiFi (30 MHz, MCS6, 80pc duty cycle)	WLAN	8.84	+0.0
10614	AAC	IEEE 802.11ac WiFi (30 MHz, MCS7, 80pc duty cycle)	WLAN	8.89	+0.0
10615	AAC	IEEE 802.11ac WiFi (30 MHz, MCS8, 80pc duty cycle)	WLAN	8.83	+0.0
10616	AAC	IEEE 802.11ac WiFi (30 MHz, MCS9, 80pc duty cycle)	WLAN	8.86	+0.0
10617	AAC	IEEE 802.11ac WiFi (30 MHz, MCS10, 80pc duty cycle)	WLAN	8.81	+0.0
10618	AAC	IEEE 802.11ac WiFi (30 MHz, MCS11, 80pc duty cycle)	WLAN	8.58	+0.0
10619	AAC	IEEE 802.11ac WiFi (30 MHz, MCS12, 80pc duty cycle)	WLAN	8.88	+0.0
10620	AAC	IEEE 802.11ac WiFi (30 MHz, MCS13, 80pc duty cycle)	WLAN	8.87	+0.0
10621	AAC	IEEE 802.11ac WiFi (30 MHz, MCS14, 80pc duty cycle)	WLAN	8.77	+0.0
10622	AAC	IEEE 802.11ac WiFi (30 MHz, MCS15, 80pc duty cycle)	WLAN	8.88	+0.0
10623	AAC	IEEE 802.11ac WiFi (30 MHz, MCS16, 80pc duty cycle)	WLAN	8.82	+0.0
10624	AAC	IEEE 802.11ac WiFi (30 MHz, MCS17, 80pc duty cycle)	WLAN	8.86	+0.0
10625	AAC	IEEE 802.11ac WiFi (30 MHz, MCS18, 80pc duty cycle)	WLAN	8.88	+0.0
10626	AAC	IEEE 802.11ac WiFi (30 MHz, MCS19, 80pc duty cycle)	WLAN	8.83	+0.0
10627	AAC	IEEE 802.11ac WiFi (30 MHz, MCS20, 80pc duty cycle)	WLAN	8.89	+0.0
10628	AAC	IEEE 802.11ac WiFi (30 MHz, MCS21, 80pc duty cycle)	WLAN	8.71	+0.0
10629	AAC	IEEE 802.11ac WiFi (30 MHz, MCS22, 80pc duty cycle)	WLAN	8.85	+0.0
10630	AAC	IEEE 802.11ac WiFi (30 MHz, MCS23, 80pc duty cycle)	WLAN	8.72	+0.0
10631	AAC	IEEE 802.11ac WiFi (30 MHz, MCS24, 80pc duty cycle)	WLAN	8.81	+0.0
10632	AAC	IEEE 802.11ac WiFi (30 MHz, MCS25, 80pc duty cycle)	WLAN	8.74	+0.0
10633	AAC	IEEE 802.11ac WiFi (30 MHz, MCS26, 80pc duty cycle)	WLAN	8.83	+0.0
10634	AAC	IEEE 802.11ac WiFi (30 MHz, MCS27, 80pc duty cycle)	WLAN	8.87	+0.0
10635	AAC	IEEE 802.11ac WiFi (30 MHz, MCS28, 80pc duty cycle)	WLAN	8.81	+0.0
10636	AAC	IEEE 802.11ac WiFi (30 MHz, MCS29, 80pc duty cycle)	WLAN	8.83	+0.0
10637	AAC	IEEE 802.11ac WiFi (30 MHz, MCS30, 80pc duty cycle)	WLAN	8.79	+0.0
10638	AAC	IEEE 802.11ac WiFi (30 MHz, MCS31, 80pc duty cycle)	WLAN	8.86	+0.0
10639	AAC	IEEE 802.11ac WiFi (30 MHz, MCS32, 80pc duty cycle)	WLAN	8.85	+0.0
10640	AAC	IEEE 802.11ac WiFi (30 MHz, MCS33, 80pc duty cycle)	WLAN	8.88	+0.0
10641	AAC	IEEE 802.11ac WiFi (30 MHz, MCS34, 80pc duty cycle)	WLAN	8.80	+0.0
10642	AAC	IEEE 802.11ac WiFi (30 MHz, MCS35, 80pc duty cycle)	WLAN	8.89	+0.0
10643	AAC	IEEE 802.11ac WiFi (30 MHz, MCS36, 80pc duty cycle)	WLAN	8.83	+0.0
10644	AAC	IEEE 802.11ac WiFi (30 MHz, MCS37, 80pc duty cycle)	WLAN	8.85	+0.0
10645	AAC	IEEE 802.11ac WiFi (30 MHz, MCS38, 80pc duty cycle)	WLAN	8.81	+0.0
10646	AAC	IEEE 802.11ac WiFi (30 MHz, MCS39, 80pc duty cycle)	WLAN	8.83	+0.0
10647	AAC	IEEE 802.11ac WiFi (30 MHz, MCS40, 80pc duty cycle)	WLAN	8.79	+0.0
10648	AAC	IEEE 802.11ac WiFi (30 MHz, MCS41, 80pc duty cycle)	WLAN	8.86	+0.0
10649	AAC	IEEE 802.11ac WiFi (30 MHz, MCS42, 80pc duty cycle)	WLAN	8.85	+0.0
10650	AAC	IEEE 802.11ac WiFi (30 MHz, MCS43, 80pc duty cycle)	WLAN	8.88	+0.0
10651	AAC	IEEE 802.11ac WiFi (30 MHz, MCS44, 80pc duty cycle)	WLAN	8.80	+0.0
10652	AAC	IEEE 802.11ac WiFi (30 MHz, MCS45, 80pc duty cycle)	WLAN	8.89	+0.0
10653	AAC	IEEE 802.11ac WiFi (30 MHz, MCS46, 80pc duty cycle)	WLAN	8.83	+0.0
10654	AAC	IEEE 802.11ac WiFi (30 MHz, MCS47, 80pc duty cycle)	WLAN	8.85	+0.0
10655	AAC	IEEE 802.11ac WiFi (30 MHz, MCS48, 80pc duty cycle)	WLAN	8.81	+0.0
10656	AAC	IEEE 802.11ac WiFi (30 MHz, MCS49, 80pc duty cycle)	WLAN	8.83	+0.0
10657	AAC	IEEE 802.11ac WiFi (30 MHz, MCS50, 80pc duty cycle)	WLAN	8.79	+0.0
10658	AAC	IEEE 802.11ac WiFi (30 MHz, MCS51, 80pc duty cycle)	WLAN	8.86	+0.0
10659	AAC	IEEE 802.11ac WiFi (30 MHz, MCS52, 80pc duty cycle)	WLAN	8.85	+0.0
10660	AAC	IEEE 802.11ac WiFi (30 MHz, MCS53, 80pc duty cycle)	WLAN	8.88	+0.0
10661	AAC	IEEE 802.11ac WiFi (30 MHz, MCS54, 80pc duty cycle)	WLAN	8.80	+0.0
10662	AAC	IEEE 802.11ac WiFi (30 MHz, MCS55, 80pc duty cycle)	WLAN	8.89	+0.0
10663	AAC	IEEE 802.11ac WiFi (30 MHz, MCS56, 80pc duty cycle)	WLAN	8.83	+0.0
10664	AAC	IEEE 802.11ac WiFi (30 MHz, MCS57, 80pc duty cycle)	WLAN	8.85	+0.0
10665	AAC	IEEE 802.11ac WiFi (30 MHz, MCS58, 80pc duty cycle)	WLAN	8.81	+0.0
10666	AAC	IEEE 802.11ac WiFi (30 MHz, MCS59, 80pc duty cycle)	WLAN	8.83	+0.0
10667	AAC	IEEE 802.11ac WiFi (30 MHz, MCS60, 80pc duty cycle)	WLAN	8.79	+0.0
10668	AAC	IEEE 802.11ac WiFi (30 MHz, MCS61, 80pc duty cycle)	WLAN	8.86	+0.0
10669	AAC	IEEE 802.11ac WiFi (30 MHz, MCS62, 80pc duty cycle)	WLAN	8.85	+0.0
10670	AAC	IEEE 802.11ac WiFi (30 MHz, MCS63, 80pc duty cycle)	WLAN	8.88	+0.0
10671	AAC	IEEE 802.11ac WiFi (30 MHz, MCS64, 80pc duty cycle)	WLAN	8.80	+0.0
10672	AAC	IEEE 802.11ac WiFi (30 MHz, MCS65, 80pc duty cycle)	WLAN	8.89	+0.0
10673	AAC	IEEE 802.11ac WiFi (30 MHz, MCS66, 80pc duty cycle)	WLAN	8.83	+0.0
10674	AAC	IEEE 802.11ac WiFi (30 MHz, MCS67, 80pc duty cycle)	WLAN	8.85	+0.0
10675	AAC	IEEE 802.11ac WiFi (30 MHz, MCS68, 80pc duty cycle)	WLAN	8.81	+0.0
10676	AAC	IEEE 802.11ac WiFi (30 MHz, MCS69, 80pc duty cycle)	WLAN	8.83	+0.0
10677	AAC	IEEE 802.11ac WiFi (30 MHz, MCS70, 80pc duty cycle)	WLAN	8.79	+0.0
10678	AAC	IEEE 802.11ac WiFi (30 MHz, MCS71, 80pc duty cycle)	WLAN	8.86	+0.0
10679	AAC	IEEE 802.11ac WiFi (30 MHz, MCS72, 80pc duty cycle)	WLAN	8.85	+0.0
10680	AAC	IEEE 802.11ac WiFi (30 MHz, MCS73, 80pc duty cycle)	WLAN	8.88	+0.0
10681	AAC	IEEE 802.11ac WiFi (30 MHz, MCS74, 80pc duty cycle)	WLAN	8.80	+0.0
10682	AAC	IEEE 802.11ac WiFi (30 MHz, MCS75, 80pc duty cycle)	WLAN	8.89	+0.0
10683	AAC	IEEE 802.11ac WiFi (30 MHz, MCS76, 80pc duty cycle)	WLAN	8.83	+0.0
10684	AAC	IEEE 802.11ac WiFi (30 MHz, MCS77, 80pc duty cycle)	WLAN	8.85	+0.0
10685	AAC	IEEE 802.11ac WiFi (30 MHz, MCS78, 80pc duty cycle)	WLAN	8.81	+0.0
10686	AAC	IEEE 802.11ac WiFi (30 MHz, MCS79, 80pc duty cycle)	WLAN	8.83	+0.0
10687	AAC	IEEE 802.11ac WiFi (30 MHz, MCS80, 80pc duty cycle)	WLAN	8.79	+0.0
10688	AAC	IEEE 802.11ac WiFi (30 MHz, MCS81, 80pc duty cycle)	WLAN	8.86	+0.0
10689	AAC	IEEE 802.11ac WiFi (30 MHz, MCS82, 80pc duty cycle)	WLAN	8.85	+0.0
10690	AAC	IEEE 802.11ac WiFi (30 MHz, MCS83, 80pc duty cycle)	WLAN	8.88	+0.0
10691	AAC	IEEE 802.11ac WiFi (30 MHz, MCS84, 80pc duty cycle)	WLAN	8.80	+0.0
10692	AAC	IEEE 802.11ac WiFi (30 MHz, MCS85, 80pc duty cycle)	WLAN	8.89	+0.0
10693	AAC	IEEE 802.11ac WiFi (30 MHz, MCS86, 80pc duty cycle)	WLAN	8.83	+0.0
10694	AAC	IEEE 802.11ac WiFi (30 MHz, MCS87, 80pc duty cycle)	WLAN	8.85	+0.0
10695	AAC	IEEE 802.11ac WiFi (30 MHz, MCS88, 80pc duty cycle)	WLAN	8.81	+0.0
10696	AAC	IEEE 802.11ac WiFi (30 MHz, MCS89, 80pc duty cycle)	WLAN	8.83	+0.0
10697	AAC	IEEE 802.11ac WiFi (30 MHz, MCS90, 80pc duty cycle)	WLAN	8.79	+0.0
10698	AAC	IEEE 802.11ac WiFi (30 MHz, MCS91, 80pc duty cycle)	WLAN	8.86	+0.0
10699	AAC	IEEE 802.11ac WiFi (30 MHz, MCS92, 80pc duty cycle)	WLAN	8.85	+0.0
10700	AAC	IEEE 802.11ac WiFi (30 MHz, MCS93, 80pc duty cycle)	WLAN	8.88	+0.0

Certificate No: EX-0886_Jan23

Page 18 of 23

EX-3886 - SN-3886

January 28, 2023

UID	Rev	Communication System Name	Group	PAW (dB)	Unc# 6 u.s
10887	AAC	IEEE 802.11ax (80 MHz, MCS4, 80pc duty cycle)	WLAN	8.95	±0.0
10888	AAC	IEEE 802.11ax (80 MHz, MCS5, 80pc duty cycle)	WLAN	8.99	±0.0
10889	AAC	IEEE 802.11ax (80 MHz, MCS6, 80pc duty cycle)	WLAN	8.93	±0.0
10890	AAC	IEEE 802.11ax (80 MHz, MCS7, 80pc duty cycle)	WLAN	8.20	±0.0
10891	AAC	IEEE 802.11ax (80 MHz, MCS8, 80pc duty cycle)	WLAN	8.20	±0.0
10892	AAC	IEEE 802.11ax (80 MHz, MCS9, 80pc duty cycle)	WLAN	8.25	±0.0
10893	AAC	IEEE 802.11ax (80 MHz, MCS10, 80pc duty cycle)	WLAN	8.25	±0.0
10894	AAC	IEEE 802.11ax (80 MHz, MCS11, 80pc duty cycle)	WLAN	8.57	±0.0
10895	AAC	IEEE 802.11ax (80 MHz, MCS12, 80pc duty cycle)	WLAN	8.70	±0.0
10896	AAC	IEEE 802.11ax (80 MHz, MCS13, 80pc duty cycle)	WLAN	8.91	±0.0
10897	AAC	IEEE 802.11ax (80 MHz, MCS14, 80pc duty cycle)	WLAN	8.61	±0.0
10898	AAC	IEEE 802.11ax (80 MHz, MCS15, 80pc duty cycle)	WLAN	8.69	±0.0
10899	AAC	IEEE 802.11ax (80 MHz, MCS16, 80pc duty cycle)	WLAN	8.80	±0.0
10900	AAC	IEEE 802.11ax (80 MHz, MCS17, 80pc duty cycle)	WLAN	8.73	±0.0
10901	AAC	IEEE 802.11ax (80 MHz, MCS18, 80pc duty cycle)	WLAN	8.66	±0.0
10902	AAC	IEEE 802.11ax (80 MHz, MCS19, 80pc duty cycle)	WLAN	8.70	±0.0
10903	AAC	IEEE 802.11ax (80 MHz, MCS20, 80pc duty cycle)	WLAN	8.58	±0.0
10904	AAC	IEEE 802.11ax (80 MHz, MCS21, 80pc duty cycle)	WLAN	8.69	±0.0
10905	AAC	IEEE 802.11ax (80 MHz, MCS22, 80pc duty cycle)	WLAN	8.66	±0.0
10906	AAC	IEEE 802.11ax (80 MHz, MCS23, 80pc duty cycle)	WLAN	8.55	±0.0
10907	AAC	IEEE 802.11ax (80 MHz, MCS24, 80pc duty cycle)	WLAN	8.32	±0.0
10908	AAC	IEEE 802.11ax (80 MHz, MCS25, 80pc duty cycle)	WLAN	8.35	±0.0
10909	AAC	IEEE 802.11ax (80 MHz, MCS26, 80pc duty cycle)	WLAN	8.28	±0.0
10910	AAC	IEEE 802.11ax (80 MHz, MCS27, 80pc duty cycle)	WLAN	8.39	±0.0
10911	AAC	IEEE 802.11ax (80 MHz, MCS28, 80pc duty cycle)	WLAN	8.67	±0.0
10912	AAC	IEEE 802.11ax (80 MHz, MCS29, 80pc duty cycle)	WLAN	8.33	±0.0
10913	AAC	IEEE 802.11ax (80 MHz, MCS30, 80pc duty cycle)	WLAN	8.28	±0.0
10914	AAC	IEEE 802.11ax (80 MHz, MCS31, 80pc duty cycle)	WLAN	8.42	±0.0
10915	AAC	IEEE 802.11ax (80 MHz, MCS32, 80pc duty cycle)	WLAN	8.38	±0.0
10916	AAC	IEEE 802.11ax (80 MHz, MCS33, 80pc duty cycle)	WLAN	8.48	±0.0
10917	AAC	IEEE 802.11ax (80 MHz, MCS34, 80pc duty cycle)	WLAN	8.24	±0.0
10918	AAC	IEEE 802.11ax (80 MHz, MCS35, 80pc duty cycle)	WLAN	8.81	±0.0
10919	AAC	IEEE 802.11ax (80 MHz, MCS36, 80pc duty cycle)	WLAN	8.87	±0.0
10920	AAC	IEEE 802.11ax (80 MHz, MCS37, 80pc duty cycle)	WLAN	8.79	±0.0
10921	AAC	IEEE 802.11ax (80 MHz, MCS38, 80pc duty cycle)	WLAN	8.85	±0.0
10922	AAC	IEEE 802.11ax (80 MHz, MCS39, 80pc duty cycle)	WLAN	8.70	±0.0
10923	AAC	IEEE 802.11ax (80 MHz, MCS40, 80pc duty cycle)	WLAN	8.50	±0.0
10924	AAC	IEEE 802.11ax (80 MHz, MCS41, 80pc duty cycle)	WLAN	8.74	±0.0
10925	AAC	IEEE 802.11ax (80 MHz, MCS42, 80pc duty cycle)	WLAN	8.75	±0.0
10926	AAC	IEEE 802.11ax (80 MHz, MCS43, 80pc duty cycle)	WLAN	8.88	±0.0
10927	AAC	IEEE 802.11ax (80 MHz, MCS44, 80pc duty cycle)	WLAN	8.85	±0.0
10928	AAC	IEEE 802.11ax (80 MHz, MCS45, 80pc duty cycle)	WLAN	8.85	±0.0
10929	AAC	IEEE 802.11ax (80 MHz, MCS46, 80pc duty cycle)	WLAN	8.64	±0.0
10930	AAC	IEEE 802.11ax (80 MHz, MCS47, 80pc duty cycle)	WLAN	8.67	±0.0
10931	AAC	IEEE 802.11ax (80 MHz, MCS48, 80pc duty cycle)	WLAN	8.42	±0.0
10932	AAC	IEEE 802.11ax (80 MHz, MCS49, 80pc duty cycle)	WLAN	8.46	±0.0
10933	AAC	IEEE 802.11ax (80 MHz, MCS50, 80pc duty cycle)	WLAN	8.40	±0.0
10934	AAC	IEEE 802.11ax (80 MHz, MCS51, 80pc duty cycle)	WLAN	8.25	±0.0
10935	AAC	IEEE 802.11ax (80 MHz, MCS52, 80pc duty cycle)	WLAN	8.35	±0.0
10936	AAC	IEEE 802.11ax (80 MHz, MCS53, 80pc duty cycle)	WLAN	8.27	±0.0
10937	AAC	IEEE 802.11ax (80 MHz, MCS54, 80pc duty cycle)	WLAN	8.38	±0.0
10938	AAC	IEEE 802.11ax (80 MHz, MCS55, 80pc duty cycle)	WLAN	8.42	±0.0
10939	AAC	IEEE 802.11ax (80 MHz, MCS56, 80pc duty cycle)	WLAN	8.29	±0.0
10940	AAC	IEEE 802.11ax (80 MHz, MCS57, 80pc duty cycle)	WLAN	8.48	±0.0
10941	AAC	IEEE 802.11ax (80 MHz, MCS58, 80pc duty cycle)	WLAN	8.40	±0.0
10942	AAC	IEEE 802.11ax (80 MHz, MCS59, 80pc duty cycle)	WLAN	8.66	±0.0
10943	AAC	IEEE 802.11ax (80 MHz, MCS60, 80pc duty cycle)	WLAN	8.98	±0.0
10944	AAC	IEEE 802.11ax (80 MHz, MCS61, 80pc duty cycle)	WLAN	9.18	±0.0
10945	AAC	IEEE 802.11ax (80 MHz, MCS62, 80pc duty cycle)	WLAN	8.93	±0.0
10946	AAC	IEEE 802.11ax (80 MHz, MCS63, 80pc duty cycle)	WLAN	9.11	±0.0
10947	AAC	IEEE 802.11ax (80 MHz, MCS64, 80pc duty cycle)	WLAN	9.34	±0.0
10948	AAC	IEEE 802.11ax (80 MHz, MCS65, 80pc duty cycle)	WLAN	8.83	±0.0
10949	AAC	IEEE 802.11ax (80 MHz, MCS66, 80pc duty cycle)	WLAN	8.90	±0.0
10950	AAC	IEEE 802.11ax (80 MHz, MCS67, 80pc duty cycle)	WLAN	8.79	±0.0
10951	AAC	IEEE 802.11ax (80 MHz, MCS68, 80pc duty cycle)	WLAN	8.83	±0.0
10952	AAC	IEEE 802.11ax (80 MHz, MCS69, 80pc duty cycle)	WLAN	8.81	±0.0

Certificate No: EX-3886_Jan23

Page 19 of 23

EXIDV4 - SN3986

January 26, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Dist. (km)
10750	AAC	IEEE 802.11a (180MHz, MCS10, 99sec duty cycle)	WLAN	9.06	±0.8
10754	AAC	IEEE 802.11a (180MHz, MCS11, 99sec duty cycle)	WLAN	8.84	±0.8
10758	AAC	IEEE 802.11a (180MHz, MCS0, 99sec duty cycle)	WLAN	8.84	±0.8
10764	AAC	IEEE 802.11a (180MHz, MCS1, 99sec duty cycle)	WLAN	8.77	±0.8
10767	AAC	IEEE 802.11a (180MHz, MCS2, 99sec duty cycle)	WLAN	8.77	±0.8
10768	AAC	IEEE 802.11a (180MHz, MCS3, 99sec duty cycle)	WLAN	8.82	±0.8
10769	AAC	IEEE 802.11a (180MHz, MCS4, 99sec duty cycle)	WLAN	8.84	±0.8
10762	AAC	IEEE 802.11a (180MHz, MCS5, 99sec duty cycle)	WLAN	8.88	±0.8
10761	AAC	IEEE 802.11a (180MHz, MCS6, 99sec duty cycle)	WLAN	8.88	±0.8
10762	AAC	IEEE 802.11a (180MHz, MCS7, 99sec duty cycle)	WLAN	8.92	±0.8
10763	AAC	IEEE 802.11a (180MHz, MCS8, 99sec duty cycle)	WLAN	8.93	±0.8
10764	AAC	IEEE 802.11a (180MHz, MCS9, 99sec duty cycle)	WLAN	8.94	±0.8
10763	AAC	IEEE 802.11a (180MHz, MCS10, 99sec duty cycle)	WLAN	8.94	±0.8
10764	AAC	IEEE 802.11a (180MHz, MCS11, 99sec duty cycle)	WLAN	8.91	±0.8
10767	AAC	802.11b (CP-OFDM, 1 RB, 3.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	7.99	±0.8
10768	AAC	802.11b (CP-OFDM, 1 RB, 10.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.01	±0.8
10768	AAC	802.11b (CP-OFDM, 1 RB, 15.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.01	±0.8
10773	AAC	802.11b (CP-OFDM, 1 RB, 20.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10773	AAC	802.11b (CP-OFDM, 1 RB, 25.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10773	AAC	802.11b (CP-OFDM, 1 RB, 30.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10773	AAC	802.11b (CP-OFDM, 1 RB, 40.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10774	AAC	802.11b (CP-OFDM, 1 RB, 60.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10775	AAC	802.11b (CP-OFDM, 50% RB, 3.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.01	±0.8
10776	AAC	802.11b (CP-OFDM, 50% RB, 10.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.00	±0.8
10777	AAC	802.11b (CP-OFDM, 50% RB, 15.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.00	±0.8
10778	AAC	802.11b (CP-OFDM, 50% RB, 20.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.04	±0.8
10779	AAC	802.11b (CP-OFDM, 50% RB, 25.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10780	AAC	802.11b (CP-OFDM, 50% RB, 30.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10781	AAC	802.11b (CP-OFDM, 50% RB, 40.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.06	±0.8
10782	AAC	802.11b (CP-OFDM, 50% RB, 60.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.05	±0.8
10783	AAC	802.11b (CP-OFDM, 100% RB, 3.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.01	±0.8
10784	AAC	802.11b (CP-OFDM, 100% RB, 10.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.06	±0.8
10785	AAC	802.11b (CP-OFDM, 100% RB, 15.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.00	±0.8
10786	AAC	802.11b (CP-OFDM, 100% RB, 20.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.02	±0.8
10787	AAC	802.11b (CP-OFDM, 100% RB, 25.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.44	±0.8
10788	AAC	802.11b (CP-OFDM, 100% RB, 30.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.28	±0.8
10789	AAC	802.11b (CP-OFDM, 100% RB, 40.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.37	±0.8
10790	AAC	802.11b (CP-OFDM, 100% RB, 60.0MHz, QPSK, 15.6kHz)	802.11b FRI TDD	8.28	±0.8
10791	AAC	802.11b (CP-OFDM, 1 RB, 3.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.85	±0.8
10792	AAC	802.11b (CP-OFDM, 1 RB, 10.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.82	±0.8
10793	AAC	802.11b (CP-OFDM, 1 RB, 15.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.85	±0.8
10794	AAC	802.11b (CP-OFDM, 1 RB, 20.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.82	±0.8
10795	AAC	802.11b (CP-OFDM, 1 RB, 25.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.84	±0.8
10796	AAC	802.11b (CP-OFDM, 1 RB, 30.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.82	±0.8
10797	AAC	802.11b (CP-OFDM, 1 RB, 40.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.21	±0.8
10798	AAC	802.11b (CP-OFDM, 1 RB, 60.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.88	±0.8
10799	AAC	802.11b (CP-OFDM, 1 RB, 80.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.88	±0.8
10800	AAC	802.11b (CP-OFDM, 1 RB, 100.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.89	±0.8
10801	AAC	802.11b (CP-OFDM, 1 RB, 120.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.87	±0.8
10802	AAC	802.11b (CP-OFDM, 1 RB, 140.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	7.83	±0.8
10803	AAC	802.11b (CP-OFDM, 50% RB, 3.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.34	±0.8
10804	AAC	802.11b (CP-OFDM, 50% RB, 10.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.37	±0.8
10805	AAC	802.11b (CP-OFDM, 50% RB, 15.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.34	±0.8
10806	AAC	802.11b (CP-OFDM, 50% RB, 20.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.34	±0.8
10807	AAC	802.11b (CP-OFDM, 50% RB, 25.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10808	AAC	802.11b (CP-OFDM, 50% RB, 30.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10809	AAC	802.11b (CP-OFDM, 50% RB, 40.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10810	AAC	802.11b (CP-OFDM, 50% RB, 60.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10811	AAC	802.11b (CP-OFDM, 50% RB, 80.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10812	AAC	802.11b (CP-OFDM, 50% RB, 100.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.34	±0.8
10813	AAC	802.11b (CP-OFDM, 50% RB, 120.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.34	±0.8
10814	AAC	802.11b (CP-OFDM, 100% RB, 3.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10815	AAC	802.11b (CP-OFDM, 100% RB, 10.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10816	AAC	802.11b (CP-OFDM, 100% RB, 15.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10817	AAC	802.11b (CP-OFDM, 100% RB, 20.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10818	AAC	802.11b (CP-OFDM, 100% RB, 25.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10819	AAC	802.11b (CP-OFDM, 100% RB, 30.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10820	AAC	802.11b (CP-OFDM, 100% RB, 40.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.35	±0.8
10821	AAC	802.11b (CP-OFDM, 100% RB, 60.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.41	±0.8
10822	AAC	802.11b (CP-OFDM, 100% RB, 80.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.41	±0.8
10823	AAC	802.11b (CP-OFDM, 100% RB, 100.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.36	±0.8
10824	AAC	802.11b (CP-OFDM, 100% RB, 120.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.36	±0.8
10825	AAC	802.11b (CP-OFDM, 100% RB, 140.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.41	±0.8
10826	AAC	802.11b (CP-OFDM, 100% RB, 160.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.42	±0.8
10827	AAC	802.11b (CP-OFDM, 100% RB, 180.0MHz, QPSK, 30.0kHz)	802.11b FRI TDD	8.43	±0.8

Certificate No. EX-3986_jan23

Page 20 of 23

EX307A - SN:3886

January 26, 2023

UEI	Rev	Communication System Name	Group	Power (dBm)	Units # = 3
10029	AAD	5G NR (CP-OFDM, 100% RB, 100MHz, QPSK, 30MHz)	5G NR FR1 TDD	8.40	-28.8
10030	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.40	-28.8
10031	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.70	-28.8
10032	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.74	-28.8
10033	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.70	-28.8
10034	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.70	-28.8
10035	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.70	-28.8
10036	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.66	-28.8
10037	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.66	-28.8
10038	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.70	-28.8
10040	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.67	-28.8
10041	AAD	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30MHz)	5G NR FR1 TDD	7.71	-28.8
10043	AAD	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.49	-29.0
10044	AAD	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.34	-29.0
10046	AAD	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.41	-29.0
10048	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.34	-29.0
10050	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10052	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.37	-29.0
10053	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10054	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10055	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10056	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10057	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10058	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.36	-29.0
10059	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.34	-29.0
10060	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.41	-29.0
10061	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.40	-29.0
10062	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.41	-29.0
10063	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.37	-29.0
10064	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.41	-29.0
10065	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10066	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10067	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10068	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10069	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10070	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10071	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10072	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10073	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10074	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10075	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10076	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10077	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10078	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10079	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10080	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10081	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10082	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10083	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10084	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10085	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10086	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10087	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10088	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10089	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10090	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10091	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10092	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10093	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10094	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10095	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10096	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10097	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10098	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10099	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10100	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10101	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10102	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10103	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10104	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10105	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10106	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10107	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10108	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10109	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0
10110	AAD	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 60MHz)	5G NR FR1 TDD	8.38	-29.0

Certificate No: EX-3886_1Jan23

Page 21 of 23



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 22/67

EX3094 - SN:3986

January 26, 2023

UFF	Rev	Communication System Manual	Group	PAU (dB)	Mag ² s = 2
10911	AAB	5G NR (DFT-s-OFDM, 80% RB, 25 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.93	-19.8
10912	AAB	5G NR (DFT-s-OFDM, 80% RB, 30 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.94	-19.8
10913	AAB	5G NR (DFT-s-OFDM, 80% RB, 40 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.94	-19.8
10914	AAB	5G NR (DFT-s-OFDM, 80% RB, 50 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10915	AAB	5G NR (DFT-s-OFDM, 80% RB, 60 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10916	AAB	5G NR (DFT-s-OFDM, 80% RB, 70 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10917	AAB	5G NR (DFT-s-OFDM, 80% RB, 80 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10918	AAB	5G NR (DFT-s-OFDM, 80% RB, 90 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10919	AAB	5G NR (DFT-s-OFDM, 80% RB, 100 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.95	-19.8
10920	AAB	5G NR (DFT-s-OFDM, 100% RB, 10 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10921	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10922	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10923	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10924	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10925	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10926	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10927	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10928	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10929	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10930	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10931	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 30 MHz)	5G NR FRI TDD	5.97	-19.8
10932	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10933	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10934	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10935	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10936	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10937	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10938	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10939	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10940	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10941	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10942	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10943	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10944	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10945	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10946	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10947	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10948	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10949	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10950	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10951	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10952	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10953	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10954	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10955	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10956	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10957	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10958	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10959	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10960	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10961	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10962	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10963	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10964	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10965	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10966	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10967	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10968	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10969	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10970	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10971	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10972	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10973	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10974	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10975	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10976	AAB	5G NR (DFT-s-OFDM, 100% RB, 15 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10977	AAB	5G NR (DFT-s-OFDM, 100% RB, 20 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10978	AAB	5G NR (DFT-s-OFDM, 100% RB, 25 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10979	AAB	5G NR (DFT-s-OFDM, 100% RB, 30 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10980	AAB	5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10981	AAB	5G NR (DFT-s-OFDM, 100% RB, 50 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10982	AAB	5G NR (DFT-s-OFDM, 100% RB, 60 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10983	AAB	5G NR (DFT-s-OFDM, 100% RB, 70 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10984	AAB	5G NR (DFT-s-OFDM, 100% RB, 80 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10985	AAB	5G NR (DFT-s-OFDM, 100% RB, 90 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8
10986	AAB	5G NR (DFT-s-OFDM, 100% RB, 100 MHz, QPSK, 15 MHz)	5G NR FRI TDD	5.97	-19.8

Certificate No: EX-3986_Jan23

Page 22 of 23

EX3044 - SN:3986

January 26, 2023

QID	Rev	Communication System Name	Group	RAI (dB)	Line ^a A = 2
10383	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 MHz)	5G NR FR1 TDD	8.31	±0.5
10384	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 15 MHz)	5G NR FR1 TDD	8.42	±0.5
10385	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	8.54	±0.5
10386	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	8.65	±0.5
10387	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	8.76	±0.5
10388	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	8.88	±0.5
10389	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	8.99	±0.5
10390	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 MHz)	5G NR FR1 TDD	9.10	±0.5

^a Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

Appendix D.2 Calibration certificate for Probe(SN 3791)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zougstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0106

Client: **SGS**
Gyeonggi-do, Republic of Korea

Certificate No.: **EX-3791_May23**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:3791**

Calibration procedure(s): **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8
Calibration procedure for dosimetric E-field probes**


Calibration date: **May 23, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.
Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-291	SN: 103044	30-Mar-23 (No. 217-03804)	Mar-24
DCP DAK-3.5 (weighted)	SN: 1249	20-Oct-22 (DCP DAK3.5-1249, Oct22)	Oct-23
DCP DAK-12	SN: 1016	20-Oct-22 (DCP DAK12-1016, Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20x)	30-Mar-23 (No. 217-03804)	Mar-24
DAE4	SN: 860	16-Mar-23 (No. DAE5-660, Mar23)	Mar-24
Reference Probe ESS0V2	SN: 3013	06-Jun-23 (No. ESS-3013, Jun23)	Jun-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41282674	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41408037	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 005110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3042US1700	04-Aug-89 (in house check Jun-22)	In house check: Jun-24
Network Analyser E8358A	SN: US41080477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Jeton Kaatzi** (Name), **Laboratory Technician** (Function),  (Signature)

Approved by: **Sven Kellin** (Name), **Technical Manager** (Function),  (Signature)

Issued: May 24, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX-3791_May23 Page 1 of 22

Calibration Laboratory of

Schmid & Partner
Engineering AG

Zougnaussstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
S Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0106

Glossary

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEC/IEEE 62209-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4MHz to 10GHz)", October 2020.
- KDB 885864, "SAR Measurement Requirements for 100MHz to 6GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM₀(φ , θ) = NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics.
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; W₀(φ , θ): A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \leq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): In a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 - SN:3791

May 23, 2023

Parameters of Probe: EX3DV4 - SN:3791

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu V / (V/m)^2$) ^A	0.54	0.52	0.51	$\pm 10.1\%$
DCP (mV) ^B	102.0	101.5	101.0	$\pm 4.7\%$

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB $\sqrt{\mu V}$	C	D dB	VR mV	Max dev.	Max Unc ^C k = 2
0	CW	X	0.00	0.00	1.00	0.00	150.1	$\pm 2.2\%$	$\pm 4.7\%$
		Y	0.00	0.00	1.00		141.8		
		Z	0.00	0.00	1.00		144.3		
10352	Pulse Waveform (200Hz, 10%)	X	20.00	82.83	23.15	10.00	80.0	$\pm 3.2\%$	$\pm 9.6\%$
		Y	20.00	83.04	23.07		80.0		
		Z	20.00	81.96	22.27		80.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	82.88	21.38	6.99	80.0	$\pm 1.9\%$	$\pm 9.6\%$
		Y	20.00	82.64	21.62		80.0		
		Z	20.00	81.55	20.93		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	20.00	84.94	21.51	3.88	95.0	$\pm 1.3\%$	$\pm 9.6\%$
		Y	20.00	83.47	20.46		95.0		
		Z	20.00	82.65	20.06		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	20.00	86.17	21.64	2.22	120.0	$\pm 1.3\%$	$\pm 9.6\%$
		Y	20.00	84.36	18.43		120.0		
		Z	20.00	84.47	18.57		120.0		
10387	QPSK Waveform, 1 MHz	X	1.55	65.02	14.22	1.00	150.0	$\pm 3.1\%$	$\pm 9.6\%$
		Y	1.46	64.35	13.56		150.0		
		Z	1.58	65.46	14.37		150.0		
10388	QPSK Waveform, 10 MHz	X	2.21	67.89	15.45	0.00	150.0	$\pm 1.0\%$	$\pm 9.6\%$
		Y	1.84	65.94	14.40		150.0		
		Z	2.11	67.23	15.16		150.0		
10395	64-QAM Waveform, 100 kHz	X	3.34	72.24	19.50	3.01	150.0	$\pm 0.7\%$	$\pm 9.6\%$
		Y	3.05	70.35	18.63		150.0		
		Z	3.10	70.91	18.91		150.0		
10399	64-QAM Waveform, 40 MHz	X	3.37	66.53	15.34	0.00	150.0	$\pm 2.5\%$	$\pm 9.6\%$
		Y	3.30	65.14	15.08		150.0		
		Z	3.43	66.80	15.50		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.73	65.27	15.21	0.00	150.0	$\pm 4.5\%$	$\pm 9.6\%$
		Y	4.69	65.13	15.14		150.0		
		Z	4.80	65.51	15.40		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E^2 -field uncertainty inside TSL (see Pages 5 and 6).

^B Linearization parameter uncertainty for maximum specified field strength.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 - SN:3791

May 23, 2023

Parameters of Probe: EX3DV4 - SN:3791

Sensor Model Parameters

	C1 IF	C2 IF	α V ⁻¹	T1 ms V ⁻²	T2 ms V ⁻¹	T3 ms	T4 V ⁻²	T5 V ⁻¹	T6
x	44.9	328.61	34.25	26.18	0.85	5.10	1.59	0.27	1.01
y	43.1	321.65	35.39	23.26	0.92	5.10	0.89	0.40	1.01
z	44.3	331.02	35.44	25.96	0.67	5.10	0.96	0.37	1.01

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	-109.5°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3-4 mm for an Area Scan job.

EX3DV4 - SN:3791

May 23, 2023

Parameters of Probe: EX3DV4 - SN:3791

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k = 2)
750	41.9	0.88	9.00	9.00	9.00	0.52	0.80	±12.0%
835	41.5	0.90	8.79	8.79	8.79	0.26	1.21	±12.0%
900	41.5	0.97	8.48	8.48	8.48	0.37	0.91	±12.0%
1750	40.1	1.37	7.60	7.60	7.60	0.40	0.66	±12.0%
1900	40.0	1.40	7.41	7.41	7.41	0.31	0.66	±12.0%
1950	40.0	1.40	7.28	7.28	7.28	0.32	0.66	±12.0%
2300	39.5	1.67	6.92	6.92	6.92	0.35	0.90	±12.0%
2450	39.2	1.80	6.80	6.80	6.80	0.41	0.90	±12.0%
2600	39.0	1.96	6.72	6.72	6.72	0.28	0.90	±12.0%
3000	38.2	2.71	6.30	6.30	6.30	0.30	1.30	±14.0%
3600	37.9	2.91	6.25	6.25	6.25	0.35	1.30	±14.0%
3700	37.7	3.12	6.19	6.19	6.19	0.35	1.30	±14.0%
3900	37.5	3.32	5.98	5.98	5.98	0.35	1.50	±14.0%
4100	37.2	3.53	5.91	5.91	5.91	0.35	1.50	±14.0%
5200	36.0	4.66	4.89	4.89	4.89	0.40	1.80	±14.0%
5300	35.9	4.76	4.74	4.74	4.74	0.40	1.80	±14.0%
5500	35.6	4.96	4.61	4.61	4.61	0.40	1.80	±14.0%
5600	35.5	5.07	4.52	4.52	4.52	0.40	1.80	±14.0%
5800	35.3	5.27	4.49	4.49	4.49	0.40	1.80	±14.0%

^C Frequency validity above 300 MHz of ±100 MHz only applies for CASY v4.4 and higher (see Page 21), else it is restricted to ±50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is ±10, 25, 40, 50 and 70 MHz for ConvF assessments at 35, 64, 128, 150 and 200 MHz respectively. Validity of ConvF assessed at 0 MHz is 4–8 MHz, and ConvF assessed at 10 MHz is 8–10 MHz. Above 5 GHz frequency validity can be extended to ±110 MHz.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7–3 GHz and 13.1% for 3–6 GHz.

^G Alpha/Depth are determined during calibration. SPEAC warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4 - SN:3791

May 23, 2023

Parameters of Probe: EX3DV4 - SN:3791


Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
6500	34.5	6.07	5.00	5.00	5.00	0.20	2.50	±18.6%

^C Frequency validity at 6.5 GHz is ~900~1700 MHz, and ~1700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.
^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than $\pm 10\%$ from the target values (typically better than $\pm 8\%$) and are valid for TSL with deviations of up to $\pm 10\%$.
^G Alpha/Depth are determined during calibration. SPEAG warrants that the remaining deviation due to the boundary effect after compensation is always less than $\pm 1\%$ for frequencies below 3 GHz; below $\pm 2\%$ for frequencies between 3-6 GHz; and below $\pm 4\%$ for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.

EX30N4 - SN:3791

May 23, 2023

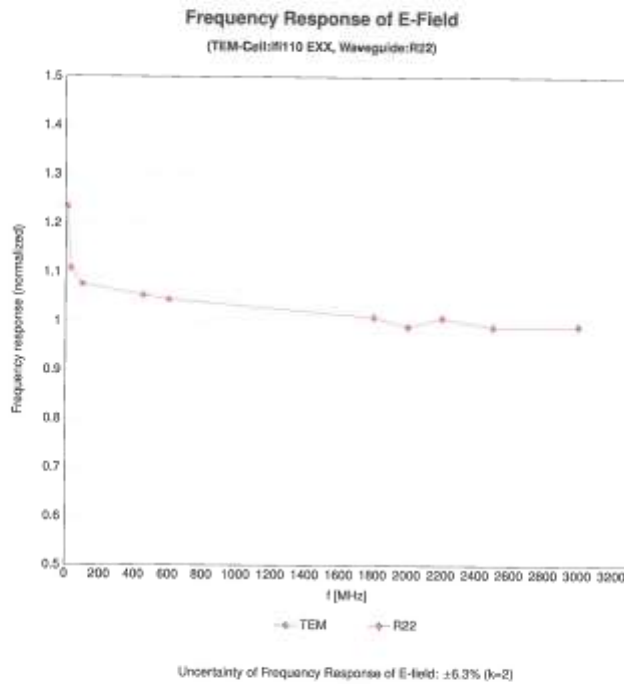


Certificate No: EX-3791_May23

Page 7 of 22

EX3DN4 - SN:3791

May 23, 2023

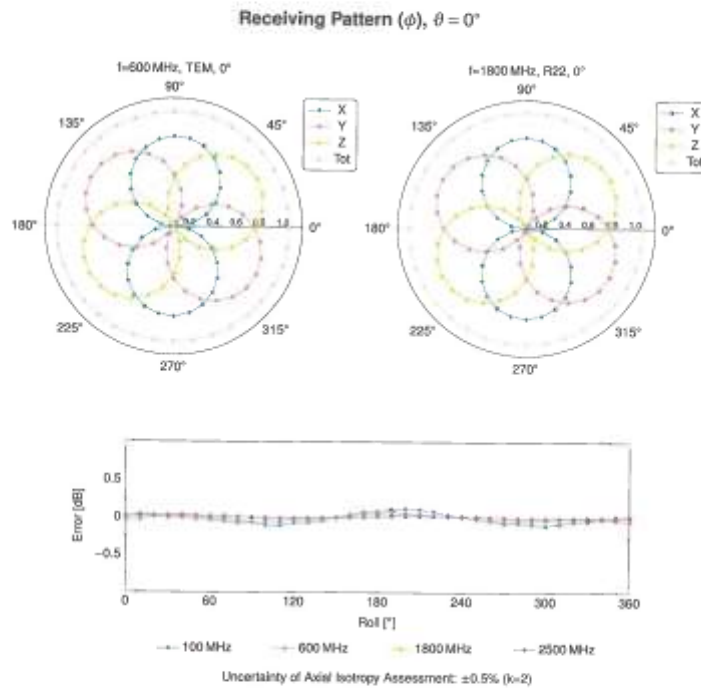


Certificate No: EX-3791_May23

Page 8 of 22

EX3DV4 - SN:3791

May 23, 2023

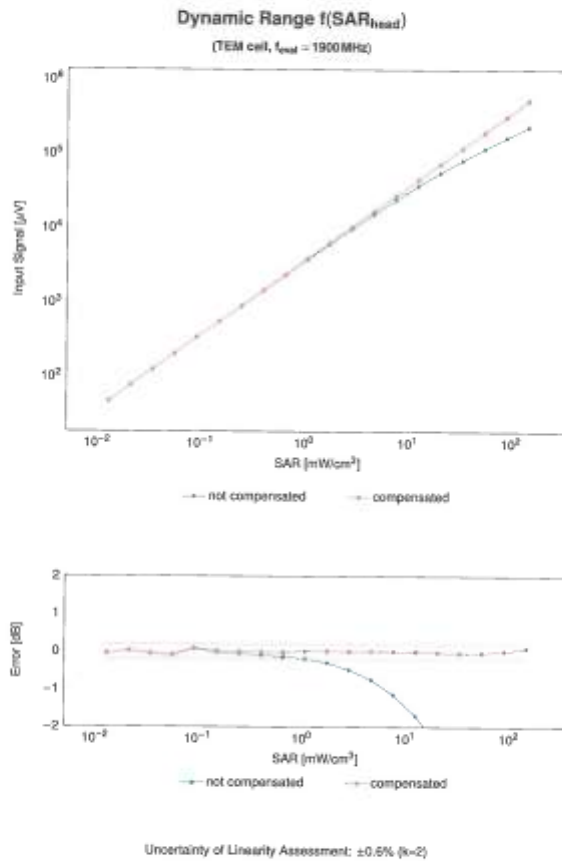


Certificate No: EX-3791_May23

Page 9 of 22


EXSDV4 - SN-3791

May 23, 2023

Conversion Factor Assessment

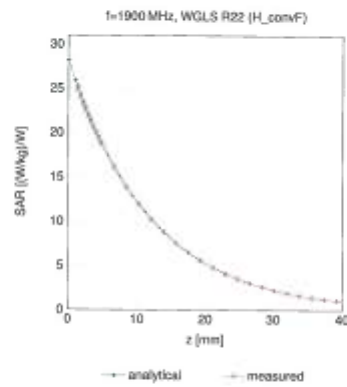

Deviation from Isotropy in Liquid

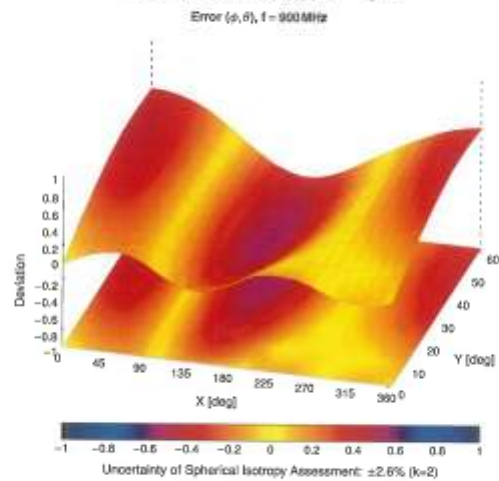

Certificate No: EX-3791_May23

Page 10 of 22

EX3DW4 - SN:3791

May 23, 2023

Appendix: Modulation Calibration Parameters

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^a k = 2
10010	CAB	SAR Validation (Square, 100ma, 10ms)	CW	0.08	±4.7
10011	CAC	UMTS FDD (WCDMA)	Test	10.00	±0.5
10011	CAC	UMTS FDD (WCDMA)	WCDMA	2.91	±0.5
10013	CAB	IEEE 802.11b WiFi 2.4GHz (DSSS, 1Mbps)	WLAN	1.87	±0.6
10013	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS OFDM, 6Mbps)	WLAN	2.46	±0.6
10021	DAC	GSM FDD (TDMA, GMSK)	GSM	9.39	±0.5
10023	DAC	GPRS FDD (TDMA, GMSK, TN 8)	GSM	8.57	±0.5
10024	DAC	GPRS FDD (TDMA, GMSK, TN 8-1)	GSM	8.56	±0.5
10025	DAC	EDGE FDD (TDMA, 8PSK, TN 8)	GSM	12.02	±0.6
10026	DAC	EDGE FDD (TDMA, 8PSK, TN 8-1)	GSM	9.55	±0.5
10027	DAC	GPRS FDD (TDMA, GMSK, TN 8-1-2)	GSM	4.80	±0.5
10028	DAC	GPRS FDD (TDMA, GMSK, TN 8-1-3)	GSM	3.95	±0.5
10029	DAC	EDGE FDD (TDMA, 8PSK, TN 8-1-2)	GSM	7.76	±0.6
10030	CAB	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.30	±0.5
10031	CAB	IEEE 802.15.1 Bluetooth (GFSK, DH2)	Bluetooth	1.67	±0.5
10032	CAB	IEEE 802.15.1 Bluetooth (2FSK, DH2)	Bluetooth	1.16	±0.5
10033	CAB	IEEE 802.15.1 Bluetooth (FSK, DH1)	Bluetooth	7.74	±0.6
10034	CAB	IEEE 802.15.1 Bluetooth (FSK, DH2)	Bluetooth	4.53	±0.5
10035	CAB	IEEE 802.15.1 Bluetooth (FSK, DH3)	Bluetooth	3.85	±0.5
10036	CAB	IEEE 802.15.1 Bluetooth (FSK, DH4)	Bluetooth	8.01	±0.5
10037	CAB	IEEE 802.15.1 Bluetooth (FSK, DH5)	Bluetooth	4.77	±0.5
10038	CAB	IEEE 802.15.1 Bluetooth (FSK, DH6)	Bluetooth	4.10	±0.5
10039	CAB	CDMA2000 (1xRTT, RC1)	CDMA2000	4.57	±0.5
10042	CAB	IS-94 / IS-136 FDD (TDMA/FDM, PSK-DQPSK, Fullrate)	AMPS	7.78	±0.5
10044	CAB	IS-94 / IS-136 FDD (TDMA/FDM, PSK, FM)	AMPS	9.06	±0.5
10048	CAB	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.80	±0.6
10049	CAB	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±0.6
10050	CAB	UMTS FDD (TD-SSDMA, 1.28Mbps)	TD-SSDMA	11.21	±0.5
10058	DAC	EDGE FDD (TDMA, 8PSK, TN 8-1-2-3)	GSM	8.52	±0.5
10059	CAB	IEEE 802.11b WiFi 2.4GHz (DSSS, 2Mbps)	WLAN	2.12	±0.6
10060	CAB	IEEE 802.11b WiFi 2.4GHz (DSSS, 5.5Mbps)	WLAN	2.83	±0.6
10061	CAB	IEEE 802.11b WiFi 2.4GHz (DSSS, 11Mbps)	WLAN	3.60	±0.6
10062	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 6Mbps)	WLAN	8.88	±0.5
10063	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 12Mbps)	WLAN	8.63	±0.5
10064	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 18Mbps)	WLAN	9.09	±0.5
10065	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 24Mbps)	WLAN	9.00	±0.5
10066	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 36Mbps)	WLAN	9.28	±0.5
10067	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 48Mbps)	WLAN	10.12	±0.5
10068	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 54Mbps)	WLAN	10.24	±0.5
10069	CAB	IEEE 802.11a WiFi 5GHz (OFDM, 54Mbps)	WLAN	10.56	±0.5
10071	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 9Mbps)	WLAN	9.03	±0.5
10072	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 12Mbps)	WLAN	9.02	±0.5
10073	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 18Mbps)	WLAN	9.94	±0.5
10074	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 24Mbps)	WLAN	10.50	±0.5
10075	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 36Mbps)	WLAN	10.77	±0.5
10076	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 48Mbps)	WLAN	10.94	±0.5
10077	CAB	IEEE 802.11g WiFi 2.4GHz (DSSS/OFDM, 54Mbps)	WLAN	11.06	±0.5
10081	CAB	CDMA2000 (1xEV-DO)	CDMA2000	3.97	±0.5
10082	CAB	IS-94 / IS-136 FDD (TDMA/FDM, PSK-DQPSK, Fullrate)	AMPS	4.77	±0.5
10090	DAC	GPRS FDD (TDMA, GMSK, TN 8-4)	GSM	8.56	±0.5
10097	CAC	UMTS FDD (HSUPA)	WCDMA	3.88	±0.5
10098	CAC	UMTS FDD (HSUPA, Subtest 2)	WCDMA	3.88	±0.5
10099	DAC	EDGE FDD (TDMA, 8PSK, TN 8-4)	GSM	9.55	±0.5
10100	CAB	LTE FDD (SC-FDMA, 100% RB, 20MHz, QPSK)	LTE-FDD	5.57	±0.5
10101	CAB	LTE FDD (SC-FDMA, 100% RB, 20MHz, 16-QAM)	LTE-FDD	6.42	±0.5
10102	CAB	LTE FDD (SC-FDMA, 100% RB, 20MHz, 64-QAM)	LTE-FDD	6.80	±0.5
10103	CAB	LTE TDD (SC-FDMA, 100% RB, 20MHz, QPSK)	LTE-TDD	9.29	±0.5
10104	CAB	LTE TDD (SC-FDMA, 100% RB, 20MHz, 16-QAM)	LTE-TDD	9.97	±0.5
10105	CAB	LTE TDD (SC-FDMA, 100% RB, 20MHz, 64-QAM)	LTE-TDD	10.01	±0.5
10106	CAB	LTE FDD (SC-FDMA, 100% RB, 10MHz, QPSK)	LTE-FDD	5.50	±0.5
10107	CAB	LTE FDD (SC-FDMA, 100% RB, 10MHz, 16-QAM)	LTE-FDD	6.43	±0.5
10110	CAB	LTE FDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-FDD	5.75	±0.5
10111	CAB	LTE FDD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-FDD	6.64	±0.5

Certificate No: EX-3791_May23

Page 11 of 22

EX3DW4 - SN:3791

May 23, 2023

UID	Rev	Communication System Name	Group	FAR (dB)	Unit# k = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-FDD	6.58	±0.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-FDD	6.62	±0.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5Mbps, 64-QAM)	WLAN	8.19	±0.6
10115	CAD	IEEE 802.11n (HT Greenfield, 13.5Mbps, 64-QAM)	WLAN	8.44	±0.6
10116	CAD	IEEE 802.11n (HT Greenfield, 13.5Mbps, 64-QAM)	WLAN	8.15	±0.6
10117	CAD	IEEE 802.11n (HT Mixed, 81Mbps, 64-QAM)	WLAN	8.07	±0.6
10118	CAD	IEEE 802.11n (HT Mixed, 81Mbps, 64-QAM)	WLAN	8.59	±0.6
10119	CAD	IEEE 802.11n (HT Mixed, 135Mbps, 64-QAM)	WLAN	8.13	±0.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 16-QAM)	LTE-FDD	6.49	±0.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	6.93	±0.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-FDD	5.73	±0.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-FDD	6.35	±0.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-FDD	6.65	±0.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.76	±0.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.41	±0.6
10147	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.72	±0.6
10148	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.49	±0.6
10149	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.60	±0.6
10150	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.29	±0.6
10151	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.90	±0.6
10152	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.29	±0.6
10153	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.76	±0.6
10154	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.43	±0.6
10155	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.79	±0.6
10156	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.46	±0.6
10157	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.62	±0.6
10158	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.56	±0.6
10159	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.43	±0.6
10160	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.54	±0.6
10161	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.46	±0.6
10162	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.21	±0.6
10163	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.78	±0.6
10164	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	5.73	±0.6
10165	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.53	±0.6
10166	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.49	±0.6
10167	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.21	±0.6
10168	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.49	±0.6
10169	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10170	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10171	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10172	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10173	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10174	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10175	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10176	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10177	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10178	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10179	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10180	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10181	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10182	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10183	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10184	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10185	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10186	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10187	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10188	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10189	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10190	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10191	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10192	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10193	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10194	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10195	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10196	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10197	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10198	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10199	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10200	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10201	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10202	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6
10203	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10204	CAF	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.52	±0.6

Certificate No: EX-3781_May23

Page 12 of 22

EX3DV4 - SN:3791

May 23, 2023

UID	Rev	Communication System Name	Group	PART (dB)	Sinc ² k = 3
10225	CAC	UMTS FDD (HSPA+)	WCDMA	5.57	±9.8
10226	CAC	LTE FDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.46	±9.8
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.26	±9.8
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.22	±9.8
10229	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	9.44	±9.8
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.35	±9.8
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±9.8
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.44	±9.8
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±9.8
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.21	±9.8
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.68	±9.8
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.39	±9.8
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±9.8
10238	CAH	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±9.8
10239	CAH	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.26	±9.8
10240	CAH	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±9.8
10241	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.82	±9.8
10242	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.66	±9.8
10243	CAC	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±9.8
10244	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±9.8
10245	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±9.8
10246	CAE	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±9.8
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	9.91	±9.8
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.09	±9.8
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.39	±9.8
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM)	LTE-TDD	9.81	±9.8
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM)	LTE-TDD	10.17	±9.8
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK)	LTE-TDD	9.24	±9.8
10253	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.90	±9.8
10254	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±9.8
10255	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.20	±9.8
10256	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.99	±9.8
10257	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.09	±9.8
10258	CAH	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±9.8
10259	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.98	±9.8
10260	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±9.8
10261	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.34	±9.8
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.60	±9.8
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	10.16	±9.8
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.20	±9.8
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.90	±9.8
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.07	±9.8
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.30	±9.8
10268	CAH	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.06	±9.8
10269	CAH	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.15	±9.8
10270	CAH	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±9.8
10271	CAC	UMTS FDD (HSPA, Subnet 5, SCPP Rel3.4)	WCDMA	4.87	±9.8
10272	CAC	UMTS FDD (HSPA, Subnet 5, SCPP Rel3.4)	WCDMA	3.96	±9.8
10273	CAH	PHS (QPSK, BW 884 MHz, Roll-off 0.5)	PHS	11.81	±9.8
10274	CAH	PHS (QPSK, BW 884 MHz, Roll-off 0.35)	PHS	11.81	±9.8
10275	CAH	PHS (QPSK, BW 884 MHz, Roll-off 0.35)	PHS	12.18	±9.8
10276	AAB	CDMA2000, RCT, SC06, Full Rate	CDMA2000	3.91	±9.8
10277	AAB	CDMA2000, RCT, SC06, Full Rate	CDMA2000	3.48	±9.8
10278	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	3.39	±9.8
10279	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	3.50	±9.8
10280	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	12.49	±9.8
10281	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	5.81	±9.8
10282	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	5.72	±9.8
10283	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	6.39	±9.8
10284	AAB	CDMA2000, RCT, SC02, Full Rate	CDMA2000	6.00	±9.8
10301	AAA	IEEE 802.16e WIMAX (20-18, 5 ms, 10 MHz, QPSK, PUSC)	WIMAX	12.03	±9.8
10302	AAA	IEEE 802.16e WIMAX (20-18, 5 ms, 10 MHz, QPSK, PUSC, 3 CTR symbols)	WIMAX	12.57	±9.8
10303	AAA	IEEE 802.16e WIMAX (20-18, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	12.52	±9.8
10304	AAA	IEEE 802.16e WIMAX (20-18, 5 ms, 10 MHz, 64QAM, PUSC)	WIMAX	11.86	±9.8
10305	AAA	IEEE 802.16e WIMAX (20-18, 10 ms, 10 MHz, 64QAM, PUSC, 10 symbols)	WIMAX	15.24	±9.8
10306	AAA	IEEE 802.16e WIMAX (20-18, 10 ms, 10 MHz, 64QAM, PUSC, 10 symbols)	WIMAX	14.67	±9.8

Certificate No: EX-3791_May23

Page 13 of 22

EX3DV4 - SN:3791

May 23, 2023

ID#	Rev	Communication Spec. Name	Group	Min (dB)	Unc. Δ
10007	AAA	IEEE 802.11a WMAN (2016, 10 ms, 10 MHz, QPSK, PUSC, 16 symbols)	WMAN	14.45	+0.5
10008	AAA	IEEE 802.11a WMAN (2016, 10 ms, 10 MHz, 16QAM, PUSC)	WMAN	14.44	+0.5
10009	AAA	IEEE 802.11a WMAN (2016, 10 ms, 10 MHz, 16QAM, AMC 2x3, 16 symbols)	WMAN	14.58	+0.9
10010	AAA	IEEE 802.11a WMAN (2016, 10 ms, 10 MHz, QPSK, AMC 2x3, 16 symbols)	WMAN	14.57	+0.9
10011	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	15.08	+0.6
10012	AAA	iDEN 1.3	iDEN	10.51	+0.6
10014	AAA	iDEN 1.5	iDEN	14.48	+0.6
10015	AAE	IEEE 802.11a WIF 2.4 GHz (30SSS, 1 Mbps, 90pc duty cycle)	WLAN	1.71	+0.6
10016	AAE	IEEE 802.11a WIF 2.4 GHz (ERP-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	1.86	+0.6
10017	AAE	IEEE 802.11a WIF 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.35	+0.6
10025	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	+0.6
10026	AAA	Pulse Waveform (200Hz, 20%)	Generic	0.99	+0.6
10027	AAA	Pulse Waveform (200Hz, 40%)	Generic	2.08	+0.6
10028	AAA	Pulse Waveform (200Hz, 60%)	Generic	2.22	+0.6
10029	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.97	+0.6
10034	AAA	QPSK Waveform, 1 MHz	Generic	5.10	+0.6
10035	AAA	QPSK Waveform, 10 MHz	Generic	6.29	+0.6
10036	AAA	64-QAM Waveform, 100 kHz	Generic	6.37	+0.6
10039	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	+0.6
10040	AAE	IEEE 802.11ac WIF (25MHz, 64QAM, 90pc duty cycle)	WLAN	8.37	+0.6
10041	AAE	IEEE 802.11ac WIF (40MHz, 64QAM, 90pc duty cycle)	WLAN	8.60	+0.6
10042	AAE	IEEE 802.11ac WIF (80MHz, 64-QAM, 90pc duty cycle)	WLAN	8.65	+0.6
10043	AAE	CDMA2000 1xEV-DO, Rev. 0	CDMA2000	3.76	+0.6
10044	AAE	CDMA2000 1xEV-DO, Rev. 3A	CDMA2000	3.77	+0.6
10045	AAE	CDMA2000 1xEV-DO, Rev. 3B, Full Rate	CDMA2000	3.82	+0.6
10046	AAE	IEEE 802.11a WIF 2.4 GHz (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.54	+0.6
10047	AAE	IEEE 802.11a WIF 2.4 GHz (ERP-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	3.23	+0.6
10048	AAE	IEEE 802.11a WIF 5 GHz (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	8.23	+0.6
10049	AAE	IEEE 802.11a WIF 5 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle, Long preamble)	WLAN	8.14	+0.6
10049	AAE	IEEE 802.11a WIF 5 GHz (DSSS-OFDM, 6 Mbps, 90pc duty cycle, Short preamble)	WLAN	8.19	+0.6
10051	AAE	IEEE 802.11n (HT Greenfield, 2.4 MHz, 16-QAM)	WLAN	0.31	+0.6
10052	AAE	IEEE 802.11n (HT Greenfield, 4.33 MHz, 16-QAM)	WLAN	0.47	+0.6
10053	AAE	IEEE 802.11n (HT Greenfield, 8.22 MHz, 64-QAM)	WLAN	0.43	+0.6
10054	AAE	IEEE 802.11n (HT Greenfield, 15 MHz, 64-QAM)	WLAN	0.41	+0.6
10055	AAE	IEEE 802.11n (HT Greenfield, 30 MHz, 64-QAM)	WLAN	0.41	+0.6
10056	AAE	IEEE 802.11n (HT Greenfield, 40 MHz, 64-QAM)	WLAN	0.41	+0.6
10057	AAE	IEEE 802.11n (HT Greenfield, 60 MHz, 64-QAM)	WLAN	0.41	+0.6
10058	AAE	IEEE 802.11n (HT Greenfield, 80 MHz, 64-QAM)	WLAN	0.41	+0.6
10059	AAE	IEEE 802.11n (HT Greenfield, 100 MHz, 64-QAM)	WLAN	0.41	+0.6
10060	AAE	IEEE 802.11n (HT Greenfield, 120 MHz, 64-QAM)	WLAN	0.41	+0.6
10061	AAE	IEEE 802.11n (HT Greenfield, 140 MHz, 64-QAM)	WLAN	0.41	+0.6
10062	AAE	IEEE 802.11n (HT Greenfield, 160 MHz, 64-QAM)	WLAN	0.41	+0.6
10063	AAE	IEEE 802.11n (HT Greenfield, 180 MHz, 64-QAM)	WLAN	0.41	+0.6
10064	AAE	IEEE 802.11n (HT Greenfield, 200 MHz, 64-QAM)	WLAN	0.41	+0.6
10065	AAE	IEEE 802.11n (HT Greenfield, 220 MHz, 64-QAM)	WLAN	0.41	+0.6
10066	AAE	IEEE 802.11n (HT Greenfield, 240 MHz, 64-QAM)	WLAN	0.41	+0.6
10067	AAE	IEEE 802.11n (HT Greenfield, 260 MHz, 64-QAM)	WLAN	0.41	+0.6
10068	AAE	IEEE 802.11n (HT Greenfield, 280 MHz, 64-QAM)	WLAN	0.41	+0.6
10069	AAE	IEEE 802.11n (HT Greenfield, 300 MHz, 64-QAM)	WLAN	0.41	+0.6
10070	AAE	IEEE 802.11n (HT Greenfield, 320 MHz, 64-QAM)	WLAN	0.41	+0.6
10071	AAE	IEEE 802.11n (HT Greenfield, 340 MHz, 64-QAM)	WLAN	0.41	+0.6
10072	AAE	IEEE 802.11n (HT Greenfield, 360 MHz, 64-QAM)	WLAN	0.41	+0.6
10073	AAE	IEEE 802.11n (HT Greenfield, 380 MHz, 64-QAM)	WLAN	0.41	+0.6
10074	AAE	IEEE 802.11n (HT Greenfield, 400 MHz, 64-QAM)	WLAN	0.41	+0.6
10075	AAE	IEEE 802.11n (HT Greenfield, 420 MHz, 64-QAM)	WLAN	0.41	+0.6
10076	AAE	IEEE 802.11n (HT Greenfield, 440 MHz, 64-QAM)	WLAN	0.41	+0.6
10077	AAE	IEEE 802.11n (HT Greenfield, 460 MHz, 64-QAM)	WLAN	0.41	+0.6
10078	AAE	IEEE 802.11n (HT Greenfield, 480 MHz, 64-QAM)	WLAN	0.41	+0.6
10079	AAE	IEEE 802.11n (HT Greenfield, 500 MHz, 64-QAM)	WLAN	0.41	+0.6
10080	AAE	IEEE 802.11n (HT Greenfield, 520 MHz, 64-QAM)	WLAN	0.41	+0.6
10081	AAE	IEEE 802.11n (HT Greenfield, 540 MHz, 64-QAM)	WLAN	0.41	+0.6
10082	AAE	IEEE 802.11n (HT Greenfield, 560 MHz, 64-QAM)	WLAN	0.41	+0.6
10083	AAE	IEEE 802.11n (HT Greenfield, 580 MHz, 64-QAM)	WLAN	0.41	+0.6
10084	AAE	IEEE 802.11n (HT Greenfield, 600 MHz, 64-QAM)	WLAN	0.41	+0.6
10085	AAE	IEEE 802.11n (HT Greenfield, 620 MHz, 64-QAM)	WLAN	0.41	+0.6
10086	AAE	IEEE 802.11n (HT Greenfield, 640 MHz, 64-QAM)	WLAN	0.41	+0.6
10087	AAE	IEEE 802.11n (HT Greenfield, 660 MHz, 64-QAM)	WLAN	0.41	+0.6
10088	AAE	IEEE 802.11n (HT Greenfield, 680 MHz, 64-QAM)	WLAN	0.41	+0.6
10089	AAE	IEEE 802.11n (HT Greenfield, 700 MHz, 64-QAM)	WLAN	0.41	+0.6
10090	AAE	IEEE 802.11n (HT Greenfield, 720 MHz, 64-QAM)	WLAN	0.41	+0.6
10091	AAE	IEEE 802.11n (HT Greenfield, 740 MHz, 64-QAM)	WLAN	0.41	+0.6
10092	AAE	IEEE 802.11n (HT Greenfield, 760 MHz, 64-QAM)	WLAN	0.41	+0.6
10093	AAE	IEEE 802.11n (HT Greenfield, 780 MHz, 64-QAM)	WLAN	0.41	+0.6
10094	AAE	IEEE 802.11n (HT Greenfield, 800 MHz, 64-QAM)	WLAN	0.41	+0.6
10095	AAE	IEEE 802.11n (HT Greenfield, 820 MHz, 64-QAM)	WLAN	0.41	+0.6
10096	AAE	IEEE 802.11n (HT Greenfield, 840 MHz, 64-QAM)	WLAN	0.41	+0.6
10097	AAE	IEEE 802.11n (HT Greenfield, 860 MHz, 64-QAM)	WLAN	0.41	+0.6
10098	AAE	IEEE 802.11n (HT Greenfield, 880 MHz, 64-QAM)	WLAN	0.41	+0.6
10099	AAE	IEEE 802.11n (HT Greenfield, 900 MHz, 64-QAM)	WLAN	0.41	+0.6
10100	AAE	IEEE 802.11n (HT Greenfield, 920 MHz, 64-QAM)	WLAN	0.41	+0.6
10101	AAE	IEEE 802.11n (HT Greenfield, 940 MHz, 64-QAM)	WLAN	0.41	+0.6
10102	AAE	IEEE 802.11n (HT Greenfield, 960 MHz, 64-QAM)	WLAN	0.41	+0.6
10103	AAE	IEEE 802.11n (HT Greenfield, 980 MHz, 64-QAM)	WLAN	0.41	+0.6
10104	AAE	IEEE 802.11n (HT Greenfield, 1000 MHz, 64-QAM)	WLAN	0.41	+0.6
10105	AAE	IEEE 802.11n (HT Greenfield, 1020 MHz, 64-QAM)	WLAN	0.41	+0.6
10106	AAE	IEEE 802.11n (HT Greenfield, 1040 MHz, 64-QAM)	WLAN	0.41	+0.6
10107	AAE	IEEE 802.11n (HT Greenfield, 1060 MHz, 64-QAM)	WLAN	0.41	+0.6
10108	AAE	IEEE 802.11n (HT Greenfield, 1080 MHz, 64-QAM)	WLAN	0.41	+0.6
10109	AAE	IEEE 802.11n (HT Greenfield, 1100 MHz, 64-QAM)	WLAN	0.41	+0.6
10110	AAE	IEEE 802.11n (HT Greenfield, 1120 MHz, 64-QAM)	WLAN	0.41	+0.6
10111	AAE	IEEE 802.11n (HT Greenfield, 1140 MHz, 64-QAM)	WLAN	0.41	+0.6
10112	AAE	IEEE 802.11n (HT Greenfield, 1160 MHz, 64-QAM)	WLAN	0.41	+0.6
10113	AAE	IEEE 802.11n (HT Greenfield, 1180 MHz, 64-QAM)	WLAN	0.41	+0.6
10114	AAE	IEEE 802.11n (HT Greenfield, 1200 MHz, 64-QAM)	WLAN	0.41	+0.6
10115	AAE	IEEE 802.11n (HT Greenfield, 1220 MHz, 64-QAM)	WLAN	0.41	+0.6
10116	AAE	IEEE 802.11n (HT Greenfield, 1240 MHz, 64-QAM)	WLAN	0.41	+0.6
10117	AAE	IEEE 802.11n (HT Greenfield, 1260 MHz, 64-QAM)	WLAN	0.41	+0.6
10118	AAE	IEEE 802.11n (HT Greenfield, 1280 MHz, 64-QAM)	WLAN	0.41	+0.6
10119	AAE	IEEE 802.11n (HT Greenfield, 1300 MHz, 64-QAM)	WLAN	0.41	+0.6
10120	AAE	IEEE 802.11n (HT Greenfield, 1320 MHz, 64-QAM)	WLAN	0.41	+0.6
10121	AAE	IEEE 802.11n (HT Greenfield, 1340 MHz, 64-QAM)	WLAN	0.41	+0.6
10122	AAE	IEEE 802.11n (HT Greenfield, 1360 MHz, 64-QAM)	WLAN	0.41	+0.6
10123	AAE	IEEE 802.11n (HT Greenfield, 1380 MHz, 64-QAM)	WLAN	0.41	+0.6
10124	AAE	IEEE 802.11n (HT Greenfield, 1400 MHz, 64-QAM)	WLAN	0.41	+0.6
10125	AAE	IEEE 802.11n (HT Greenfield, 1420 MHz, 64-QAM)	WLAN	0.41	+0.6
10126	AAE	IEEE 802.11n (HT Greenfield, 1440 MHz, 64-QAM)	WLAN	0.41	+0.6
10127	AAE	IEEE 802.11n (HT Greenfield, 1460 MHz, 64-QAM)	WLAN	0.41	+0.6
10128	AAE	IEEE 802.11n (HT Greenfield, 1480 MHz, 64-QAM)	WLAN	0.41	+0.6
10129	AAE	IEEE 802.11n (HT Greenfield, 1500 MHz, 64-QAM)	WLAN	0.41	+0.6
10130	AAE	IEEE 802.11n (HT Greenfield, 1520 MHz, 64-QAM)	WLAN	0.41	+0.6
10131	AAE	IEEE 802.11n (HT Greenfield, 1540 MHz, 64-QAM)	WLAN	0.41	+0.6
10132	AAE	IEEE 802.11n (HT Greenfield, 1560 MHz, 64-QAM)	WLAN	0.41	+0.6
10133	AAE	IEEE 802.11n (HT Greenfield, 1580 MHz, 64-QAM)	WLAN	0.41	+0.6
10134	AAE	IEEE 802.11n (HT Greenfield, 1600 MHz, 64-QAM)	WLAN	0.41	+0.6
10135	AAE	IEEE 802.11n (HT Greenfield, 1620 MHz, 64-QAM)	WLAN	0.41	+0.6
10136	AAE	IEEE 802.11n (HT Greenfield, 1640 MHz, 64-QAM)	WLAN	0.41	+0.6
10137	AAE	IEEE 802.11n (HT Greenfield, 1660 MHz, 64-QAM)	WLAN	0.41	+0.6
10138	AAE	IEEE 802.11n (HT Greenfield, 1680 MHz, 64-QAM)	WLAN	0.41	+0.6
10139	AAE	IEEE 802.11n (HT Greenfield, 1700 MHz, 64-QAM)	WLAN	0.41	+0.6
10140	AAE	IEEE 802.11n (HT Greenfield, 1720 MHz, 64-QAM)	WLAN	0.41	+0.6
10141	AAE	IEEE 802.11n (HT Greenfield, 1740 MHz, 64-QAM)	WLAN	0.41	+0.6
10142	AAE	IEEE 802.11n (HT Greenfield, 1760 MHz, 64-QAM)	WLAN	0.41	+0.6
10143	AAE	IEEE 802.11n (HT Greenfield, 1780 MHz, 64-QAM)	WLAN	0.41	+0.6
10144	AAE	IEEE 802.11n (HT Greenfield, 1800 MHz, 64-QAM)	WLAN	0.41	+0.6
10145	AAE	IEEE 802.11n (HT Greenfield, 1820 MHz, 64-QAM)	WLAN	0.41	+0.6
10146	AAE	IEEE 802.11n (HT Greenfield, 1840 MHz, 64-QAM)	WLAN	0.41	+0.6
10147	AAE	IEEE 802.11n (HT Greenfield, 1860 MHz, 64-QAM)	WLAN	0.41	+0.6
10148	AAE	IEEE 802.11n (HT Greenfield, 1880 MHz, 64-QAM)	WLAN	0.41	+0.6
10149	AAE	IEEE 802.11n (HT Greenfield, 1900 MHz, 64-QAM)	WLAN	0.41	+0.6
10150	AAE	IEEE 802.11n (HT Greenfield, 1920 MHz, 64-QAM)	WLAN	0.41	+0.6
10151	AAE	IEEE 802.11n (HT Greenfield, 1940 MHz, 64-QAM)	WLAN	0.41	+0.6
10152	AAE	IEEE 802.11n (HT Greenfield, 1960 MHz, 64-QAM)	WLAN	0.41	+0.6
10153	AAE	IEEE 802.11n (HT Greenfield, 1980 MHz, 64-QAM)	WLAN	0.41	+0.6
10154	AAE	IEEE 802.11n (HT Greenfield, 2000 MHz, 64-QAM)	WLAN	0.41	+0.6
10155	AAE	IEEE 802.11n (HT Greenfield, 2020 MHz, 64-QAM)	WLAN	0.41	+0.6
10156	AAE	IEEE 802.11n (HT Greenfield, 2040 MHz, 64-QAM)	WLAN	0.41	+0.6
10157	AAE	IEEE 802.11n (HT Greenfield, 2060 MHz, 64-QAM)	WLAN	0.41	+0.6
10158	AAE	IEEE 802.11n (HT Greenfield, 2080 MHz, 64-QAM)	WLAN	0.41	+0.6
10159	AAE	IEEE 802.11n (HT Greenfield, 2100 MHz, 64-QAM)	WLAN	0.41	+0.6
10160	AAE	IEEE 802.11n (HT Greenfield, 2120 MHz, 64-QAM)	WLAN	0.41	+0.6
10161	AAE	IEEE 802.11n (HT Greenfield, 2140 MHz, 64-QAM)	WLAN	0.41	+0.6
10162	AAE	IEEE 802.11n (HT Greenfield, 2160 MHz, 64-QAM)	WLAN	0.41	+0.6
10163	AAE	IEEE 802.11n (HT Greenfield, 2180 MHz, 64-QAM)	WLAN	0.41	+0.6
10164	AAE	IEEE 802.11n (HT Greenfield, 2200 MHz, 64-QAM)	WLAN	0.41	+0.6
10165	AAE	IEEE 802.11n (HT Greenfield, 2220 MHz, 64-QAM)	WLAN	0.41	+0.6
10166	AAE	IEEE 802.11n (HT Greenfield, 2240 MHz, 64-QAM)	WLAN	0.41	+0.6
10167	AAE	IEEE 802.11n (HT Greenfield, 2260 MHz, 64-QAM)	WLAN	0.41	+0.6
10168	AAE	IEEE 802.11n (HT Greenfield, 2280 MHz, 64-QAM)	WLAN	0.41	+0.6
10169	AAE	IEEE 802.11n (HT Greenfield, 2300 MHz, 64-QAM)	WLAN	0.41	+0.6
10170	AAE	IEEE 802.11n (HT Greenfield, 2320 MHz, 64-QAM)	WLAN	0.41	+0.6
10171	AAE	IEEE 802.11n (HT Greenfield, 2340 MHz, 64-QAM)	WLAN	0.41	+0.6
10172	AAE	IEEE 802.11n (HT Greenfield, 2360 MHz, 64-QAM)	WLAN	0.41	+0.6
10173	AAE	IEEE 802.11n (HT Greenfield, 2380 MHz, 64-QAM)	WLAN	0.41	+0.6
10174	AAE	IEEE 802.11n (HT Greenfield, 2400 MHz, 64-QAM)	WLAN	0.41	+0.6
10175	AAE	IEEE 802.11n (HT Greenfield, 2420 MHz, 64-QAM)	WLAN	0.41	+0.6
10176	AAE	IEEE 802.11n (HT Greenfield, 2440 MHz, 64-QAM)	WLAN	0.41	+0.6
10177	AAE	IEEE 802.11n (HT Greenfield, 2460 MHz, 64-QAM)	WLAN	0.41	+0.6
10178	AAE	IEEE 802.11n (HT Greenfield, 2480 MHz, 64-QAM)	WLAN	0.41	+0.6
10179	AAE	IEEE 802.11n (HT Greenfield, 2500 MHz, 64-QAM)	WLAN	0.41	+0.6
10180	AAE	IEEE 802.11n (HT Greenfield, 2520 MHz, 64-QAM)	WLAN	0.41	+0.6
10181	AAE	IEEE 802.11n (HT Greenfield, 2540 MHz, 64-QAM)	WLAN	0.41	+0.6
10182	AAE	IEEE 802.11n (HT Greenfield, 2560 MHz, 64-QAM)	WLAN	0.41	+0.6
10183	AAE	IEEE 802.11n (HT Greenfield, 2580 MHz, 64-QAM)	WLAN	0.41	+0.6
10184	AAE	IEEE 802.11n (HT Greenfield, 2600 MHz, 64-QAM)	WLAN	0.41	+0.6
10185					

Certificate No: EX-3791_May23

Page 14 of 22

EX3DW4 - SN:3791

May 23, 2023

Item	Rev	Communication System Name	Group	PAR (dB)	Line* k=2
16472	AAQ	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.57	±0.5
16473	AAQ	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.88	±0.5
16474	AAQ	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.32	±0.5
16475	AAQ	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.57	±0.5
16477	AAQ	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.32	±0.5
16478	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.57	±0.5
16479	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.74	±0.5
16480	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.18	±0.5
16481	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.45	±0.5
16482	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.71	±0.5
16483	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.39	±0.5
16484	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.47	±0.5
16485	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.59	±0.5
16486	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.38	±0.5
16487	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.60	±0.5
16488	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.70	±0.5
16489	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.54	±0.5
16490	AAQ	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.74	±0.5
16491	AAQ	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.41	±0.5
16492	AAQ	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.55	±0.5
16493	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.74	±0.5
16494	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.37	±0.5
16495	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.54	±0.5
16496	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.67	±0.5
16497	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.40	±0.5
16498	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.68	±0.5
16499	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.67	±0.5
16500	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.44	±0.5
16501	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.52	±0.5
16502	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.72	±0.5
16503	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.31	±0.5
16504	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.54	±0.5
16505	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.74	±0.5
16506	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.38	±0.5
16507	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.55	±0.5
16508	AAQ	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.69	±0.5
16509	AAQ	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.49	±0.5
16510	AAQ	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.51	±0.5
16511	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2.3,4,7,8,9)	LTE-TDD	7.74	±0.5
16512	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.42	±0.5
16513	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2.3,4,7,8,9)	LTE-TDD	8.45	±0.5
16514	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.58	±0.5
16515	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.57	±0.5
16516	AAA	IEEE 802.11b WiFi 2.4 GHz (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	1.58	±0.5
16517	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	8.23	±0.5
16518	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	8.29	±0.5
16519	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	8.12	±0.5
16520	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	7.57	±0.5
16521	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	8.45	±0.5
16522	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	8.06	±0.5
16523	AAC	IEEE 802.11a WiFi 5 GHz (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	8.27	±0.5
16524	AAC	IEEE 802.11ac WiFi (20 MHz, MCS0, 90pc duty cycle)	WLAN	8.36	±0.5
16525	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.42	±0.5
16526	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.21	±0.5
16527	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.36	±0.5
16528	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.29	±0.5
16529	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.36	±0.5
16530	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.43	±0.5
16531	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.29	±0.5
16532	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.38	±0.5
16533	AAC	IEEE 802.11ac WiFi (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.45	±0.5
16534	AAC	IEEE 802.11ac WiFi (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.45	±0.5
16535	AAC	IEEE 802.11ac WiFi (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.33	±0.5
16536	AAC	IEEE 802.11ac WiFi (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.44	±0.5
16537	AAC	IEEE 802.11ac WiFi (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.54	±0.5
16538	AAC	IEEE 802.11ac WiFi (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.39	±0.5
16539	AAC	IEEE 802.11ac WiFi (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.39	±0.5

Certificate No: EX-3791_May23

Page 15 of 22

EX30N4 - SN.3791

May 23, 2023

IRD	Rev	Communication System Name	Group	PAR (dBm)	Unc ² k = 2
10541	AAC	IEEE 802.11ac WFI (40 MHz, MCS7, 90pc duty cycle)	WLAN	0.46	±0.6
10542	AAC	IEEE 802.11ac WFI (40 MHz, MCS8, 90pc duty cycle)	WLAN	0.65	±0.6
10543	AAC	IEEE 802.11ac WFI (40 MHz, MCS9, 90pc duty cycle)	WLAN	0.66	±0.6
10544	AAC	IEEE 802.11ac WFI (80 MHz, MCS1, 90pc duty cycle)	WLAN	0.47	±0.6
10545	AAC	IEEE 802.11ac WFI (80 MHz, MCS2, 90pc duty cycle)	WLAN	0.55	±0.6
10546	AAC	IEEE 802.11ac WFI (80 MHz, MCS3, 90pc duty cycle)	WLAN	0.35	±0.6
10547	AAC	IEEE 802.11ac WFI (80 MHz, MCS4, 90pc duty cycle)	WLAN	0.40	±0.6
10548	AAC	IEEE 802.11ac WFI (80 MHz, MCS5, 90pc duty cycle)	WLAN	0.37	±0.6
10549	AAC	IEEE 802.11ac WFI (80 MHz, MCS6, 90pc duty cycle)	WLAN	0.38	±0.6
10550	AAC	IEEE 802.11ac WFI (80 MHz, MCS7, 90pc duty cycle)	WLAN	0.50	±0.6
10551	AAC	IEEE 802.11ac WFI (80 MHz, MCS8, 90pc duty cycle)	WLAN	0.42	±0.6
10552	AAC	IEEE 802.11ac WFI (80 MHz, MCS9, 90pc duty cycle)	WLAN	0.45	±0.6
10553	AAC	IEEE 802.11ac WFI (160 MHz, MCS0, 90pc duty cycle)	WLAN	0.48	±0.6
10554	AAC	IEEE 802.11ac WFI (160 MHz, MCS1, 90pc duty cycle)	WLAN	0.47	±0.6
10555	AAC	IEEE 802.11ac WFI (160 MHz, MCS2, 90pc duty cycle)	WLAN	0.50	±0.6
10556	AAC	IEEE 802.11ac WFI (160 MHz, MCS3, 90pc duty cycle)	WLAN	0.52	±0.6
10557	AAC	IEEE 802.11ac WFI (160 MHz, MCS4, 90pc duty cycle)	WLAN	0.73	±0.6
10558	AAC	IEEE 802.11ac WFI (160 MHz, MCS5, 90pc duty cycle)	WLAN	0.73	±0.6
10559	AAC	IEEE 802.11ac WFI (160 MHz, MCS6, 90pc duty cycle)	WLAN	0.56	±0.6
10560	AAC	IEEE 802.11ac WFI (160 MHz, MCS7, 90pc duty cycle)	WLAN	0.59	±0.6
10561	AAC	IEEE 802.11ac WFI (160 MHz, MCS8, 90pc duty cycle)	WLAN	0.77	±0.6
10562	AAC	IEEE 802.11ac WFI (160 MHz, MCS9, 90pc duty cycle)	WLAN	0.25	±0.6
10563	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 6 Mbps, 90pc duty cycle)	WLAN	0.45	±0.6
10564	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	0.13	±0.6
10565	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	0.00	±0.6
10566	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	0.37	±0.6
10567	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	0.30	±0.6
10568	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	1.29	±0.6
10569	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	1.39	±0.6
10570	AAC	IEEE 802.11b WFI (2.4 GHz) (DSSS, 1 Mbps, 90pc duty cycle)	WLAN	1.98	±0.6
10571	AAC	IEEE 802.11b WFI (2.4 GHz) (DSSS, 2 Mbps, 90pc duty cycle)	WLAN	1.98	±0.6
10572	AAC	IEEE 802.11b WFI (2.4 GHz) (DSSS, 3.5 Mbps, 90pc duty cycle)	WLAN	1.98	±0.6
10573	AAC	IEEE 802.11b WFI (2.4 GHz) (DSSS, 5.5 Mbps, 90pc duty cycle)	WLAN	1.98	±0.6
10574	AAC	IEEE 802.11b WFI (2.4 GHz) (DSSS, 11 Mbps, 90pc duty cycle)	WLAN	0.59	±0.6
10575	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 9 Mbps, 90pc duty cycle)	WLAN	0.60	±0.6
10576	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 12 Mbps, 90pc duty cycle)	WLAN	0.70	±0.6
10577	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 18 Mbps, 90pc duty cycle)	WLAN	0.49	±0.6
10578	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 24 Mbps, 90pc duty cycle)	WLAN	0.36	±0.6
10579	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 36 Mbps, 90pc duty cycle)	WLAN	0.70	±0.6
10580	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 48 Mbps, 90pc duty cycle)	WLAN	0.26	±0.6
10581	AAC	IEEE 802.11g WFI (2.4 GHz) (DSSS-OFDM, 54 Mbps, 90pc duty cycle)	WLAN	0.67	±0.6
10582	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 6 Mbps, 90pc duty cycle)	WLAN	0.59	±0.6
10583	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 9 Mbps, 90pc duty cycle)	WLAN	0.60	±0.6
10584	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 12 Mbps, 90pc duty cycle)	WLAN	0.70	±0.6
10585	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 18 Mbps, 90pc duty cycle)	WLAN	0.49	±0.6
10586	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 24 Mbps, 90pc duty cycle)	WLAN	0.36	±0.6
10587	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 36 Mbps, 90pc duty cycle)	WLAN	0.70	±0.6
10588	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 48 Mbps, 90pc duty cycle)	WLAN	0.26	±0.6
10589	AAC	IEEE 802.11a WFI (5 GHz) (OFDM, 54 Mbps, 90pc duty cycle)	WLAN	0.67	±0.6
10590	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS0, 90pc duty cycle)	WLAN	0.79	±0.6
10591	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS1, 90pc duty cycle)	WLAN	0.74	±0.6
10592	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS2, 90pc duty cycle)	WLAN	0.74	±0.6
10593	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS3, 90pc duty cycle)	WLAN	0.71	±0.6
10594	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS4, 90pc duty cycle)	WLAN	0.72	±0.6
10595	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS5, 90pc duty cycle)	WLAN	0.90	±0.6
10596	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS6, 90pc duty cycle)	WLAN	0.38	±0.6
10597	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS7, 90pc duty cycle)	WLAN	0.79	±0.6
10598	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS8, 90pc duty cycle)	WLAN	0.80	±0.6
10599	AAC	IEEE 802.11n (HT Mixed, 20 MHz, MCS9, 90pc duty cycle)	WLAN	0.80	±0.6
10600	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS0, 90pc duty cycle)	WLAN	0.94	±0.6
10601	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS1, 90pc duty cycle)	WLAN	0.93	±0.6
10602	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS2, 90pc duty cycle)	WLAN	0.97	±0.6
10603	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS3, 90pc duty cycle)	WLAN	0.97	±0.6
10604	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS4, 90pc duty cycle)	WLAN	0.82	±0.6
10605	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS5, 90pc duty cycle)	WLAN	0.84	±0.6
10606	AAC	IEEE 802.11n (HT Mixed, 40 MHz, MCS6, 90pc duty cycle)	WLAN	0.77	±0.6
10607	AAC	IEEE 802.11ac WFI (20 MHz, MCS1, 90pc duty cycle)	WLAN	0.77	±0.6

Certificate No: EX-3791_May23

Page 16 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 40/67

EX30V4 - SN:5791

May 23, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unit: k = 2
10609	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.67	±0.5
10610	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.78	±0.5
10611	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.79	±0.5
10612	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.77	±0.5
10613	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.94	±0.5
10614	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.99	±0.5
10615	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±0.5
10616	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.82	±0.5
10617	AAC	IEEE 802.11ac WiFi (20 MHz, MCS1, 90pc duty cycle)	WLAN	8.81	±0.5
10618	AAC	IEEE 802.11ac WiFi (20 MHz, MCS2, 90pc duty cycle)	WLAN	8.59	±0.5
10619	AAC	IEEE 802.11ac WiFi (20 MHz, MCS3, 90pc duty cycle)	WLAN	8.86	±0.5
10620	AAC	IEEE 802.11ac WiFi (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.87	±0.5
10621	AAC	IEEE 802.11ac WiFi (20 MHz, MCS5, 90pc duty cycle)	WLAN	8.77	±0.5
10622	AAC	IEEE 802.11ac WiFi (20 MHz, MCS6, 90pc duty cycle)	WLAN	8.68	±0.5
10623	AAC	IEEE 802.11ac WiFi (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.62	±0.5
10624	AAC	IEEE 802.11ac WiFi (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.96	±0.5
10625	AAC	IEEE 802.11ac WiFi (20 MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±0.5
10626	AAC	IEEE 802.11ac WiFi (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.82	±0.5
10627	AAC	IEEE 802.11ac WiFi (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±0.5
10628	AAC	IEEE 802.11ac WiFi (20 MHz, MCS12, 90pc duty cycle)	WLAN	8.71	±0.5
10629	AAC	IEEE 802.11ac WiFi (20 MHz, MCS13, 90pc duty cycle)	WLAN	8.85	±0.5
10630	AAC	IEEE 802.11ac WiFi (20 MHz, MCS14, 90pc duty cycle)	WLAN	8.72	±0.5
10631	AAC	IEEE 802.11ac WiFi (20 MHz, MCS15, 90pc duty cycle)	WLAN	8.81	±0.5
10632	AAC	IEEE 802.11ac WiFi (20 MHz, MCS16, 90pc duty cycle)	WLAN	8.74	±0.5
10633	AAC	IEEE 802.11ac WiFi (20 MHz, MCS17, 90pc duty cycle)	WLAN	8.83	±0.5
10634	AAC	IEEE 802.11ac WiFi (20 MHz, MCS18, 90pc duty cycle)	WLAN	8.90	±0.5
10635	AAC	IEEE 802.11ac WiFi (20 MHz, MCS19, 90pc duty cycle)	WLAN	8.81	±0.5
10636	AAC	IEEE 802.11ac WiFi (20 MHz, MCS20, 90pc duty cycle)	WLAN	8.82	±0.5
10637	AAC	IEEE 802.11ac WiFi (20 MHz, MCS21, 90pc duty cycle)	WLAN	8.79	±0.5
10638	AAC	IEEE 802.11ac WiFi (20 MHz, MCS22, 90pc duty cycle)	WLAN	8.99	±0.5
10639	AAC	IEEE 802.11ac WiFi (20 MHz, MCS23, 90pc duty cycle)	WLAN	8.85	±0.5
10640	AAC	IEEE 802.11ac WiFi (20 MHz, MCS24, 90pc duty cycle)	WLAN	8.90	±0.5
10641	AAC	IEEE 802.11ac WiFi (20 MHz, MCS25, 90pc duty cycle)	WLAN	8.90	±0.5
10642	AAC	IEEE 802.11ac WiFi (20 MHz, MCS26, 90pc duty cycle)	WLAN	8.90	±0.5
10643	AAC	IEEE 802.11ac WiFi (20 MHz, MCS27, 90pc duty cycle)	WLAN	8.89	±0.5
10644	AAC	IEEE 802.11ac WiFi (20 MHz, MCS28, 90pc duty cycle)	WLAN	8.95	±0.5
10645	AAC	IEEE 802.11ac WiFi (20 MHz, MCS29, 90pc duty cycle)	WLAN	8.11	±0.5
10646	AAC	IEEE 802.11ac WiFi (20 MHz, MCS30, 90pc duty cycle)	WLAN	8.11	±0.5
10647	AAC	IEEE 802.11ac WiFi (20 MHz, MCS31, 90pc duty cycle)	WLAN	8.11	±0.5
10648	AAC	IEEE 802.11ac WiFi (20 MHz, MCS32, 90pc duty cycle)	WLAN	8.11	±0.5
10649	AAC	IEEE 802.11ac WiFi (20 MHz, MCS33, 90pc duty cycle)	WLAN	8.11	±0.5
10650	AAC	IEEE 802.11ac WiFi (20 MHz, MCS34, 90pc duty cycle)	WLAN	8.11	±0.5
10651	AAC	IEEE 802.11ac WiFi (20 MHz, MCS35, 90pc duty cycle)	WLAN	8.11	±0.5
10652	AAC	IEEE 802.11ac WiFi (20 MHz, MCS36, 90pc duty cycle)	WLAN	8.11	±0.5
10653	AAC	IEEE 802.11ac WiFi (20 MHz, MCS37, 90pc duty cycle)	WLAN	8.11	±0.5
10654	AAC	IEEE 802.11ac WiFi (20 MHz, MCS38, 90pc duty cycle)	WLAN	8.11	±0.5
10655	AAC	IEEE 802.11ac WiFi (20 MHz, MCS39, 90pc duty cycle)	WLAN	8.11	±0.5
10656	AAC	IEEE 802.11ac WiFi (20 MHz, MCS40, 90pc duty cycle)	WLAN	8.11	±0.5
10657	AAC	IEEE 802.11ac WiFi (20 MHz, MCS41, 90pc duty cycle)	WLAN	8.11	±0.5
10658	AAC	IEEE 802.11ac WiFi (20 MHz, MCS42, 90pc duty cycle)	WLAN	8.11	±0.5
10659	AAC	IEEE 802.11ac WiFi (20 MHz, MCS43, 90pc duty cycle)	WLAN	8.11	±0.5
10660	AAC	IEEE 802.11ac WiFi (20 MHz, MCS44, 90pc duty cycle)	WLAN	8.11	±0.5
10661	AAC	IEEE 802.11ac WiFi (20 MHz, MCS45, 90pc duty cycle)	WLAN	8.11	±0.5
10662	AAC	IEEE 802.11ac WiFi (20 MHz, MCS46, 90pc duty cycle)	WLAN	8.11	±0.5
10663	AAC	IEEE 802.11ac WiFi (20 MHz, MCS47, 90pc duty cycle)	WLAN	8.11	±0.5
10664	AAC	IEEE 802.11ac WiFi (20 MHz, MCS48, 90pc duty cycle)	WLAN	8.11	±0.5
10665	AAC	IEEE 802.11ac WiFi (20 MHz, MCS49, 90pc duty cycle)	WLAN	8.11	±0.5
10666	AAC	IEEE 802.11ac WiFi (20 MHz, MCS50, 90pc duty cycle)	WLAN	8.11	±0.5

Certificate No: EX-3791_May23

Page 17 of 22

Report File No : F690501-RF-SAR000386-A1

Date of Issue : 2023-11-30

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

SAR7081-04 (2020.12.15)(0)

A4 (210mm x 297mm)



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 41/67

EX30N4 - SN.3791

May 23, 2023

ISO	Rev	Communication System Name	Group	PWR (dBm)	Unc ^a k = 2
10887	AAC	IEEE 802.11ax (30 MHz, MCS4, 90pc duty cycle)	WLAN	0.45	±0.6
10888	AAC	IEEE 802.11ax (30 MHz, MCS5, 90pc duty cycle)	WLAN	0.39	±0.6
10889	AAC	IEEE 802.11ax (30 MHz, MCS6, 90pc duty cycle)	WLAN	0.55	±0.6
10890	AAC	IEEE 802.11ax (30 MHz, MCS7, 90pc duty cycle)	WLAN	0.29	±0.6
10891	AAC	IEEE 802.11ax (30 MHz, MCS8, 90pc duty cycle)	WLAN	0.25	±0.6
10892	AAC	IEEE 802.11ax (30 MHz, MCS9, 90pc duty cycle)	WLAN	0.29	±0.6
10893	AAC	IEEE 802.11ax (30 MHz, MCS10, 90pc duty cycle)	WLAN	0.57	±0.6
10894	AAC	IEEE 802.11ax (30 MHz, MCS11, 90pc duty cycle)	WLAN	0.70	±0.6
10895	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	0.91	±0.6
10896	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	0.61	±0.6
10897	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	0.89	±0.6
10898	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	0.86	±0.6
10899	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	0.73	±0.6
10900	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	0.86	±0.6
10901	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	0.82	±0.6
10902	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	0.56	±0.6
10903	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	0.60	±0.6
10904	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	0.32	±0.6
10905	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	0.55	±0.6
10906	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	0.33	±0.6
10907	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	0.29	±0.6
10908	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	0.39	±0.6
10909	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	0.67	±0.6
10910	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	0.33	±0.6
10911	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	0.28	±0.6
10912	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	0.45	±0.6
10913	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	0.30	±0.6
10914	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	0.45	±0.6
10915	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	0.30	±0.6
10916	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	0.40	±0.6
10917	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	0.66	±0.6
10918	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	0.01	±0.6
10919	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	0.87	±0.6
10920	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	0.76	±0.6
10921	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	0.55	±0.6
10922	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	0.70	±0.6
10923	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	0.60	±0.6
10924	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	0.74	±0.6
10925	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	0.72	±0.6
10926	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	0.66	±0.6
10927	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	0.65	±0.6
10928	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	0.64	±0.6
10929	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	0.67	±0.6
10930	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	0.42	±0.6
10931	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	0.46	±0.6
10932	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	0.40	±0.6
10933	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	0.35	±0.6
10934	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	0.27	±0.6
10935	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	0.36	±0.6
10936	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	0.42	±0.6
10937	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	0.29	±0.6
10938	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	0.48	±0.6
10939	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	0.43	±0.6
10940	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	0.40	±0.6
10941	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	0.34	±0.6
10942	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	0.18	±0.6
10943	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	0.93	±0.6
10944	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	0.11	±0.6
10945	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	0.04	±0.6
10946	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	0.90	±0.6
10947	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	0.79	±0.6
10948	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	0.82	±0.6
10949	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	0.81	±0.6
10950	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN		
10951	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN		
10952	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN		

Certificate No: EX-3791_May23

Page 18 of 22

Report File No : F690501-RF-SAR000386-A1

Date of Issue : 2023-11-30

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

SAR7081-04 (2020.12.15)(0)

A4 (210mm x 297mm)

EX30V4 - SN-3791

May 23, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Line ^h k = 2
10753	AAC	IEEE 802.11ax (160MHz, MCS10, 80pc duty cycle)	WLAN	8.66	±0.5
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 80pc duty cycle)	WLAN	8.54	±0.5
10755	AAC	IEEE 802.11ax (160MHz, MCS0, 80pc duty cycle)	WLAN	8.64	±0.5
10756	AAC	IEEE 802.11ax (160MHz, MCS1, 80pc duty cycle)	WLAN	8.77	±0.5
10757	AAC	IEEE 802.11ax (160MHz, MCS2, 80pc duty cycle)	WLAN	8.77	±0.5
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 80pc duty cycle)	WLAN	8.89	±0.5
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 80pc duty cycle)	WLAN	8.58	±0.5
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 80pc duty cycle)	WLAN	8.40	±0.5
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 80pc duty cycle)	WLAN	8.59	±0.5
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 80pc duty cycle)	WLAN	8.49	±0.5
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 80pc duty cycle)	WLAN	8.53	±0.5
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 80pc duty cycle)	WLAN	8.54	±0.5
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 80pc duty cycle)	WLAN	8.54	±0.5
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 80pc duty cycle)	WLAN	8.51	±0.5
10767	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15kHz)	5G NR FR1 TDD	7.99	±0.5
10768	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.01	±0.5
10769	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.01	±0.5
10770	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±0.5
10771	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±0.5
10772	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.23	±0.5
10773	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.03	±0.5
10774	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±0.5
10775	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	±0.5
10776	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.36	±0.5
10777	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.35	±0.5
10778	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.34	±0.5
10779	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.42	±0.5
10780	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.38	±0.5
10781	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.38	±0.5
10782	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.43	±0.5
10783	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	±0.5
10784	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.29	±0.5
10785	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.40	±0.5
10786	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.35	±0.5
10787	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.44	±0.5
10788	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.39	±0.5
10789	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.37	±0.5
10790	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.39	±0.5
10791	AAC	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.83	±0.5
10792	AAC	5G NR (CP-OFDM, 1 RB, 10 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.92	±0.5
10793	AAC	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.85	±0.5
10794	AAC	5G NR (CP-OFDM, 1 RB, 20 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.82	±0.5
10795	AAC	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.84	±0.5
10796	AAC	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.82	±0.5
10797	AAC	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.01	±0.5
10798	AAC	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.89	±0.5
10799	AAC	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.89	±0.5
10800	AAC	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.85	±0.5
10801	AAC	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.89	±0.5
10802	AAC	5G NR (CP-OFDM, 1 RB, 120 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.87	±0.5
10803	AAC	5G NR (CP-OFDM, 1 RB, 160 MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.90	±0.5
10804	AAC	5G NR (CP-OFDM, 50% RB, 5 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10805	AAC	5G NR (CP-OFDM, 50% RB, 10 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.37	±0.5
10806	AAC	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10807	AAC	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10808	AAC	5G NR (CP-OFDM, 50% RB, 25 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10809	AAC	5G NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10810	AAC	5G NR (CP-OFDM, 50% RB, 40 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10811	AAC	5G NR (CP-OFDM, 50% RB, 50 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10812	AAC	5G NR (CP-OFDM, 100% RB, 5 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10813	AAC	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10814	AAC	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10815	AAC	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.33	±0.5
10816	AAC	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.30	±0.5
10817	AAC	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10818	AAC	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10819	AAC	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.39	±0.5
10820	AAC	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10821	AAC	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.42	±0.5
10822	AAC	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.45	±0.5

Certificato No: EX-3791_May23

Page 19 of 22

EX30N4 - SN:3791

May 23, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² R=2
10820	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 36 kHz)	5G NR FR1 TDD	6.40	±0.6
10830	AAD	5G NR (CP-OFDM, 1 RB, 12 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.03	±0.6
10831	AAD	5G NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.73	±0.6
10832	AAD	5G NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.74	±0.6
10833	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±0.6
10834	AAD	5G NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.75	±0.6
10835	AAD	5G NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±0.6
10836	AAD	5G NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.66	±0.6
10837	AAD	5G NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.68	±0.6
10838	AAD	5G NR (CP-OFDM, 1 RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.70	±0.6
10839	AAD	5G NR (CP-OFDM, 1 RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.67	±0.6
10840	AAD	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	7.71	±0.6
10841	AAD	5G NR (CP-OFDM, 50% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.48	±0.6
10842	AAD	5G NR (CP-OFDM, 50% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±0.6
10843	AAD	5G NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±0.6
10844	AAD	5G NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±0.6
10845	AAD	5G NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.38	±0.6
10846	AAD	5G NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±0.6
10847	AAD	5G NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.35	±0.6
10848	AAD	5G NR (CP-OFDM, 100% RB, 35 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.38	±0.6
10849	AAD	5G NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.34	±0.6
10850	AAD	5G NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±0.6
10851	AAD	5G NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.40	±0.6
10852	AAD	5G NR (CP-OFDM, 100% RB, 80 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±0.6
10853	AAD	5G NR (CP-OFDM, 100% RB, 90 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.37	±0.6
10854	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	5G NR FR1 TDD	8.41	±0.6
10855	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 36 kHz)	5G NR FR1 TDD	5.68	±0.6
10856	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 36 kHz)	5G NR FR1 TDD	5.69	±0.6
10857	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.75	±0.6
10858	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.66	±0.6
10859	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.70	±0.6
10860	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.65	±0.6
10861	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.76	±0.6
10862	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10863	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10864	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10865	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10866	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10867	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10868	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10869	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10870	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10871	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10872	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10873	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10874	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10875	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10876	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10877	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10878	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10879	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10880	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10881	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10882	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10883	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10884	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10885	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10886	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10887	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10888	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10889	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10890	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10891	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10892	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10893	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10894	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10895	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10896	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10897	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10898	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10899	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10900	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10901	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10902	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10903	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10904	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10905	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10906	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10907	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10908	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10909	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6
10910	AAD	5G NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 120 kHz)	5G NR FR1 TDD	5.78	±0.6

Certificate No: EX-3791_May23

Page 20 of 22

EX3DW4 - SN:3791

May 23, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ^a k=3
10911	AAB	SG NR (DFT-s-OFDM, 50% RB, 25MHz, QPSK, 30kHz)	SG NR FRI TDD	5.93	±0.6
10912	AAB	SG NR (DFT-s-OFDM, 50% RB, 25MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10913	AAB	SG NR (DFT-s-OFDM, 50% RB, 40MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10914	AAB	SG NR (DFT-s-OFDM, 50% RB, 50MHz, QPSK, 30kHz)	SG NR FRI TDD	5.85	±0.6
10915	AAB	SG NR (DFT-s-OFDM, 50% RB, 60MHz, QPSK, 30kHz)	SG NR FRI TDD	5.83	±0.6
10916	AAB	SG NR (DFT-s-OFDM, 50% RB, 80MHz, QPSK, 30kHz)	SG NR FRI TDD	5.87	±0.6
10917	AAB	SG NR (DFT-s-OFDM, 50% RB, 100MHz, QPSK, 30kHz)	SG NR FRI TDD	5.94	±0.6
10918	AAC	SG NR (DFT-s-OFDM, 100% RB, 5MHz, QPSK, 30kHz)	SG NR FRI TDD	5.96	±0.6
10919	AAB	SG NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 30kHz)	SG NR FRI TDD	5.95	±0.6
10920	AAB	SG NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 30kHz)	SG NR FRI TDD	5.87	±0.6
10921	AAB	SG NR (DFT-s-OFDM, 100% RB, 20MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10922	AAB	SG NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 30kHz)	SG NR FRI TDD	5.82	±0.6
10923	AAB	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10924	AAB	SG NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10925	AAB	SG NR (DFT-s-OFDM, 100% RB, 45MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10926	AAB	SG NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 30kHz)	SG NR FRI TDD	5.86	±0.6
10927	AAB	SG NR (DFT-s-OFDM, 100% RB, 60MHz, QPSK, 30kHz)	SG NR FRI TDD	5.84	±0.6
10928	AAC	SG NR (DFT-s-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	SG NR FRI TDD	5.84	±0.6
10929	AAC	SG NR (DFT-s-OFDM, 1 RB, 10MHz, QPSK, 15kHz)	SG NR FRI TDD	5.82	±0.6
10930	AAC	SG NR (DFT-s-OFDM, 1 RB, 15MHz, QPSK, 15kHz)	SG NR FRI TDD	5.82	±0.6
10931	AAC	SG NR (DFT-s-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10932	AAC	SG NR (DFT-s-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10933	AAC	SG NR (DFT-s-OFDM, 1 RB, 30MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10934	AAC	SG NR (DFT-s-OFDM, 1 RB, 40MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10935	AAC	SG NR (DFT-s-OFDM, 1 RB, 50MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10936	AAC	SG NR (DFT-s-OFDM, 50% RB, 5MHz, QPSK, 15kHz)	SG NR FRI TDD	5.90	±0.6
10937	AAC	SG NR (DFT-s-OFDM, 50% RB, 10MHz, QPSK, 15kHz)	SG NR FRI TDD	5.77	±0.6
10938	AAC	SG NR (DFT-s-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	SG NR FRI TDD	5.90	±0.6
10939	AAC	SG NR (DFT-s-OFDM, 50% RB, 20MHz, QPSK, 15kHz)	SG NR FRI TDD	5.80	±0.6
10940	AAC	SG NR (DFT-s-OFDM, 50% RB, 25MHz, QPSK, 15kHz)	SG NR FRI TDD	5.89	±0.6
10941	AAC	SG NR (DFT-s-OFDM, 50% RB, 30MHz, QPSK, 15kHz)	SG NR FRI TDD	5.85	±0.6
10942	AAC	SG NR (DFT-s-OFDM, 50% RB, 40MHz, QPSK, 15kHz)	SG NR FRI TDD	5.85	±0.6
10943	AAC	SG NR (DFT-s-OFDM, 50% RB, 50MHz, QPSK, 15kHz)	SG NR FRI TDD	5.85	±0.6
10944	AAC	SG NR (DFT-s-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	SG NR FRI TDD	5.81	±0.6
10945	AAC	SG NR (DFT-s-OFDM, 100% RB, 10MHz, QPSK, 15kHz)	SG NR FRI TDD	5.85	±0.6
10946	AAC	SG NR (DFT-s-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	SG NR FRI TDD	5.83	±0.6
10947	AAC	SG NR (DFT-s-OFDM, 100% RB, 20MHz, QPSK, 15kHz)	SG NR FRI TDD	5.87	±0.6
10948	AAC	SG NR (DFT-s-OFDM, 100% RB, 25MHz, QPSK, 15kHz)	SG NR FRI TDD	5.84	±0.6
10949	AAC	SG NR (DFT-s-OFDM, 100% RB, 30MHz, QPSK, 15kHz)	SG NR FRI TDD	5.87	±0.6
10950	AAC	SG NR (DFT-s-OFDM, 100% RB, 40MHz, QPSK, 15kHz)	SG NR FRI TDD	5.94	±0.6
10951	AAC	SG NR (DFT-s-OFDM, 100% RB, 50MHz, QPSK, 15kHz)	SG NR FRI TDD	5.92	±0.6
10952	AAA	SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	SG NR FRI FDD	6.35	±0.6
10953	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15kHz)	SG NR FRI FDD	6.15	±0.6
10954	AAA	SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	SG NR FRI FDD	6.23	±0.6
10955	AAA	SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15kHz)	SG NR FRI FDD	6.02	±0.6
10956	AAA	SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz)	SG NR FRI FDD	6.14	±0.6
10957	AAA	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz)	SG NR FRI FDD	6.31	±0.6
10958	AAA	SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz)	SG NR FRI FDD	6.61	±0.6
10959	AAA	SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz)	SG NR FRI FDD	6.33	±0.6
10960	AAC	SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 15kHz)	SG NR FRI TDD	6.32	±0.6
10961	AAB	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 15kHz)	SG NR FRI TDD	6.36	±0.6
10962	AAB	SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 15kHz)	SG NR FRI TDD	6.40	±0.6
10963	AAB	SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 15kHz)	SG NR FRI TDD	6.56	±0.6
10964	AAC	SG NR DL (CP-OFDM, TM 3.1, 5MHz, 64-QAM, 30kHz)	SG NR FRI TDD	6.28	±0.6
10965	AAB	SG NR DL (CP-OFDM, TM 3.1, 10MHz, 64-QAM, 30kHz)	SG NR FRI TDD	6.37	±0.6
10966	AAB	SG NR DL (CP-OFDM, TM 3.1, 15MHz, 64-QAM, 30kHz)	SG NR FRI TDD	6.55	±0.6
10967	AAB	SG NR DL (CP-OFDM, TM 3.1, 20MHz, 64-QAM, 30kHz)	SG NR FRI TDD	6.42	±0.6
10968	AAB	SG NR DL (CP-OFDM, TM 3.1, 30MHz, 64-QAM, 30kHz)	SG NR FRI TDD	6.49	±0.6
10972	AAB	SG NR (DFT-s-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	SG NR FRI TDD	11.59	±0.6
10973	AAB	SG NR (DFT-s-OFDM, 1 RB, 100MHz, QPSK, 30kHz)	SG NR FRI TDD	9.95	±0.6
10974	AAB	SG NR (CP-OFDM, 100% RB, 100MHz, 256-QAM, 30kHz)	SG NR FRI TDD	10.28	±0.6
10979	AAA	ULLA BOM	ULLA	1.16	±0.6
10979	AAA	ULLA HORN	ULLA	8.68	±0.6
10980	AAA	ULLA HORN	ULLA	10.32	±0.6
10981	AAA	ULLA HORN	ULLA	3.19	±0.6
10982	AAA	ULLA HORN	ULLA	3.43	±0.6

Certificate No: EX-3791_May23

Page 21 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 45/67

EX3DW4 - SN:3791

May 23, 2023

UID	Raw	Communication System Name	Group	PAR (dB)	Unc ² k=2
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.31	±0.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	9.42	±0.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.54	±0.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.56	±0.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.63	±0.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.38	±0.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.33	±0.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 60 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	9.52	±0.6
11000	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	10.24	±0.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	10.73	±0.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.79	±0.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.55	±0.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 44 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.46	±0.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 66 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	8.51	±0.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.76	±0.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	±0.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 44 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.95	±0.6
11012	AAA	5G NR DL (CP-OFDM, TM 3.1, 66 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	8.69	±0.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.27	±0.6
11014	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.45	±0.6
11015	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±0.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±0.6
11017	AAA	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.61	±0.6
11018	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±0.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.20	±0.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±0.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.46	±0.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.36	±0.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.09	±0.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	±0.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±0.6
11026	AAA	IEEE 802.11be (320 MHz, MCS14, 99pc duty cycle)	WLAN	8.38	±0.6

² Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 46/67

Appendix D.3 Calibration certificate for Probe(SN 7574)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland

S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 0108

Client: **SGS**
Gyeonggi-do, Republic of Korea

Certificate No.: **EX-7574_Jul23**

CALIBRATION CERTIFICATE

Object: **EX3DV4 - SN:7574**

Calibration procedure(s): **QA CAL-01.v10, QA CAL-12.v10, QA CAL-14.v7, QA CAL-23.v6,
QA CAL-25.v8**
Calibration procedure for dosimetric E-field probes

Calibration date: **July 18, 2023**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.
All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3) °C and humidity < 70%.
Calibration Equipment used (MATE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter NRP2	SN: 104778	30-Mar-23 (No. 217-03804/03805)	Mar-24
Power sensor NRP-Z91	SN: 103244	30-Mar-23 (No. 217-03804)	Mar-24
GCP DAK-3.5 (weighted)	SN: 1249	25-Oct-22 (GCP-DAK3.5-1249_Oct22)	Oct-23
GCP DAK-12	SN: 1016	20-Oct-22 (GCP-DAK12-1016_Oct22)	Oct-23
Reference 20 dB Attenuator	SN: CC2552 (20w)	30-Mar-23 (No. 217-03806)	Mar-24
DAE4	SN: 690	16-Mar-23 (No. DAE4-690_Mar23)	Mar-24
Reference Probe E83DV2	SN: 3013	06-Jan-23 (No. E83-3013_Jan23)	Jan-24

Secondary Standards	ID	Check Date (in house)	Scheduled Check
Power meter E4419B	SN: GB41250874	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: MY41098087	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
Power sensor E4412A	SN: 050110210	06-Apr-16 (in house check Jun-22)	In house check: Jun-24
RF generator HP 8648C	SN: US3942U01750	04-Aug-09 (in house check Jun-22)	In house check: Jun-24
Network Analyzer E6359A	SN: US41560477	31-Mar-14 (in house check Oct-22)	In house check: Oct-24

Calibrated by: **Laif Klynsner** Function: **Laboratory Technician** Signature: 

Approved by: **Sven Kohn** Function: **Technical Manager** Signature: 

Issued: July 18, 2023

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: EX-7574_Jul23 Page 1 of 22

Report File No : F690501-RF-SAR000386-A1

Date of Issue : 2023-11-30

(All SGS services are rendered in accordance with the applicable SGS conditions of service available on request and accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx>.)

SAR7081-04 (2020.12.15)(0)

A4 (210mm x 297mm)

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 0108**

Glossary

TSL	tissue simulating liquid
NORM _{x,y,z}	sensitivity in free space
ConvF	sensitivity in TSL / NORM _{x,y,z}
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C, D	modulation dependent linearization parameters
Polarization φ	φ rotation around probe axis
Polarization θ	θ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEC1000-1528, "Measurement Procedure For The Assessment Of Specific Absorption Rate Of Human Exposure To Radio Frequency Fields From Hand-Held And Body-Worn Wireless Communication Devices – Part 1528: Human Models, Instrumentation And Procedures (Frequency Range of 4 MHz to 10 GHz)", October 2020.
- KDB 865684, "SAR Measurement Requirements for 100 MHz to 6 GHz"

Methods Applied and Interpretation of Parameters:

- NORM_{x,y,z}: Assessed for E-field polarization $\theta = 0$ ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide). NORM_{x,y,z} are only intermediate values, i.e., the uncertainties of NORM_{x,y,z} does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM_{x,y,z} * frequency_response (see Frequency Response Chart). This linearization is implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included in the stated uncertainty of ConvF.
- DCP_{x,y,z}: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal. DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- A_{x,y,z}; B_{x,y,z}; C_{x,y,z}; D_{x,y,z}; VR_{x,y,z}: A, B, C, D are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for $f \geq 800$ MHz) and inside waveguide using analytical field distributions based on power measurements for $f > 800$ MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORM_{x,y,z} * ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle: The angle is assessed using the information gained by determining the NORM_x (no uncertainty required).

EX3DV4 - SN:7574

July 18, 2023

Parameters of Probe: EX3DV4 - SN:7574

Basic Calibration Parameters

	Sensor X	Sensor Y	Sensor Z	Unc (k = 2)
Norm ($\mu V/(V/m)^2$) ^A	0.50	0.52	0.48	±10.1%
DCP (mV) ^B	108.0	103.5	109.5	±4.7%

Calibration Results for Modulation Response

UID	Communication System Name		A dB	B dB/√μV	C	D dB	VR mV	Max dev.	Max Unc ^C k = 2
0	CW	X	0.00	0.00	1.00	0.00	167.4	±2.7%	±4.7%
		Y	0.00	0.00	1.00		164.8		
		Z	0.00	0.00	1.00		159.7		
10352	Pulse Waveform (200Hz, 10%)	X	1.39	60.03	5.99	10.00	60.0	±2.6%	±9.6%
		Y	1.50	60.70	6.33		60.0		
		Z	1.35	60.00	5.91		60.0		
10353	Pulse Waveform (200Hz, 20%)	X	20.00	74.00	9.00	6.99	80.0	±2.6%	±9.6%
		Y	0.79	60.00	4.78		80.0		
		Z	0.82	60.00	4.72		80.0		
10354	Pulse Waveform (200Hz, 40%)	X	0.11	139.75	0.01	3.98	95.0	±2.6%	±9.6%
		Y	0.06	123.67	0.78		95.0		
		Z	0.05	136.27	0.01		95.0		
10355	Pulse Waveform (200Hz, 60%)	X	5.22	71.39	0.19	2.22	120.0	±1.6%	±9.6%
		Y	1.09	159.88	2.98		120.0		
		Z	0.36	60.00	2.47		120.0		
10387	QPSK Waveform, 1 MHz	X	0.82	70.89	16.77	1.00	150.0	±3.6%	±9.6%
		Y	0.45	64.14	12.92		150.0		
		Z	0.88	75.09	19.87		150.0		
10388	QPSK Waveform, 10 MHz	X	1.65	69.88	16.19	0.00	150.0	±1.3%	±9.6%
		Y	1.28	66.88	14.14		150.0		
		Z	1.85	73.16	17.07		150.0		
10396	64-QAM Waveform, 100 kHz	X	1.67	64.64	16.36	3.01	150.0	±1.1%	±9.6%
		Y	1.61	63.97	15.91		150.0		
		Z	1.82	66.58	17.38		150.0		
10399	64-QAM Waveform, 40 MHz	X	2.94	67.23	15.84	0.00	150.0	±2.1%	±9.6%
		Y	2.83	67.07	15.58		150.0		
		Z	2.93	68.24	16.30		150.0		
10414	WLAN CCDF, 64-QAM, 40 MHz	X	4.01	67.05	16.00	0.00	150.0	±3.5%	±9.6%
		Y	3.75	66.82	15.59		150.0		
		Z	3.78	67.48	16.03		150.0		

Note: For details on UID parameters see Appendix

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

^A The uncertainties of Norm X,Y,Z do not affect the E₂-field uncertainty inside TSL (see Pages 5 and 6).

^B Linearization parameter uncertainty for maximum specified field strength.

^C Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.



EX3DV4 - SN:7574

July 18, 2023

Parameters of Probe: EX3DV4 - SN:7574

Sensor Model Parameters

	C1 fF	C2 fF	α V^{-1}	T1 $mA \cdot V^{-2}$	T2 $mA \cdot V^{-1}$	T3 mS	T4 V^{-2}	T5 V^{-1}	T6
x	9.7	70.28	33.85	3.20	0.00	4.90	0.17	0.04	1.00
y	8.0	69.84	35.20	2.89	0.00	4.33	0.06	0.07	1.00
z	7.0	51.16	34.07	3.87	0.00	4.90	0.50	0.00	1.00

Other Probe Parameters

Sensor Arrangement	Triangular
Connector Angle	154.8°
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	9 mm
Tip Diameter	2.5 mm
Probe Tip to Sensor X Calibration Point	1 mm
Probe Tip to Sensor Y Calibration Point	1 mm
Probe Tip to Sensor Z Calibration Point	1 mm
Recommended Measurement Distance from Surface	1.4 mm

Note: Measurement distance from surface can be increased to 3~4 mm for an Area Scan job.

EX3DV4 - SN:7574

July 18, 2023

Parameters of Probe: EX3DV4 - SN:7574

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
750	41.9	0.89	9.60	9.60	9.60	0.40	0.93	±12.0%
835	41.5	0.90	9.24	9.24	9.24	0.26	1.22	±12.0%
900	41.5	0.97	9.03	9.03	9.03	0.46	0.80	±12.0%
1750	40.1	1.37	8.39	8.39	8.39	0.27	0.86	±12.0%
1900	40.0	1.40	7.94	7.94	7.94	0.27	0.86	±12.0%
1950	40.0	1.40	7.75	7.75	7.75	0.35	0.86	±12.0%
2300	39.5	1.67	7.66	7.66	7.66	0.29	0.90	±12.0%
2450	39.2	1.80	7.32	7.32	7.32	0.27	0.90	±12.0%
2900	39.0	1.96	7.11	7.11	7.11	0.41	0.90	±12.0%
3000	38.2	2.71	6.81	6.81	6.81	0.30	1.35	±14.0%
3500	37.9	2.91	6.61	6.61	6.61	0.30	1.35	±14.0%
3700	37.7	3.12	6.52	6.52	6.52	0.30	1.35	±14.0%
3900	37.5	3.32	6.39	6.39	6.39	0.40	1.60	±14.0%
4100	37.2	3.53	6.33	6.33	6.33	0.40	1.60	±14.0%
4400	36.9	3.84	5.87	5.87	5.87	0.40	1.70	±14.0%
4600	36.7	4.04	5.82	5.82	5.82	0.40	1.70	±14.0%
4800	36.4	4.25	5.88	5.88	5.88	0.40	1.80	±14.0%
4950	36.3	4.40	5.65	5.65	5.65	0.40	1.80	±14.0%
5200	36.0	4.66	5.27	5.27	5.27	0.40	1.80	±14.0%
5300	35.9	4.76	5.06	5.06	5.06	0.40	1.80	±14.0%
5500	35.6	4.96	4.81	4.81	4.81	0.40	1.80	±14.0%
5600	35.5	5.07	4.61	4.61	4.61	0.40	1.80	±14.0%
5800	35.3	5.27	4.60	4.60	4.60	0.40	1.80	±14.0%

^C Frequency validity above 300-MHz of ±100 MHz only applies for DASTM v4.4 and higher (see Page 2), else it is restricted to ±50-MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band. Frequency validity below 300 MHz is 10, 25, 40, 55 and 70 MHz for ConvF assessments at 30, 64, 156, 150 and 225 MHz respectively. Validity of ConvF assessed at 6 MHz is 4–8 MHz, and ConvF assessed at 13 MHz is 9–16 MHz. Above 5-GHz frequency validity can be extended to ±110 MHz.

^F The probe is calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than ±5% from the target values (typically better than ±3%) and are valid for TSL with deviations of up to ±10%. If TSL with deviations from the target of less than ±5% are used, the calibration uncertainties are 11.1% for 0.7–3 GHz and 13.1% for 3–6 GHz.

^G Alpha/Depth are determined during calibration. SPISAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz and below ±2% for frequencies between 3–6 GHz at any distance larger than half the probe tip diameter from the boundary.



EX3DV4 - SN:7574

July 18, 2023

Parameters of Probe: EX3DV4 - SN:7574

Calibration Parameter Determined in Head Tissue Simulating Media

f (MHz) ^C	Relative Permittivity ^F	Conductivity ^F (S/m)	ConvF X	ConvF Y	ConvF Z	Alpha ^G	Depth ^G (mm)	Unc (k=2)
6500	34.5	6.07	5.10	5.10	5.10	0.20	2.50	±18.6%
7000	33.9	6.66	5.05	5.05	5.05	0.30	2.80	±18.6%


^C Frequency validity at 6.5 GHz is -600/+700 MHz, and ±700 MHz at or above 7 GHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

^F The probes are calibrated using tissue simulating liquids (TSL) that deviate for ϵ' and σ by less than ±15% from the target values (typically better than ±6%) and are valid for TSL with deviations of up to ±10%.

^G Alpha/Depth are determined during calibration. SPSSAG warrants that the remaining deviation due to the boundary effect after compensation is always less than ±1% for frequencies below 3 GHz; below ±2% for frequencies between 3-6 GHz; and below ±4% for frequencies between 6-10 GHz at any distance larger than half the probe tip diameter from the boundary.

EX3DV4 - SN:7574

July 18, 2023

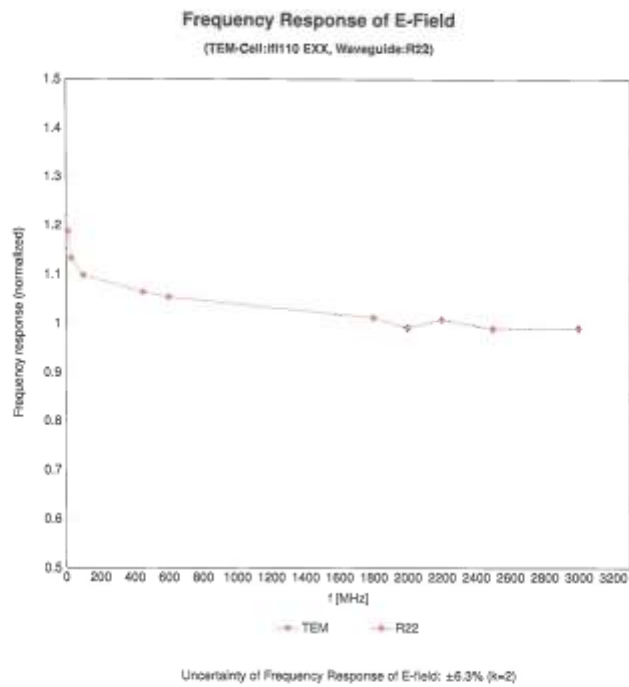


Certificate No: EX-7574_Jul23

Page 7 of 22

EX3DV4 - SN:7574

July 18, 2023

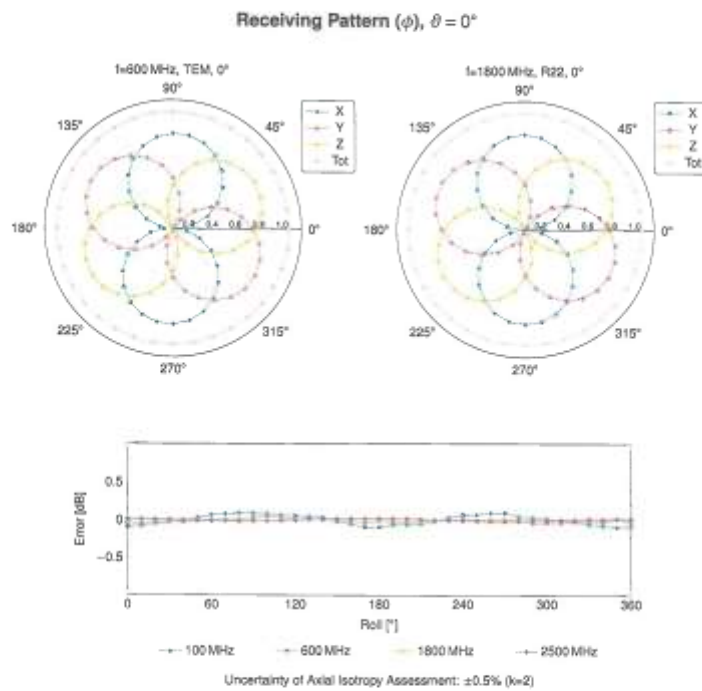


Certificate No: EX-7574_Jul23

Page 8 of 22

EX3DV4 - SN:7574

July 18, 2023

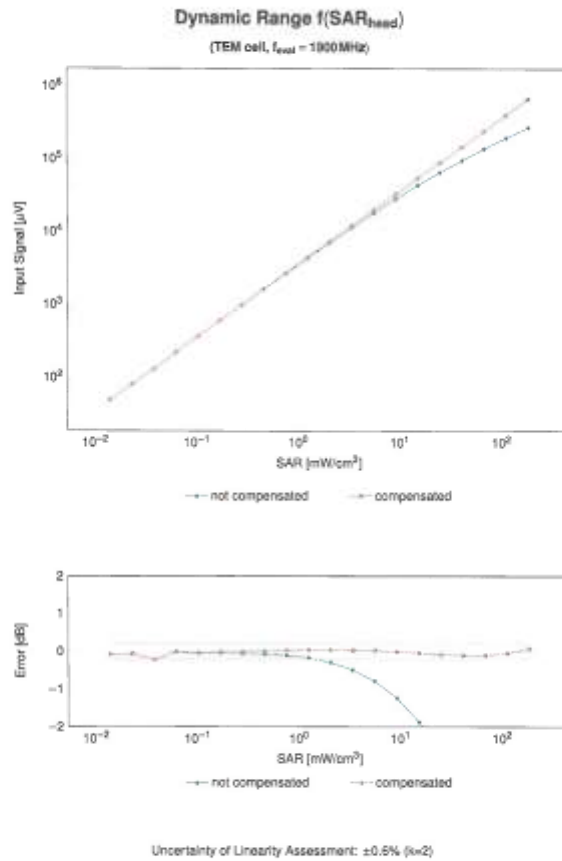


Certificate No: EX-7574_Ju23

Page 9 of 22

EX3DV4 - SN:7574


July 18, 2023

Conversion Factor Assessment

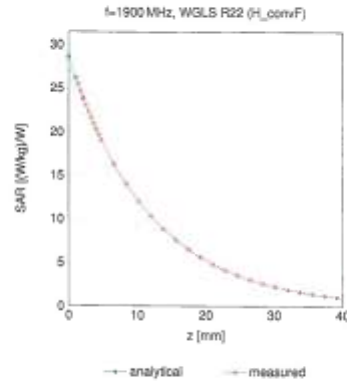

Deviation from Isotropy in Liquid

Error (θ, ϕ), $f = 900 \text{ MHz}$

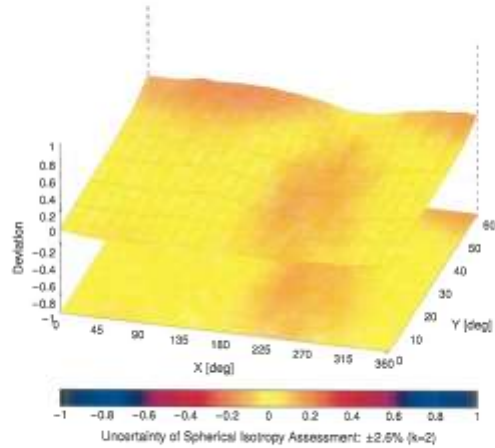

Certificate No: EX-7574_Jul23

Page 10 of 22

EX3DV4 - SN:7574

July 18, 2023

Appendix: Modulation Calibration Parameters

URI	Rev	Communication System Name	Group	PAR (dB)	Unc ² k = 2
9		CW	CW	0.30	±4.7
10010	CAR	SAR Validation (Square, 100ms, 10ms)	SAR	10.00	±0.0
10011	CAC	UMTS-FDD (WCDMA)	WCDMA	2.91	±0.0
10012	CAR	IEEE 802.11b WFI 2.4GHz (DSSS, 1Mbps)	WLAN	1.87	±0.0
10013	CAR	IEEE 802.11g WFI 2.4GHz (DSSS-OFDM, 6Mbps)	WLAN	3.46	±0.0
10021	DAC	GSM-FDD (TDMA, GMSK)	GSM	9.39	±0.0
10023	DAC	GPRS-FDD (TDMA, GMSK, TN 0)	GSM	9.59	±0.0
10024	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1)	GSM	9.58	±0.0
10025	DAC	EDGE-FDD (TDMA, GMSK, TN 0)	GSM	12.62	±0.0
10027	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2)	GSM	9.56	±0.0
10028	DAC	GPRS-FDD (TDMA, GMSK, TN 0-1-2-3)	GSM	9.55	±0.0
10029	DAC	EDGE-FDD (TDMA, GMSK, TN 0-1-2)	GSM	7.78	±0.0
10030	CAR	IEEE 802.15.1 Bluetooth (GFSK, DH1)	Bluetooth	5.36	±0.0
10031	CAR	IEEE 802.15.1 Bluetooth (GFSK, DH3)	Bluetooth	1.87	±0.0
10032	CAR	IEEE 802.15.1 Bluetooth (GFSK, DH5)	Bluetooth	1.16	±0.0
10033	CAR	IEEE 802.15.1 Bluetooth (P4-DQPSK, CH1)	Bluetooth	7.74	±0.0
10034	CAR	IEEE 802.15.1 Bluetooth (P4-DQPSK, CH3)	Bluetooth	4.53	±0.0
10035	CAR	IEEE 802.15.1 Bluetooth (P4-DQPSK, CH5)	Bluetooth	3.83	±0.0
10036	CAR	IEEE 802.15.1 Bluetooth (8-DPSK, DH1)	Bluetooth	8.01	±0.0
10037	CAR	IEEE 802.15.1 Bluetooth (8-DPSK, DH3)	Bluetooth	4.77	±0.0
10038	CAR	IEEE 802.15.1 Bluetooth (8-DPSK, CH5)	Bluetooth	4.10	±0.0
10039	CAR	CDMA2000 (1xRTT, FCS)	CDMA2000	4.57	±0.0
10042	CAR	IS-54 / IS-136 FDD (TDMA-FDD, Full-DQPSK, Full-rate)	AMPS	7.78	±0.0
10044	CAR	IS-95/IS-TIA-855 FDD (TDMA, FM)	AMPS	6.00	±0.0
10046	CAR	DECT (TDD, TDMA/FDM, GFSK, Full Slot, 24)	DECT	13.60	±0.0
10049	CAR	DECT (TDD, TDMA/FDM, GFSK, Double Slot, 12)	DECT	10.79	±0.0
10056	CAR	UMTS-TDD (TD-SCDMA, 1.28Mbps)	TD-SCDMA	11.01	±0.0
10059	DAC	EDGE-FDD (TDMA, GFSK, TN 0-1-2-3)	GSM	6.82	±0.0
10060	CAR	IEEE 802.11b WFI 2.4GHz (DSSS, 2Mbps)	WLAN	2.12	±0.0
10061	CAR	IEEE 802.11b WFI 2.4GHz (DSSS, 5.5Mbps)	WLAN	2.85	±0.0
10062	CAR	IEEE 802.11b WFI 2.4GHz (DSSS, 11Mbps)	WLAN	3.60	±0.0
10063	CAD	IEEE 802.11a WFI 5GHz (OFDM, 6Mbps)	WLAN	6.96	±0.0
10064	CAD	IEEE 802.11a WFI 5GHz (OFDM, 12Mbps)	WLAN	8.63	±0.0
10065	CAD	IEEE 802.11a WFI 5GHz (OFDM, 18Mbps)	WLAN	9.09	±0.0
10066	CAD	IEEE 802.11a WFI 5GHz (OFDM, 24Mbps)	WLAN	9.39	±0.0
10067	CAD	IEEE 802.11a WFI 5GHz (OFDM, 36Mbps)	WLAN	10.12	±0.0
10068	CAD	IEEE 802.11a WFI 5GHz (OFDM, 48Mbps)	WLAN	10.36	±0.0
10069	CAD	IEEE 802.11a WFI 5GHz (OFDM, 54Mbps)	WLAN	10.96	±0.0
10071	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 9Mbps)	WLAN	0.83	±0.0
10072	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 12Mbps)	WLAN	0.62	±0.0
10073	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 18Mbps)	WLAN	0.94	±0.0
10074	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 24Mbps)	WLAN	10.30	±0.0
10075	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 36Mbps)	WLAN	10.77	±0.0
10076	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 48Mbps)	WLAN	10.94	±0.0
10077	CAR	IEEE 802.11g WFI 2.4GHz (DSSS/OFDM, 54Mbps)	WLAN	11.00	±0.0
10081	CAR	CDMA2000 (1xRTT, FCS)	CDMA2000	3.97	±0.0
10082	CAR	IS-54 / IS-136 FDD (TDMA-FDD, Full-DQPSK, Full-rate)	AMPS	4.77	±0.0
10083	DAC	GPRS-FDD (TDMA, GMSK, TN 0-4)	GSM	6.56	±0.0
10087	CAC	UMTS-FDD (HSDPA)	WCDMA	3.99	±0.0
10088	CAC	UMTS-FDD (HSUPA, Subrate 2)	WCDMA	3.99	±0.0
10089	DAC	EDGE-FDD (TDMA, GFSK, TN 0-4)	GSM	9.55	±0.0
10103	CAR	LTE-FDD (SC-FDMA, 100% RB, 20MHz, QPSK)	LTE-FDD	5.87	±0.0
10104	CAR	LTE-FDD (SC-FDMA, 100% RB, 20MHz, 16-QAM)	LTE-FDD	9.42	±0.0
10105	CAR	LTE-FDD (SC-FDMA, 100% RB, 20MHz, 64-QAM)	LTE-FDD	8.83	±0.0
10106	CAR	LTE-FDD (SC-FDMA, 100% RB, 10MHz, QPSK)	LTE-FDD	9.29	±0.0
10107	CAR	LTE-FDD (SC-FDMA, 100% RB, 10MHz, 16-QAM)	LTE-FDD	9.29	±0.0
10108	CAR	LTE-FDD (SC-FDMA, 100% RB, 10MHz, 64-QAM)	LTE-FDD	10.51	±0.0
10109	CAR	LTE-FDD (SC-FDMA, 100% RB, 10MHz, QPSK)	LTE-FDD	5.80	±0.0
10110	CAR	LTE-FDD (SC-FDMA, 100% RB, 5MHz, QPSK)	LTE-FDD	8.43	±0.0
10111	CAR	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 16-QAM)	LTE-FDD	5.75	±0.0
10112	CAR	LTE-FDD (SC-FDMA, 100% RB, 5MHz, 64-QAM)	LTE-FDD	6.44	±0.0

Certificate No: EX-7574_Jul23

Page 11 of 22

EX3DW4 - SN:7574

July 18, 2023

UBD	Rev	Communication System Name	Group	PAR (dB)	Unc ² p = 2
10112	CAH	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	6.59	±0.6
10113	CAH	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	6.60	±0.6
10114	CAD	IEEE 802.11n (HT Greenfield, 13.5Mbps, BPSK)	WLAN	8.10	±0.6
10115	CAD	IEEE 802.11n (HT Greenfield, 81Mbps, 16-QAM)	WLAN	8.49	±0.6
10116	CAD	IEEE 802.11n (HT Greenfield, 135Mbps, 64-QAM)	WLAN	8.15	±0.6
10117	CAD	IEEE 802.11n (HT Mixed, 13.5Mbps, BPSK)	WLAN	8.07	±0.6
10118	CAD	IEEE 802.11n (HT Mixed, 81Mbps, 16-QAM)	WLAN	8.99	±0.6
10119	CAD	IEEE 802.11n (HT Mixed, 135Mbps, 64-QAM)	WLAN	8.13	±0.6
10140	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 16-QAM)	LTE-FDD	6.49	±0.6
10141	CAF	LTE-FDD (SC-FDMA, 100% RB, 15MHz, 64-QAM)	LTE-FDD	6.53	±0.6
10142	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, QPSK)	LTE-FDD	6.79	±0.6
10143	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 16-QAM)	LTE-FDD	6.35	±0.6
10144	CAF	LTE-FDD (SC-FDMA, 100% RB, 3MHz, 64-QAM)	LTE-FDD	6.65	±0.6
10145	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, QPSK)	LTE-FDD	5.78	±0.6
10146	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 16-QAM)	LTE-FDD	6.41	±0.6
10147	CAG	LTE-FDD (SC-FDMA, 100% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.72	±0.6
10148	CAF	LTE-FDD (SC-FDMA, 50% RB, 30MHz, 16-QAM)	LTE-FDD	6.42	±0.6
10149	CAF	LTE-FDD (SC-FDMA, 50% RB, 30MHz, 64-QAM)	LTE-FDD	6.60	±0.6
10150	CAF	LTE-FDD (SC-FDMA, 50% RB, 30MHz, 16-QAM)	LTE-FDD	6.28	±0.6
10151	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, QPSK)	LTE-TDD	6.60	±0.6
10152	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, 16-QAM)	LTE-TDD	6.62	±0.6
10153	CAH	LTE-TDD (SC-FDMA, 50% RB, 20MHz, 64-QAM)	LTE-TDD	6.06	±0.6
10154	CAH	LTE-FDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-FDD	6.75	±0.6
10155	CAH	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-FDD	6.40	±0.6
10156	CAH	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-FDD	6.79	±0.6
10157	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, 16-QAM)	LTE-FDD	6.49	±0.6
10158	CAH	LTE-FDD (SC-FDMA, 50% RB, 10MHz, 64-QAM)	LTE-FDD	6.82	±0.6
10159	CAH	LTE-FDD (SC-FDMA, 50% RB, 5MHz, 64-QAM)	LTE-FDD	6.56	±0.6
10160	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, QPSK)	LTE-FDD	6.82	±0.6
10161	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 16-QAM)	LTE-FDD	6.43	±0.6
10162	CAF	LTE-FDD (SC-FDMA, 50% RB, 15MHz, 64-QAM)	LTE-FDD	6.58	±0.6
10163	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, QPSK)	LTE-FDD	6.40	±0.6
10164	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 16-QAM)	LTE-FDD	6.21	±0.6
10165	CAG	LTE-FDD (SC-FDMA, 50% RB, 1.4MHz, 64-QAM)	LTE-FDD	6.79	±0.6
10166	CAF	LTE-FDD (SC-FDMA, 1 RB, 20MHz, QPSK)	LTE-FDD	5.73	±0.6
10167	CAF	LTE-FDD (SC-FDMA, 1 RB, 20MHz, 16-QAM)	LTE-FDD	6.82	±0.6
10168	CAF	LTE-FDD (SC-FDMA, 1 RB, 20MHz, 64-QAM)	LTE-FDD	6.49	±0.6
10169	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, QPSK)	LTE-TDD	6.21	±0.6
10170	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 16-QAM)	LTE-TDD	6.44	±0.6
10171	CAH	LTE-TDD (SC-FDMA, 1 RB, 20MHz, 64-QAM)	LTE-TDD	6.25	±0.6
10172	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, QPSK)	LTE-FDD	5.72	±0.6
10173	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10174	CAH	LTE-FDD (SC-FDMA, 1 RB, 10MHz, 64-QAM)	LTE-FDD	6.73	±0.6
10175	CAH	LTE-FDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-FDD	6.52	±0.6
10176	CAH	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 16-QAM)	LTE-FDD	6.50	±0.6
10177	CAH	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10178	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-FDD	6.72	±0.6
10179	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10180	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10181	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, QPSK)	LTE-FDD	6.73	±0.6
10182	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 16-QAM)	LTE-FDD	6.51	±0.6
10183	CAF	LTE-FDD (SC-FDMA, 1 RB, 3MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10184	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, QPSK)	LTE-FDD	6.51	±0.6
10185	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 16-QAM)	LTE-FDD	6.50	±0.6
10186	CAF	LTE-FDD (SC-FDMA, 1 RB, 15MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10187	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, QPSK)	LTE-FDD	6.73	±0.6
10188	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 16-QAM)	LTE-FDD	6.52	±0.6
10189	CAG	LTE-FDD (SC-FDMA, 1 RB, 1.4MHz, 64-QAM)	LTE-FDD	6.50	±0.6
10190	CAD	IEEE 802.11n (HT Greenfield, 8.5Mbps, BPSK)	WLAN	8.39	±0.6
10191	CAD	IEEE 802.11n (HT Greenfield, 44Mbps, 16-QAM)	WLAN	8.12	±0.6
10192	CAD	IEEE 802.11n (HT Greenfield, 88Mbps, 64-QAM)	WLAN	8.21	±0.6
10193	CAD	IEEE 802.11n (HT Mixed, 8.5Mbps, BPSK)	WLAN	8.10	±0.6
10194	CAD	IEEE 802.11n (HT Mixed, 44Mbps, 16-QAM)	WLAN	8.13	±0.6
10195	CAD	IEEE 802.11n (HT Mixed, 88Mbps, 64-QAM)	WLAN	8.27	±0.6
10196	CAD	IEEE 802.11n (HT Mixed, 65Mbps, 64-QAM)	WLAN	8.27	±0.6
10197	CAD	IEEE 802.11n (HT Mixed, 7.3Mbps, BPSK)	WLAN	8.53	±0.6
10198	CAD	IEEE 802.11n (HT Mixed, 43.3Mbps, 16-QAM)	WLAN	8.13	±0.6
10199	CAD	IEEE 802.11n (HT Mixed, 72.2Mbps, 64-QAM)	WLAN	8.27	±0.6
10200	CAD	IEEE 802.11n (HT Mixed, 15Mbps, BPSK)	WLAN	8.56	±0.6
10201	CAD	IEEE 802.11n (HT Mixed, 80Mbps, 16-QAM)	WLAN	8.48	±0.6
10202	CAD	IEEE 802.11n (HT Mixed, 150Mbps, 64-QAM)	WLAN	8.58	±0.6

Certificate No: EX-7574_Jul23

Page 12 of 22

EX3DV4 - SN:7574

July 18, 2023

UID	Rev	Communication System Name	Group	PAIR (dB)	Use ¹ N=2
10225	CAC	UMTS-FDD (HSR-)	WCDMA	9.97	±0.5
10226	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.49	±0.5
10227	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.25	±0.5
10228	CAC	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK)	LTE-TDD	9.22	±0.5
10229	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM)	LTE-TDD	9.49	±0.5
10230	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM)	LTE-TDD	10.25	±0.5
10231	CAC	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK)	LTE-TDD	9.19	±0.5
10232	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM)	LTE-TDD	9.49	±0.5
10233	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM)	LTE-TDD	10.25	±0.5
10234	CAH	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK)	LTE-TDD	9.21	±0.5
10235	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM)	LTE-TDD	9.48	±0.5
10236	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 64-QAM)	LTE-TDD	10.25	±0.5
10237	CAH	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK)	LTE-TDD	9.21	±0.5
10238	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM)	LTE-TDD	9.48	±0.5
10239	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM)	LTE-TDD	10.25	±0.5
10240	CAG	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK)	LTE-TDD	9.21	±0.5
10241	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.86	±0.5
10242	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM)	LTE-TDD	9.86	±0.5
10243	CAG	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK)	LTE-TDD	9.46	±0.5
10244	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-TDD	10.06	±0.5
10245	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-TDD	10.06	±0.5
10246	CAG	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK)	LTE-TDD	9.30	±0.5
10247	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM)	LTE-TDD	9.91	±0.5
10248	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM)	LTE-TDD	10.09	±0.5
10249	CAH	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK)	LTE-TDD	9.29	±0.5
10250	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.81	±0.5
10251	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.17	±0.5
10252	CAH	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.34	±0.5
10253	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM)	LTE-TDD	9.00	±0.5
10254	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM)	LTE-TDD	10.14	±0.5
10255	CAG	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK)	LTE-TDD	9.30	±0.5
10256	CAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM)	LTE-TDD	9.36	±0.5
10257	CAG	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM)	LTE-TDD	10.08	±0.5
10258	CAC	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK)	LTE-TDD	9.34	±0.5
10259	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM)	LTE-TDD	9.38	±0.5
10260	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM)	LTE-TDD	9.97	±0.5
10261	CAC	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK)	LTE-TDD	9.34	±0.5
10262	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM)	LTE-TDD	9.83	±0.5
10263	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM)	LTE-TDD	10.18	±0.5
10264	CAH	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK)	LTE-TDD	9.23	±0.5
10265	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM)	LTE-TDD	9.92	±0.5
10266	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM)	LTE-TDD	10.27	±0.5
10267	CAH	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK)	LTE-TDD	9.33	±0.5
10268	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM)	LTE-TDD	10.64	±0.5
10269	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM)	LTE-TDD	10.13	±0.5
10270	CAG	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-TDD	9.58	±0.5
10274	CAC	UMTS-FDD (HSR+, Subnet 5, 30PPH RAB 10)	WCDMA	4.87	±0.5
10275	CAC	UMTS-FDD (HSR+, Subnet 5, 30PPH RAB 4)	WCDMA	3.96	±0.5
10277	CAG	PHS (QPSK)	PHS	11.81	±0.5
10278	CAG	PHS (QPSK, BW 800 MHz, Roll-off 0.2)	PHS	11.81	±0.5
10279	CAG	PHS (QPSK, BW 800 MHz, Roll-off 0.38)	PHS	12.16	±0.5
10280	ANB	CDMA2000, RCT, SCSS, Full Rate	CDMA2000	3.91	±0.5
10281	ANB	CDMA2000, RCT, SCSS, Full Rate	CDMA2000	3.46	±0.5
10282	ANB	CDMA2000, RCT, SCSS, Full Rate	CDMA2000	3.38	±0.5
10283	ANB	CDMA2000, RCT, SCSS, Full Rate	CDMA2000	3.50	±0.5
10284	ANB	CDMA2000, RCT, SCSS, 1/8th Rate 25%	CDMA2000	12.49	±0.5
10287	ANB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	5.81	±0.5
10288	ANB	LTE-FDD (SC-FDMA, 50% RB, 20 MHz, QPSK)	LTE-FDD	6.72	±0.5
10289	ANB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM)	LTE-FDD	6.38	±0.5
10290	ANB	LTE-FDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM)	LTE-FDD	6.80	±0.5
10301	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, QPSK, PUSC)	WIMAX	12.03	±0.5
10302	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, QPSK, PUSC, 3 CTR symbols)	WIMAX	12.57	±0.5
10303	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, 64QAM, PUSC)	WIMAX	12.52	±0.5
10304	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, 64QAM, PUSC)	WIMAX	11.86	±0.5
10305	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	15.24	±0.5
10306	AAA	IEEE 802.11a WIMAX (20-18, 5 m, 10 MHz, 64QAM, PUSC, 15 symbols)	WIMAX	14.67	±0.5

Certificate No: EX-7574_Ju23

Page 13 of 22

EXSDN4 - SN:7574

July 18, 2023

UID	Rev	Communication System Name	Group	RNR (dB)	Unit# A = 2
10307	AAA	IEEE 802.11e WMAK (20-18, 10 ms, 10 MHz, QPSK, PUSC, 18 symbols)	WMAK	14.49	±0.5
10308	AAA	IEEE 802.11e WMAK (20-18, 10 ms, 10 MHz, 16QAM, PUSC)	WMAK	14.48	±0.5
10309	AAA	IEEE 802.11e WMAK (20-18, 10 ms, 10 MHz, 16QAM, AMC 2x3, 18 symbols)	WMAK	14.58	±0.5
10310	AAA	IEEE 802.11e WMAK (20-18, 10 ms, 10 MHz, QPSK, AMC 2x3, 18 symbols)	WMAK	14.57	±0.5
10311	AAE	LTE-FDD (SC-FDMA, 100% RB, 15 MHz, QPSK)	LTE-FDD	6.06	±0.6
10313	AAA	IDEN 1-3	IDEN	10.51	±0.5
10314	AAA	IDEN 1-5	IDEN	10.48	±0.5
10315	AAE	IEEE 802.11b WFI 3.4 GHz (DSSS, 1 Mbps, 99% duty cycle)	WLAN	1.71	±0.4
10316	AAE	IEEE 802.11g WFI 3.4 GHz (ERP-OFDM, 6 Mbps, 99% duty cycle)	WLAN	8.36	±0.6
10317	AAE	IEEE 802.11n WFI 5 GHz (OFDM, 6 Mbps, 99% duty cycle)	WLAN	8.36	±0.6
10382	AAA	Pulse Waveform (200Hz, 10%)	Generic	10.00	±0.5
10383	AAA	Pulse Waveform (200Hz, 25%)	Generic	6.00	±0.5
10384	AAA	Pulse Waveform (200Hz, 40%)	Generic	3.58	±0.4
10385	AAA	Pulse Waveform (200Hz, 60%)	Generic	3.32	±0.5
10386	AAA	Pulse Waveform (200Hz, 80%)	Generic	0.07	±0.5
10387	AAA	QPSK Waveform, 1 MHz	Generic	5.10	±0.6
10388	AAA	QPSK Waveform, 10 MHz	Generic	5.02	±0.6
10389	AAA	64-QAM Waveform, 100 kHz	Generic	6.37	±0.6
10390	AAA	64-QAM Waveform, 40 MHz	Generic	6.27	±0.6
10400	AAE	IEEE 802.11ac WFI 20 MHz (64-QAM, 99% duty cycle)	WLAN	6.37	±0.6
10401	AAE	IEEE 802.11ac WFI 40 MHz (64-QAM, 99% duty cycle)	WLAN	6.60	±0.6
10402	AAE	IEEE 802.11ac WFI 80 MHz (64-QAM, 99% duty cycle)	WLAN	6.53	±0.6
10403	AAE	CDMA2000 (1xEV-DO, Rev. 3)	CDMA2000	3.76	±0.5
10404	AAE	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	3.77	±0.5
10406	AAE	CDMA2000 (1xEV-DO, Rev. A)	CDMA2000	5.22	±0.6
10410	AAH	LTE-TDD (SC-FDMA, 1 RB, 18 MHz, QPSK, UL Subframe=2,3,4,7,8,9, Subframe Cont'd)	LTE-TDD	7.82	±0.6
10414	AAA	WLAN CDF, 64-QAM, 40 MHz	Generic	8.54	±0.6
10415	AAA	IEEE 802.11b WFI 2.4 GHz (DSSS, 1 Mbps, 99% duty cycle)	WLAN	1.54	±0.5
10416	AAA	IEEE 802.11g WFI 2.4 GHz (ERP-OFDM, 6 Mbps, 99% duty cycle)	WLAN	8.23	±0.6
10417	AAE	IEEE 802.11n WFI 5 GHz (OFDM, 6 Mbps, 99% duty cycle)	WLAN	8.23	±0.6
10418	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99% duty cycle, Long preamble)	WLAN	8.14	±0.6
10419	AAA	IEEE 802.11g WFI 2.4 GHz (DSSS-OFDM, 6 Mbps, 99% duty cycle, Short preamble)	WLAN	8.19	±0.6
10420	AAE	IEEE 802.11n (HT Greenfield, 7.2 Mbps, BPSK)	WLAN	8.32	±0.6
10423	AAE	IEEE 802.11n (HT Greenfield, 43.3 Mbps, 16-QAM)	WLAN	8.47	±0.6
10424	AAE	IEEE 802.11n (HT Greenfield, 72.2 Mbps, 64-QAM)	WLAN	8.40	±0.6
10425	AAE	IEEE 802.11n (HT Greenfield, 15 Mbps, BPSK)	WLAN	8.41	±0.6
10426	AAE	IEEE 802.11n (HT Greenfield, 50 Mbps, 16-QAM)	WLAN	8.45	±0.6
10427	AAE	IEEE 802.11n (HT Greenfield, 150 Mbps, 64-QAM)	WLAN	8.41	±0.6
10430	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1)	LTE-FDD	6.28	±0.6
10431	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1)	LTE-FDD	6.38	±0.6
10432	AAE	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1)	LTE-FDD	6.34	±0.6
10433	AAE	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1)	LTE-FDD	6.34	±0.6
10434	AAE	W-CDMA (HS Test Model 1, 5.4 DPCCH)	WCDMA	6.60	±0.6
10435	AAE	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10447	AAE	LTE-FDD (OFDMA, 5 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.56	±0.6
10448	AAE	LTE-FDD (OFDMA, 10 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.59	±0.6
10449	AAE	LTE-FDD (OFDMA, 15 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.51	±0.6
10450	AAE	LTE-FDD (OFDMA, 20 MHz, E-TM 3.1, Clipping 44%)	LTE-FDD	7.40	±0.6
10451	AAE	W-CDMA (HS Test Model 1, 5.4 DPCCH, Clipping 44%)	WCDMA	7.59	±0.6
10453	AAE	Validation (Squaw, 10 ms, 1 ms)	Test	10.00	±0.5
10456	AAE	IEEE 802.11ac WFI (100 MHz, 64-QAM, 99% duty cycle)	WLAN	6.63	±0.6
10457	AAE	UMTS-FDD (DC-HSUPA)	WCDMA	6.55	±0.6
10458	AAA	CDMA2000 (1xEV-DO, Rev. B, 2 carriers)	CDMA2000	6.35	±0.6
10459	AAA	CDMA2000 (1xEV-DO, Rev. B, 3 carriers)	CDMA2000	6.35	±0.6
10460	AAE	UMTS-FDD (WCDMA, AMR)	WCDMA	2.39	±0.5
10481	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10482	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.30	±0.6
10483	AAE	LTE-TDD (SC-FDMA, 1 RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.58	±0.6
10484	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10485	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.6
10486	AAE	LTE-TDD (SC-FDMA, 1 RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.6
10487	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10488	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.6
10489	AAE	LTE-TDD (SC-FDMA, 1 RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.58	±0.6
10490	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10491	AAE	LTE-TDD (SC-FDMA, 1 RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.6

Certificate No: EX-7574_Jul23

Page 14 of 22

EX3DV4 - SM-7574

July 18, 2023

SRD	Rev	Communication System Name	Group	PAR (dB)	Unc ² z = 2
10472	AAQ	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.6
10473	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.82	±0.6
10474	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.6
10475	AAF	LTE-TDD (SC-FDMA, 1 RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.6
10477	AAQ	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.32	±0.6
10479	AAQ	LTE-TDD (SC-FDMA, 1 RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.57	±0.6
10479	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.6
10480	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.18	±0.6
10481	AAQ	LTE-TDD (SC-FDMA, 50% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±0.6
10482	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.71	±0.6
10483	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.39	±0.6
10484	AAQ	LTE-TDD (SC-FDMA, 50% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.47	±0.6
10485	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.59	±0.6
10485	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.34	±0.6
10487	AAQ	LTE-TDD (SC-FDMA, 50% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.69	±0.6
10488	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.70	±0.6
10489	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.6
10490	AAQ	LTE-TDD (SC-FDMA, 50% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.6
10491	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.6
10492	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.41	±0.6
10493	AAF	LTE-TDD (SC-FDMA, 50% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±0.6
10494	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.6
10495	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.37	±0.6
10496	AAQ	LTE-TDD (SC-FDMA, 50% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.6
10497	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±0.6
10498	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±0.6
10499	AAQ	LTE-TDD (SC-FDMA, 100% RB, 1.4 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.68	±0.6
10500	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.67	±0.6
10501	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.44	±0.6
10502	AAQ	LTE-TDD (SC-FDMA, 100% RB, 3 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.52	±0.6
10503	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.72	±0.6
10504	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.31	±0.6
10505	AAQ	LTE-TDD (SC-FDMA, 100% RB, 5 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.54	±0.6
10506	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.6
10507	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.36	±0.6
10508	AAQ	LTE-TDD (SC-FDMA, 100% RB, 10 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.55	±0.6
10509	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.69	±0.6
10510	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.46	±0.6
10511	AAF	LTE-TDD (SC-FDMA, 100% RB, 15 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.51	±0.6
10512	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, QPSK, UL Subframe=2,3,4,7,8,9)	LTE-TDD	7.74	±0.6
10513	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 16-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.42	±0.6
10514	AAQ	LTE-TDD (SC-FDMA, 100% RB, 20 MHz, 64-QAM, UL Subframe=2,3,4,7,8,9)	LTE-TDD	8.45	±0.6
10515	AAA	IEEE 802.11b WIF 2.4 GHz (2SSS, 2Mbps, 99pc duty cycle)	WLAN	1.58	±0.6
10516	AAA	IEEE 802.11b WIF 2.4 GHz (2SSS, 5.5Mbps, 99pc duty cycle)	WLAN	1.57	±0.6
10517	AAA	IEEE 802.11b WIF 2.4 GHz (2SSS, 11Mbps, 99pc duty cycle)	WLAN	1.58	±0.6
10518	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 6Mbps, 99pc duty cycle)	WLAN	6.23	±0.6
10519	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 12Mbps, 99pc duty cycle)	WLAN	6.39	±0.6
10520	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 18Mbps, 99pc duty cycle)	WLAN	6.12	±0.6
10521	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 24Mbps, 99pc duty cycle)	WLAN	7.97	±0.6
10522	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 36Mbps, 99pc duty cycle)	WLAN	8.45	±0.6
10523	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 48Mbps, 99pc duty cycle)	WLAN	8.08	±0.6
10524	AAQ	IEEE 802.11a WIF 5 GHz (OFDM, 54Mbps, 99pc duty cycle)	WLAN	8.27	±0.6
10525	AAQ	IEEE 802.11ac WIF (20MHz, MCS0, 99pc duty cycle)	WLAN	6.35	±0.6
10526	AAQ	IEEE 802.11ac WIF (20MHz, MCS1, 99pc duty cycle)	WLAN	6.42	±0.6
10527	AAQ	IEEE 802.11ac WIF (20MHz, MCS2, 99pc duty cycle)	WLAN	6.21	±0.6
10528	AAQ	IEEE 802.11ac WIF (20MHz, MCS3, 99pc duty cycle)	WLAN	6.39	±0.6
10529	AAQ	IEEE 802.11ac WIF (20MHz, MCS4, 99pc duty cycle)	WLAN	6.35	±0.6
10530	AAQ	IEEE 802.11ac WIF (20MHz, MCS5, 99pc duty cycle)	WLAN	6.43	±0.6
10531	AAQ	IEEE 802.11ac WIF (20MHz, MCS6, 99pc duty cycle)	WLAN	6.29	±0.6
10532	AAQ	IEEE 802.11ac WIF (20MHz, MCS7, 99pc duty cycle)	WLAN	6.33	±0.6
10533	AAQ	IEEE 802.11ac WIF (20MHz, MCS8, 99pc duty cycle)	WLAN	6.33	±0.6
10534	AAQ	IEEE 802.11ac WIF (40MHz, MCS9, 99pc duty cycle)	WLAN	6.45	±0.6
10535	AAQ	IEEE 802.11ac WIF (40MHz, MCS10, 99pc duty cycle)	WLAN	6.43	±0.6
10536	AAQ	IEEE 802.11ac WIF (40MHz, MCS11, 99pc duty cycle)	WLAN	6.33	±0.6
10537	AAQ	IEEE 802.11ac WIF (40MHz, MCS12, 99pc duty cycle)	WLAN	6.44	±0.6
10538	AAQ	IEEE 802.11ac WIF (40MHz, MCS13, 99pc duty cycle)	WLAN	6.54	±0.6
10540	AAQ	IEEE 802.11ac WIF (40MHz, MCS14, 99pc duty cycle)	WLAN	6.39	±0.6

Certificate No: EX-7574_Ju23

Page 15 of 22

EX30V4 - SN:7574

July 18, 2023

Mod	Rev	Communication System Name	Group	PAR (dB)	Unc ² A = 2
10541	AAC	IEEE 802.11a WLAN (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.48	±0.5
10542	AAC	IEEE 802.11a WLAN (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.55	±0.5
10543	AAC	IEEE 802.11a WLAN (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.62	±0.5
10544	AAC	IEEE 802.11a WLAN (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.67	±0.5
10545	AAC	IEEE 802.11a WLAN (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.72	±0.5
10546	AAC	IEEE 802.11a WLAN (40 MHz, MCS12, 90pc duty cycle)	WLAN	8.78	±0.5
10547	AAC	IEEE 802.11a WLAN (40 MHz, MCS13, 90pc duty cycle)	WLAN	8.83	±0.5
10548	AAC	IEEE 802.11a WLAN (40 MHz, MCS14, 90pc duty cycle)	WLAN	8.87	±0.5
10549	AAC	IEEE 802.11a WLAN (40 MHz, MCS15, 90pc duty cycle)	WLAN	8.92	±0.5
10550	AAC	IEEE 802.11a WLAN (40 MHz, MCS16, 90pc duty cycle)	WLAN	8.96	±0.5
10551	AAC	IEEE 802.11a WLAN (40 MHz, MCS17, 90pc duty cycle)	WLAN	9.00	±0.5
10552	AAC	IEEE 802.11a WLAN (40 MHz, MCS18, 90pc duty cycle)	WLAN	9.04	±0.5
10553	AAC	IEEE 802.11a WLAN (40 MHz, MCS19, 90pc duty cycle)	WLAN	9.08	±0.5
10554	AAC	IEEE 802.11a WLAN (40 MHz, MCS20, 90pc duty cycle)	WLAN	9.12	±0.5
10555	AAC	IEEE 802.11a WLAN (40 MHz, MCS21, 90pc duty cycle)	WLAN	9.16	±0.5
10556	AAC	IEEE 802.11a WLAN (40 MHz, MCS22, 90pc duty cycle)	WLAN	9.20	±0.5
10557	AAC	IEEE 802.11a WLAN (40 MHz, MCS23, 90pc duty cycle)	WLAN	9.24	±0.5
10558	AAC	IEEE 802.11a WLAN (40 MHz, MCS24, 90pc duty cycle)	WLAN	9.28	±0.5
10559	AAC	IEEE 802.11a WLAN (40 MHz, MCS25, 90pc duty cycle)	WLAN	9.32	±0.5
10560	AAC	IEEE 802.11a WLAN (40 MHz, MCS26, 90pc duty cycle)	WLAN	9.36	±0.5
10561	AAC	IEEE 802.11a WLAN (40 MHz, MCS27, 90pc duty cycle)	WLAN	9.40	±0.5
10562	AAC	IEEE 802.11a WLAN (40 MHz, MCS28, 90pc duty cycle)	WLAN	9.44	±0.5
10563	AAC	IEEE 802.11a WLAN (40 MHz, MCS29, 90pc duty cycle)	WLAN	9.48	±0.5
10564	AAC	IEEE 802.11a WLAN (40 MHz, MCS30, 90pc duty cycle)	WLAN	9.52	±0.5
10565	AAC	IEEE 802.11a WLAN (40 MHz, MCS31, 90pc duty cycle)	WLAN	9.56	±0.5
10566	AAC	IEEE 802.11a WLAN (40 MHz, MCS32, 90pc duty cycle)	WLAN	9.60	±0.5
10567	AAC	IEEE 802.11a WLAN (40 MHz, MCS33, 90pc duty cycle)	WLAN	9.64	±0.5
10568	AAC	IEEE 802.11a WLAN (40 MHz, MCS34, 90pc duty cycle)	WLAN	9.68	±0.5
10569	AAC	IEEE 802.11a WLAN (40 MHz, MCS35, 90pc duty cycle)	WLAN	9.72	±0.5
10570	AAC	IEEE 802.11a WLAN (40 MHz, MCS36, 90pc duty cycle)	WLAN	9.76	±0.5
10571	AAC	IEEE 802.11a WLAN (40 MHz, MCS37, 90pc duty cycle)	WLAN	9.80	±0.5
10572	AAC	IEEE 802.11a WLAN (40 MHz, MCS38, 90pc duty cycle)	WLAN	9.84	±0.5
10573	AAC	IEEE 802.11a WLAN (40 MHz, MCS39, 90pc duty cycle)	WLAN	9.88	±0.5
10574	AAC	IEEE 802.11a WLAN (40 MHz, MCS40, 90pc duty cycle)	WLAN	9.92	±0.5
10575	AAC	IEEE 802.11a WLAN (40 MHz, MCS41, 90pc duty cycle)	WLAN	9.96	±0.5
10576	AAC	IEEE 802.11a WLAN (40 MHz, MCS42, 90pc duty cycle)	WLAN	10.00	±0.5
10577	AAC	IEEE 802.11a WLAN (40 MHz, MCS43, 90pc duty cycle)	WLAN	10.04	±0.5
10578	AAC	IEEE 802.11a WLAN (40 MHz, MCS44, 90pc duty cycle)	WLAN	10.08	±0.5
10579	AAC	IEEE 802.11a WLAN (40 MHz, MCS45, 90pc duty cycle)	WLAN	10.12	±0.5
10580	AAC	IEEE 802.11a WLAN (40 MHz, MCS46, 90pc duty cycle)	WLAN	10.16	±0.5
10581	AAC	IEEE 802.11a WLAN (40 MHz, MCS47, 90pc duty cycle)	WLAN	10.20	±0.5
10582	AAC	IEEE 802.11a WLAN (40 MHz, MCS48, 90pc duty cycle)	WLAN	10.24	±0.5
10583	AAC	IEEE 802.11a WLAN (40 MHz, MCS49, 90pc duty cycle)	WLAN	10.28	±0.5
10584	AAC	IEEE 802.11a WLAN (40 MHz, MCS50, 90pc duty cycle)	WLAN	10.32	±0.5
10585	AAC	IEEE 802.11a WLAN (40 MHz, MCS51, 90pc duty cycle)	WLAN	10.36	±0.5
10586	AAC	IEEE 802.11a WLAN (40 MHz, MCS52, 90pc duty cycle)	WLAN	10.40	±0.5
10587	AAC	IEEE 802.11a WLAN (40 MHz, MCS53, 90pc duty cycle)	WLAN	10.44	±0.5
10588	AAC	IEEE 802.11a WLAN (40 MHz, MCS54, 90pc duty cycle)	WLAN	10.48	±0.5
10589	AAC	IEEE 802.11a WLAN (40 MHz, MCS55, 90pc duty cycle)	WLAN	10.52	±0.5
10590	AAC	IEEE 802.11a WLAN (40 MHz, MCS56, 90pc duty cycle)	WLAN	10.56	±0.5
10591	AAC	IEEE 802.11a WLAN (40 MHz, MCS57, 90pc duty cycle)	WLAN	10.60	±0.5
10592	AAC	IEEE 802.11a WLAN (40 MHz, MCS58, 90pc duty cycle)	WLAN	10.64	±0.5
10593	AAC	IEEE 802.11a WLAN (40 MHz, MCS59, 90pc duty cycle)	WLAN	10.68	±0.5
10594	AAC	IEEE 802.11a WLAN (40 MHz, MCS60, 90pc duty cycle)	WLAN	10.72	±0.5
10595	AAC	IEEE 802.11a WLAN (40 MHz, MCS61, 90pc duty cycle)	WLAN	10.76	±0.5
10596	AAC	IEEE 802.11a WLAN (40 MHz, MCS62, 90pc duty cycle)	WLAN	10.80	±0.5
10597	AAC	IEEE 802.11a WLAN (40 MHz, MCS63, 90pc duty cycle)	WLAN	10.84	±0.5
10598	AAC	IEEE 802.11a WLAN (40 MHz, MCS64, 90pc duty cycle)	WLAN	10.88	±0.5
10599	AAC	IEEE 802.11a WLAN (40 MHz, MCS65, 90pc duty cycle)	WLAN	10.92	±0.5
10600	AAC	IEEE 802.11a WLAN (40 MHz, MCS66, 90pc duty cycle)	WLAN	10.96	±0.5
10601	AAC	IEEE 802.11a WLAN (40 MHz, MCS67, 90pc duty cycle)	WLAN	11.00	±0.5
10602	AAC	IEEE 802.11a WLAN (40 MHz, MCS68, 90pc duty cycle)	WLAN	11.04	±0.5
10603	AAC	IEEE 802.11a WLAN (40 MHz, MCS69, 90pc duty cycle)	WLAN	11.08	±0.5
10604	AAC	IEEE 802.11a WLAN (40 MHz, MCS70, 90pc duty cycle)	WLAN	11.12	±0.5
10605	AAC	IEEE 802.11a WLAN (40 MHz, MCS71, 90pc duty cycle)	WLAN	11.16	±0.5
10606	AAC	IEEE 802.11a WLAN (40 MHz, MCS72, 90pc duty cycle)	WLAN	11.20	±0.5
10607	AAC	IEEE 802.11a WLAN (40 MHz, MCS73, 90pc duty cycle)	WLAN	11.24	±0.5
10608	AAC	IEEE 802.11a WLAN (40 MHz, MCS74, 90pc duty cycle)	WLAN	11.28	±0.5

Certificate No: EX-7574_Jul23

Page 16 of 22

EX3DV4 - SN:7574

July 18, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² k = 2
10609	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.57	±0.5
10610	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.79	±0.5
10611	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.79	±0.5
10612	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.77	±0.5
10613	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.64	±0.5
10614	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.52	±0.5
10615	AAC	IEEE 802.11ac WPI (20MHz, MCS9, 90pc duty cycle)	WLAN	8.62	±0.5
10616	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.69	±0.5
10617	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.61	±0.5
10618	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.58	±0.5
10619	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±0.5
10620	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.67	±0.5
10621	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.77	±0.5
10622	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.68	±0.5
10623	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.62	±0.5
10624	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.90	±0.5
10625	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.90	±0.5
10626	AAC	IEEE 802.11ac WPI (40MHz, MCS9, 90pc duty cycle)	WLAN	8.85	±0.5
10627	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.85	±0.5
10628	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.71	±0.5
10629	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.85	±0.5
10630	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.79	±0.5
10631	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.87	±0.5
10632	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.74	±0.5
10633	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.83	±0.5
10634	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±0.5
10635	AAC	IEEE 802.11ac WPI (80MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±0.5
10636	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	8.83	±0.5
10637	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	8.79	±0.5
10638	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	8.86	±0.5
10639	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	8.86	±0.5
10640	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	8.96	±0.5
10641	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	9.06	±0.5
10642	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	9.06	±0.5
10643	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	9.09	±0.5
10644	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	9.06	±0.5
10645	AAC	IEEE 802.11ac WPI (160MHz, MCS9, 90pc duty cycle)	WLAN	9.11	±0.5
10646	AAC	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±0.5
10647	AAC	LTE-TDD (SC-FDMA, 1 RB, 5MHz, QPSK, UL Subframe=2,7)	LTE-TDD	11.96	±0.5
10648	AAC	CDMA2000 (1x Advanced)	CDMA2000	9.45	±0.5
10649	AAC	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	9.91	±0.5
10650	AAC	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.42	±0.5
10651	AAC	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	6.96	±0.5
10652	AAC	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±0.5
10653	AAC	LTE-TDD (OFDMA, 5MHz, E-TM 3.1, Clipping 44%)	LTE-TDD	7.21	±0.5
10654	AAC	Pulse Waveform (200Hz, 10%)	Test	10.93	±0.5
10655	AAC	Pulse Waveform (200Hz, 20%)	Test	9.99	±0.5
10656	AAC	Pulse Waveform (200Hz, 40%)	Test	9.99	±0.5
10657	AAC	Pulse Waveform (200Hz, 60%)	Test	9.99	±0.5
10658	AAC	Pulse Waveform (200Hz, 80%)	Test	9.97	±0.5
10659	AAC	Bluetooth Low Energy	Bluetooth	9.13	±0.5
10660	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	9.89	±0.5
10661	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	9.57	±0.5
10662	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	9.78	±0.5
10663	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	9.74	±0.5
10664	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.86	±0.5
10665	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.77	±0.5
10666	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.73	±0.5
10667	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.76	±0.5
10668	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.86	±0.5
10669	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.80	±0.5
10670	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.62	±0.5
10671	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.83	±0.5
10672	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.82	±0.5
10673	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.26	±0.5
10674	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.33	±0.5
10675	AAC	IEEE 802.11ax (20MHz, MCS9, 90pc duty cycle)	WLAN	8.28	±0.5

Certificate No: EX-7574_Ju23

Page 17 of 22

EX3DV4 - SN:7574

July 18, 2023

UID	Rev	Communication System Name	Group	PRF (dB)	Line ¹ k = 2
10687	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.45	±0.6
10688	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.29	±0.6
10689	AAC	IEEE 802.11ax (20 MHz, MCS4, 90pc duty cycle)	WLAN	8.55	±0.6
10690	AAC	IEEE 802.11ax (20 MHz, MCS7, 90pc duty cycle)	WLAN	8.29	±0.6
10691	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.25	±0.6
10692	AAC	IEEE 802.11ax (20 MHz, MCS8, 90pc duty cycle)	WLAN	8.29	±0.6
10693	AAC	IEEE 802.11ax (20 MHz, MCS10, 90pc duty cycle)	WLAN	8.25	±0.6
10694	AAC	IEEE 802.11ax (20 MHz, MCS11, 90pc duty cycle)	WLAN	8.57	±0.6
10695	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.79	±0.6
10696	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.91	±0.6
10697	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.51	±0.6
10698	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.89	±0.6
10699	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.82	±0.6
10700	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.75	±0.6
10701	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.88	±0.6
10702	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.70	±0.6
10703	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.62	±0.6
10704	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.56	±0.6
10705	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±0.6
10706	AAC	IEEE 802.11ax (40 MHz, MCS11, 90pc duty cycle)	WLAN	8.66	±0.6
10707	AAC	IEEE 802.11ax (40 MHz, MCS0, 90pc duty cycle)	WLAN	8.32	±0.6
10708	AAC	IEEE 802.11ax (40 MHz, MCS1, 90pc duty cycle)	WLAN	8.55	±0.6
10709	AAC	IEEE 802.11ax (40 MHz, MCS2, 90pc duty cycle)	WLAN	8.39	±0.6
10710	AAC	IEEE 802.11ax (40 MHz, MCS3, 90pc duty cycle)	WLAN	8.35	±0.6
10711	AAC	IEEE 802.11ax (40 MHz, MCS4, 90pc duty cycle)	WLAN	8.39	±0.6
10712	AAC	IEEE 802.11ax (40 MHz, MCS5, 90pc duty cycle)	WLAN	8.97	±0.6
10713	AAC	IEEE 802.11ax (40 MHz, MCS6, 90pc duty cycle)	WLAN	8.33	±0.6
10714	AAC	IEEE 802.11ax (40 MHz, MCS7, 90pc duty cycle)	WLAN	8.26	±0.6
10715	AAC	IEEE 802.11ax (40 MHz, MCS8, 90pc duty cycle)	WLAN	8.45	±0.6
10716	AAC	IEEE 802.11ax (40 MHz, MCS9, 90pc duty cycle)	WLAN	8.35	±0.6
10717	AAC	IEEE 802.11ax (40 MHz, MCS10, 90pc duty cycle)	WLAN	8.48	±0.6
10718	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.24	±0.6
10719	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.61	±0.6
10720	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.67	±0.6
10721	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.76	±0.6
10722	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.58	±0.6
10723	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.70	±0.6
10724	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.90	±0.6
10725	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.74	±0.6
10726	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.72	±0.6
10727	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.69	±0.6
10728	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.69	±0.6
10729	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.94	±0.6
10730	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.67	±0.6
10731	AAC	IEEE 802.11ax (80 MHz, MCS1, 90pc duty cycle)	WLAN	8.42	±0.6
10732	AAC	IEEE 802.11ax (80 MHz, MCS2, 90pc duty cycle)	WLAN	8.44	±0.6
10733	AAC	IEEE 802.11ax (80 MHz, MCS3, 90pc duty cycle)	WLAN	8.43	±0.6
10734	AAC	IEEE 802.11ax (80 MHz, MCS4, 90pc duty cycle)	WLAN	8.25	±0.6
10735	AAC	IEEE 802.11ax (80 MHz, MCS5, 90pc duty cycle)	WLAN	8.33	±0.6
10736	AAC	IEEE 802.11ax (80 MHz, MCS6, 90pc duty cycle)	WLAN	8.27	±0.6
10737	AAC	IEEE 802.11ax (80 MHz, MCS7, 90pc duty cycle)	WLAN	8.38	±0.6
10738	AAC	IEEE 802.11ax (80 MHz, MCS8, 90pc duty cycle)	WLAN	8.42	±0.6
10739	AAC	IEEE 802.11ax (80 MHz, MCS9, 90pc duty cycle)	WLAN	8.29	±0.6
10740	AAC	IEEE 802.11ax (80 MHz, MCS10, 90pc duty cycle)	WLAN	8.48	±0.6
10741	AAC	IEEE 802.11ax (80 MHz, MCS11, 90pc duty cycle)	WLAN	8.40	±0.6
10742	AAC	IEEE 802.11ax (80 MHz, MCS0, 90pc duty cycle)	WLAN	8.43	±0.6
10743	AAC	IEEE 802.11ax (160 MHz, MCS0, 90pc duty cycle)	WLAN	8.94	±0.6
10744	AAC	IEEE 802.11ax (160 MHz, MCS1, 90pc duty cycle)	WLAN	9.16	±0.6
10745	AAC	IEEE 802.11ax (160 MHz, MCS2, 90pc duty cycle)	WLAN	9.20	±0.6
10746	AAC	IEEE 802.11ax (160 MHz, MCS3, 90pc duty cycle)	WLAN	9.11	±0.6
10747	AAC	IEEE 802.11ax (160 MHz, MCS4, 90pc duty cycle)	WLAN	9.04	±0.6
10748	AAC	IEEE 802.11ax (160 MHz, MCS5, 90pc duty cycle)	WLAN	8.93	±0.6
10749	AAC	IEEE 802.11ax (160 MHz, MCS6, 90pc duty cycle)	WLAN	8.99	±0.6
10750	AAC	IEEE 802.11ax (160 MHz, MCS7, 90pc duty cycle)	WLAN	8.79	±0.6
10751	AAC	IEEE 802.11ax (160 MHz, MCS8, 90pc duty cycle)	WLAN	8.89	±0.6
10752	AAC	IEEE 802.11ax (160 MHz, MCS9, 90pc duty cycle)	WLAN	8.81	±0.6

Certificate No: EX-7574_Jul23

Page 18 of 22

EX30V4 - SN:7574

July 10, 2023

UID	Rev	Communication System Name	Group	PAR (dB)	Unc ² k = 2
10753	AAC	IEEE 802.11ax (160MHz, MCS15, 90ps duty cycle)	WLAN	8.00	±0.5
10754	AAC	IEEE 802.11ax (160MHz, MCS11, 90ps duty cycle)	WLAN	8.04	±0.5
10755	AAC	IEEE 802.11ax (160MHz, MCS8, 90ps duty cycle)	WLAN	8.04	±0.5
10756	AAC	IEEE 802.11ax (160MHz, MCS3, 90ps duty cycle)	WLAN	8.77	±0.5
10757	AAC	IEEE 802.11ax (160MHz, MCS3, 90ps duty cycle)	WLAN	8.77	±0.5
10758	AAC	IEEE 802.11ax (160MHz, MCS3, 90ps duty cycle)	WLAN	8.00	±0.5
10759	AAC	IEEE 802.11ax (160MHz, MCS4, 90ps duty cycle)	WLAN	8.08	±0.5
10760	AAC	IEEE 802.11ax (160MHz, MCS5, 90ps duty cycle)	WLAN	8.49	±0.5
10761	AAC	IEEE 802.11ax (160MHz, MCS6, 90ps duty cycle)	WLAN	8.58	±0.5
10762	AAC	IEEE 802.11ax (160MHz, MCS7, 90ps duty cycle)	WLAN	8.40	±0.5
10763	AAC	IEEE 802.11ax (160MHz, MCS8, 90ps duty cycle)	WLAN	8.53	±0.5
10764	AAC	IEEE 802.11ax (160MHz, MCS9, 90ps duty cycle)	WLAN	8.54	±0.5
10765	AAC	IEEE 802.11ax (160MHz, MCS10, 90ps duty cycle)	WLAN	8.50	±0.5
10766	AAC	IEEE 802.11ax (160MHz, MCS11, 90ps duty cycle)	WLAN	8.51	±0.5
10767	AAC	5G NR (CP-OFDM, 1 RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	7.99	±0.5
10768	AAC	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.01	±0.5
10769	AAC	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.01	±0.5
10770	AAC	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±0.5
10771	AAC	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.02	±0.5
10772	AAC	5G NR (CP-OFDM, 1 RB, 30MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.03	±0.5
10773	AAC	5G NR (CP-OFDM, 1 RB, 40MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.03	±0.5
10774	AAC	5G NR (CP-OFDM, 1 RB, 50MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.08	±0.5
10775	AAC	5G NR (CP-OFDM, 50% RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	±0.5
10776	AAC	5G NR (CP-OFDM, 50% RB, 10MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.30	±0.5
10777	AAC	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.30	±0.5
10778	AAC	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.34	±0.5
10779	AAC	5G NR (CP-OFDM, 50% RB, 25MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.43	±0.5
10780	AAC	5G NR (CP-OFDM, 50% RB, 30MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.38	±0.5
10781	AAC	5G NR (CP-OFDM, 50% RB, 40MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.38	±0.5
10782	AAC	5G NR (CP-OFDM, 50% RB, 50MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.43	±0.5
10783	AAC	5G NR (CP-OFDM, 100% RB, 5MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.31	±0.5
10784	AAC	5G NR (CP-OFDM, 100% RB, 10MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.39	±0.5
10785	AAC	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.40	±0.5
10786	AAC	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.35	±0.5
10787	AAC	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.44	±0.5
10788	AAC	5G NR (CP-OFDM, 100% RB, 30MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.39	±0.5
10789	AAC	5G NR (CP-OFDM, 100% RB, 40MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.37	±0.5
10790	AAC	5G NR (CP-OFDM, 100% RB, 50MHz, QPSK, 15kHz)	5G NR FR1 TDD	8.39	±0.5
10791	AAC	5G NR (CP-OFDM, 1 RB, 5MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.80	±0.5
10792	AAC	5G NR (CP-OFDM, 1 RB, 10MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.92	±0.5
10793	AAC	5G NR (CP-OFDM, 1 RB, 15MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.95	±0.5
10794	AAC	5G NR (CP-OFDM, 1 RB, 20MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.82	±0.5
10795	AAC	5G NR (CP-OFDM, 1 RB, 25MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.84	±0.5
10796	AAC	5G NR (CP-OFDM, 1 RB, 30MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.82	±0.5
10797	AAC	5G NR (CP-OFDM, 1 RB, 40MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.01	±0.5
10798	AAC	5G NR (CP-OFDM, 1 RB, 50MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.89	±0.5
10799	AAC	5G NR (CP-OFDM, 1 RB, 60MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.93	±0.5
10800	AAC	5G NR (CP-OFDM, 1 RB, 80MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.89	±0.5
10801	AAC	5G NR (CP-OFDM, 1 RB, 90MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.87	±0.5
10802	AAC	5G NR (CP-OFDM, 1 RB, 100MHz, QPSK, 30kHz)	5G NR FR1 TDD	7.93	±0.5
10803	AAC	5G NR (CP-OFDM, 50% RB, 10MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10804	AAC	5G NR (CP-OFDM, 50% RB, 15MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.37	±0.5
10805	AAC	5G NR (CP-OFDM, 50% RB, 20MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10806	AAC	5G NR (CP-OFDM, 50% RB, 25MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10807	AAC	5G NR (CP-OFDM, 50% RB, 30MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.38	±0.5
10808	AAC	5G NR (CP-OFDM, 50% RB, 40MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.35	±0.5
10809	AAC	5G NR (CP-OFDM, 50% RB, 50MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.34	±0.5
10810	AAC	5G NR (CP-OFDM, 50% RB, 60MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.38	±0.5
10811	AAC	5G NR (CP-OFDM, 50% RB, 80MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.30	±0.5
10812	AAC	5G NR (CP-OFDM, 50% RB, 90MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10813	AAC	5G NR (CP-OFDM, 100% RB, 10MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10814	AAC	5G NR (CP-OFDM, 100% RB, 15MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.36	±0.5
10815	AAC	5G NR (CP-OFDM, 100% RB, 20MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.39	±0.5
10816	AAC	5G NR (CP-OFDM, 100% RB, 25MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.41	±0.5
10817	AAC	5G NR (CP-OFDM, 100% RB, 30MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.42	±0.5
10818	AAC	5G NR (CP-OFDM, 100% RB, 40MHz, QPSK, 30kHz)	5G NR FR1 TDD	8.43	±0.5

Certificate No: EX-7574_Ju23

Page 18 of 22

EX9DV4 - SN:7574

July 18, 2023

ID	Rev	Communication System Name	Group	PAR (dB)	Unc ¹ k=2
10089	AAD	50 NR (CP-OFDM, 100% RB, 120 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.40	+3.8
10090	AAD	50 NR (CP-OFDM, 1 RB, 120 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.65	+3.8
10091	AAD	50 NR (CP-OFDM, 1 RB, 15 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.75	+3.8
10092	AAD	50 NR (CP-OFDM, 1 RB, 25 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.74	+3.8
10093	AAD	50 NR (CP-OFDM, 1 RB, 30 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.70	+3.8
10094	AAD	50 NR (CP-OFDM, 1 RB, 35 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.76	+3.8
10095	AAD	50 NR (CP-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.70	+3.8
10096	AAD	50 NR (CP-OFDM, 1 RB, 50 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.60	+3.8
10097	AAD	50 NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.60	+3.8
10098	AAD	50 NR (CP-OFDM, 1 RB, 60 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	7.70	+3.8
10099	AAD	50 NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	7.40	+3.8
10100	AAD	50 NR (CP-OFDM, 50% RB, 120 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.30	+3.8
10101	AAD	50 NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.40	+3.8
10102	AAD	50 NR (CP-OFDM, 50% RB, 30 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.40	+3.8
10103	AAD	50 NR (CP-OFDM, 100% RB, 10 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.34	+3.8
10104	AAD	50 NR (CP-OFDM, 100% RB, 15 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.38	+3.8
10105	AAD	50 NR (CP-OFDM, 100% RB, 20 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.37	+3.8
10106	AAD	50 NR (CP-OFDM, 100% RB, 25 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.38	+3.8
10107	AAD	50 NR (CP-OFDM, 100% RB, 30 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.38	+3.8
10108	AAD	50 NR (CP-OFDM, 100% RB, 40 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.34	+3.8
10109	AAD	50 NR (CP-OFDM, 100% RB, 50 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.41	+3.8
10110	AAD	50 NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.40	+3.8
10111	AAD	50 NR (CP-OFDM, 100% RB, 60 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10112	AAD	50 NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.30	+3.8
10113	AAD	50 NR (CP-OFDM, 100% RB, 100 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.40	+3.8
10114	AAD	50 NR (CP-OFDM, 100% RB, 150 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.41	+3.8
10115	AAD	50 NR (CP-OFDM, 100% RB, 150 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.40	+3.8
10116	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 30 kHz)	50 NR FR1 TDD	8.38	+3.8
10117	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10118	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10119	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10120	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10121	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10122	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10123	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10124	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10125	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10126	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10127	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10128	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10129	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10130	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10131	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10132	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10133	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10134	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10135	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8
10136	AAD	50 NR (CP-OFDM, 100% RB, 180 MHz, QPSK, 60 kHz)	50 NR FR1 TDD	8.41	+3.8

Certificate No: EX-7574 Jul23

Page 20 of 22

EX30V4 - SN:7574

July 18, 2023

Mod	Rev	Communication System Name	Group	PAR (dB)	Use# & = 2
10011	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±0.5
10012	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10013	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10014	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±0.5
10015	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.83	±0.5
10016	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±0.5
10017	AAB	5G NR (DFT-s-OFDM, 50% RB, 15 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10018	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±0.5
10019	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.86	±0.5
10020	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.87	±0.5
10021	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10022	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.82	±0.5
10023	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10024	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10025	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.85	±0.5
10026	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10027	AAB	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	5.84	±0.5
10028	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±0.5
10029	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.83	±0.5
10030	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±0.5
10031	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10032	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10033	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10034	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10035	AAC	5G NR (DFT-s-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10036	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.80	±0.5
10037	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.77	±0.5
10038	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.80	±0.5
10039	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±0.5
10040	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.86	±0.5
10041	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±0.5
10042	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.88	±0.5
10043	AAC	5G NR (DFT-s-OFDM, 50% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±0.5
10044	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.81	±0.5
10045	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.85	±0.5
10046	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±0.5
10047	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±0.5
10048	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.84	±0.5
10049	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.87	±0.5
10050	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.84	±0.5
10051	AAC	5G NR (DFT-s-OFDM, 100% RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 FDD	5.82	±0.5
10052	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.25	±0.5
10053	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.15	±0.5
10054	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.23	±0.5
10055	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 FDD	6.43	±0.5
10056	AAA	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	6.14	±0.5
10057	AAA	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	6.31	±0.5
10058	AAA	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	6.61	±0.5
10059	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 FDD	6.33	±0.5
10060	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	6.32	±0.5
10061	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	6.36	±0.5
10062	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	6.40	±0.5
10063	AAB	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR FR1 TDD	6.55	±0.5
10064	AAC	5G NR DL (CP-OFDM, TM 3.1, 5 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	6.39	±0.5
10065	AAB	5G NR DL (CP-OFDM, TM 3.1, 10 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	6.37	±0.5
10066	AAB	5G NR DL (CP-OFDM, TM 3.1, 15 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	6.58	±0.5
10067	AAB	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	6.42	±0.5
10068	AAB	5G NR DL (CP-OFDM, TM 3.1, 100 MHz, 64-QAM, 30 kHz)	5G NR FR1 TDD	6.46	±0.5
10070	AAB	5G NR (CP-OFDM, 1 RB, 5 MHz, QPSK, 15 kHz)	5G NR FR1 TDD	11.50	±0.5
10075	AAB	5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)	5G NR FR1 TDD	6.06	±0.5
10076	AAB	5G NR (CP-OFDM, 100% RB, 100 MHz, 256-QAM, 30 kHz)	5G NR FR1 TDD	10.25	±0.5
10078	AAA	ULLA BDR	ULLA	1.16	±0.5
10079	AAA	ULLA HDRM	ULLA	6.50	±0.5
10080	AAA	ULLA HDRB	ULLA	10.32	±0.5
10081	AAA	ULLA HDRp4	ULLA	5.19	±0.5
10082	AAA	ULLA HDRp8	ULLA	5.49	±0.5

Certificate No: EX-7574_ju23

Page 21 of 22



SGS Korea Co., Ltd.

4, LS-ro 182beon-gil, Gunpo-si, Gyeonggi-do, 15807

Tel. 031-428-5700 / Fax. 031-427-2371

<http://www.sgsgroup.kr>

Page : 67/67

EX30V4 - SN:7574

July 18, 2023

UID	Rev	Communication System Details	Group	RAI (dB)	Unc ² k = 2
10983	AAA	5G NR DL (CP-OFDM, TM 3.1, 48 MHz, 64-QAM, 15 kHz)	5G NR PR1 TDD	9.51	±0.6
10984	AAA	5G NR DL (CP-OFDM, TM 3.1, 56 MHz, 64-QAM, 15 kHz)	5G NR PR1 TDD	9.42	±0.6
10985	AAA	5G NR DL (CP-OFDM, TM 3.1, 48 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.54	±0.6
10986	AAA	5G NR DL (CP-OFDM, TM 3.1, 56 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.50	±0.6
10987	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.53	±0.6
10988	AAA	5G NR DL (CP-OFDM, TM 3.1, 70 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.38	±0.6
10989	AAA	5G NR DL (CP-OFDM, TM 3.1, 80 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.33	±0.6
10990	AAA	5G NR DL (CP-OFDM, TM 3.1, 90 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	9.53	±0.6
11000	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR PR1 TDD	10.34	±0.6
11004	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR PR1 TDD	10.73	±0.6
11005	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR PR1 FDD	9.70	±0.6
11006	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 15 kHz)	5G NR PR1 FDD	9.55	±0.6
11007	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR PR1 FDD	9.45	±0.6
11008	AAA	5G NR DL (CP-OFDM, TM 3.1, 40 MHz, 64-QAM, 15 kHz)	5G NR PR1 FDD	9.51	±0.6
11009	AAA	5G NR DL (CP-OFDM, TM 3.1, 25 MHz, 64-QAM, 30 kHz)	5G NR PR1 FDD	9.78	±0.6
11010	AAA	5G NR DL (CP-OFDM, TM 3.1, 30 MHz, 64-QAM, 30 kHz)	5G NR PR1 FDD	9.95	±0.6
11011	AAA	5G NR DL (CP-OFDM, TM 3.1, 48 MHz, 64-QAM, 30 kHz)	5G NR PR1 FDD	9.96	±0.6
11013	AAA	5G NR DL (CP-OFDM, TM 3.1, 66 MHz, 64-QAM, 30 kHz)	5G NR PR1 FDD	8.68	±0.6
11013	AAA	IEEE 802.11be (320 MHz, MCS1, 99pc duty cycle)	WLAN	8.47	±0.6
11014	AAA	IEEE 802.11be (320 MHz, MCS2, 99pc duty cycle)	WLAN	8.48	±0.6
11015	AAA	IEEE 802.11be (320 MHz, MCS3, 99pc duty cycle)	WLAN	8.44	±0.6
11016	AAA	IEEE 802.11be (320 MHz, MCS4, 99pc duty cycle)	WLAN	8.44	±0.6
11017	AAA	IEEE 802.11be (320 MHz, MCS5, 99pc duty cycle)	WLAN	8.41	±0.6
11018	AAA	IEEE 802.11be (320 MHz, MCS6, 99pc duty cycle)	WLAN	8.40	±0.6
11019	AAA	IEEE 802.11be (320 MHz, MCS7, 99pc duty cycle)	WLAN	8.29	±0.6
11020	AAA	IEEE 802.11be (320 MHz, MCS8, 99pc duty cycle)	WLAN	8.27	±0.6
11021	AAA	IEEE 802.11be (320 MHz, MCS9, 99pc duty cycle)	WLAN	8.45	±0.6
11022	AAA	IEEE 802.11be (320 MHz, MCS10, 99pc duty cycle)	WLAN	8.39	±0.6
11023	AAA	IEEE 802.11be (320 MHz, MCS11, 99pc duty cycle)	WLAN	8.29	±0.6
11024	AAA	IEEE 802.11be (320 MHz, MCS12, 99pc duty cycle)	WLAN	8.42	±0.6
11025	AAA	IEEE 802.11be (320 MHz, MCS13, 99pc duty cycle)	WLAN	8.37	±0.6
11026	AAA	IEEE 802.11be (320 MHz, MCS14, 99pc duty cycle)	WLAN	8.38	±0.6

² Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.