

## PARENT UNIT ICONS (CONT'D)

| Status icons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | Status icons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p><b>Connection status</b></p> <ul style="list-style-type: none"> <li> - Strong signal strength.</li> <li> - Moderate signal strength.</li> <li> - Low signal strength.</li> <li> - Weak signal strength.</li> </ul> <p><b>Split mode</b><br/>(*For pairing with <b>VM934-2</b> only)</p> <p><b>Patrol mode</b><br/>(*For pairing with <b>VM934-2</b> only)</p> <p><b>Current view status</b></p> <ul style="list-style-type: none"> <li>The baby unit number that is being viewed when in: <ul style="list-style-type: none"> <li><b>Single CAM</b> mode.</li> <li><b>Patrol</b> mode (*For pairing with <b>VM934-2</b> only)</li> <li><b>Split</b> mode (*For pairing with <b>VM934-2</b> only)</li> </ul> </li> </ul> <p><b>Night vision</b> - On</p> <p><b>Zoom</b> - On</p> | <p><b>Lullaby</b> - On</p> <p><b>Night light</b> - On</p> <p><b>Night light</b> - Auto night light timer is activated.</p> <p><b>Real-time temperature</b></p> <ul style="list-style-type: none"> <li>Real-time temperature detected by the baby unit in Fahrenheit (°F) or Celsius (°C) (e.g. <b>57°F</b> or <b>14°C</b>).</li> </ul> <p><b>Temperature alert tone</b> - On</p> <p><b>Talkback</b> - On</p> <p><b>Mute alert</b></p> <ul style="list-style-type: none"> <li>Displays when the parent unit speaker volume is set to off.</li> <li>Displays when the parent unit is talking to the baby unit.</li> </ul> <p><b>Battery status</b></p> <ul style="list-style-type: none"> <li> animates when the battery is charging.</li> <li> - battery is fully charged.</li> <li> - battery is low and needs charging.</li> </ul> |
| Alert icons                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <ul style="list-style-type: none"> <li>Displays when parent unit's battery is low and needs charging.</li> <li>Displays when connection between parent unit and baby unit is lost.</li> <li>Displays when sound is detected at a baby unit when in <b>Split</b> view. (For <b>VM934-2</b> only)</li> <li>Baby unit detects temperature reaches or exceeds the set maximum.</li> <li>Baby unit detects temperature is at or is lower than the set minimum.</li> </ul>                                                                                                                                                                                                                                                                                                              |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

## SOUND SENSITIVITY AND SOUND ACTIVATION

### Adjust the sound sensitivity of the baby unit


The parent unit screen will turn on only when the detected sounds exceed a set level.

Use the parent unit to adjust the microphone sensitivity of your baby unit. The higher the sensitivity level, the more sensitive the baby unit is in detecting sounds that transmit to the parent unit. The sound sensitivity level is preset to the highest level.

| SOUND SENSITIVITY LEVEL | Level 5 (Highest)                                                                                      | Level 4 (High)                                                                                                                    | Level 3 (Medium)                                                                                                                     | Level 2 (Low)                                                                                                                 | Level 1 (Lowest)                                                                                                                      |
|-------------------------|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| DESCRIPTION             | The parent unit screen turns on for quiet sounds, (including background noises) from your baby's room. | The parent unit screen turns on for loud babbling and louder sounds from your baby. It remains off when your baby sleeps soundly. | The parent unit screen turns on for loud babbling and louder sounds from your baby. It remains off when your baby makes soft sounds. | The parent unit screen turns on for crying and louder sounds from your baby. It remains off when your baby makes soft sounds. | The parent unit screen turns on for loud crying or screeching sounds from your baby. It remains off when your baby makes soft sounds. |


When **AUTO** is selected, the parent unit screen stays off to save power when the baby unit detects sounds that are lower than the set sensitivity level.

Once the baby unit detects sounds that are louder than the set sensitivity level, the parent unit screen turns on automatically. It will then turn off again after 50 seconds if the sounds detected are lower than the set sensitivity level.

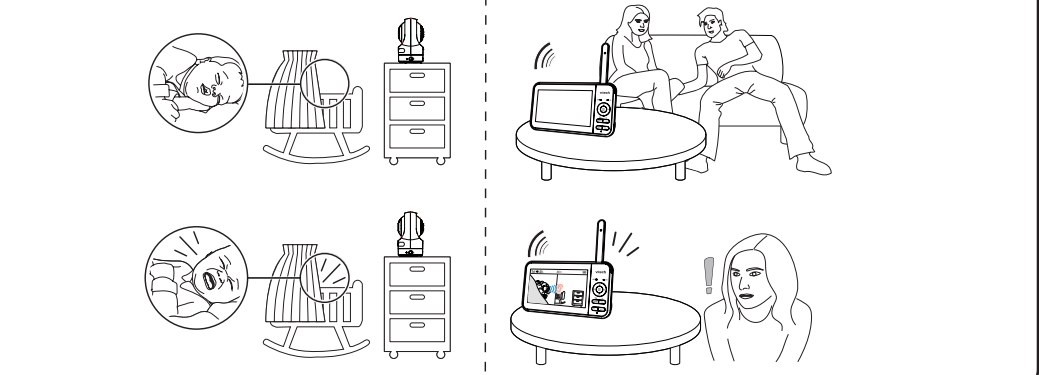


## DIM MODE

Dim mode helps you save parent unit power. Your parent unit display will automatically dim after 10 minutes of inactivity, when no keys are pressed or alerts are received from the baby unit.

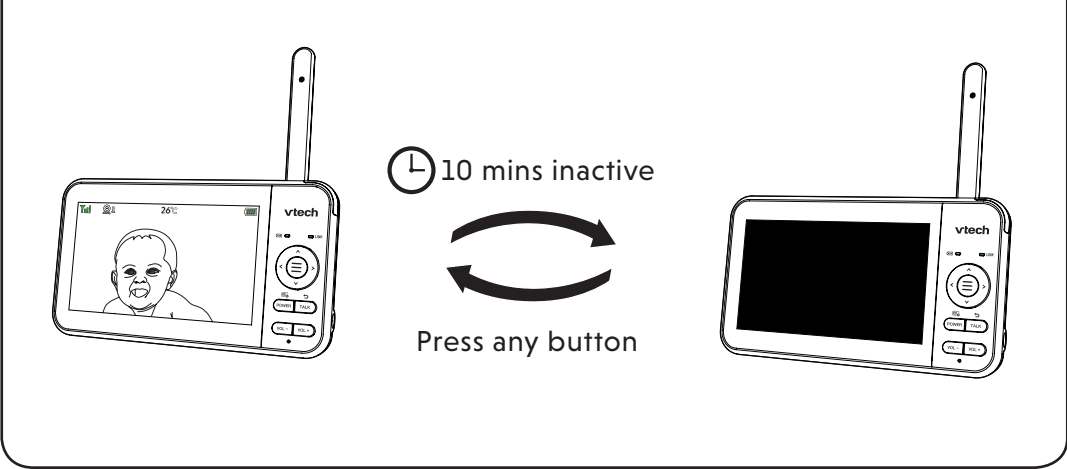


## NIGHT VISION

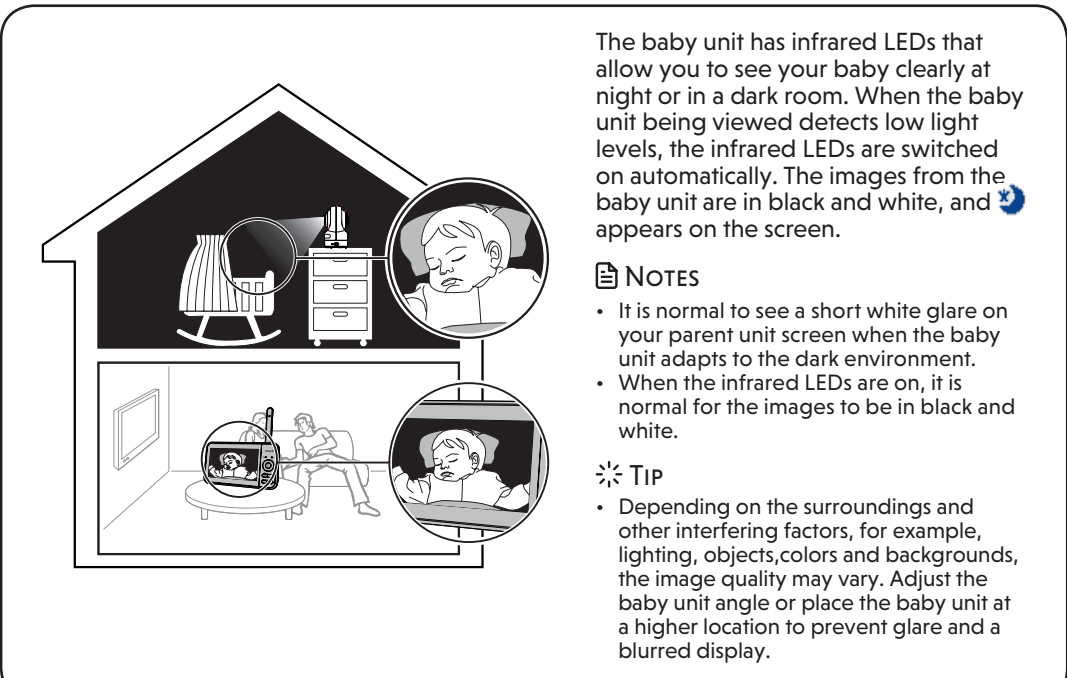

## FOR VM934-2 ONLY

### Status check - Two baby units

If you are viewing baby unit **1**, the **POWER** LED light of baby unit **1** turns on. As baby unit **2** is not being viewed, its **POWER** LED light flashes.

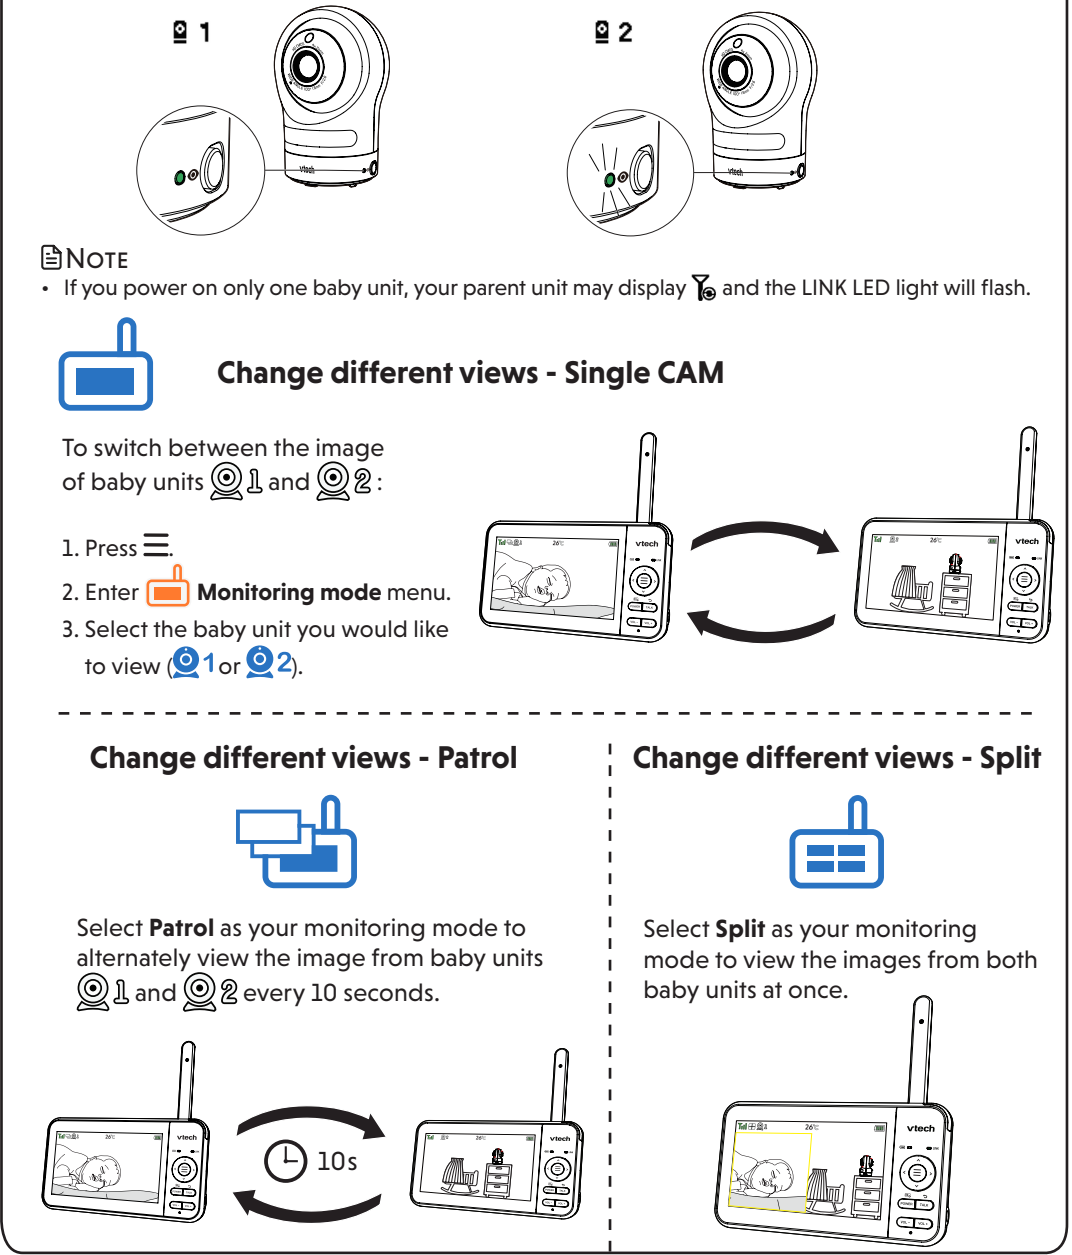


## FREQUENTLY ASKED QUESTIONS

Below are the questions most frequently asked about the baby monitor.

|                                                                                                                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Why does the baby monitor not respond normally?                                                                       | Try the following (in the order listed) for common cure:<br>1. Disconnect the power to the baby units and the parent unit.<br>2. Wait a few seconds before connecting power back to the baby units and the parent unit.<br>3. Turn on the baby units and the parent unit.<br>4. Wait for the parent unit to synchronize with the baby units. Allow up to one minute for this to take place.                                                                                                                                 |
| Why doesn't the parent unit and parent unit power-on light illuminate when the units are switched on?                 | Perhaps the parent unit is not connected to the power. Insert the adapter plug into the parent unit and put the adapter in a wall socket. Then, press <b>POWER</b> to switch on the parent unit and to establish connection with the baby unit.<br><br>Perhaps the baby unit is not connected to the power. Insert the adapter plug into the baby unit and put the adapter in a wall socket. Then, slide the <b>ON/OFF</b> switch to <b>ON</b> to switch on the baby unit and to establish connection with the parent unit. |
| Why doesn't my parent unit charge while connected to AC power?                                                        | Make sure the power is not controlled by a electronic wall switch.<br><br>The battery may de degraded through extended use or defective. See Warranty for repair/replacement.                                                                                                                                                                                                                                                                                                                                               |
| Why is my screen in black and white?                                                                                  | The screen is in black and white during night-time or in a dark room when the night vision feature is activated. This is normal.                                                                                                                                                                                                                                                                                                                                                                                            |
| Why do I get glare or blurry display on my screen when viewing my baby at night?                                      | During night-time or in a dark room, the surroundings and other interfering factors, like lightings, objects, colors and backgrounds may affect the image quality on your parent unit screen. Adjust the baby unit's angle or place the baby unit at a higher level to prevent glare and blurry display.                                                                                                                                                                                                                    |
| Why does the baby monitor produce a feedback noise?                                                                   | The parent unit and baby units may be too close to each other.<br>• Move the parent unit away from the baby units until the noise stops; OR<br>• Turn down the volume of your parent unit.                                                                                                                                                                                                                                                                                                                                  |
| Why does the parent unit beep?                                                                                        | The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet).<br><br>The parent unit may not have enough charge for the parent unit to perform normally. Charge the battery in the parent unit until the battery icon segments are solid .<br><br>The temperature of your baby's room may be too high or too low.                                                                                                                                                           |
| Why does the parent unit react too quickly to other sounds?                                                           | The baby unit also picks up other sounds than those of your baby. Adjust the sound sensitivity level to a lower level or lower the parent unit speaker volume.                                                                                                                                                                                                                                                                                                                                                              |
| Why don't I hear a sound/Why can't I hear my baby cry?                                                                | The parent unit speaker volume may be too low. See <b>Adjust parent unit speaker volume</b> to increase the volume.<br><br>You may have set a low sound sensitivity level. See <b>Adjust the sound sensitivity of the baby unit</b> to set to a higher level.                                                                                                                                                                                                                                                               |
| Why can't I establish a connection? Why is the connection lost every now and then? Why are there sound interruptions? | The baby units may be out of range. Move the parent unit closer to the baby units (but not less than 3 feet).<br><br>Other electronic products and wireless products may cause interference with your baby monitor. Try installing your baby monitor as far away from these devices as possible.<br><br>If you power on only one baby unit, your parent unit may display  and the <b>LINK</b> LED light will flash.                                                                                                         |

## MOUNT THE BABY UNIT (OPTIONAL)

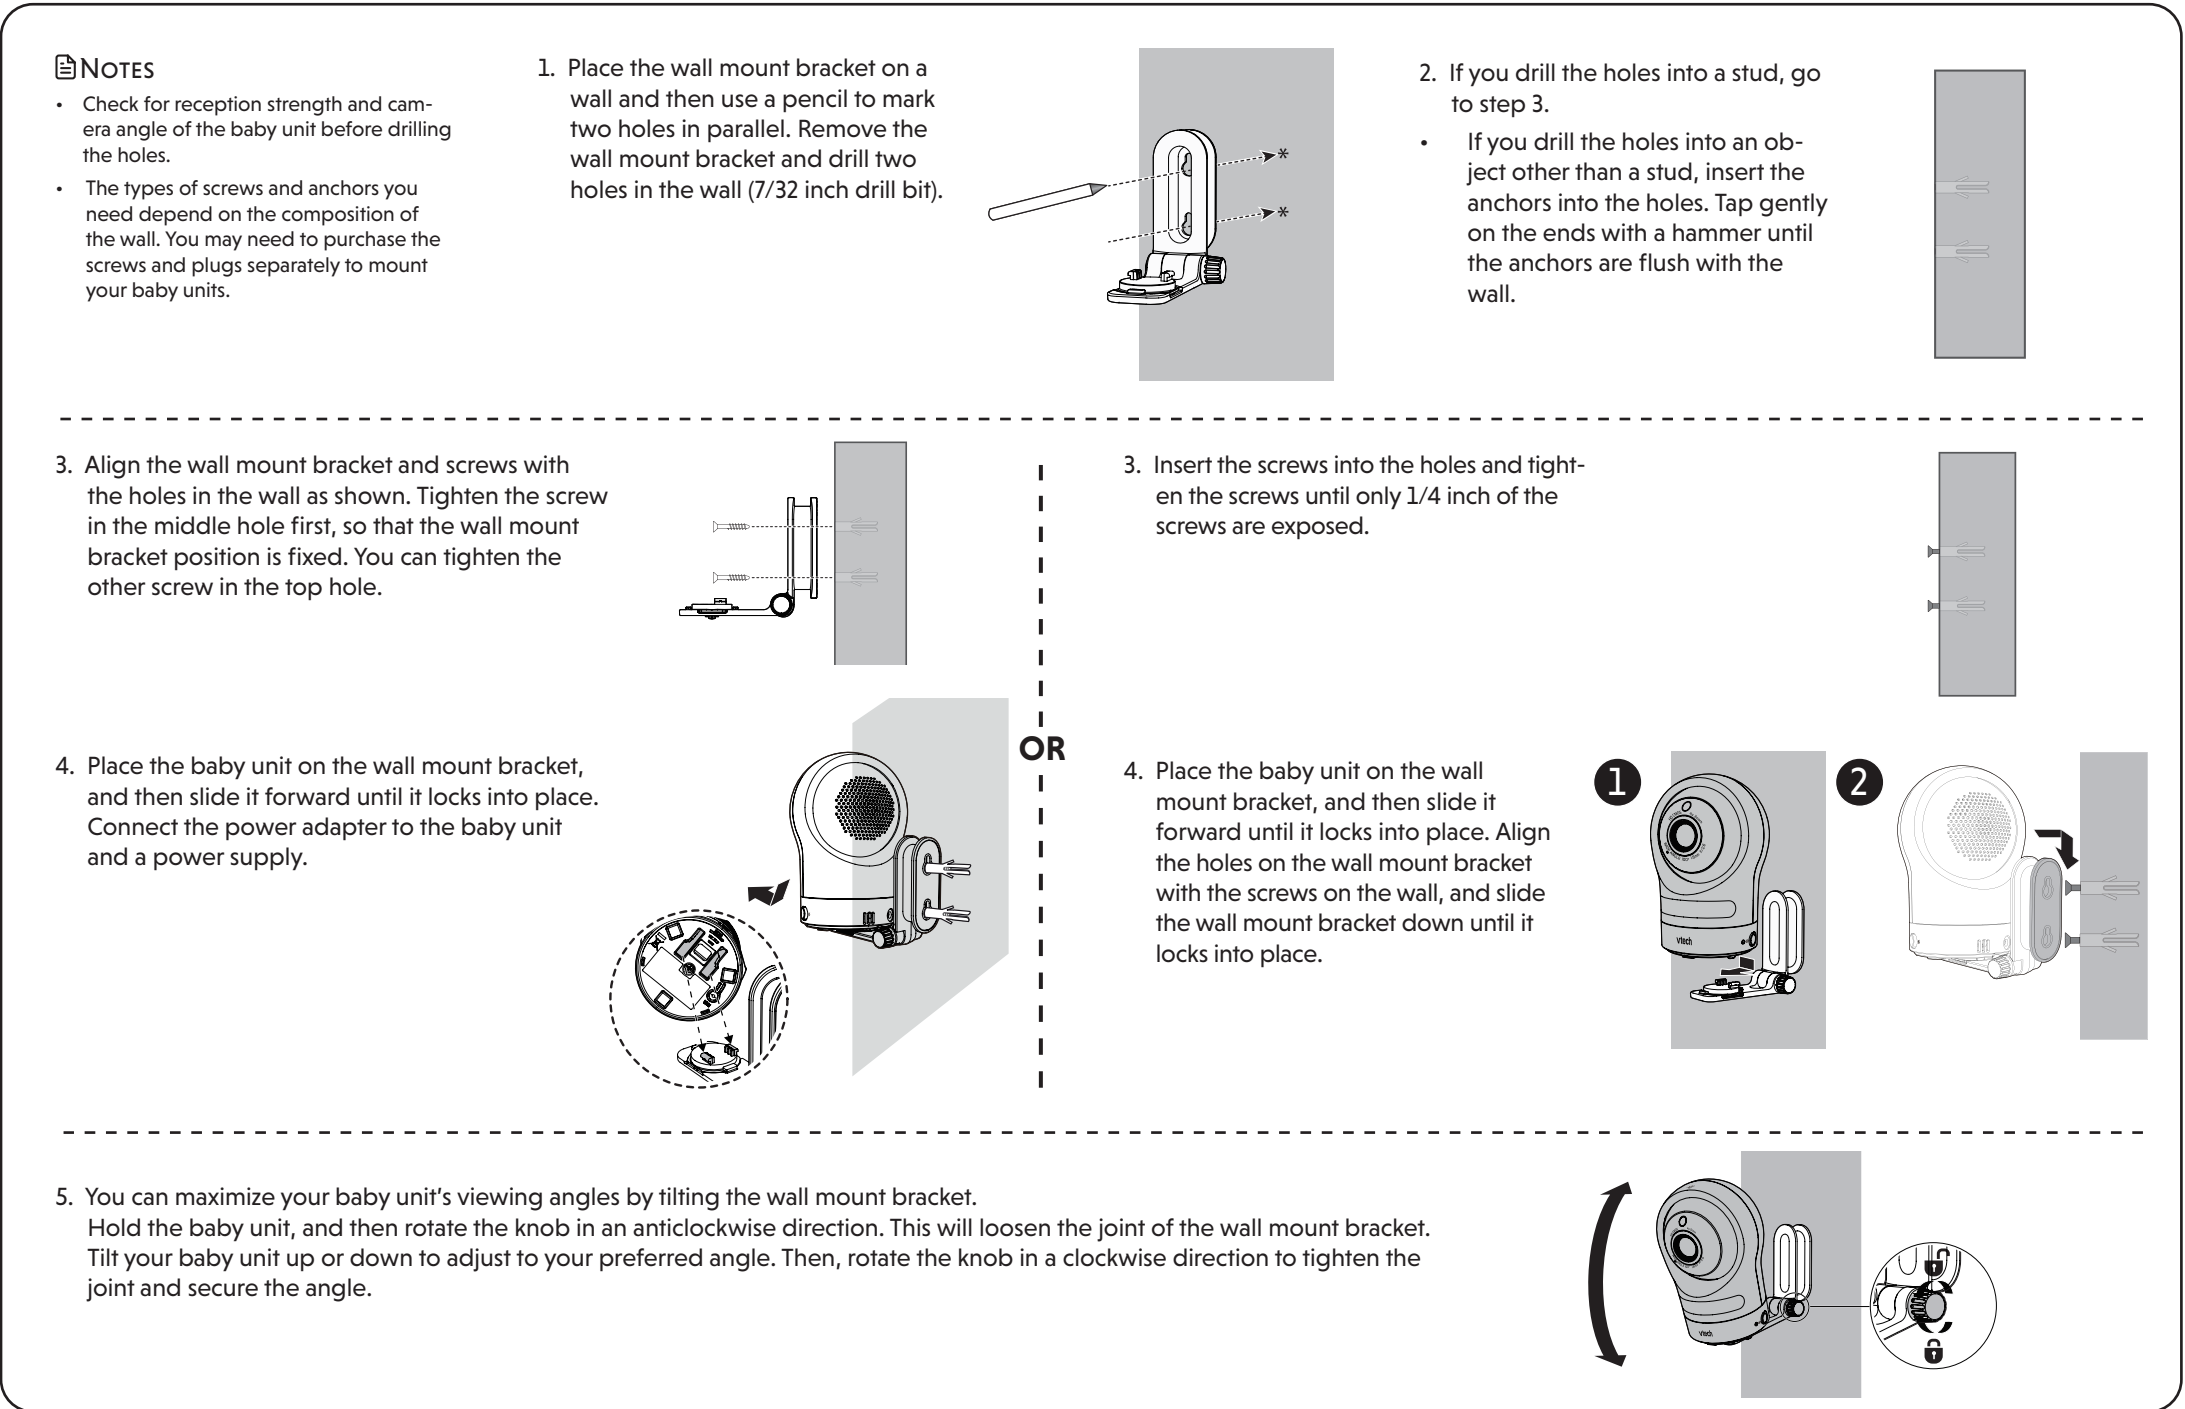

## THE RBRC SEAL

The RBRC Seal on the Li-Ion battery indicates that Vtech Communications, Inc. is voluntarily participating in an industry program to collect and recycle these batteries at the end of their useful lives, when taken out of service within the United States and Canada.

The program provides a convenient alternative to placing used Li-Ion batteries into the trash or municipal waste, which may be illegal in your area.

Vtech's participation makes it easy for you to drop off the spent battery at local retailers participating in the program or at authorized Vtech product service centers. Please call **1 (800) 8 BATTERY** for information on Li-Ion battery recycling and disposal bans/restrictions in your area. Vtech's involvement in this program is part of its commitment to protecting our environment and conserving natural resources.

The RBRC Seal and 1 (800) 8 BATTERY® are registered trademarks of Call2recycle, Inc.

## FCC AND IC REGULATIONS

### FCC Part 15

This equipment has been tested and found to comply with the requirements for a Class B digital device under Part 15 of the Federal Communications Commission (FCC) rules. These requirements are intended to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:** Changes or modifications to this equipment not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

To ensure safety of users, the FCC has established criteria for the amount of radio frequency energy that can be safely absorbed by a user or bystander according to the intended usage of the product. This product has been tested and found to comply with the FCC criteria. The baby unit shall be installed and used such that parts of all persons' body are maintained at a distance of approximately 8 in (20 cm) or more. The transmitter and antenna of the parent unit shall be held at least 1 in (2.5 cm) from your face.

This Class B digital apparatus complies with Canadian requirement: CAN ICES-3 (B)/NMB-3(B)

### Industry Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device. The term "IC" before the certification/registration number only signifies that the Industry Canada technical specifications were met. This product meets the applicable Innovation, Science and Economic Development Canada technical specifications.

### RF radiation exposure statement

The product complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. The baby unit should be installed and operated with a minimum distance of 8 in (20 cm) between the baby unit and all persons' body. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. This equipment complies also with Industry Canada RSS-102 with respect to Canada's Health Code 6 for Exposure of Humans to RF Fields.

## CALIFORNIA ENERGY COMMISSION BATTERY CHARGING TESTING MODE

This baby monitor meets the California Energy Commission (CEC) regulations for energy consumption. Your baby monitor is set up to comply with the energy-conserving standards right out of the box. Follow the instructions to install and charge the battery. The CEC battery charging testing mode is activated while charging. Even if the parent unit is paired to baby units, the CEC battery charging testing mode is activated while it is powered off and charging.

## DISCLAIMER AND LIMITATION OF LIABILITY

Vtech Communications, Inc. and its suppliers assume no responsibility for any damage or loss resulting from the use of this user's manual. Vtech Communications, Inc. and its suppliers assume no responsibility for any loss or claims by third parties that may arise through the use of this product. Company: Vtech Communications, Inc. Address: 9020 SW Washington Square Road - Ste 555 Tigard, OR 97223, United States Phone: 1 (800) 595-9511 in the U.S. or 1 (800) 264-7377 in Canada

## FOR CETL COMPLIANCE ONLY

### Mesures de sécurité importantes

La plaque signalétique appliquée est située au bas du socle de l'unité du bébé.

Lorsque vous utilisez votre appareil, vous devriez toujours suivre certaines mesures de précaution de base afin de réduire les risques d'incendie, d'électrocution et de blessures corporelles, dont ceux qui suivent :

- Observez toutes les instructions et mises en garde inscrites sur l'appareil.
- L'installation par un adulte est requise.
- MISE EN GARDE:** N'installez pas l'unité du bébé à une hauteur supérieure à 2 mètres.
- Ce produit ne remplace pas la surveillance adulte du nourrisson. La supervision du nourrisson est la responsabilité du parent ou de la personne qui s'occupe de l'enfant. Ce produit pourrait cesser de fonctionner et, par conséquent, vous ne devriez pas présupposer qu'il continuerait de fonctionner correctement pendant une période de temps donnée. De plus, il ne s'agit pas d'un instrument médical et ne devrait pas être utilisé comme tel. Ce produit est destiné à vous aider à superviser votre bébé.
- N'utilisez pas cet appareil près de l'eau ni de toute autre source d'humidité, par exemple, près d'une baignoire, cuve à lessive, évier de cuisine, dans un sous-sol humide ni près d'une piscine, dans un sous-sol humide ou une douche.
- MISE EN GARDE:** N'utilisez que la pile fournie. Il peut y avoir un risque d'explosion si un mauvais type de pile est utilisé pour le dispositif alimant. La pile ne peut pas être soumise à des températures extrêmes élevées ou basses et à une faible pression atmosphérique à haute altitude pendant son utilisation, son entreposage ou son transport. Le fait de jeter la pile dans au feu ou dans un four chaud, ou d'écraser ou de couper mécaniquement la pile peut entraîner une explosion. Le fait de laisser la pile dans un environnement à température extrêmement élevée peut entraîner une explosion ou une fuite de liquide ou de gaz inflammable. Une gâse inflammable ou une pression d'air extrêmement basse peut provoquer une explosion ou une fuite de liquide ou de gaz inflammable. Mettez au rebut la pile usagée conformément aux informations figurant dans la section **Le seul RBRC**.
- N'utilisez que les adaptateurs inclus avec ce produit. L'utilisation d'un adaptateur dont la polarité ou la tension serait inadéquate risque d'endommager sérieusement le produit et mettre votre sécurité en péril.

- Informations sur les piles rechargeables : Chargeur Power Enrol Co., Ltd. Li-Ion battery, 3.6V, 2600mAh, 9.36Wh; Modèle : ICR18650-2.6Ah-3.6V-131P
- Les enfants ne doivent pas être laissés seuls avec la prise de courant, les adaptateurs secteur ont été conçus pour être orientés correctement, soit à la verticale ou au plancher. Les broches n'ont pas été conçues pour supporter le poids du bloc d'alimentation et le maintenir en place si celui-ci est branché dans une prise au plafond, sous une table ou dans un meuble.
- Pour les PRODUITS À BRANCHER À UNE PRISE DE COURANT, la prise de courant doit être installée près du produit, afin d'assurer une accessibilité sécuritaire à la prise de courant.

Débranchez ce produit de la prise de courant avant de procéder au nettoyage. Utilisez des produits de nettoyage en aérosols. Utilisez un chiffon humide pour le nettoyer.

- Ne coupez pas les cordons d'alimentation pour remplacer les fils, car ceci peut entraîner des dommages ou des blessures.
- Ne laissez aucun objet reposer ni appuyer sur le cordon d'alimentation. N'installez pas cet appareil dans un endroit où l'on risque d'écraser le cordon d'alimentation ou de le piétiner.
- Ne faites fonctionner cet appareil qu'avec le type d'alimentation indiqué sur l'étiquette. Si vous ne connaissez pas le type d'alimentation que vous possédez à votre domicile, consultez votre marchand ou votre compagnie locale d'électricité.
- Ne surchargez pas les prises de courant murales ni les rallonges électriques.
- Ne placez pas cet appareil sur un chariot, meuble, trépied, support de montage ni table chancelants.
- Les trous et ouvertures du boîtier, situés à l'arrière de l'appareil ou sous celui-ci, servent à aérer l'appareil. Pour l'empêcher de surchauffer, ne bloquez sous aucun prétexte ces ouvertures et n'empêchez pas l'aération adéquate de l'appareil en le

placant sur un lit, divan, tapis ou toute autre surface similaire. De même, ne le positionnez pas à proximité ni au-dessus d'une source de chaleur ou d'un calorifère. De plus, ne placez pas l'appareil dans un endroit avant de vous assurer qu'il y ait une bonne circulation d'air.

N'enfoncez jamais d'objets à travers les ouvertures de cet appareil, car ils pourraient entrer en contact avec des points de tension dangereux ou causer des courts-circuits qui peuvent entraîner en incendies ou en risques d'électrocution. Ne renversez jamais de liquide dans ce produit.

Afin de réduire les risques d'électrocution, ne démontez pas cet appareil, mais apportez-le dans un centre de service autorisé. L'ouverture du boîtier ou le retrait de toutes pièces que contient cet appareil, à l'exception de l'accès autorisé à certaines portes ou ouvertures, risque de vous exposer à des points de tension dangereux ou d'autres dangers. Un remontage incorrect peut par la suite présenter des risques d'électrocution.

Vous devriez tester la réception chaque fois que vous mettez l'appareil en fonction. Examinez les composantes afin de vérifier si celles-ci ne sont pas endommagées.

Il existe un très faible risque de perte de confidentialité avec certains appareils électroniques (autres écoute-bébés, téléphones sans fil, etc.). Pour l'éviter, s'assurer que le produit n'a jamais été utilisé avant l'achat, réinitialiser l'unité de façon périodique, éteindre l'écoute-bébé quand il n'est pas en cours d'utilisation.

Les enfants devraient être supervisés afin de vous assurer qu'ils ne jouent pas avec l'appareil.

Le produit n'est pas conçu pour être utilisé par des personnes (incluant des enfants) aux capacités physiques, sensorielles ou mentales réduites ou qui manquent d'expérience et de connaissances, à moins qu'il leur ait donné suffisamment de supervision ou d'instructions relativement à l'utilisation de l'appareil par une personne responsable de leur sécurité.

## LIMITED WARRANTY

### What does this limited warranty cover?

The manufacturer of this Vtech Product warrants to the holder of a valid proof of purchase ("Consumer" or "you") that the Product and all accessories provided in the sales package ("Product") are free from defects in material and workmanship, pursuant to the following terms and conditions, when installed and used normally and in accordance with the Product operating instructions. This limited warranty extends only to the Consumer for Products purchased and used in the United States of America and Canada.

**What will Vtech do if the Product is not free from defects in materials and workmanship during the limited warranty period ("Materially Defective Product")?**

During the limited warranty period, Vtech's authorized service representative will repair or replace at Vtech's option, without charge, a Materially Defective Product. If we repair the Product, we may use new refurbished replacement parts. If we choose to replace the Product, we may replace it with a new or refurbished Product of the same or similar design. We will retain defective parts, modules, or equipment. Repair or replacement of the Product, at Vtech's option, is your exclusive remedy. Vtech will return the repaired or replacement Product to the Vtech service location along with a description of the malfunction or difficulty.

**How long is the limited warranty period?**

The limited warranty period for the Product extends for ONE (1) YEAR from the date of purchase. If Vtech repairs or replaces a Materially Defective Product under the terms of this limited warranty, this limited warranty also applies to the repaired or replacement Product for a period of either (a) 90 days from the date the repaired or replacement Product is shipped to you or (b) the time remaining on the original one-year warranty, whichever is longer.

### What is not covered by this limited warranty?

This limited warranty does not cover:

- Product that has been subjected to misuse, accident, shipping or other physical damage, improper installation, abnormal operation or handling, neglect, inundation, fire, solar or other liquid intrusion; or
- Product that has been damaged due to repair, alteration or modification by anyone other than an authorized service representative of Vtech; or
- Product to the extent that the problem experienced is caused by signal conditions, network reliability, or cable or antenna systems; or
- Product to the extent that the problem is caused by use with non-Vtech accessories; or
- Product whose warranty/quality stickers, product serial number, plate or electronic label have been removed, altered or rendered illegible; or
- Product purchased, used, serviced, or shipped for repair from outside the United States of America or Canada, or used for commercial or institutional purposes (including but not limited to Products used for rental purposes); or
- Product returned without a valid proof of purchase (see item 2 below); or
- Charges for installation or set up, adjustment of customer controls, and installation or repair of systems outside the unit.

**Please retain your original sales receipt as proof of purchase.**

## CABLE MANAGEMENT

