

Model: LS6331 Base Antenna

Antenna description:

This wire Monopole antenna is optimized and used in the Base unit. This antenna is directly soldered to the ANT RF output in the main PCB.

Model Number	Description
LS6331 BS ANT	1.9GHz Monopole

Specification:

Operation Frequency Range	1921.536 to 1928.448 MHz
Maximum Gain	0 dBi
Type	Monopole
Operation bandwidth	70MHz
Nominal Impedance	~50 ohms
Manufacturer	Vtech Telecommunications Ltd
Manufacturer address	23/F, Tai Ping Industrial Centre, Blk1, 57 Ting Kok Road, Tai Po, Hong Kong
Model number	ANT-LS6331-F-DE-0



*NOTE: Frequency and Orientation with maximum Antenna Gain.

Frequency: 1924.992 MHz


	Vertical	Horizontal
Antenna Gain (dBi)	0.00	-6.19

LS6331 BS ANT Radiation Pattern_XY Plane

— Vertical
— Horizontal

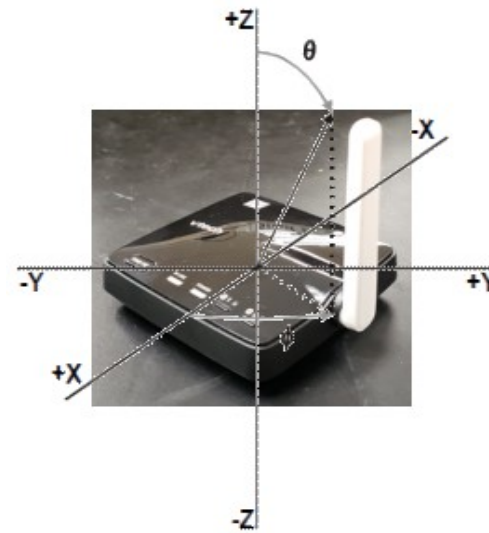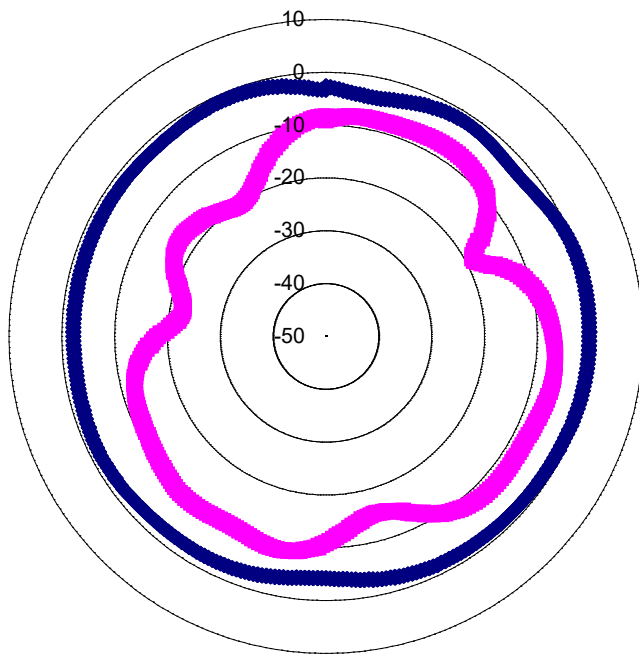

LS6331 BS ANT Antenna Dimensions in mm

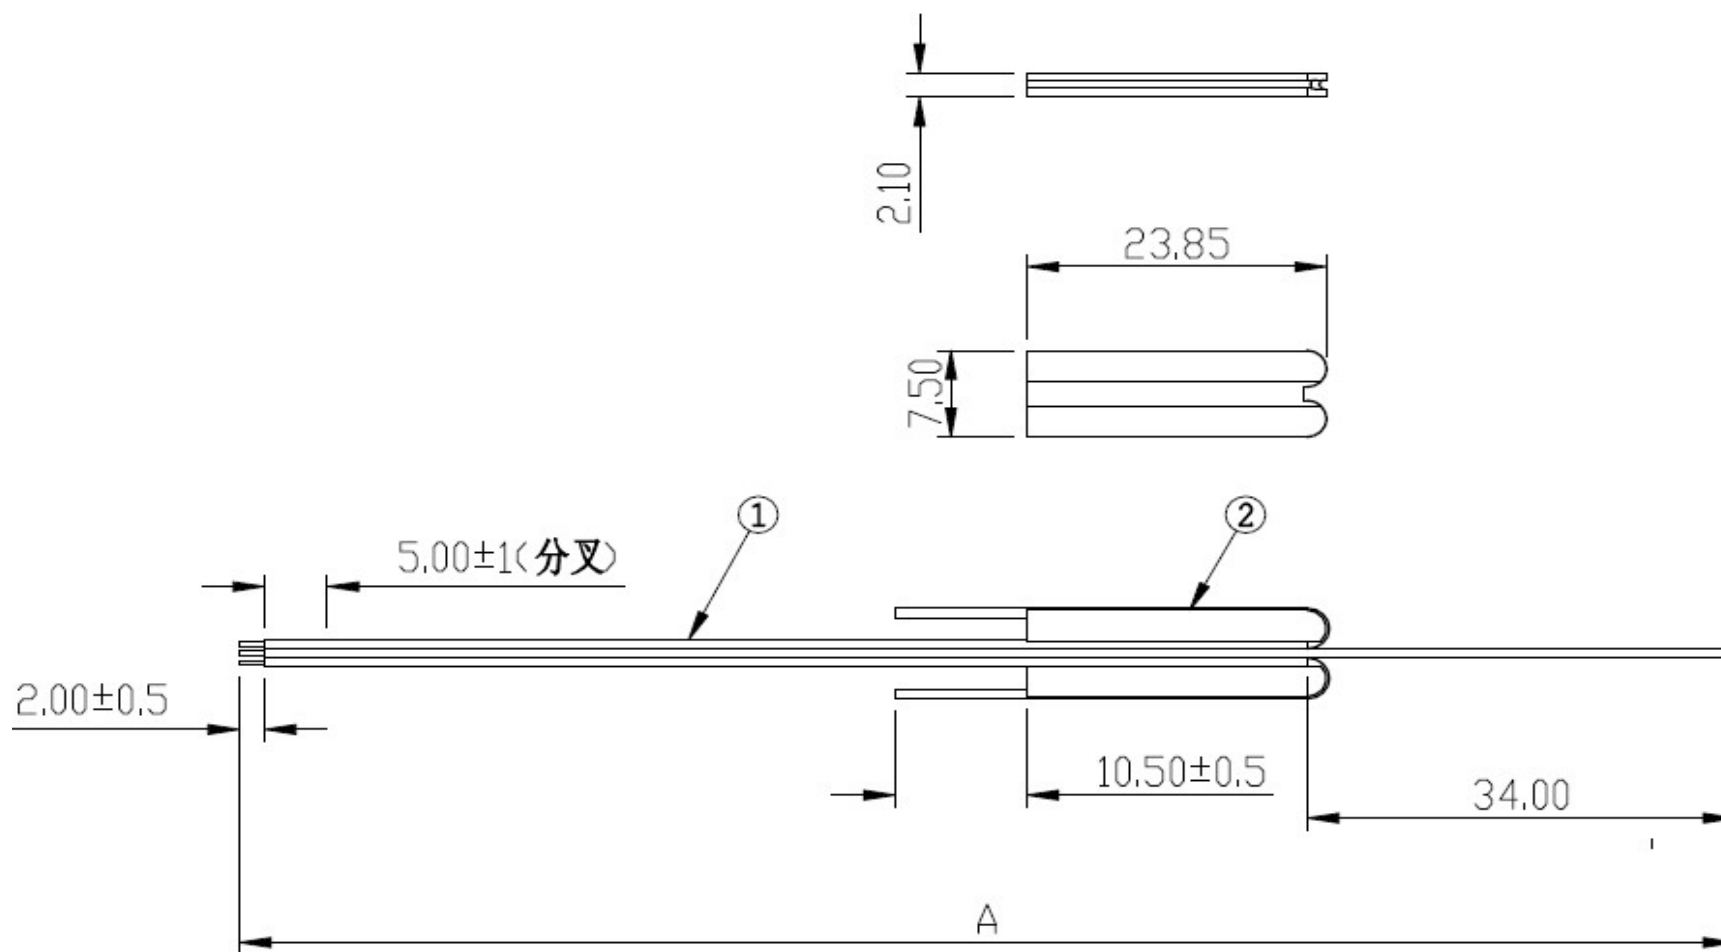

Model: LS6331 Base Bluetooth Antenna

Antenna description:

This printed F antenna is optimized and used in the Base unit. This antenna is directly soldered to the Bluetooth RF output in the main PCB.

Model Number	Description
LS6331 BS BT ANT	2.4GHz Printed F Antenna

Specification:




Operation Frequency Range	2402 to 2480 MHz
Maximum Gain	0 dBi
Type	Printed F Antenna
Operation bandwidth	90MHz
Nominal Impedance	~50 ohms
Manufacturer	Vtech Telecommunications Ltd
Manufacturer address	23/F, Tai Ping Industrial Centre, Blk1, 57 Ting Kok Road, Tai Po, Hong Kong
Model number	ANT-LS6331-F-BT-0

*NOTE: Frequency and Orientation with maximum Antenna Gain.

Frequency: 2440MHz

	Vertical	Horizontal
Antenna Gain (dBi)	-10.18	0

LS6331 BS BT Radiation Pattern_XY Plane

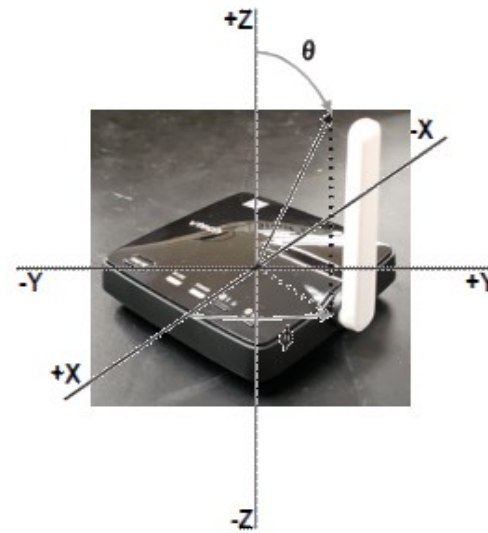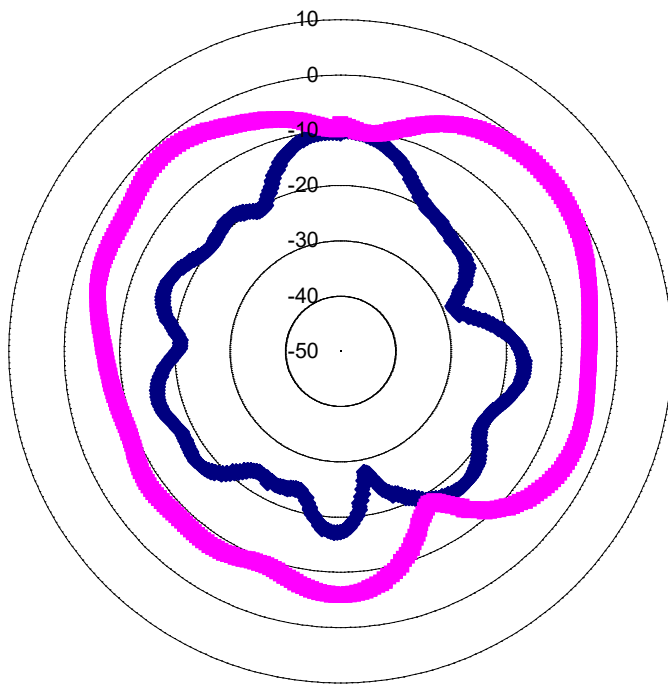

LS6331 BS BT Antenna Dimensions in mm

