


BS2632 BT ANT SPEC

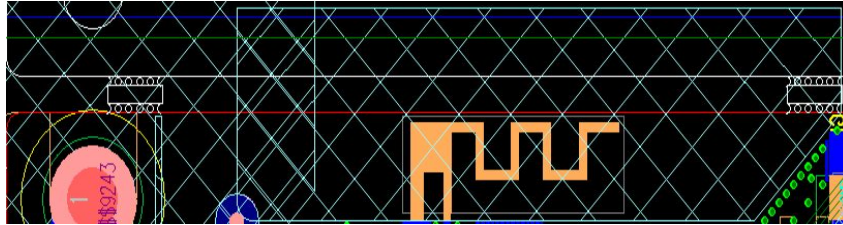

Type: PCB On Board ANT

Length: 14.2mm


Width: 5.4mm

Technology: FR4

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China


BT ANT SWR & Return Loss (2.4G)

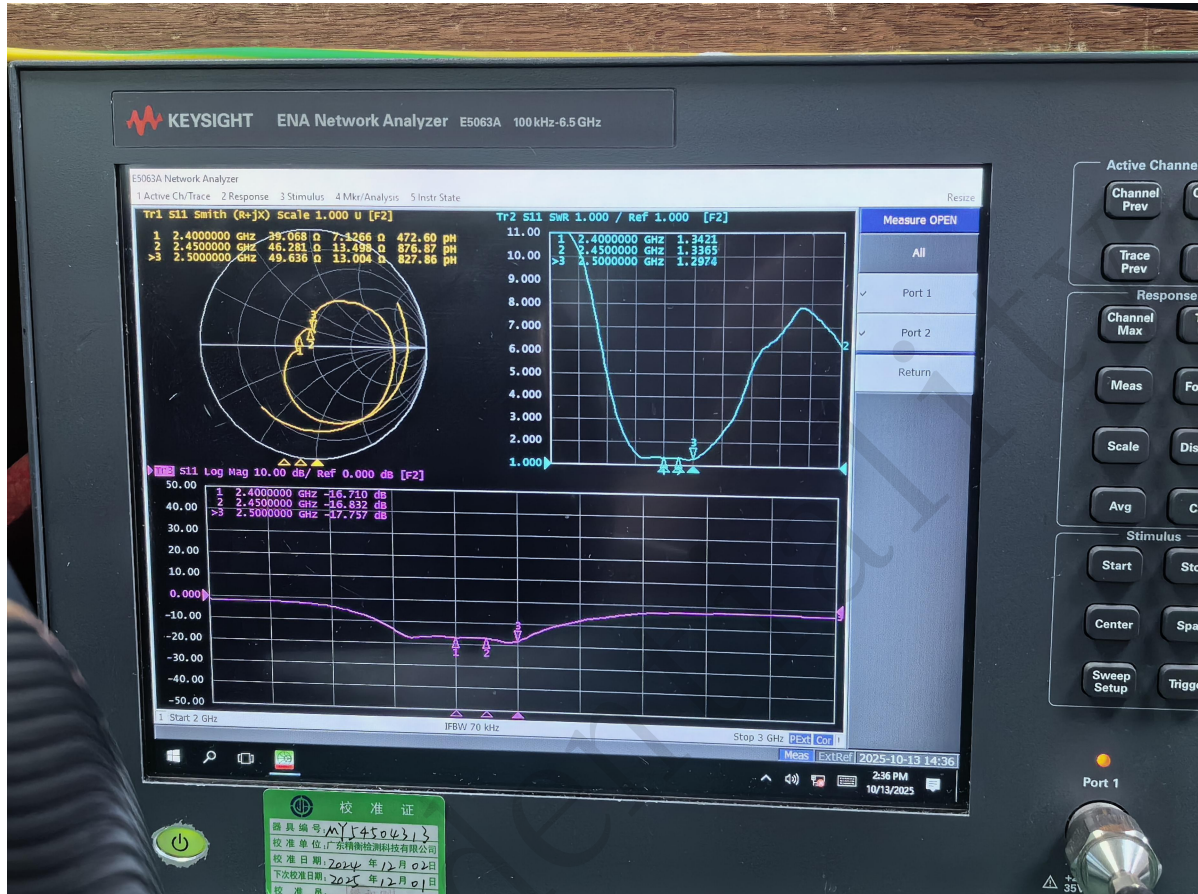


BT Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	36.98	2.92
2410 MHz	37.62	3.04
2420 MHz	38.36	3.20
2430 MHz	39.66	3.31
2440 MHz	40.40	3.38
2450 MHz	40.84	3.45
2460 MHz	40.58	3.34
2470 MHz	39.49	3.21
2480 MHz	39.21	3.16
2490 MHz	38.56	3.02
2500 MHz	37.66	2.93

frequency=2450MHz, X-Z Plane

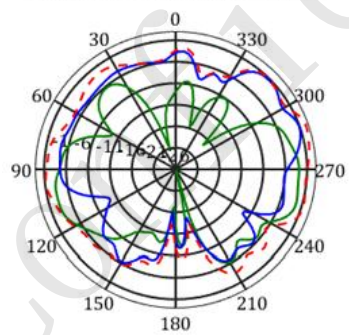

frequency=2450MHz, Y-Z Plane

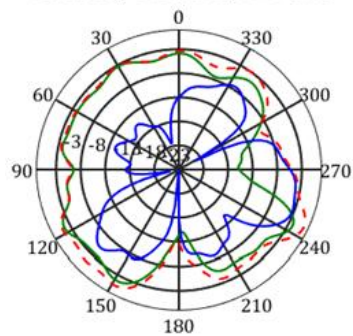

frequency=2450MHz, X-Y Plane

