


PA2629 BT ANT SPEC

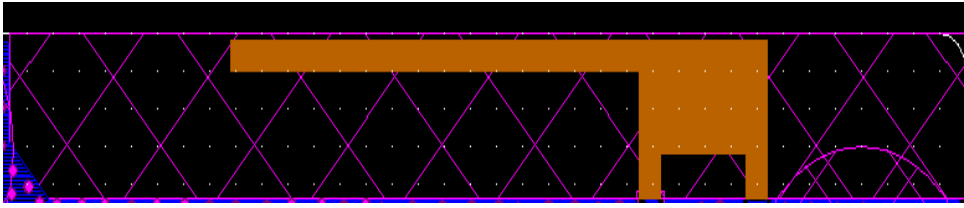

Type: PCB On Board ANT

Length: 20.5mm

Width: 4.7mm

Technology: FR4

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China


BT ANT SWR & Return Loss (2.4G)




BT Efficiency & Gain

Frequency (MHz)	Efficiency (%)	Gain (dBi)
2400 MHz	35.59	1.46
2410 MHz	36.61	1.54
2420 MHz	37.72	1.49
2430 MHz	37.53	1.65
2440 MHz	39.01	1.78
2450 MHz	39.75	1.83
2460 MHz	38.42	1.79
2470 MHz	37.41	1.62
2480 MHz	37.38	1.64
2490 MHz	36.69	1.56
2500 MHz	35.42	1.47

frequency=2450MHz, X-Z Plane

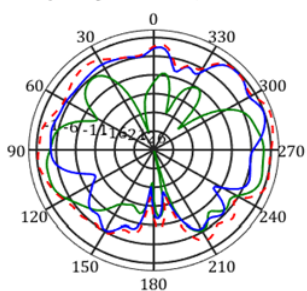

frequency=2450MHz, Y-Z Plane



frequency=2450MHz, X-Y Plane

