


## SB2636B BT ANT SPEC

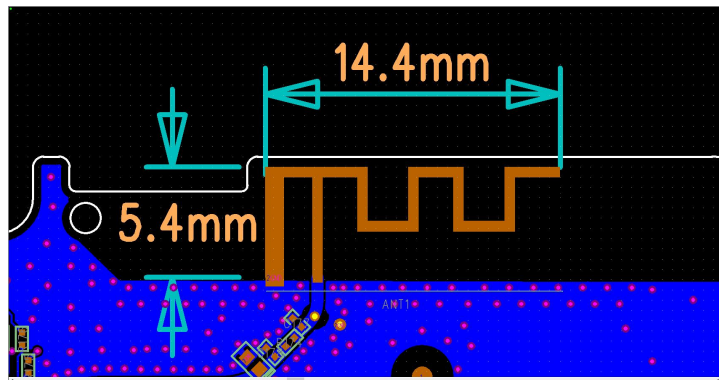

Type: PCB ANT

Length: 14.4mm

Width: 5.4mm

Technology: FR4, Electrolytic copper

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,  
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

## BT ANT SWR & Return Loss(2.4G)



## BT Efficiency & Gain

| Frequency(MHz) | Efficiency(%) | Gain(dBi) |
|----------------|---------------|-----------|
| 2400           | 40.58         | 1.86      |
| 2410           | 41.12         | 1.97      |
| 2420           | 41.78         | 2.11      |
| 2430           | 43.57         | 2.28      |
| 2440           | 43.82         | 2.33      |
| 2450           | 44.94         | 2.45      |
| 2460           | 44.58         | 2.38      |
| 2470           | 43.49         | 2.23      |
| 2480           | 42.98         | 2.16      |
| 2490           | 42.56         | 2.04      |
| 2500           | 41.66         | 1.96      |

天线辐射方向图  
Antenna Radiation Pattern

