


SR&SL ANT SPEC

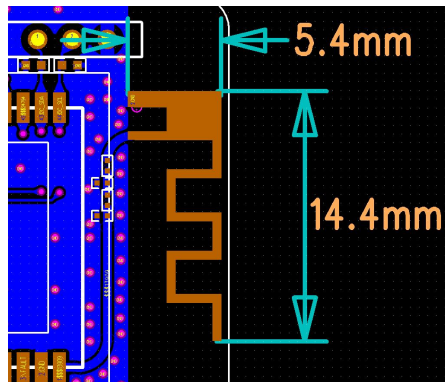

Type: PCB ANT

Length: 14.4mm Width: 5.4mm


Technology: FR4, Electrolytic copper

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,

Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

BT ANT SWR & Return Loss(2.4G)

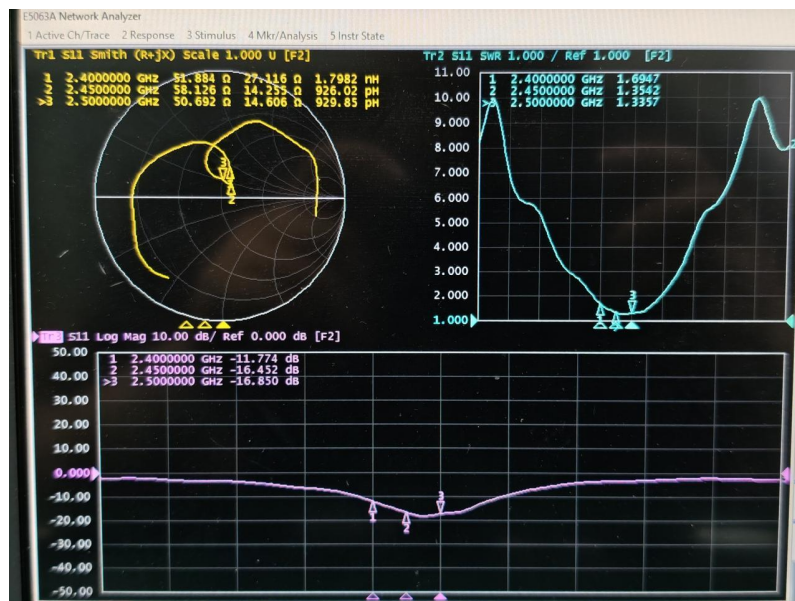

BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400 MHz	36.63	1.12
2410 MHz	37.17	1.19
2420 MHz	37.51	1.22
2430 MHz	37.76	1.29
2440 MHz	40.05	1.49
2450 MHz	40.19	1.52
2460 MHz	40.43	1.61
2470 MHz	40.31	1.58
2480 MHz	38.40	1.41
2490 MHz	37.58	1.36
2500 MHz	37.40	1.33

