


SW ANT SPEC

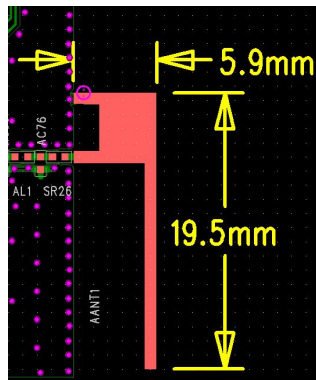

Type: PCB ANT

Length: 19.5mm Width: 5.9mm


Technology: FR4, Electrolytic copper

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,

Shiyan Town, Baoan District, Shenzhen City, Guangdong, China

BT ANT SWR & Return Loss(2.4G)

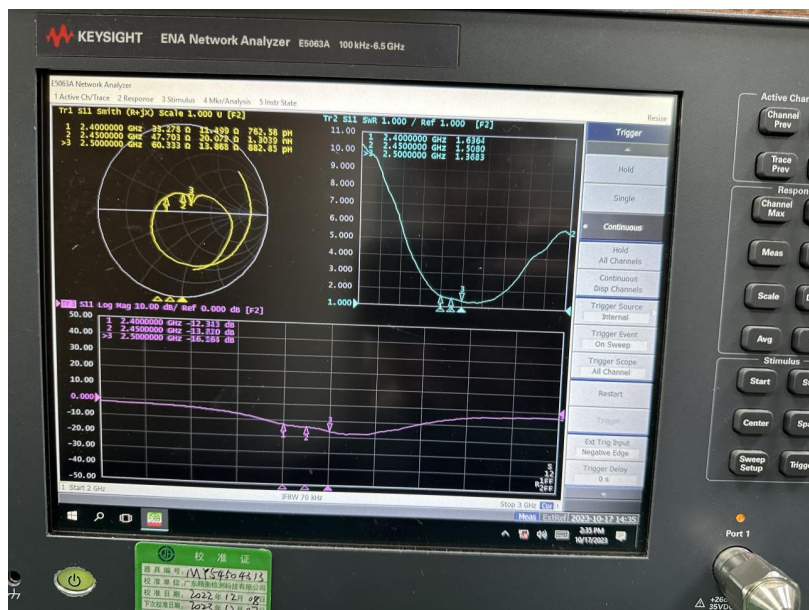

BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400 MHz	39.53	1.46
2410 MHz	39.72	1.48
2420 MHz	39.67	1.52
2430 MHz	39.55	1.60
2440 MHz	39.72	1.59
2450 MHz	40.22	1.65
2460 MHz	39.61	1.58
2470 MHz	39.65	1.55
2480 MHz	39.57	1.49
2490 MHz	38.79	1.41
2500 MHz	38.51	1.36

