


Wt2625 BT ANT SPEC

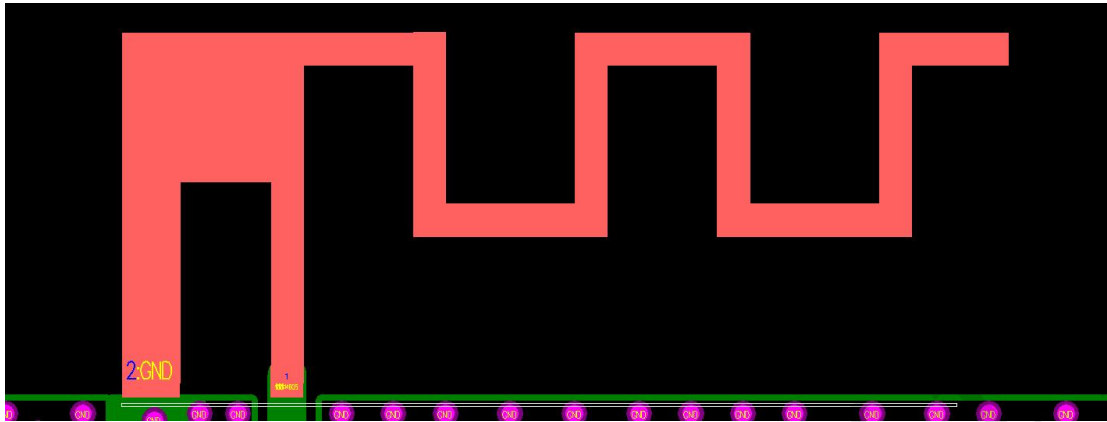

Type: PCB On Board ANT

Length: 13.7mm

Width: 5.7mm

Technology: FR4

Manufacturer of Antenna: SHENZHEN FENDA TECHNOLOGY CO., LTD.

Address of antenna manufacturer: Fenda Hi-Tech Park, Zhoushi Road,
Shiyan Town, Baoan District, Shenzhen City, Guangdong, China


BT ANT SWR & Return Loss(2.4G)




BT Efficiency & Gain

Frequency(MHz)	Efficiency(%)	Gain(dBi)
2400	41.23	2.15
2410	42.77	2.19
2420	43.22	2.24
2430	44.11	2.30
2440	44.62	2.38
2450	46.84	2.45
2460	45.93	2.40
2470	44.70	2.25
2480	43.88	2.19
2490	43.15	2.05
2500	42.18	1.98

frequency=2450MHz, X-Z Plane



frequency=2450MHz, Y-Z Plane

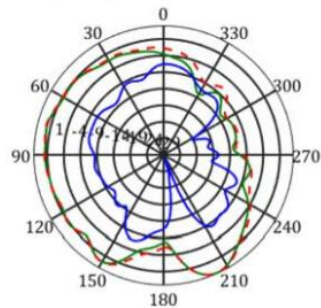

frequency=2450MHz, X-Y Plane

