

DC POWER CEILING FAN REMOTE CONTROL MANUAL

LEARNING PROCESS

NOTE: The Hand Held Remote Control System is equipped with a learning frequency function which has code combinations to prevent potential interference from other remote units.

Step: 1 Open the remote battery cover and install DC12V battery.

Step: 2 Within 30 seconds of turning the Receivers AC power ON.

Step: 3 Press and hold remote  for over 5 seconds, once the receiver has detected the frequency, the receiver will make sound, Bi Bi, twice. This will indicate the receiver has learned the frequency that was previously selected on the transmitter.


◆ (you need to perform this step when replace blade or learning variable speed drive)

Step: 4 Fan setting : Within 30 seconds of turning the Receivers AC power ON, Press and hold remote “” button about 5~15 seconds, will hear 3 Bi Bi sound, withir 60 seconds will hear 3 Bi Bi sound means setting is completed.

NOTE: After the AC power is on, do not press any other button on the transmitter before setting learning. Doing so will cause the procedure to fail.

After completing the steps above, you should be able to operate the ceiling fan and light. If the fan is not responding to the transmitter, please turn the power off to the receiver. And repeat step 1 and 2.

NOTE: Remove the battery if not used for long periods of time to prevent damage to the hand held remote.

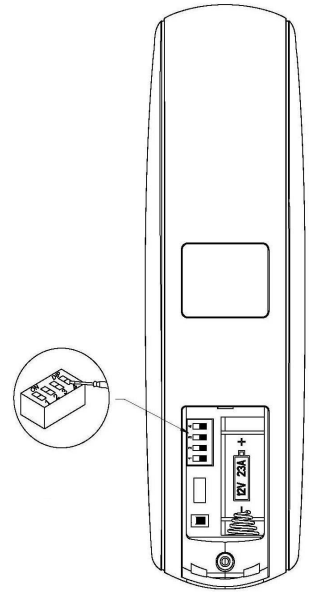

FUNCTIONS OF TRANSMITTER

1.  : To turn the fan off.

2.  : Press this button to increasing fan speed and LED indicator would be on the position of fan speed. (1~6 speed)

If press this button when fan is off, fan speed memory will changed for increasing one speed.

Example : If fan speed is on 1st , press  to turn off fan and then press . Next time fan turn on 2nd speed.

3.  : Press this button to decreasing fan speed and LED indicator would be on the position of fan speed.(1~6 speed)

If press this button when fan is off, fan speed memory will changed for decreasing one speed.

Example : If fan speed is on 6th , press  to turn off fan and then press . Next time fan turn on 5th speed.


4.  : To set fan wind direction up or down.

5.  : “NATURAL FLOW”, press the button for set fan speed change automatically. If fan speed is on 1st, 2nd, or 3rd, press this button for low fan speed changing automatically. If fan speed is on 4th, 5th, or 6th, press this button for high fan speed changing automatically.

6.  : To turn on and turn off the light.

7. When pressing remote button, the LED indicator on position 1 would be on. If you press remote button and LED indicator would not be on, you should change new DC12V battery .

8. When pressing remote button, the receiver would make sound one time for indicating of getting signal from remote well.

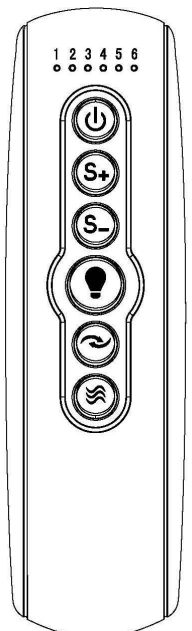

TR180A

To assure continued FCC compliance:

FEDERAL COMMUNICATIONS COMMISSION INTERFERENCE STATEMENT

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

--Reorient or relocate the receiving antenna. --Increase the separation between the equipment and receiver. --Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. --Consult the dealer or an experienced radio/TV technician for help.

CAUTION:

To assure continued FCC compliance:

Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the equipment.

FCC ID : KUJCE10603

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.