



ADVANCED  
COMPLIANCE LABORATORY

6 Randolph Way  
Hillsborough, NJ 08876  
Tel: (732) 560-9010  
Fax: (732) 560-9173

## ELECTROMAGNETIC EMISSION COMPLIANCE REPORT

of

DOOR CHIME TRANSMITTER

MODEL: 0713

FCC ID: L5C0713

OCTOBER 17, 2000

This report concerns (check one): Original grant ☒ Class II change ☐  
Equipment type: Low Power Intentional Radiator

Deferred grant requested per 47 CF 0.457(d)(1)(ii)? yes ☐ no ☒  
If yes, defer until: \_\_\_\_\_ (date)  
Company agrees to notify the Commission by \_\_\_\_\_ (date)  
of the intended date of announcement of the product so that the grant can be  
issued on that date.

Transition Rules Request per 15.37? yes ☐ no ☒  
If no, assumed Part 15, Subpart B for unintentional radiators - the new 47 CFR  
[10-1-90 Edition] provision.

Report prepared for: **ANSEN ELECTRONICS COMPANY**  
Report prepared by: Advanced Compliance Lab  
Report number: **0048-2K0920-02(Tx)**



The test result in this report IS supported and covered by the NVLAP accreditation

## Table of Contents

|  |           |
|--|-----------|
| Report Cover Page .....                  | 1         |
| Table of Contents.....                   | 2         |
| Figures.....                             | 3         |
| <b>1. GENERAL INFORMATION.....</b>       | <b>4</b>  |
| 1.1 Verification of Compliance.....      | 4         |
| 1.2 Equipment Modifications.....         | 5         |
| 1.3 Product Information.....             | 6         |
| 1.4 Test Methodology .....               | 6         |
| 1.5 Test Facility.....                   | 6         |
| 1.6 Test Equipment.....                  | 6         |
| 1.7 Statement of the Document Use.....   | 7         |
| <b>2. PRODUCT LABELING.....</b>          | <b>8</b>  |
| <b>3. SYSTEM TEST CONFIGURATION.....</b> | <b>9</b>  |
| 3.1 Justification.....                   | 9         |
| 3.2 Special Accessories.....             | 9         |
| 3.3 Configuration of Tested System.....  | 9         |
| <b>4. SYSTEM SCHEMATICS .....</b>        | <b>13</b> |
| <b>5. RADIATED EMISSION DATA .....</b>   | <b>14</b> |
| 5.1 Field Strength Calculation .....     | 14        |
| 5.2 Test Methods and Conditions .....    | 14        |
| 5.3 Test Data.....                       | 14        |
| 5.4 Occupied Bandwidth.....              | 16        |
| <b>6. PHOTOS OF TESTED EUT .....</b>     | <b>17</b> |

## Figures

|   |           |
|---|-----------|
| <b>Figure 2.1 FCC ID Label .....</b>                        | <b>8</b>  |
| <b>Figure 2.2 Location of Label on Back of the EUT.....</b> | <b>8</b>  |
| <b>Figure 3.1 Radiated Test Setup, X Axis.....</b>          | <b>10</b> |
| <b>Figure 3.2 Radiated Test Setup, Y Axis.....</b>          | <b>11</b> |
| <b>Figure 3.3 Radiated Test Setup, Z Axis .....</b>         | <b>12</b> |
| <b>Figure 4.1 EUT Schematics .....</b>                      | <b>13</b> |
| <b>Figure 6.1 Occupied Bandwidth .....</b>                  | <b>18</b> |
| <b>Figure 6.2 Front View.....</b>                           | <b>19</b> |
| <b>Figure 6.3 Rear View .....</b>                           | <b>20</b> |
| <b>Figure 6.4 Inside View .....</b>                         | <b>21</b> |
| <b>Figure 6.5 Component Side .....</b>                      | <b>22</b> |
| <b>Figure 6.6 Foil Side .....</b>                           | <b>23</b> |
| <b>Figure 6.7 Pulse Train Timing Plot .....</b>             | <b>24</b> |
| <b>Figure 6.8 Block Diagram.....</b>                        | <b>25</b> |

# 1. GENERAL INFORMATION


## 1.1 Verification of Compliance

EUT: DOOR CHIME TRANSMITTER  
 Model: 0713  
 Applicant: ANSEN ELECTRONICS COMPANY  
 Test Type: FCC Part 15C CERTIFICATION  
 Result: PASS  
 Tested by: ADVANCED COMPLIANCE LABORATORY  
 Test Date: OCTOBER 09, 2000  
 Report Number: 0048-2K0920-02(Tx)

The above equipment was tested by Advanced Compliance Laboratory, Inc. for compliance with the requirement set forth in the FCC rules and regulations Part 15, subpart C. This said equipment in the configuration described in the report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

The estimated uncertainty of the test result is given as following. The method of uncertainty calculation is provided in Advanced Compliance Lab. Doc. No. 0048-01-01.

|                                 | Prob. Dist. | Uncertainty(dB) | Uncertainty(dB) | Uncertainty(dB) |
|---------------------------------|-------------|-----------------|-----------------|-----------------|
|                                 |             | 30-1000MHz      | 1-6.5GHz        | Conducted       |
| Combined Std. Uncertainty $u_c$ | norm.       | $\pm 2.36$      | $\pm 2.99$      | $\pm 1.83$      |



Wei Li  
 Lab Manager  
 Advanced Compliance Lab

Date: October 17, 2000

## **1.2 Equipment Modifications**

N/A

### 1.3 Product Information

#### System Configuration

| ITEM            | DESCRIPTION                                   | FCC ID  | CABLE |
|-----------------|---|---------|-------|
| Product         | DOOR CHIME<br>TRANSMITTER 0713 <sup>(1)</sup> | L5C0713 |       |
| Housing         | PLASTICS                                      |         |       |
| Power Supply    | 12V DC  |         |       |
| Clock/OSC Freq. | 311.2 MHz                                     |         |       |
| Receiver        | 0712 and 0714<br>(FCC Part15 Class B DoC)     |         |       |

(1) EUT submitted for grant.

### 1.4 Test Methodology

Radiated tests were performed according to the procedures in ANSI C63.4-1992 at an antenna to EUT distance of 3 meters.

### 1.5 Test Facility

The open area test site and conducted measurement facility used to collect the radiated and conducted data are located at 50 Randolph Road, Somerset, New Jersey. This site has been accepted by FCC to perform measurements under Part 15 or 18 in a letter dated May 19, 1997 (Refer to: 31040/PRV 1300F2). The NVLAP Lab code for accreditation of FCC EMC Test Method is: 200101-0.

### 1.6 Test Equipment


| Manufacture     | Model   | Serial No. | Description                           | Last Cal<br>dd/mm/yy | Cal<br>Due<br>dd/mm/yy |
|-----------------|---------|------------|---------------------------------------|----------------------|------------------------|
| Hewlett-Packard | HP8546A | 3625A00341 | EMI Receiver                          | 15/12/99             | 15/12/00               |
| Fischer Custom  | LISN-2  | 900-4-008  | Line Impedance Stabilization Networks | 20/05/00             | 20/05/01               |
| Fischer Custom  | LISN-2  | 900-4-009  | Line Impedance Stabilization Networks | 26/04/00             | 26/04/01               |
| EMCO            | 3115    | 4945       | Double Ridge Guide Horn Antenna       | 05/12/99             | 05/12/00               |
| EMCO            | 3104C   | 4396       | 30-200MHz Bi-conical Antenna          | 02/05/00             | 02/05/01               |
| EMCO            | 3146    | 3350       | 200-1000MHz Log-Periodic Antenna      | 02/05/00             | 02/05/01               |

All Test Equipment Used are Calibrated Traceable to NIST Standards.


### **1.7 Statement for the Document Use**

This report shall not be reproduced except in full, without the written approval of the laboratory. And this report must not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. Government.

## 2. PRODUCT LABELING

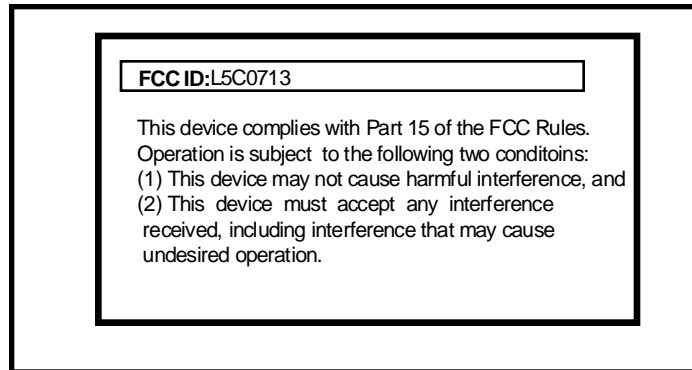

**Figure 2.1 FCC ID Label**

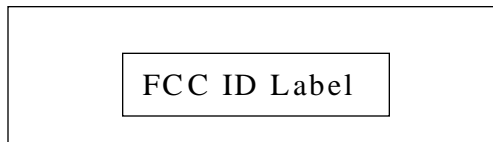

**Figure 2.2 Location of label on the Rear of EUT**



### **3. SYSTEM TEST CONFIGURATION**

#### **3.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it). And its antenna was built on board permanently. Fresh batteries are used during the test in order to generate maximum emission from EUT. Transmission will immediately stop when switch button is released.

Testing was performed in “ON” mode. It is the worst case. ( Chime channel settings won’t affect the emission strength)

#### **3.2 Special Accessories**

N/A

#### **3.3 Configuration of Tested System**

Figure 3.1 and Figure 3.3 illustrate this system, which is tested standing along.



**Figure 3.1 Radiated Test Setup, X Axis**




**Figure 3.2 Radiated Test Setup, Y Axis**



**Figure 3.3 Radiated Test Setup, Z Axis**

## **4. SYSTEM SCHEMATICS**

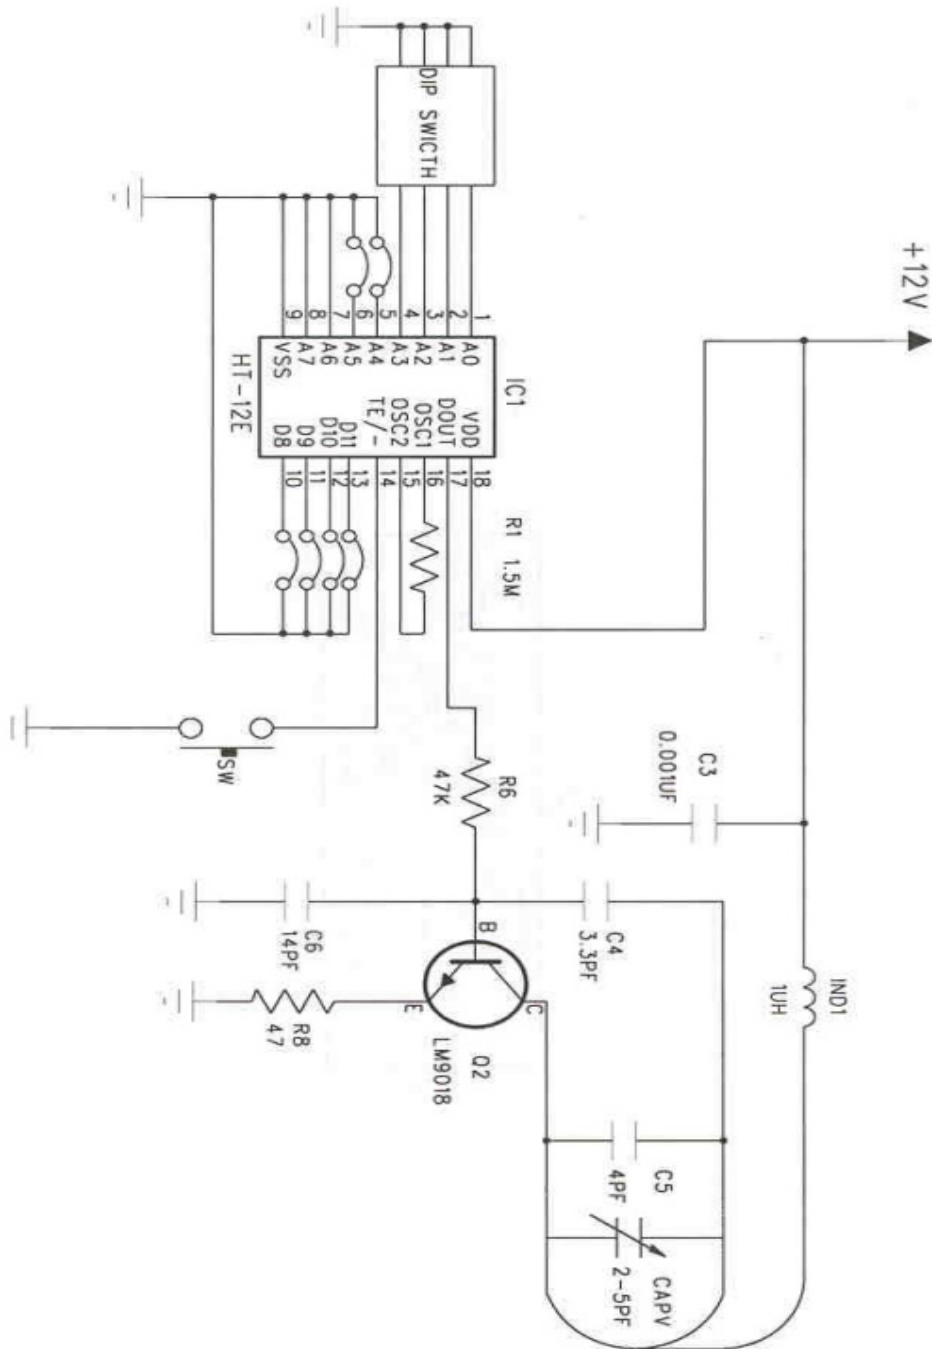

**Figure 4.1 System Schematics**

## 5. RADIATED EMISSION DATA

### 5.1 Field Strength Calculation

The corrected field strength is automatically calculated by EMI Receiver using following:

$$FS = RA - AF - CF - AG$$

where FS: Corrected Field Strength in dB $\mu$ V/m

RA: Amplitude of EMI Receiver before correction in dB $\mu$ V

AF: Antenna Factor in dB/m

CF: Cable Attenuation Factor in dB

AG: Built-in Preamplifier Gain in dB (Stored in receiver as part of the calibration data)

The pulse train timing plot ( w/ max. occupied signal energy) is showed in **Figure 6.7**. The maximum setting for high voltage is

$$(60+10) \times 0.4 / 100 = 0.28$$

The maximum average field strength should be **0.28** of the peak field strength measured. So we use peak value **minus 11.1 dB** as calculated maximum average field strength

### 5.2 Test Methods and Conditions

The EUT exercise program was loaded during the radiated emission test. The initial step in collecting radiated data is a EMI Receiver scan of the measurement range 30MHz - 5GHz using peak detector. IF bandwidth is 120kHz and video bandwidth is 300kHz for measuring 30MHz-1GHz. Both bandwidths are 1MHz for above 1GHz measurement.

### 5.3 Test Data

The following data lists the significant emission frequencies, polarity and position, peak reading of the EMI Receiver, calculated average reading, the FCC limit, and the difference between the peak reading and the limit. Explanation of the correction and calculation are given in section 5.1.

Test Personnel:

Tester Signature: 

Date: 10-17-2000

Typed/Printed Name: David Tu

#### Radiated Test Data

| Frequency | Polarity | Height | Azimuth | Peak | Calculated | Class B(1) | Difference |
|-----------|----------|--------|---------|------|------------|------------|------------|
|-----------|----------|--------|---------|------|------------|------------|------------|

| (MHz)  | [H, V]<br>Position<br>[X,Y,X] | (m) | (Degree) | Reading<br>(dBμV/m) | Average<br>Reading<br>(dBμV/m) | 3m Limit<br>(dBμV/m) | from limit<br>(dB) |
|--------|-------------------------------|-----|----------|---------------------|--------------------------------|----------------------|--------------------|
| 311.2  | XH                            | 1.0 | 110      | 84.6                | 73.5                           | 75.4 (2)             | -1.9               |
| 622.5  | XH                            | 1.2 | 225      | 64.9                | 53.8                           | 55.4 (3)             | -1.6               |
| 933.8  | XH                            | 1.3 | 150      | 64.5                | 53.4                           | 55.4 (3)             | -2.0               |
| 1245.0 | XH                            | 1.0 | 250      | 55.8                | 44.7                           | 55.4 (3)             | -10.7              |
| 311.2  | XV                            | 1.9 | 105      | 80.6                | 69.5                           | 75.4                 | -5.9               |
| 622.5  | XV                            | 1.8 | 020      | 58.9                | 47.8                           | 55.4                 | -7.6               |
| 933.8  | XV                            | 1.5 | 180      | 54.0                | 42.9                           | 55.4                 | -12.5              |
| 1245.0 | XV                            | 2.5 | 110      | 59.4                | 48.3                           | 55.4                 | -7.1               |
| 311.2  | YH                            | 1.0 | 280      | 78.8                | 67.7                           | 75.4                 | -7.7               |
| 622.5  | YH                            | 1.2 | 265      | 64.3                | 53.2                           | 55.4                 | -2.2               |
| 933.8  | YH                            | 1.3 | 265      | 64.9                | 53.8                           | 55.4                 | -1.6               |
| 1245.0 | YH                            | 1.0 | 225      | 55.6                | 44.5                           | 55.4                 | -10.9              |
| 311.2  | YV                            | 1.9 | 175      | 82.4                | 71.3                           | 75.4                 | -4.1               |
| 622.5  | YV                            | 2.2 | 180      | 58.3                | 47.2                           | 55.4                 | -8.2               |
| 933.8  | YV                            | 1.7 | 180      | 63.7                | 52.6                           | 55.4                 | -2.8               |
| 1245.0 | YV                            | 1.0 | 090      | 54.3                | 43.2                           | 55.4                 | -12.2              |
| 311.2  | ZH                            | 1.0 | 180      | 83.4                | 72.3                           | 75.4                 | -3.1               |
| 1245.0 | ZH                            | 1.0 | 120      | 64.4                | 53.3                           | 55.4                 | -2.1               |
| 311.2  | ZV                            | 1.7 | 090      | 81.9                | 70.8                           | 75.4                 | -4.6               |
| 622.5  | ZV                            | 1.0 | 180      | 64.6                | 53.5                           | 55.4                 | -1.9               |
| 933.8  | ZV                            | 1.0 | 180      | 65.2                | 54.1                           | 55.4                 | -1.3               |
| 1245.0 | ZV                            | 1.0 | 270      | 49.6                | 38.5                           | 55.4                 | -16.9              |

- (1) See Figure 3.1, 3.2 and 3.3 for definition of position X-1, Y-2, Z-3.  
(2) Fundamental limit is 3750-12500 microvolts/meter linear interpolations (15.231b).  
(3) Spurious limit is 375-1250 microvolts/meter linear interpolations.(15.231 b)

## 5.4 Occupied Bandwidth

The bandwidth of the emission shall be no wider than 0.25% of the center frequency, in this case, 0.775 MHz. Bandwidth is determined at the points 20dB down from the modulated carrier. Fig.6.1 shows the occupied bandwidth plot.



## **6. PHOTOS OF TESTED EUT**

The following photos show the inside details of the EUT.

See Attachments: occupied bandwidth, front.jpg, rear.jpg, inside.jpg, compnt.jpg, foil.jpg, pulse train plot ,block diagram.