

1

2

3

4

REV.	DESCRIPTION	DRAWN/DATE	CHECK/DATE	APPROVED/DATE

A

A

B


B

C


C

D


D

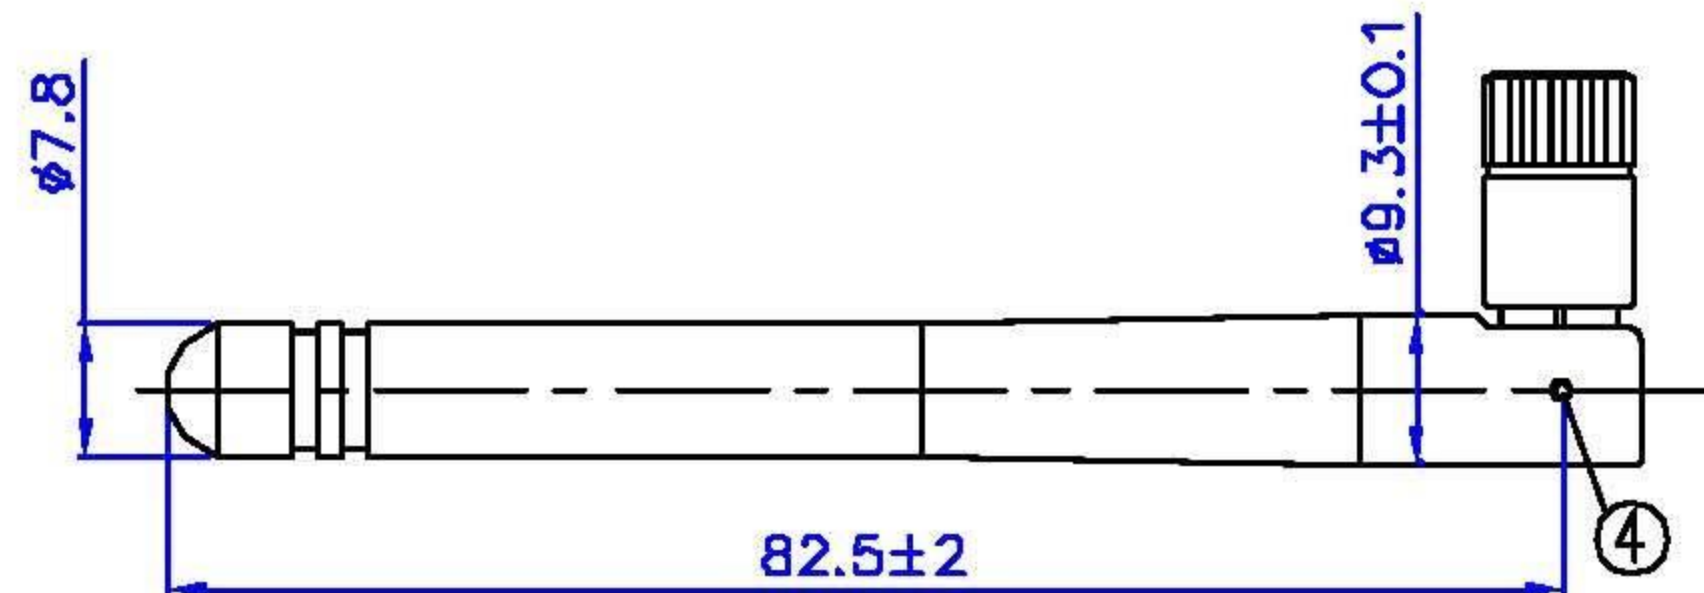

PE BAG
Shrink Line

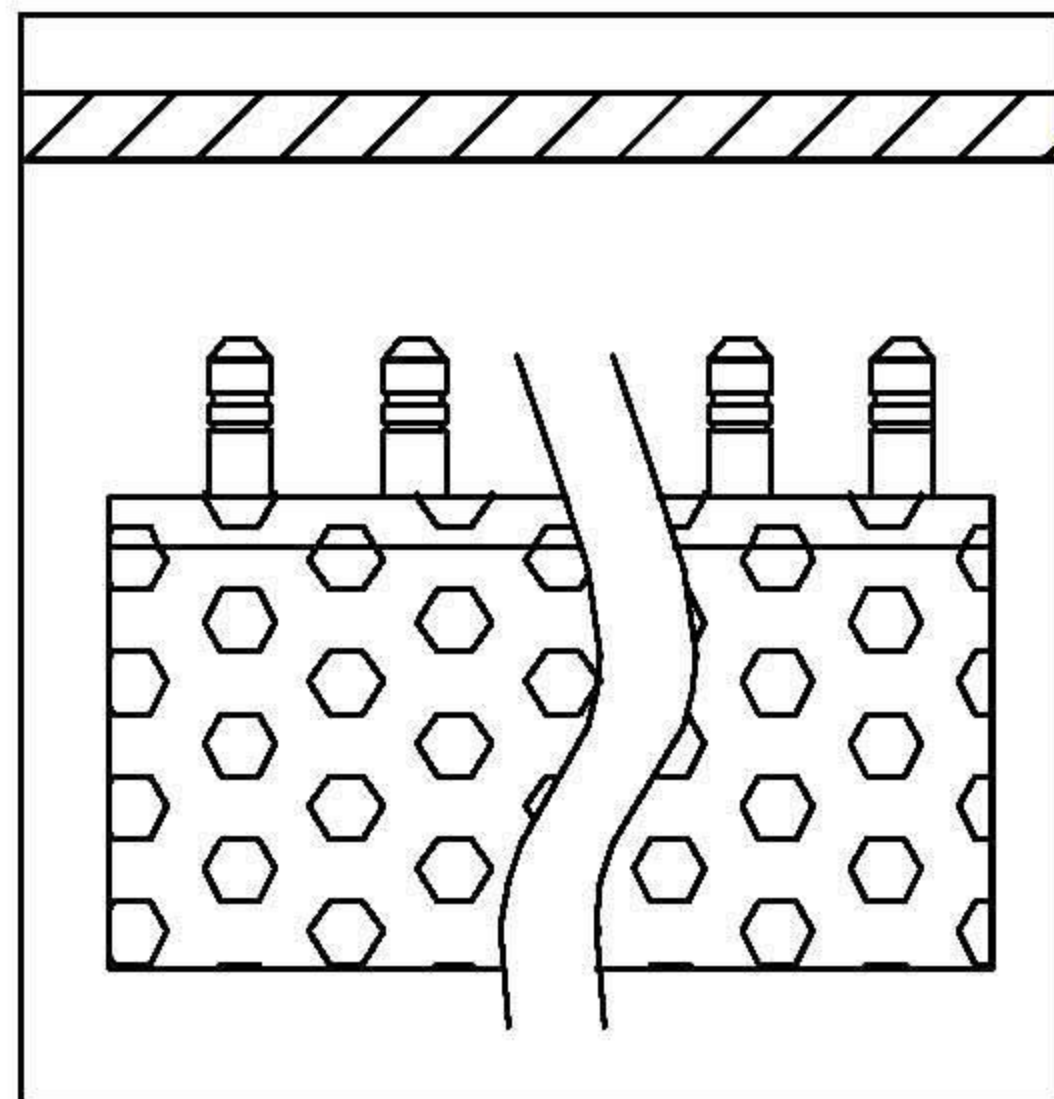

Specification:
Frequency Range: 2.4GHz~2.5GHz
Return Loss:-10dB or less
VSWR:1.92 or less
Gain(peak):1.8dBi

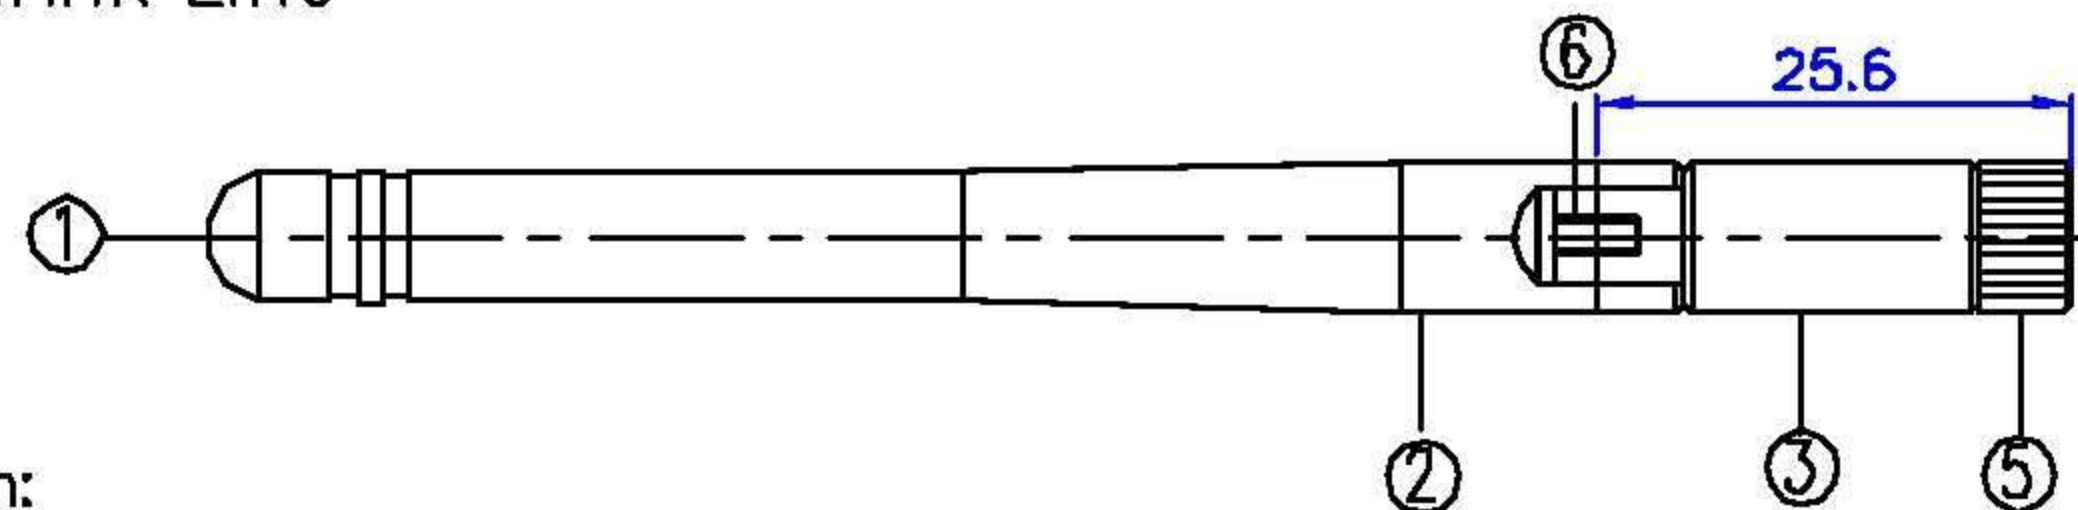

BOM

Packing : 20pcs/bag

6	ANTENNA COVER	TPE(BLACK)	1		
5	ANTENNA BASE	PC(BLACK)	1		
4	ANTENNA BASE	PBT(BLACK)	1		
3	RNET	BRASS(BLACK)	2		
2	CONNECTOR	RP-SMA STR. PLUG	1		
1	CABLE	RG-178 , COAXIAL CABLE(BROWN)	1		
ITEM	ITEM NAME	MATERIAL	FINISH	Q'TY/EA	REMARK

THIS DRAWING IS A CONTROLLED DOCUMENT	
GENERAL TOLERANCE	ANGLE TOLERANCE
X ±0.38	X° ±3.0°
.X ±0.25	.X° ±2.0°
.XX ±0.13	.XX° ±1.5°
.XXX ±0.05	.XXX° ±1.0°

UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS
2. BREAK ALL SHARP EDGES TO 2 MM.
3. BREAK FOR 15°-45° LAST THREADS 45°
4. MACHINE SURFACE ROUGHNESS
5. DIMENSIONS ON COAXIAL CENTERS TO
BE CONCENTRIC WITH 0.2 TIR
6. ALL DIMENSIONS ARE AFTER PLATING

MATERIAL	FINISH
SEE BOM	SEE BOM

DRAWN	DATE
Vivco	08/01/2008
CHECKED	DATE

APPROVED	DATE

UNIT	m/m [INCHES]

CUSTOMER DRAWING

bec Bobbintron Electrical Corp.
www.bobbintron.com

TITLE: RP-SMA PLUG FOR RG 178 ANTENNA

MODEL: - - -

SIGNATURE	DATE	SHEET 1 OF 1	REV.
DWG. Lillian	06/06/13	DWG. NO: V1101-5A3NBTO	-
CHK.			
APP.		PART NO: SA-006-01	

SHEET 1 OF 1
FILE NO: V1101-5A3NBTO-B

1

2

3

4