

Audiovox

SIR - PnP3

Draft manual



JUN. 15, 2004

FCC Warning

THE MANUFACTURER IS NOT RESPONSIBLE FOR ANY RADIO OR TV INTERFERENCE CAUSED BY UNAUTHORIZED MODIFICATIONS TO THIS EQUIPMENT. SUCH MODIFICATIONS COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.


Note

This equipment has been tested and found to comply with Part 15 of the FCC Rules. These rules are designed to provide reasonable protection against harmful interference. This equipment may cause harmful interference to radio communications if it is not installed and used in accordance with these instructions. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be

determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one of more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and Sirius Receiver.
- Connect the equipment into an outlet on a circuit different from that to which the Sirius Receiver is connected
- Consult the dealer or an experienced radio/TV technician for help.

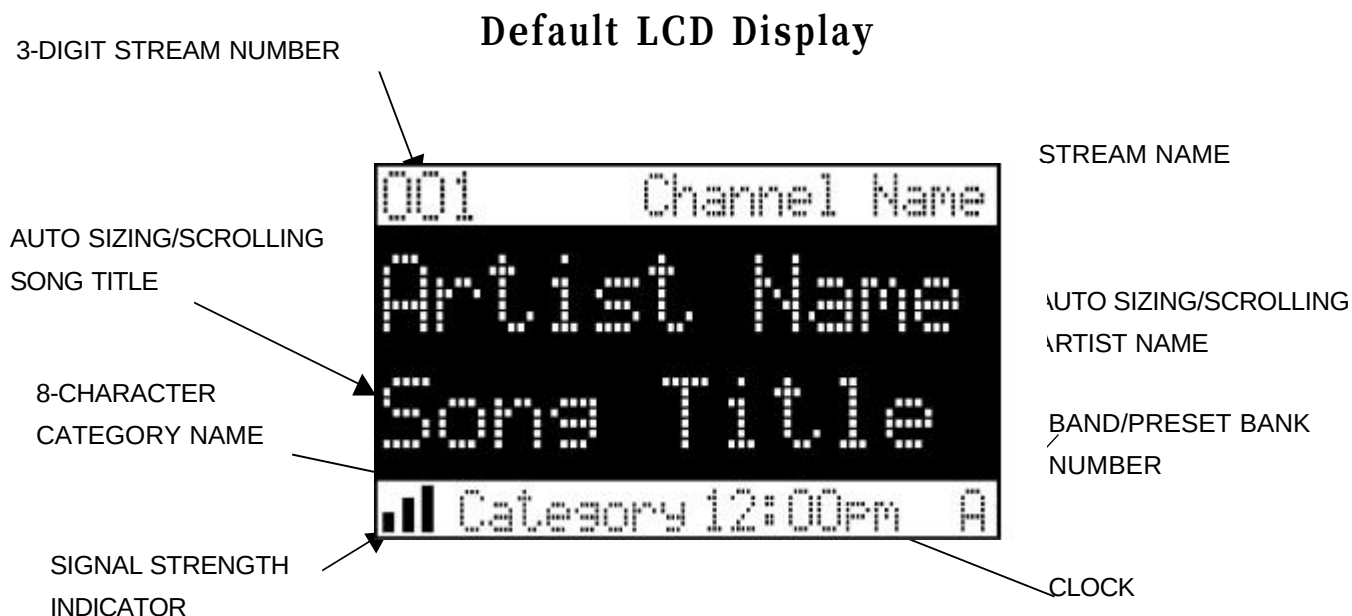

Front Button description

Channel up/down Encoder Knob and Select Button:

The Channel up/down encoder knob is the primary control for navigating through the various lists and option menus available on the unit. In the default mode, the Channel up/down knob provides sequential tuning through the available program streams. Turning Channel knob clockwise is tunes up one stream-per-detent, while turning Channel knob counterclockwise is tunes down one stream-per-detent. When in the list mode, turning knob is scrolls down and up, respectively, through the various menus and lists. The current selection from the list will be highlighted on the display. When the item is highlighted, press the Select Button to enter the selection. Pressing and holding the Select button will tune to the previously selected stream.

Category Buttons:

The Up or Down category buttons allows the user to advance through the stream groups based on content category. By turning Channel knob, the user can then scroll up or down through the streams within that category. Once a choice has been made, it can be entered by pressing the Select Button.

Memory (MEMO) Button (S-SEEK Function):

This feature allows the user to capture and store the current program data information (Stream Name & Number/ Artist & Song title). You can store up to 20 Artist/Song Title combinations. The Shuttle also has the capability to search the current incoming Sirius signal, and thereby alert you if it matches the Artist/Song title stored in Shuttle memory.

Display (DISP) Button:

This button allows the user to choose one of several ways of presenting the Stream Name, Artist and Song title information on the LCD screen.

Menu (MENU) Button:

The MENU Button is used to access Menu Options which displays the user setup menu, plus other feature/ function adjustments.

BAND Button (BAND)/Preset Tune (P. TUNE):

Each momentary press of the BAND Button allows the user to switch between 3 bands of Stream presets (10 presets each A, B and C). Pressing and holding the BAND Button for 2 seconds initiates preset tuning that will display and tune all stored preset streams in sequence. This is indicated by the reverse image of the stream number and band preset number on the display. Pre-set tuning continues until the user decides to terminate this function by pressing and holding the BAND Button for 2 seconds.


Keypad Buttons 0-9:

These buttons are used to directly enter a desired stream number. They are also used when entering and recalling preset stream numbers into memory.

Basic Operation

With the unit properly installed, activated and connected to your home or vehicle audio system, proceed as follows:

1. Press the Power button; the Shuttle turns on and the Sirius logo appears for 2 seconds followed by the default display for the stream and tuning mode in effect prior to turnoff.
2. Turn knob to select and play the desired stream, or use the Category Up/Down buttons to tune and select a desired stream based on genre.

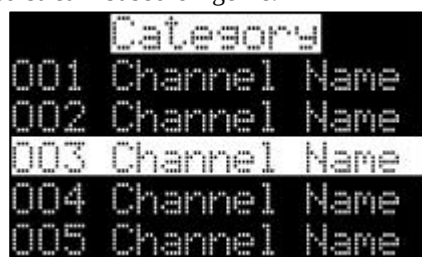



Tuning By Category

When in **Category Tuning Mode**, each momentary press of the Category Up/Down Button(s) advances through the available Genres:

1. Using the Channel knob, select the desired stream.
2. Press the Select button to select that stream.
3. Once the stream has been selected, the unit will revert to the default screen and your selection will be played.

Content Listing Options (Look Ahead)

This feature allows you to view what is playing on other streams without having to change the current stream you are listening to. The content listing options are selected by using the DISP button. When the default screen is displayed on the LCD, pressing and holding the DISP Button will display all the available stream numbers and stream names. The second press of the DISP button will display all currently available artists. The third press of the DISP button will display song titles. While in the Category List menu, pressing the DISP button changes Stream List to Artist List. The available content listing now displays information by the Artist Name.

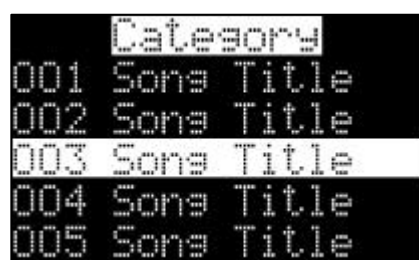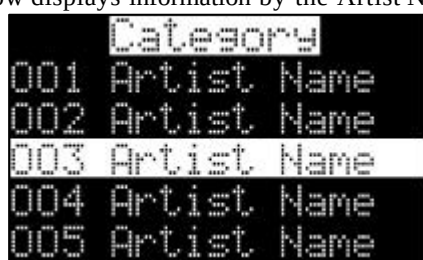


The DISP button is also used during category tuning. Consecutively pressing the DISP button while tuning by category will display the Stream Name, Artist Name or Song Title within the selected category. While the preceding screens are displayed, turning Channel knob allows navigation through the list. When the desired selection is highlighted, press the Select button and your selection will be played.

Direct Tuning

Streams can also be directly accessed by pressing the Select (remote control) button and using the 1-6 number keys to numerically enter the desired stream. Once the desired stream number has been entered, press the Select button again to play.


Setting/Using Stream Preset Buttons

The unit contains 10 preset buttons. There are three banks of preset memory locations offering a total of 30 presets. These banks are designated A, B and C and can be selected using the BAND button. The display in the lower right hand side changes to show the corresponding Preset bank. Each bank will store 10 user-preferred streams. Select the desired stream you wish to save into memory by using the Channel knob, the direct tuning method or the category tuning method. With the desired stream playing, press and hold any of the numbered keypad buttons or remote control buttons (0-9); the corresponding preset number will flash. A confirmation tone is heard, confirming that the preset has been stored. Continue this procedure for storing all desired streams. To retrieve a preset stream, momentarily press and release the number button corresponding to the desired stream.

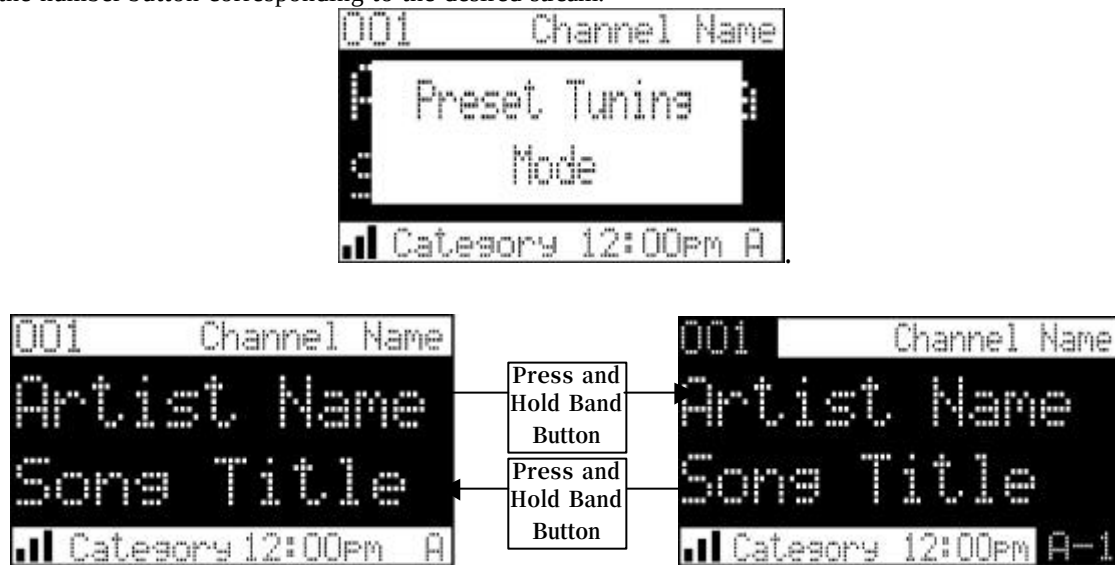

Preset List Mode

To search by list for a preset, press and hold the BAND button to enter Preset Tune mode. When in the Preset Tune Mode, press and hold the DISP button for 2 seconds; this exits normal preset tuning and enters a 6-line menu mode which displays the Preset number (A-1), a single space and the 20-character stream name. While in the Preset List menu, pressing the DISP button once will change to Artist List; a second press of the DISP button changes to Song List. While the contents of the preset listing are displayed, turn Channel knob to navigate through the list. When the desired selection is highlighted, press the Select Button and the stream will be played.

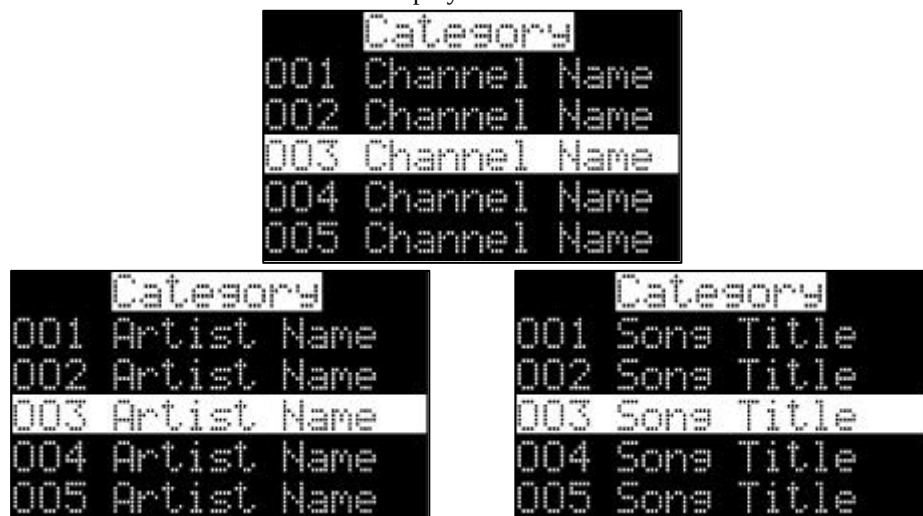

Display Button

Pressing the Display button from the Default display toggles between the artist name/song title screen or large letter format. When the letter size changes, the field will scroll. This feature is useful when viewing the display at a distance.




001 Channel Name
002 Channel Name
003 Channel Name
004 Channel Name
005 Channel Name
006 Channel Name

NOTE: The field will scroll only if the length of the artist or title cannot be viewed in its entirety. Pressing and holding the Display button will enter the stream list mode. While in the Stream List mode, any subsequent press of the DISP button will display program information by Artist Name, Song Title or stream name. Pressing and holding the DISP button will exit the Stream List mode and return to the previously selected tuning/display mode.



001 Artist Name
002 Artist Name
003 Artist Name
004 Artist Name
005 Artist Name
006 Artist Name

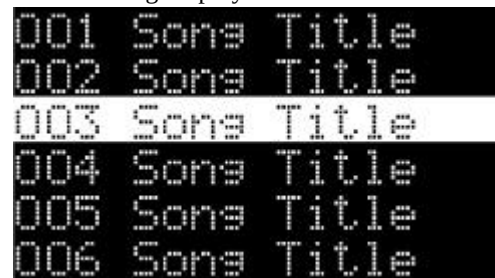

001 Song Title
002 Song Title
003 Song Title
004 Song Title
005 Song Title
006 Song Title

Memory Button (S-Seek Function):

This feature allows the user to capture and store the current program data information (Artist & Song title) with up to 20 listings (20 Artist/Song Title combinations). The unit also has the capability to search the current incoming Sirius signal and alert the user when a saved song is being played.

1. While the Shuttle is in either of the two standard display modes, momentarily pressing and releasing the MEMO button stores the current program data information within the Shuttle's memory. A Memory Stored pop-up screen, followed by **X Used/ Y Empty** will each appear for 1 second.



001 Channel Name
Stored
Category 12:00pm A




001 Channel Name
X Used / Y Empty
Category 12:00pm A

2. By holding down the MEMO button for 3 seconds, the stored memory information (one at a time) is displayed on the LCD screen in page format. Use the Channel knob to scroll through the 30-page listing and view the information. This function allows you to recall information regarding the Artist/Song Title for your own personal review. To return to the default tuning mode press and hold the MEMO button for 3 seconds.



3. Momentarily pressing the Select button while in memory recall mode results in a pop-up screen displaying two selectable options:

Delete
S-Seek

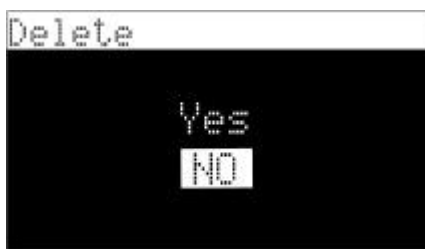

Turning Channel knob highlights the options and pushing the knob selects the option. The delete option allows the user to delete the currently featured artist/ song title selection from S-Seek memory. The default setting is **NO**. If the **YES** option is chosen, the currently featured Artist/ Song Title is deleted from S-Seek memory. The **SSeek** option allows the user to turn the S-Seek function on or off. The default setting is S-Seek on. If the off option is chosen, the user will not be alerted when a stored artist song title selection is currently playing. Momentarily pressing the MEMO button will exit the current menu and return to the previous menu.

4. When the S-seek function is on each time the Shuttle is turned on, it automatically searches the incoming signal to determine if a match exists between the signal and the currently saved information stored in receiver memory. If one or more matches are found, pop-up screen momentarily appears for 2 seconds and displays the Phrase **S-Seek Alert**. An audible beep tone will be heard indicating that a match has been found. The display then reverts to the **S-Seek Alert** screen which displays the current matches. You can now select the Artist/Song that you wish to listen to.



No stored match alert is provided for the currently selected stream. To ensure that no duplicate entries are stored in memory, the receiver will check the stored input data to ensure the information about to be stored is not already in memory.

- a. If one or more matches are found, a display list appears, and allows you to scroll through the list of songs using the Channel knob. Once a song is found, it can be selected by pressing the Select button, and the display will revert to either of the selected display modes.
- b. If a selection is not chosen within 10 seconds after the last action, the screen will revert to the previously selected display and tuning mode.

NOTE: Play of the current selection will continue until a new selection is made.

5. If the MEMO button is pressed to save a currently playing selection, and all of the memory spaces are full, **S-Seek Full** will flash on the display for 1 second, followed by a pop-up screen presenting the **Replace-Cancel** options. This prompt allows you to make the following Replace/Cancel choices:



- a. By selecting **Replace**, the memory list will appear, and you can use the Channel knob to select the information that you would like to overwrite with the new Artist/Song Title. After highlighting the selected title in the list, press the Select button to delete the stored Artist/Song Title, and replace it with the updated information.
- b. By selecting **Cancel**, the prompt screen would disappear and revert to the original screen.



Menu Display Operations

To enter the Menu Options page, press the MENU Button. The **Menu Options** list will appear on the LCD display.

Using the Channel encoder knob, highlight the option you wish to adjust and then press the Select button. The following options are available:

- Sirius ID**
- Display Settings**
- Confirm Tone Options**
- FM Transmitter Options**
- Add or Skip**
- Lock Options**
- Audio Level Options**
- Antenna Aiming**
- Memory Options**
- Time Based Features**
- Factory Default**

If, while in the menu screen function, a button is not pressed within 10 seconds from the previously selected function, the unit exits the menu screen function and reverts to the default screen display.

Sirius ID

Displays your 12 digit Sirius ID number. No adjustments are allowed in this mode. To exit this option, press the Select button or Menu Button.

Display Settings

The following adjustments are possible:

- Contrast Control**
- Dimming Control**
 - Manual
 - Automatic

Font Type

To enter any of these modes, use the Channel knob to highlight the option you wish to adjust and press the Select button. The automatic dimming function is enabled when **Automatic** is selected. Also the automatic dimming function is disabled when **Manual** is selected.

Confirm Tone Options

The following adjustments are possible:

ON

OFF

Upon entering this option, turn Channel knob to toggle between Tone **On** or **Off**. Highlight the desired condition, and press the Select button to enter the tone On or Off function. When the tone is enabled, a beep tone will sound each time the Power On/Off button or preset buttons are pressed.

FM Transmitter Options

The following adjustments are possible:

FM On/ Off

Frequency selection

To enter any of these modes, use the Channel knob to highlight the option you wish to adjust and press the select button.

SIR-PnP3 has a FM transmitter. FM transmitter is designed to operate on frequency in the 88.1 ~ 94.9 MHz range into 200KHz step.

The u-com in SIR-PnP3 is tuning a selected FM frequency to car stereo. The selected frequency varies as voltage and the voltage inputs to the RF OSC port of FM stereo transmitter IC (BH1415F).

The stereo audio signal is modulated the selected frequency and the modulated RF is amplified by FM stereo transmitter IC (BH1415F).

The amplified RF is transmitted via transmitting antenna.

All tuning and verification are performed by the manufacturer and there are adjustments which can be made by the user within the 88.1 ~ 94.9 MHz range. External ground is the chassis of vehicle and transmitting antenna of the EUT is built-in inside the EUT.

Add or Skip

Upon entering this mode, a stream list is displayed with the current stream in play highlighted. Turn Channel knob to navigate the list and highlight the stream to be adjusted. Once a stream has been highlighted, pressing the Select Button displays the text **Skip** next to the stream, and prevents the stream from being accessible during any of the tuning modes. Skipped streams can only be accessed either through direct stream number entry or by returning to this menu and going through the same process to return the skipped stream to the list. Upon adding a stream, the text **Skip** is removed from alongside the stream number/ name.

Lock Options

Upon entering this mode for the first time, the user is prompted to enter a four digit numerical code that is used to lock/unlock stream access. All future entries into this mode displays a stream list with the current stream in play highlighted. The Channel knob is used to navigate the list and highlight the stream to be adjusted. Once a stream has been highlighted, pressing the Select button displays the text **Lock** next to the stream and prevents the stream from being accessible during any of the tuning modes. Locked streams can be accessed only by direct stream number entry, at which time the user will be prompted to enter the previously stored 4-digit code. Once the correct code has been entered, the audio begins to play. The stream returns to the locked status if the stream is changed or the vehicle/unit is turned off (or by returning to this menu and going through the same process to return the stream to the

list). Upon adding a stream, the text **Lock** is removed from alongside the stream number/name.

Lock/Unlock Default Code Function

The first time the Lock/Unlock function is accessed, the user must enter the default lock code. The default lock code is 0000. This code can be maintained or changed. To change the default lock code perform the following procedure:

1. Press the MENU button to access the User Menu.
2. Turn Channel knob to select the **"Lock Options"**
3. Press the Select button.
4. Turn the Channel knob to highlight **Edit Code**.
5. Press the Select button.
6. Enter the default code **0000**.
7. The **New Code** prompt will appear. Enter your new four digit code using the 0-9 number buttons. You will then be prompted to confirm the new code by entering your code again.
8. The lock code is now changed.

Edit Code

Upon entering this mode, the user is prompted to enter the current four digit numerical code being used to lock/unlock stream access. Once the correct code has been entered, the user is prompted to enter the new 4-digit code twice. The second entry is requested for confirmation.

Audio Level Options

Upon entering this mode, a 10 segment horizontal bar graph is displayed with a **-** sign to the left and a **+** sign to the right. The current setting is indicated on the bar graph. Turning Channel knob will adjust the bar graph audio level indication and audio gain, accordingly. To select and exit this function, press the Select button. No button activity for 10 seconds will also exit this function.

Antenna Aiming (Home Installation)

Upon entering this mode, two 10 segment horizontal bar graphs are displayed with a **-** sign to the left and a **+** sign to the right. The satellite signal strength is displayed by the SAT graph. The terrestrial signal strength is displayed by the TER graph. Position the antenna to optimize either the satellite or terrestrial signal. The current setting is indicated on the bar graph. Moving the antenna location adjusts the bar graphs signal strength, represented by the filled-in bar graph squares, thus ensuring optimum reception. To exit this function, press the Select Button.

NOTE: Terrestrial repeaters are typically used in large urban areas where structures may affect the line of sight satellite signal. Terrestrial signals (TER) may not be available in your geographic location.

Memory Options

In this mode, the user can turn the Memory Search Function (S-Seek) ON or OFF. In addition, all 20 Memory Locations can be cleared. On the display, the top line displays the text, **Memory Options**.

The following adjustment options are possible:

1. **Automatic Memory Search function - On or Off.**
Use the Channel knob to select between the 2 options by highlighting the desired selection. Then press the Select button to enter the option.
2. **Clear all Memory Locations.** Press the Select button; a prompt display screen appears confirming -

Are You Sure? Select Yes or No and press the Select button.

Time Based Features

The following adjustments are possible:

Clock

Alarm Clock

Program Alert

Auto Shutdown

Sleep Mode

Upon entering this mode, turn Channel knob to highlight the desired function and press the Select button.

NOTE: No button activity for 10 seconds will also exit the desired (highlighted) function.

Clock

When entering this menu option, you can set up the clock shown on the default display, based on the format desired, the time zone in which you reside and Daylight Savings Time, if used. The clock data is provided via the Sirius stream, and will update based on the received signal.

Format:

The clock format option provides:

12 Hour (Default)

24 Hour

Use the Channel knob to highlight the desired format and press the Select button.

Time Zone:

The Time Zone option provides:

(GMT-9:00) Alaska

(GMT-8:00) Pacific

(GMT-7:00) Mountain

(GMT-6:00) Central

(GMT-5:00) Eastern

(GMT-4:00) Atlantic

(GMT-3:30) Newfoundland (Abbreviated as GMT-3:30 Newfoundland)

Use the Channel knob to highlight the desired time zone and press the Select Button.

Daylight Savings Time (DST) Observance:

Activate this function if your area is subject to DST;

Turn Channel knob to toggle between **DST Observed** (default) or **DST Not Observed**.

NOTE: When the shuttle has not been turned on or has been removed from the docking port for any length of time be sure to position the antenna to receive the satellite signal so the time can be automatically updated. If the time information has been lost, the shuttle will not display the time information and preprogrammed alarms will not be triggered until the shuttle updates the time information using the satellite signal.

Alarm Clock:

When this menu option is highlighted and selected, you will be able to set the unit to turn on at a specific time. The last selected stream prior to shutdown will be present when the Alarm feature is activated. Additionally, a series of beep tones will be heard. Press any button on the front panel to silence the alarm tones. The alarm will trigger again at the set time unless the Alarm Off feature is selected under the Set Alarm function.

Set Alarm (Default-Off)

Use the Channel knob to toggle between **Alarm On** or **Alarm Off** and press the Select Button for desired alarm status. When the alarm is on the time will be displayed on the default screen in reverse image.

Alarm Time

When this menu option is highlighted and selected the current alarm setting is displayed. The factory default is 12:00PM. By pressing the category buttons the hours can be increased or decreased in one hour increments. AM or PM will switch automatically when the AM or PM threshold has been exceeded. By turning Channel knob the minutes can be increased or decreased in one minute increments. Turning Channel knob clockwise will increase the minutes and Channel knob counterclockwise will decrease the minutes. When the desired time is displayed, press the Select button. NOTE: Loss of the satellite signal by the shuttle will result in a series of alarm tones only.

Program Alert

When this menu option is highlighted and selected, you will be able to program the unit to switch to a selected stream at a specific time. On the display, **Set Stream Alert** will occupy the top text line. The following adjustments are accessible:

Program Time/Day (Default-12:00pm, Monday)

Stream (Default-Currently Playing Stream)

Program Alert On/Off (Default-Off)

Time/Day:

Turning Channel knob toggles between **Time** and **Day**.

If **Time** is selected, pressing the category buttons the hours can be increased or decreased in one hour increments. AM or PM will switch automatically when the AM or PM threshold has been exceeded. By turning Channel knob the minutes can be increased or decreased in one minute increments. Turning the Channel knob clockwise will increase the minutes and counterclockwise will decrease the minutes. When the desired time is displayed, press the Select button.

If **Day** is selected, the screen displays a default day of **Monday**, with selectable choices of **Monday, Tuesday, Wednesday, Thursday, Friday, Saturday** or **Sunday**. Use the Channel knob to select the desired day from the default value (Monday).

Stream:

Turn Channel knob to scroll through a listing of all the Sirius streams in a circular motion. The listing should encompass all 5 available lines. When the desired stream is highlighted, press the Select button.

Program Alert On/Off:

Turn Channel knob to toggle between **Program Alert On** or **Program Alert Off**. When the desired alert status is high lighted, press the Select button.

Auto Shutdown

In this mode, you have the option of programming the unit to automatically shut off after a 1- hour period without any user intervention. After 59 minutes of inactivity, a beep tone sounds, and a display prompt appears on the screen, stating **Cancel Auto Shutdown**. Press the Select button to terminate the function temporarily.

NOTE: This function is especially useful when the shuttle is being powered by battery (Car etc.).

The following options are available in this mode:

Enabled

Disabled (Default)

Turn Channel knob to toggle between

Enabled and **Disabled**. When the desired shut down status is highlighted, press the Select button.

Sleep Mode:

In this mode, you have the capability of programming the unit to shut off after a selected period of time.

The screen displays **Sleep Mode** on the top line, with optional time settings as follows:

Sleep Off

15 minute

30 minute

45 minute

60 minute

Sleep Off is the factory default setting. Turn Channel knob to toggle through the desired sleep times. When the desired time is highlighted, press the Select button. The unit will now turn off after the selected time has expired

Factory Default

The Factory Default screen displays the text **Restore Default Settings** with the following adjustments:

Yes/No

Upon entering this mode, Turning Channel knob toggles between the Yes or No function/display selection. If Yes is chosen, the unit reverts to the original factory settings for the following parameters:

- All Presets revert to empty
- Auto Dimming On
- Display Contrast to 50%
- Display Mode to Auto
- FM Modulator to On
- Audio Output Level to 70%
- Access to all skipped Shuttles (Locked streams remain locked)
- Memory Search On
- Memory Locations are erased
- 12 Hour Clock Format
- Eastern Time Zone
- Daylight Savings Time Observed

