


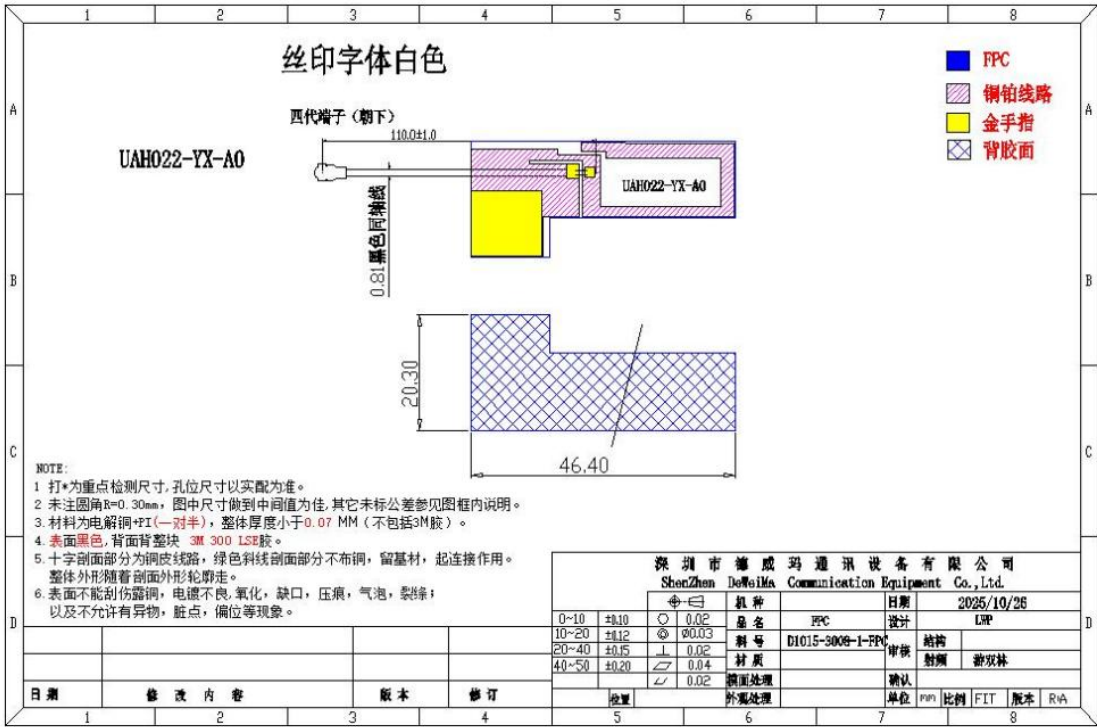


Antenna Information

1. Manufacturer's name:
Shenzhen Deiwema Communication Equipment Co., Ltd.
2. manufacturer's address:
No. 23, Second Entrepreneurship Road, Bao'an District, Shenzhen City. Friendship Building, Building 1, 3rd Floor. (Behind Ping An Bank, Exit B of Honglang North Metro Station)
3. Antenna model name:
UAH022-YX-A0,
UAH022-YX-B0,
UAH022-YX-C0,
AAB015AA
4. Antenna size

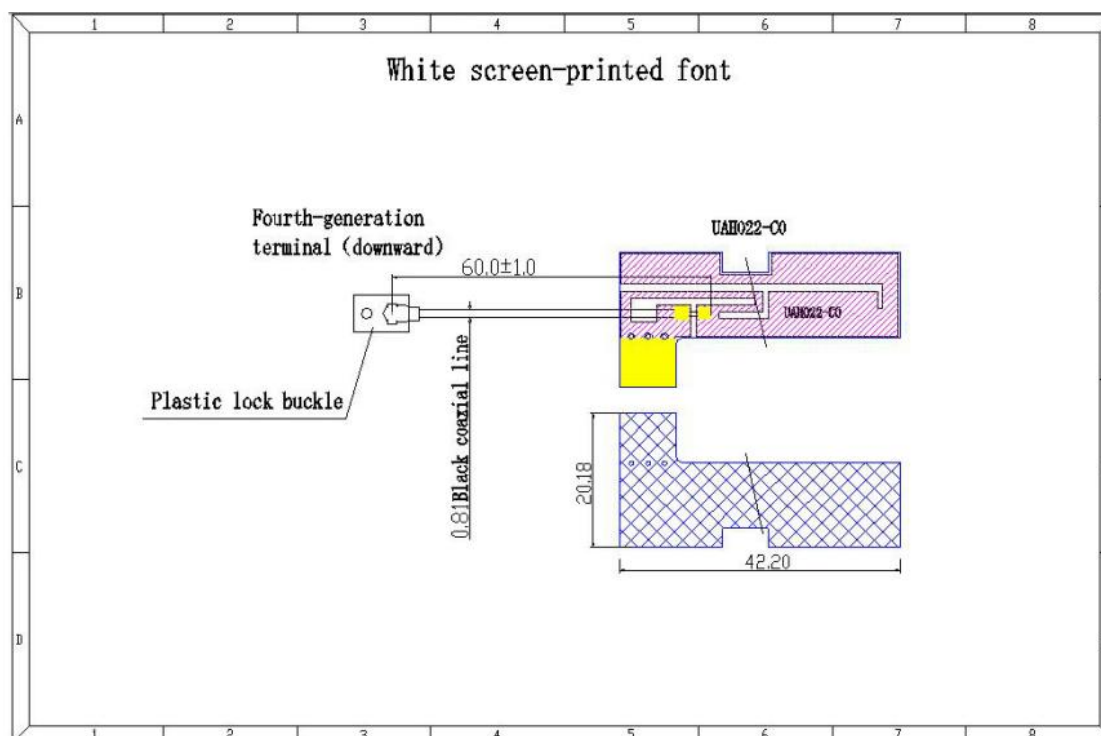

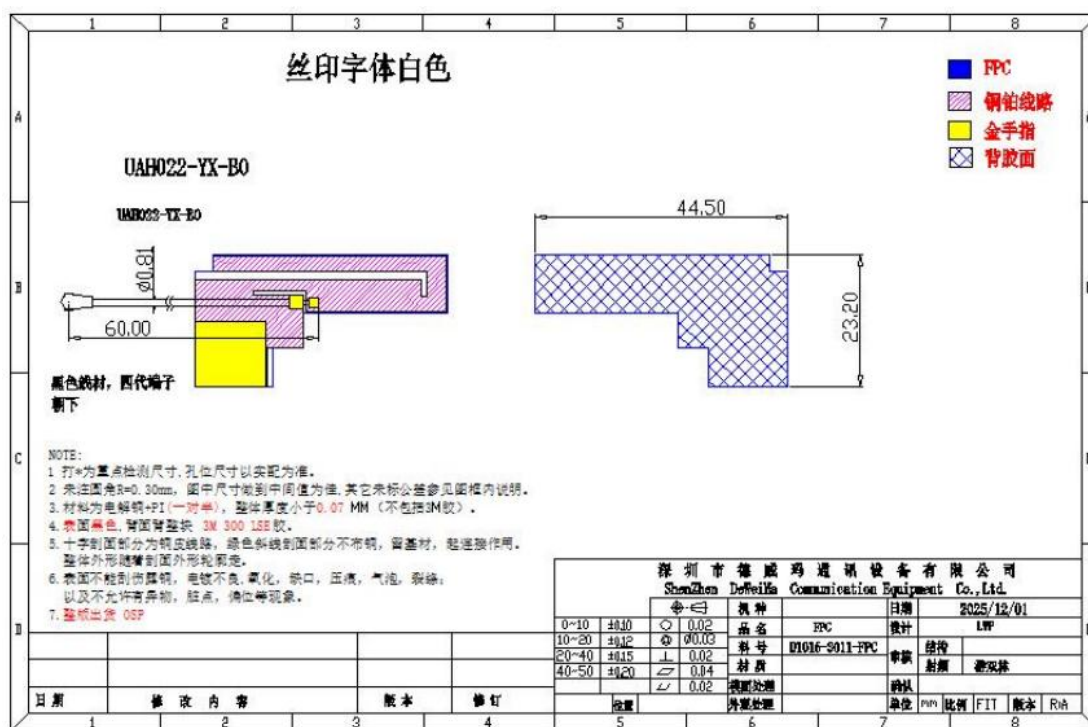

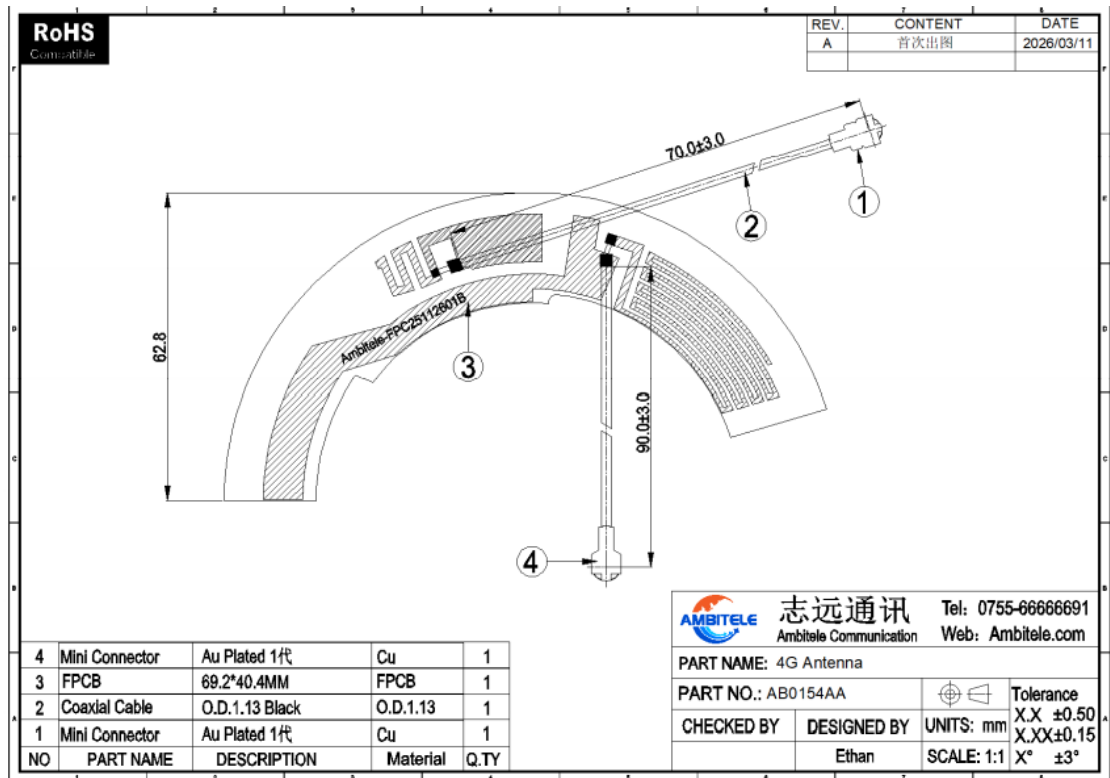

Only apply 900MHz antenna (antenna 3+4)

5. Antenna Gain: Only radiated measurements are used to show compliance with FCC limits for fundamental and spurious emissions..

UAH022-YX-A0

Gain&Efficiency&PhaseCenter 增益、效率和相位中心			
Frequency 频率(MHz)	Gain 增益(dBi)	Efficiency 效率(dB)	Efficiency 效率(%)
900.00	2.14	-3.76	42.05
905.00	2.15	-3.67	42.94
910.00	2.13	-3.76	42.08
915.00	1.95	-3.86	41.13
920.00	1.82	-3.88	40.88
925.00	1.77	-4.04	39.41
930.00	1.74	-4.21	37.94

UAH022-YX-B0

Gain&Efficiency&PhaseCenter 增益、效率和相位中心			
Frequency 频率(MHz)	Gain 增益(dBi)	Efficiency 效率(dB)	Efficiency 效率(%)
880.00	1.47	-5.04	31.37
885.00	1.86	-4.50	35.48
890.00	1.80	-4.33	36.94
895.00	1.87	-4.07	39.14
900.00	1.60	-4.10	38.92
905.00	1.23	-4.25	37.62
910.00	0.76	-4.54	35.20
915.00	0.23	-4.84	32.84
920.00	0.07	-4.89	32.46
925.00	0.45	-4.70	33.86
930.00	1.05	-4.42	36.15
935.00	1.41	-4.20	37.98
940.00	1.54	-4.22	37.84

UAH022-YX-C0

Gain&Efficiency&PhaseCenter 增益、效率和相位中心			
Frequency 频率(MHz)	Gain 增益(dBi)	Efficiency 效率(dB)	Efficiency 效率(%)
902.50	2.31	-3.60	33.70
908.38	2.01	-3.64	33.27
914.25	1.90	-3.63	33.36
920.13	1.92	-3.59	33.80
926.00	1.76	-3.63	33.36

AAB015AA

Frequency (MHz)	Gain (dBi)	Efficiency (dB)	Efficiency (%)
900	-3.8	-8.1353	15.36
905	-2.77	-7.3158	18.55
910	-2.13	-6.8044	20.87
915	-1.7	-6.4198	22.8
920	-1.04	-5.8678	25.9
925	-0.58	-5.4591	28.45
930	-0.33	-5.3723	29.02