



# FCC Test Report

APPLICANT : Huawei Technologies Co., Ltd.  
EQUIPMENT : Smart Phone  
BRAND NAME : HUAWEI  
MODEL NAME : GLK-LX1U  
FCC ID : QISGLK-LX1U  
STANDARD : 47 CFR Part 15 Subpart B  
CLASSIFICATION : Certification

The product was received on Mar. 28, 2019 and testing was completed on Apr. 20, 2019. We, Sporton International (ShenZhen) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures given in ANSI C63.4-2014 and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (ShenZhen) Inc., the test report shall not be reproduced except in full.

Approved by: Eric Shih / Manager



**Sporton International (Shenzhen) Inc.**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,  
Guangdong Province 518055, China**



## TABLE OF CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>REVISION HISTORY .....</b>                                | <b>3</b>  |
| <b>SUMMARY OF TEST RESULT .....</b>                          | <b>4</b>  |
| <b>1. GENERAL DESCRIPTION .....</b>                          | <b>5</b>  |
| 1.1. Applicant.....                                          | 5         |
| 1.2. Manufacturer .....                                      | 5         |
| 1.3. Product Feature of Equipment Under Test .....           | 5         |
| 1.4. Product Specification of Equipment Under Test .....     | 6         |
| 1.5. Modification of EUT .....                               | 7         |
| 1.6. Test Location.....                                      | 7         |
| 1.7. Specification of Accessory .....                        | 8         |
| 1.8. Applicable Standards .....                              | 9         |
| <b>2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST .....</b>   | <b>10</b> |
| 2.1. Test Mode .....                                         | 10        |
| 2.2. Connection Diagram of Test System .....                 | 13        |
| 2.3. Support Unit used in test configuration and system..... | 13        |
| 2.4. EUT Operation Test Setup .....                          | 14        |
| <b>3. TEST RESULT .....</b>                                  | <b>15</b> |
| 3.1. Test of AC Conducted Emission Measurement .....         | 15        |
| 3.2. Test of Radiated Emission Measurement .....             | 19        |
| <b>4. LIST OF MEASURING EQUIPMENT .....</b>                  | <b>24</b> |
| <b>5. UNCERTAINTY OF EVALUATION .....</b>                    | <b>25</b> |
| <b>APPENDIX A. SETUP PHOTOGRAPHS</b>                         |           |



## REVISION HISTORY

| REPORT NO. | VERSION | DESCRIPTION             | ISSUED DATE   |
|------------|---------|-------------------------|---------------|
| FC932820   | Rev. 01 | Initial issue of report | Apr. 30, 2019 |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |
|            |         |                         |               |



## SUMMARY OF TEST RESULT

| Report Section | FCC Rule | Description           | Limit           | Result | Remark                                                     |
|----------------|----------|-----------------------|-----------------|--------|------------------------------------------------------------|
| 3.1            | 15.107   | AC Conducted Emission | < 15.107 limits | PASS   | Under limit<br>6.45 dB at<br>0.150 MHz                     |
| 3.2            | 15.109   | Radiated Emission     | < 15.109 limits | PASS   | Under limit<br>6.10 dB at<br>960.000 MHz<br>for Quasi-Peak |



## 1. General Description

### 1.1. Applicant

**Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.2. Manufacturer

**Huawei Technologies Co., Ltd.**

Administration Building, Headquarters of Huawei Technologies Co., Ltd., Bantian, Longgang District, Shenzhen, 518129, P.R.C

### 1.3. Product Feature of Equipment Under Test

| Product Feature                 |                                                                                                                                                                                                                                          |
|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                       | Smart Phone                                                                                                                                                                                                                              |
| Brand Name                      | HUAWEI                                                                                                                                                                                                                                   |
| Model Name                      | GLK-LX1U                                                                                                                                                                                                                                 |
| FCC ID                          | QISGLK-LX1U                                                                                                                                                                                                                              |
| EUT supports Radios application | GSM/GPRS/EGPRS/WCDMA/HSPA/DC-HSDPA/HSPA+(16QAM Uplink is not supported)/LTE/NFC<br>WLAN 2.4GHz 802.11b/g/n HT20/HT40<br>WLAN 5GHz 802.11a/n HT20/HT40<br>WLAN 5GHz 802.11ac VHT20/VHT40/VHT80<br>Bluetooth BR/EDR/LE<br>FM Receiver/GNSS |
| IMEI Code                       | Conduction: 867285040001637/867285040004151<br>Radiation: 867285040040809/867285040042052                                                                                                                                                |
| HW Version                      | HL7SENE                                                                                                                                                                                                                                  |
| SW Version                      | 9.1.0.102(C900E102R1P1)                                                                                                                                                                                                                  |

**Remark:** The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.4. Product Specification of Equipment Under Test

| Standards-related Product Specification |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Tx Frequency</b>                     | GSM850: 824.2 MHz ~ 848.8 MHz<br>GSM1900: 1850.2 MHz ~ 1909.8MHz<br>WCDMA Band V: 826.4 MHz ~ 846.6 MHz<br>WCDMA Band IV : 1712.4 MHz ~ 1752.6 MHz<br>WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz<br>LTE Band 4 : 1710.7 MHz ~ 1754.3 MHz<br>LTE Band 5 : 824.7 MHz ~ 848.3 MHz<br>LTE Band 7 : 2502.5 MHz ~ 2567.5 MHz<br>LTE Band 38 : 2572.5MHz ~ 2617.5MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/n/ac: 5180 MHz ~ 5240 MHz;<br>5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5700 MHz<br>5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>NFC : 13.56 MHz                                |
| <b>Rx Frequency</b>                     | GSM850: 869.2 MHz ~ 893.8 MHz<br>GSM1900: 1930.2 MHz ~ 1989.8 MHz<br>WCDMA Band V: 871.4 MHz ~ 891.6 MHz<br>WCDMA Band IV : 2112.4 MHz ~ 2152.6 MHz<br>WCDMA Band II: 1932.4 MHz ~ 1987.6 MHz<br>LTE Band 4 : 2110.7 MHz ~ 2154.3 MHz<br>LTE Band 5 : 869.7 MHz ~ 893.3 MHz<br>LTE Band 7 : 2622.5 MHz ~ 2687.5 MHz<br>LTE Band 38 : 2572.5MHz ~ 2617.5MHz<br>802.11b/g/n: 2412 MHz ~ 2462 MHz<br>802.11a/n/ac: 5180 MHz ~ 5240 MHz;<br>5260 MHz ~ 5320 MHz;<br>5500 MHz ~ 5700 MHz<br>5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz<br>GNSS : 1559 MHz ~ 1610 MHz<br>NFC : 13.56 MHz |
| <b>Antenna Type</b>                     | WWAN : Internal Antenna<br>WLAN : Internal Antenna<br>Bluetooth : Internal Antenna<br>GNSS: Fixed Internal Antenna<br>NFC : Fixed Internal Antenna<br>FM : Fixed Internal Antenna                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Type of Modulation</b>               | GSM: GMSK<br>GPRS: GMSK<br>EDGE(MCS 0-4): GMSK / (MCS 5-9): 8PSK<br>WCDMA : BPSK (Uplink)<br>HSDPA/DC-HSDPA : QPSK (Uplink)<br>HSUPA : QPSK (Uplink)<br>HSPA+ : 16QAM (16QAM uplink is not supported)<br>DC-HSDPA : 64QAM<br>LTE: QPSK / 16QAM / 64QAM<br>802.11b : DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n/ac : OFDM (BPSK / QPSK / 16QAM / 64QAM)                                                                                                                                                                                                                                         |

|  |                                                                                                                                                            |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | /256QAM)<br>Bluetooth LE : GFSK<br>Bluetooth (1Mbps) : GFSK<br>Bluetooth (2Mbps) : $\pi$ /4-DQPSK<br>Bluetooth (3Mbps) : 8-DPSK<br>GNSS : BPSK<br>NFC: ASK |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------|

## 1.5. Modification of EUT

No modifications are made to the EUT during all test items.

## 1.6. Test Location

Sporton International (Shenzhen) Inc is accredited to ISO 17025 by National Voluntary Laboratory Accreditation Program (NVLAP code: 600156-0).

|                           |                                                                                                                                                                                  |                            |                                       |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Site</b>          | Sporton International (Shenzhen) Inc.                                                                                                                                            |                            |                                       |
| <b>Test Site Location</b> | 1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen City,<br>Guangdong Province 518055, China<br>TEL: +86-755-8637-9589<br>FAX: +86-755-8637-9595 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                          | <b>FCC designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | CO01-SZ                                                                                                                                                                          | CN5018                     | 337463                                |

|                           |                                                                                                                                                                              |                            |                                       |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|---------------------------------------|
| <b>Test Site</b>          | Sporton International (Shenzhen) Inc.                                                                                                                                        |                            |                                       |
| <b>Test Site Location</b> | No. 3 Bldg the third floor of south, Shahe River west, Fengzeyuan Warehouse, Nanshan<br>District, Shenzhen City, Guangdong Province 518055, China<br>TEL: +86-755- 3320-2398 |                            |                                       |
| <b>Test Site No.</b>      | <b>Sporton Site No.</b>                                                                                                                                                      | <b>FCC designation No.</b> | <b>FCC Test Firm Registration No.</b> |
|                           | 03CH01-SZ                                                                                                                                                                    | CN5019                     | 577730                                |



## 1.7. Specification of Accessory

|               |              |                                                                                    |            |              |
|---------------|--------------|------------------------------------------------------------------------------------|------------|--------------|
| AC Adapter 1  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200U02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: Salcomp                                                              | SN         |              |
| AC Adapter 2  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200U02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: BYD                                                                  | SN         |              |
| AC Adapter 3  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200U02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: HUNTKEY                                                              | SN         |              |
| AC Adapter 4  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200U02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: PHIHONG                                                              | SN         |              |
| AC Adapter 5  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200E02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: Salcomp                                                              | SN         |              |
| AC Adapter 6  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200E02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: BYD                                                                  | SN         |              |
| AC Adapter 7  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200E02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: HUNTKEY                                                              | SN         |              |
| AC Adapter 8  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200E02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: PHIHONG                                                              | SN         |              |
| AC Adapter 9  | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200B02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: Salcomp                                                              | SN         |              |
| AC Adapter 10 | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200B02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: BYD                                                                  | SN         |              |
| AC Adapter 11 | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200B02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: HUNTKEY                                                              | SN         |              |
| AC Adapter 12 | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200B02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: PHIHONG                                                              | SN         |              |
| AC Adapter 13 | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200A02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: Salcomp                                                              | SN         |              |
| AC Adapter 14 | Brand Name   | Huawei Technologies Co., Ltd.                                                      | Model Name | HW-050200A02 |
|               | Power Rating | I/P: <u>100</u> - <u>240</u> Vac, <u>500</u> mA, O/P: <u>5</u> Vdc, <u>2000</u> mA |            |              |
|               | Manufacturer | Manufacturer: BYD                                                                  | SN         |              |
| USB Cable 1   | Brand Name   | Ningbo Broad Telecommunication Co., Ltd                                            | Model Name | WA0020       |
|               | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core                          |            |              |

|             |              |                                                             |            |                     |
|-------------|--------------|-------------------------------------------------------------|------------|---------------------|
| USB Cable 2 | Brand Name   | Dongguan Mingji Electronics Technology Group Co.,Ltd        | Model Name | 203-1572-0          |
|             | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core   |            |                     |
| USB Cable 3 | Brand Name   | Freeport Resources Enterprises (Jiangxi) Co.,Ltd            | Model Name | 18-93C2CHO-001HF    |
|             | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core   |            |                     |
| USB Cable 4 | Brand Name   | HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD                | Model Name | CUDU01B-HC295-EH    |
|             | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core   |            |                     |
| USB Cable 5 | Brand Name   | LUXSHARE Precision Industry Co., Ltd.                       | Model Name | L99UC131-CS-H       |
|             | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core   |            |                     |
| USB Cable 6 | Brand Name   | HUIZHOU DEHONG TECHNOLOGY CO.,LTD.                          | Model Name | 330-50507           |
|             | Signal Line  | <u>1</u> meter, non-shielded cable, with w/o ferrite core   |            |                     |
| Earphone 1  | Brand Name   | HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD                | Model Name | EPAB542-2WH06-DH    |
|             | Signal Line  | <u>1.1</u> meter, non-shielded cable, with w/o ferrite core |            |                     |
| Earphone 2  | Brand Name   | HONGFUJIN PRECISION INDUSTRIAL(SHENZHEN).LTD                | Model Name | EPAB542-2WH05-DH    |
|             | Signal Line  | <u>1.1</u> meter, non-shielded cable, with w/o ferrite core |            |                     |
| Earphone 3  | Brand Name   | Boluo County Quancheng Electronic Co., Ltd.                 | Model Name | 1293-3283-3.5MM-322 |
|             | Signal Line  | <u>1.1</u> meter, non-shielded cable, with w/o ferrite core |            |                     |
| Earphone 4  | Brand Name   | Jiangxi Lianchuang Hongsheng Electronic Co., LTD.           | Model Name | MEND1532B528A02     |
|             | Signal Line  | <u>1.1</u> meter, non-shielded cable, with w/o ferrite core |            |                     |
| Earphone 5  | Brand Name   | Jiangxi Lianchuang Hongsheng Electronic Co., LTD.           | Model Name | MEND1532B528B00     |
|             | Signal Line  | <u>1.1</u> meter, non-shielded cable, with w/o ferrite core |            |                     |
| Battery     | Brand Name   | HuaweiTechnologies Co., Ltd.                                | Model Name | HB446486ECW         |
|             | Power Rating | <u>3.82</u> Vdc, <u>3900</u> mAh                            | Type       | Li-ion, <u>Yes</u>  |

## 1.8. Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart B
- ♦ ANSI C63.4-2014

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.



## **2. Test Configuration of Equipment Under Test**

### **2.1. Test Mode**


The EUT has been associated with peripherals pursuant to ANSI C63.4-2014 and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (30MHz to the 5th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower).

| Test Items            | Function Type                                                                                                                                    |
|-----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| AC Conducted Emission | Mode 1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(Charging from Adapter 1) + SIM 1             |
|                       | Mode 2: PCS1900 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Front) + Earphone 2 + USB cable 2(Charging from Adapter 2) + SIM 1              |
|                       | Mode 3: WCDMA850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Color Bar (EMP4) + Earphone 3 + USB cable 3(Charging from Adapter 3) + SIM 1         |
|                       | Mode 4: WCDMA1900 Idle + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 4 + USB cable 4(Charging from Adapter 4) + SIM 1                    |
|                       | Mode 5: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 5(Charging from Adapter 5) + SIM 1                |
|                       | Mode 6: LTE Band 4 Idle + Bluetooth Idle + WLAN (5G) Idle + H-Pattan + Earphone 1 + USB cable 6(Charging from Adapter 6) + SIM 1                 |
|                       | Mode 7: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx ( 98MHz ) + Earphone 1 + USB cable 1(Charging from Adapter 7) + SIM 1        |
|                       | Mode 8: LTE Band 7 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(Charging from Adapter 8) + SIM 1            |
|                       | Mode 9: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(Notebook USB Data Link to EUT) + SIM 1       |
|                       | Mode 10 : GSM 850 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(EUT USB Data Link to Notebook) + SIM 1       |
|                       | Mode 11 : GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(Notebook USB Data Link to SD Card) + SIM 1 |
|                       | Mode 12 : GSM 850 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(SD Card USB Data Link to Notebook) + SIM 1   |
|                       | Mode 13 : GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 2(EUT USB Data Link to Notebook) + SIM 1     |
|                       | Mode 14 : GSM 850 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Rear) + Earphone 1 + USB cable 3(EUT USB Data Link to Notebook) + SIM 1       |
|                       | Mode 15 : GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 4(EUT USB Data Link to Notebook) + SIM 1     |
|                       | Mode 16 : GSM 850 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Rear) + Earphone 1 + USB cable 5(EUT USB Data Link to Notebook) + SIM 1       |
|                       | Mode 17 : GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 6(EUT USB Data Link to Notebook) + SIM 1     |

|                                                                                                                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Radiated Emissions                                                                                                                                                                                                                                                                                                                                         | <p>Mode 1: GSM 850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Camera (Rear) + Earphone 1 + USB cable 1(Charging from Adapter 1) + SIM 1</p> <p>Mode 2: PCS1900 Idle + Bluetooth Idle + WLAN (5G) Idle + Camera (Front) + Earphone 2 + USB cable 2(Charging from Adapter 2) + SIM 1</p> <p>Mode 3: WCDMA850 Idle + Bluetooth Idle + WLAN (2.4G) Idle + Play (MPEG4) + Earphone 3 + USB cable 3(Charging from Adapter 3) + SIM 1</p> <p>Mode 4: WCDMA1900 Idle + Bluetooth Idle + WLAN (5G) Idle + NFC On + Earphone 4 + USB cable 4(Charging from Adapter 4) + SIM 1</p> <p>Mode 5: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 5(Charging from Adapter 5) + SIM 1</p> <p>Mode 6: LTE Band 4 Idle + Bluetooth Idle + WLAN (5G) Idle + H-Pattan + Earphone 5 + USB cable 6(Charging from Adapter 6) + SIM 1</p> <p>Mode 7: LTE Band 5 Idle + Bluetooth Idle + WLAN (2.4G) Idle + FM Rx ( 98MHz ) + Earphone 5 + USB cable 5(Charging from Adapter 7) + SIM 1</p> <p>Mode 8: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 5(Charging from Adapter 5) + SIM 1</p> <p>Mode 9: WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 1(Notebook USB Data Link to EUT) + SIM 1</p> <p>Mode 10 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 1(EUT USB Data Link to Notebook) + SIM 1</p> <p>Mode 11 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 1(Notebook USB Data Link to SD Card) + SIM 1</p> <p>Mode 12 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 1(SD Card USB Data Link to Notebook) + SIM 1</p> <p>Mode 13 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 2(EUT USB Data Link to Notebook) + SIM 1</p> <p>Mode 14 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 3(EUT USB Data Link to Notebook) + SIM 1</p> <p>Mode 15 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 4(EUT USB Data Link to Notebook) + SIM 1</p> <p>Mode 16 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (5G) Idle + GNSS Rx + Earphone 5 + USB cable 5(EUT USB Data Link to Notebook) + SIM 1</p> <p>Mode 17 : WCDMA 1700 Idle + Bluetooth Idle + WLAN (2.4G) Idle + GNSS Rx + Earphone 5 + USB cable 6(EUT USB Data Link to Notebook) + SIM 1</p> |
| <b>Remark:</b> <ol style="list-style-type: none"> <li>1. The worst case of AC is mode 1; only the test data of this mode is reported.</li> <li>2. The worst case of RE is mode 17; only the test data of this mode is reported.</li> <li>3. Data Link with Notebook / PC means data application transferred mode between EUT and Notebook / PC.</li> </ol> |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

## 2.2.Connection Diagram of Test System

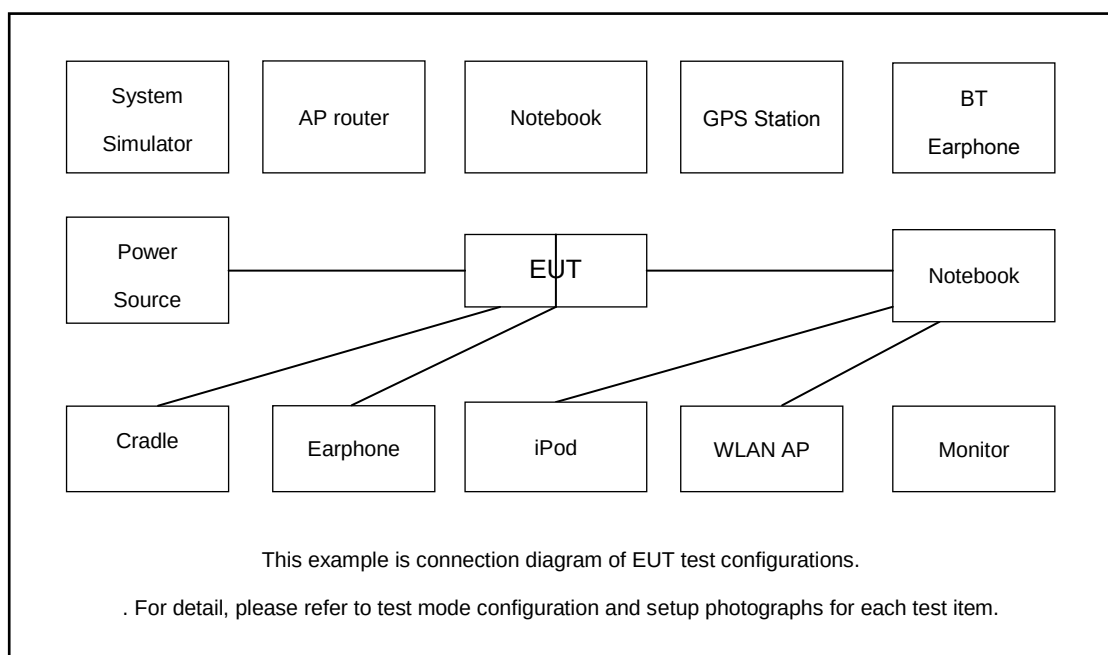

## 2.3. Support Unit used in test configuration and system

| Item | Equipment            | Trade Name | Model Name | FCC ID      | Data Cable     | Power Cord                                                 |
|------|----------------------|------------|------------|-------------|----------------|------------------------------------------------------------|
| 1.   | System Simulator     | Anritsu    | MT8820C    | N/A         | N/A            | Unshielded,1.8m                                            |
| 2.   | LABS ATGPS Simulator | RACELOGIC  | RLLS03-2P  | Fcc DoC     | N/A            | Unshielded,1.8m                                            |
| 3.   | Labsat               | RACELOGIC  | 18645      | N/A         | N/A            | Unshielded,1.8m                                            |
| 4.   | FM Base Station      | R&S        | SMB100A    | Fcc DoC     | N/A            | Shielded, 1.5m                                             |
| 5.   | WLAN AP              | Dlink      | DIR-820L   | KA2IR820LA1 | N/A            | Unshielded,1.8m                                            |
| 6.   | WLAN AP              | ASUS       | RT-AC66U   | MSQ-RTAC66U | N/A            | Unshielded,1.8m                                            |
| 7.   | Bluetooth Earphone   | Samsung    | EO-MG900   | PYAHS-107W  | N/A            | N/A                                                        |
| 8.   | Notebook             | Lenovo     | E540       | FCC DoC     | N/A            | AC I/P :<br>Unshielded, 1.2m<br>DC O/P : Shielded,<br>1.8m |
| 9.   | SD Card              | N/A        | MicroSD HC | FCC DoC     | N/A            | N/A                                                        |
| 10.  | iPod nano 8GB        | Apple      | MC690ZP/A  | FCC DoC     | Shielded, 1.2m | N/A                                                        |
| 11.  | iPod                 | Apple      | MC525 ZP/A | DoC         | Shielded, 1.0m | N/A                                                        |

## **2.4. EUT Operation Test Setup**

The EUT was in GSM or WCDMA or LTE idle mode during the testing. The EUT was synchronized to the BCCH, and is in continuous receiving mode by setting system simulator's paging reorganization.

At the same time, the EUT was attached to the Bluetooth earphone or WLAN AP, and the following programs installed in the EUT were programmed during the test.

1. Data application is transferred between notebook and EUT via USB cable.
2. Turn on camera to capture images.
3. Turn on NFC Function.
4. Turn on FM Function.
5. Turn on MPEG4 function.
6. Turn on GNSS function to make the EUT receive continuous signals from GNSS station.

### 3. Test Result

#### 3.1. Test of AC Conducted Emission Measurement

##### 3.1.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

<Class B Limit>

| Frequency of emission<br>(MHz) | Conducted limit (dBuV) |           |
|--------------------------------|------------------------|-----------|
|                                | Quasi-peak             | Average   |
| 0.15-0.5                       | 66 to 56*              | 56 to 46* |
| 0.5-5                          | 56                     | 46        |
| 5-30                           | 60                     | 50        |

\*Decreases with the logarithm of the frequency.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedure


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.1.4 Test Setup

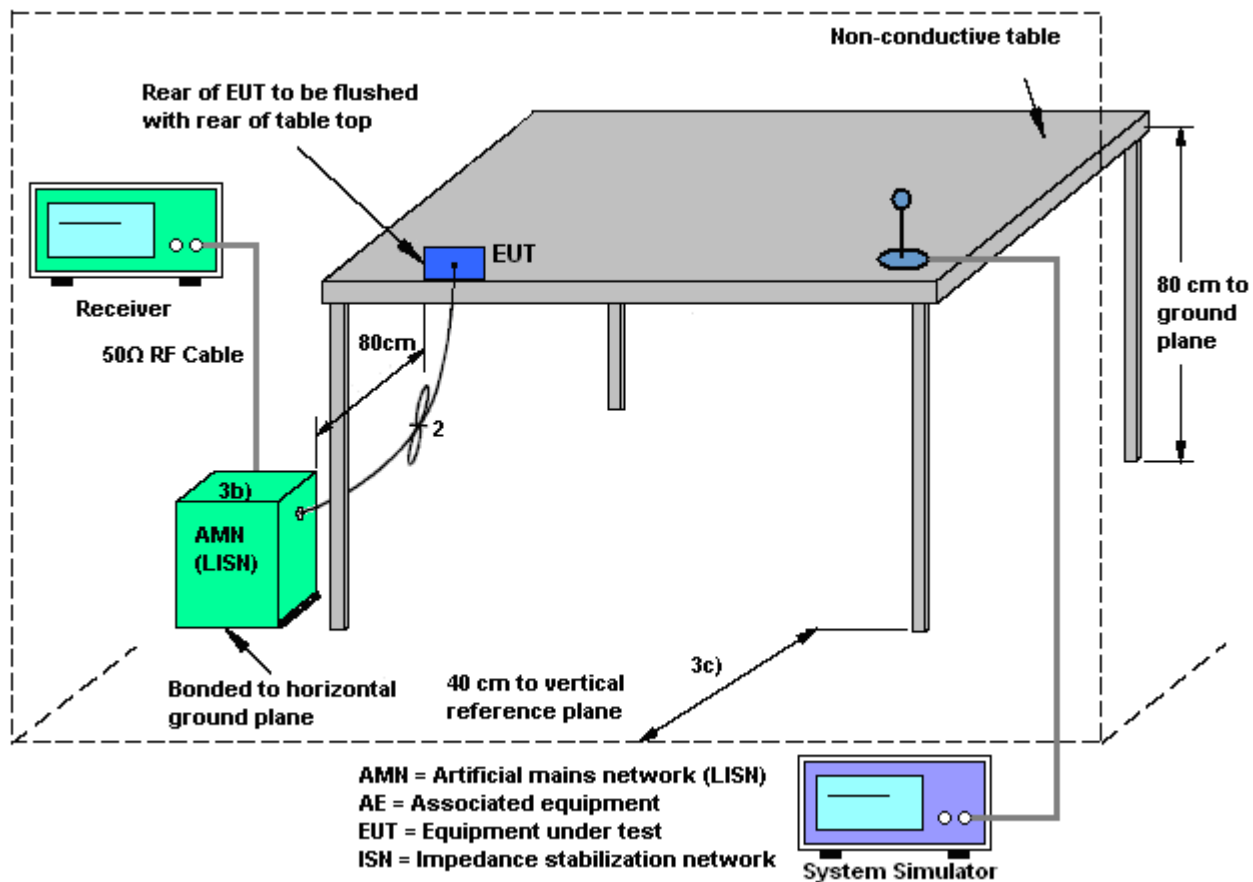




## 3.1.5 Test Result of AC Conducted Emission

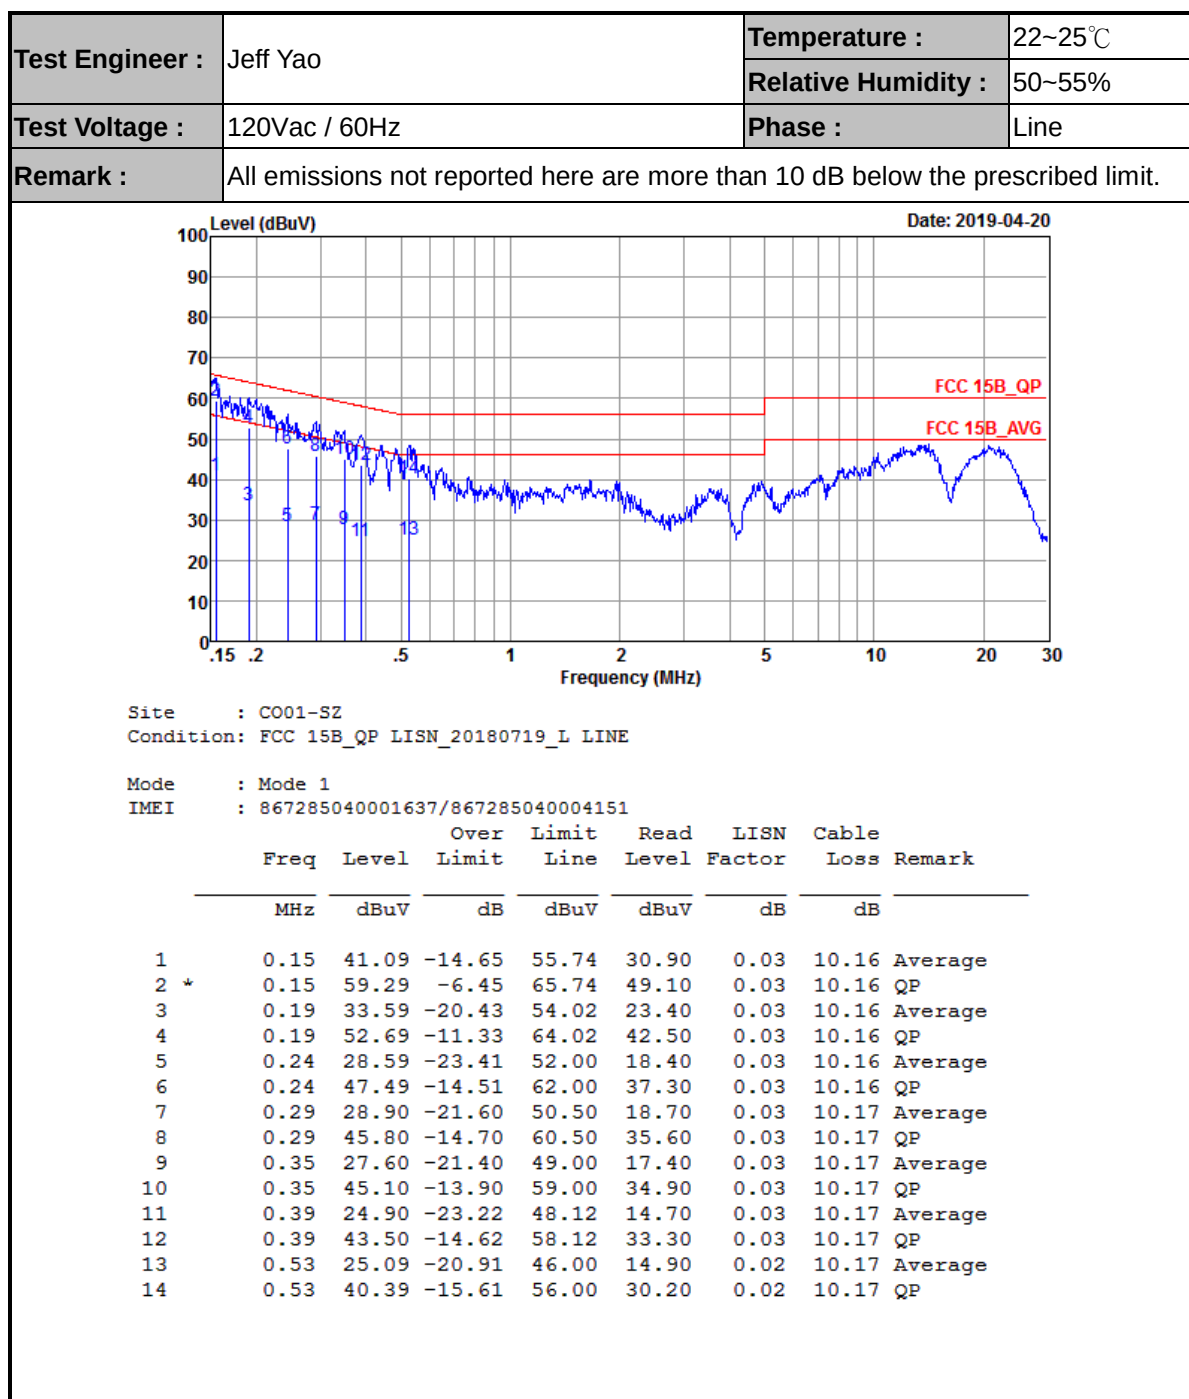



|                        |                                                                                 |                            |         |
|------------------------|---------------------------------------------------------------------------------|----------------------------|---------|
| <b>Test Engineer :</b> | Jeff Yao                                                                        | <b>Temperature :</b>       | 22~25℃  |
|                        |                                                                                 | <b>Relative Humidity :</b> | 50~55%  |
| <b>Test Voltage :</b>  | 120Vac / 60Hz                                                                   | <b>Phase :</b>             | Neutral |
| <b>Remark :</b>        | All emissions not reported here are more than 10 dB below the prescribed limit. |                            |         |

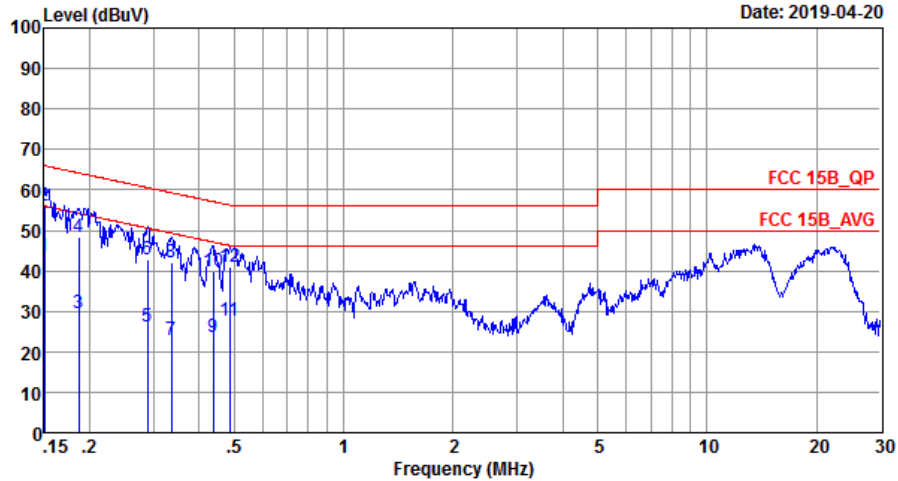

Site : CO01-SZ  
Condition: FCC 15B\_QP LISN\_20180719\_N NEUTRAL

Mode : Mode 1  
IMEI : 867285040001637/867285040004151

|     | Freq | Level | Over Limit | Limit Line | Read Level | LISN Factor | Cable Loss | Remark  |
|-----|------|-------|------------|------------|------------|-------------|------------|---------|
|     | MHz  | dBuV  | dB         | dBuV       | dBuV       | dB          | dB         |         |
| 1   | 0.15 | 43.49 | -12.51     | 56.00      | 33.30      | 0.03        | 10.16      | Average |
| 2 * | 0.15 | 56.19 | -9.81      | 66.00      | 46.00      | 0.03        | 10.16      | QP      |
| 3   | 0.19 | 29.69 | -24.51     | 54.20      | 19.50      | 0.03        | 10.16      | Average |
| 4   | 0.19 | 48.29 | -15.91     | 64.20      | 38.10      | 0.03        | 10.16      | QP      |
| 5   | 0.29 | 26.10 | -24.44     | 50.54      | 15.90      | 0.03        | 10.17      | Average |
| 6   | 0.29 | 42.90 | -17.64     | 60.54      | 32.70      | 0.03        | 10.17      | QP      |
| 7   | 0.34 | 22.90 | -26.41     | 49.31      | 12.70      | 0.03        | 10.17      | Average |
| 8   | 0.34 | 41.90 | -17.41     | 59.31      | 31.70      | 0.03        | 10.17      | QP      |
| 9   | 0.44 | 23.59 | -23.52     | 47.11      | 13.40      | 0.02        | 10.17      | Average |
| 10  | 0.44 | 39.79 | -17.32     | 57.11      | 29.60      | 0.02        | 10.17      | QP      |
| 11  | 0.49 | 27.79 | -18.44     | 46.23      | 17.60      | 0.02        | 10.17      | Average |
| 12  | 0.49 | 40.79 | -15.44     | 56.23      | 30.60      | 0.02        | 10.17      | QP      |

## 3.2. Test of Radiated Emission Measurement

### 3.2.1. Limit of Radiated Emission

The emissions from an unintentional radiator shall not exceed the field strength levels specified in the following table:

**<Class B Limit>**

| Frequency<br>(MHz) | Field Strength<br>(microvolts/meter) | Measurement Distance<br>(meters) |
|--------------------|--------------------------------------|----------------------------------|
| 30 – 88            | 100                                  | 3                                |
| 88 – 216           | 150                                  | 3                                |
| 216 - 960          | 200                                  | 3                                |
| Above 960          | 500                                  | 3                                |

### 3.2.2. Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

### 3.2.3. Test Procedures


1. The EUT was placed on a turntable with 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a Bi-Log antenna and its height is adjusted between one to four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode (RBW=120kHz/VBW=300kHz for frequency below 1GHz; RBW=1MHz VBW=3MHz (Peak), RBW=1MHz/VBW=10Hz (Average) for frequency above 1GHz).
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported.
8. Emission level (dB $\mu$ V/m) = 20 log Emission level ( $\mu$ V/m)
9. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

### 3.2.4. Test Setup of Radiated Emission

For radiated emissions from 30MHz to 1GHz

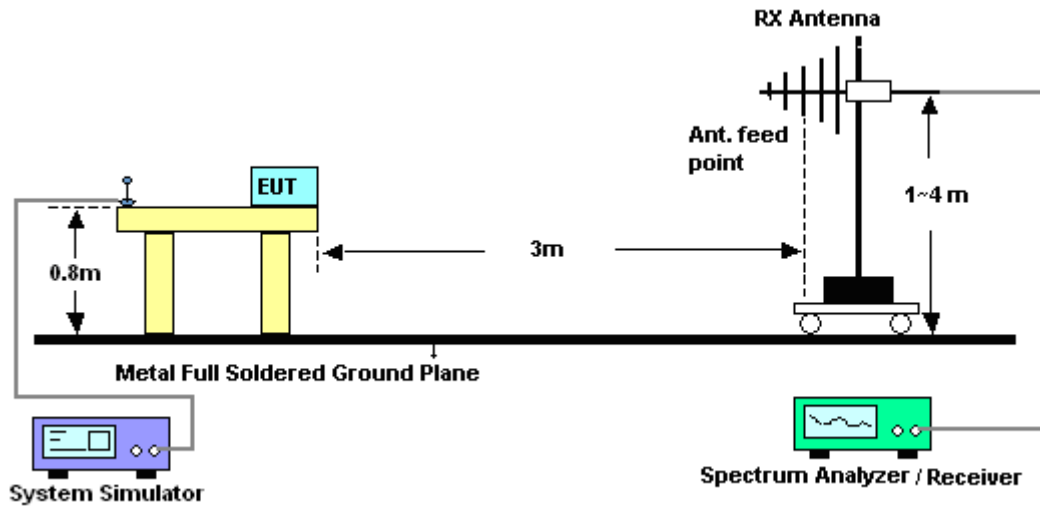


For radiated emissions above 1GHz

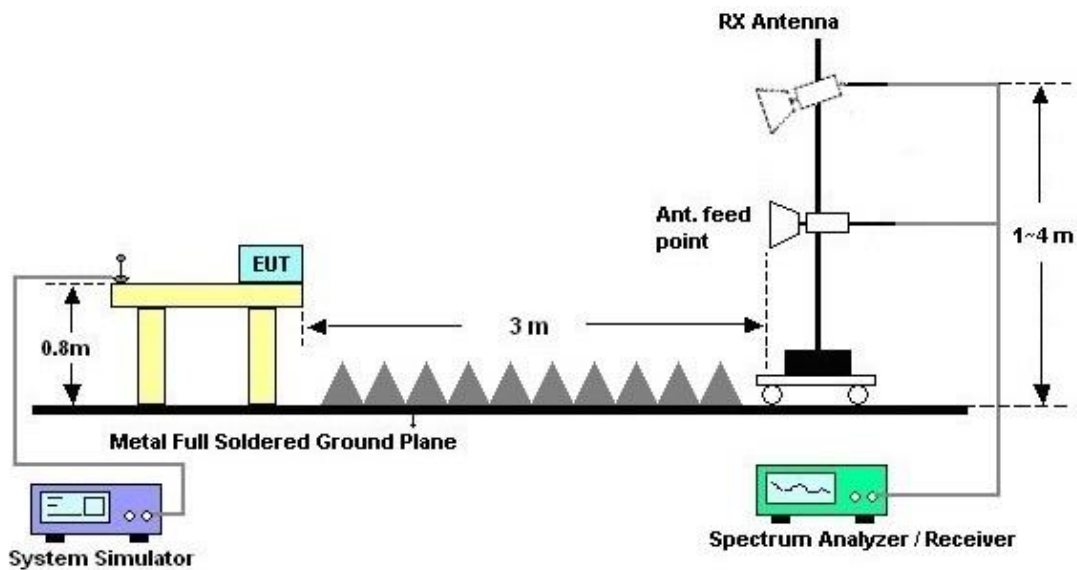




## 3.2.5. Test Result of Radiated Emission

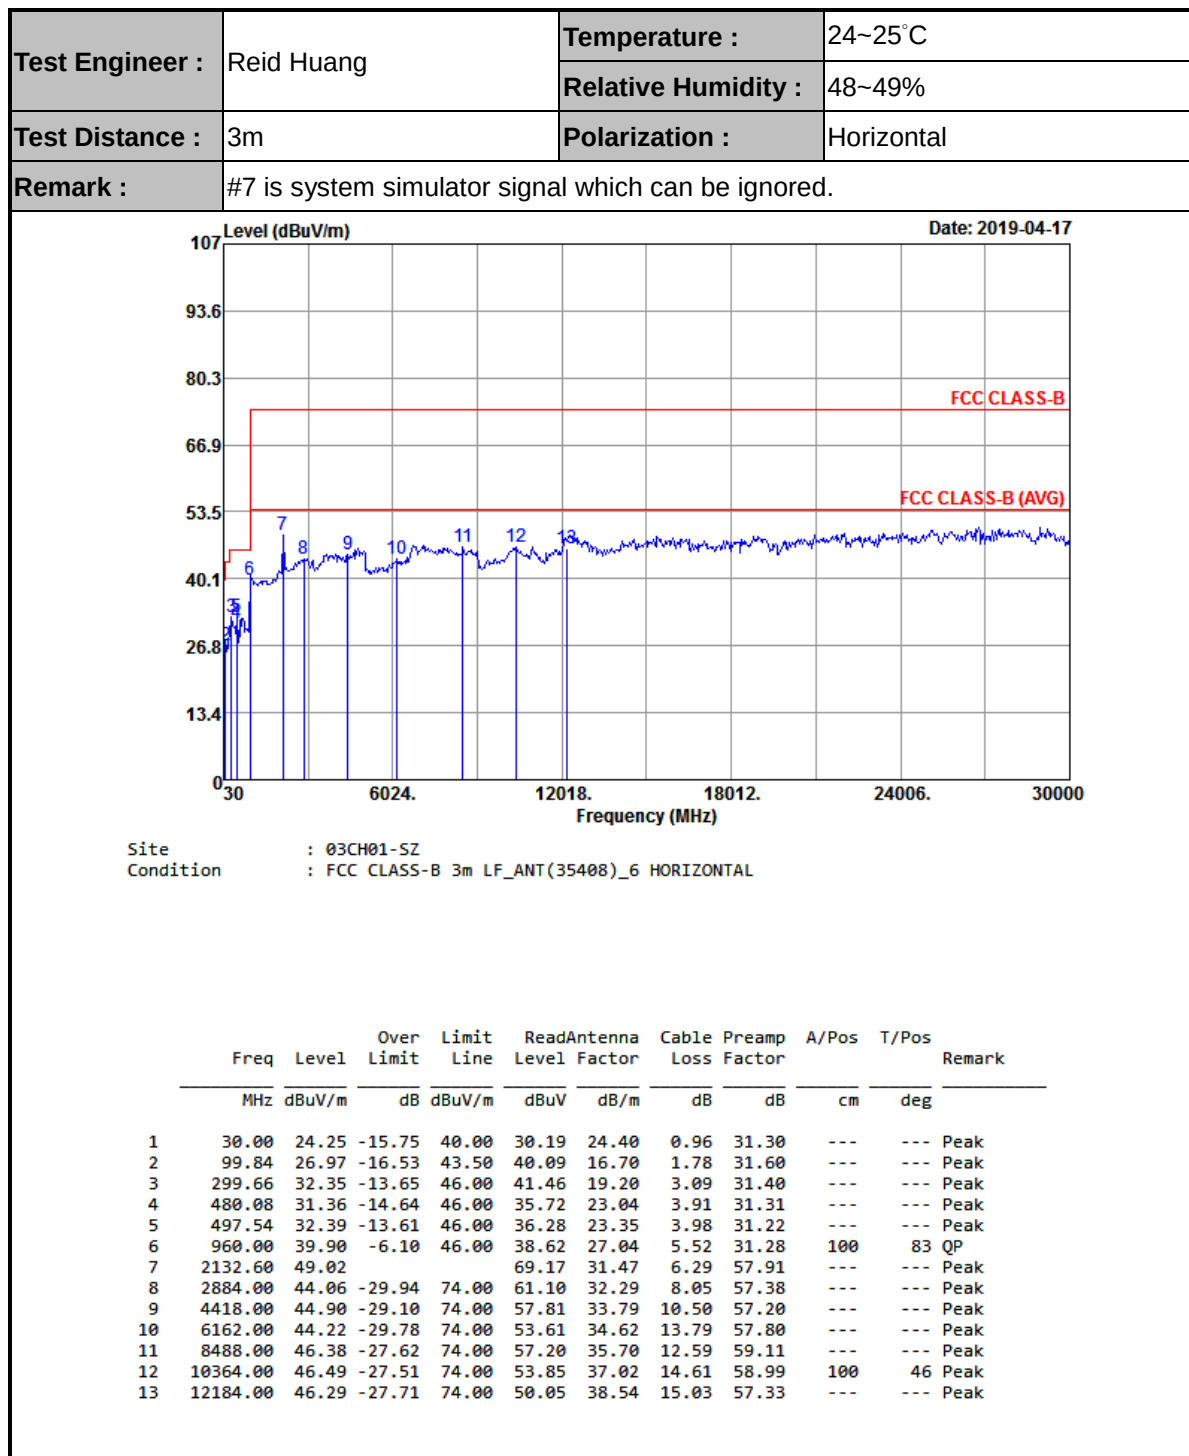



|                 |                                                     |                     |          |
|-----------------|-----------------------------------------------------|---------------------|----------|
| Test Engineer : | Reid Huang                                          | Temperature :       | 24~25°C  |
|                 |                                                     | Relative Humidity : | 48~49%   |
| Test Distance : | 3m                                                  | Polarization :      | Vertical |
| Remark :        | #7 is system simulator signal which can be ignored. |                     |          |

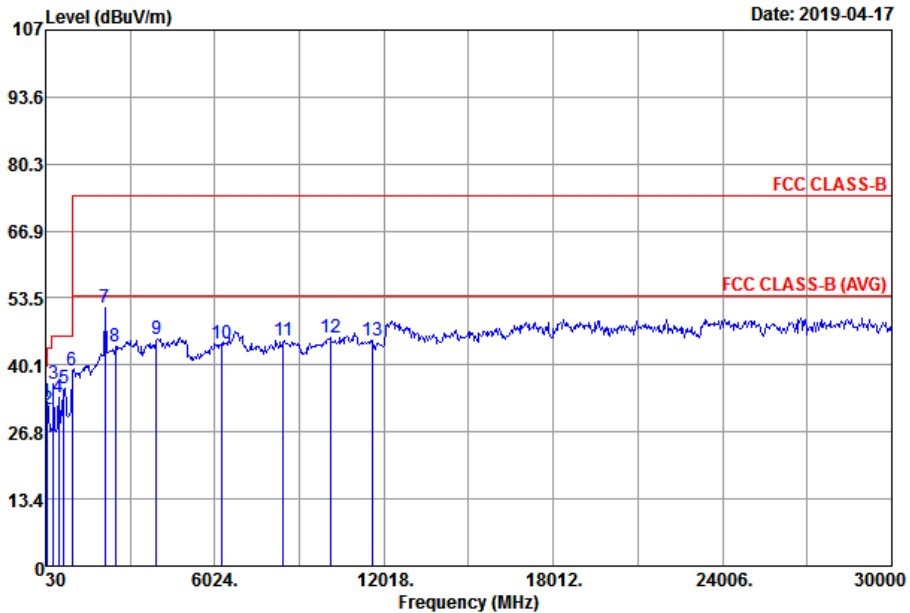

Site : 03CH01-SZ  
Condition : FCC CLASS-B 3m LF\_ANT(35408)\_6 VERTICAL

|    | Freq     | Level  | Over   | Limit  | ReadAntenna | Cable | Preamp | A/Pos | T/Pos | Remark  |
|----|----------|--------|--------|--------|-------------|-------|--------|-------|-------|---------|
|    | MHz      | dBuV/m | Limit  | Line   | Level       | Loss  | Factor |       |       |         |
|    |          |        | dB     | dBuV/m | dBuV        | dB/m  | dB     | dB    | cm    | deg     |
| 1  | 46.49    | 32.86  | -7.14  | 40.00  | 47.42       | 15.74 | 1.23   | 31.53 | ---   | Peak    |
| 2  | 99.84    | 31.28  | -12.22 | 43.50  | 44.40       | 16.70 | 1.78   | 31.60 | ---   | Peak    |
| 3  | 299.66   | 36.38  | -9.62  | 46.00  | 45.49       | 19.20 | 3.09   | 31.40 | ---   | Peak    |
| 4  | 480.08   | 33.71  | -12.29 | 46.00  | 38.07       | 23.04 | 3.91   | 31.31 | ---   | Peak    |
| 5  | 666.32   | 35.59  | -10.41 | 46.00  | 37.72       | 24.76 | 4.60   | 31.49 | ---   | Peak    |
| 6  | 960.00   | 39.03  | -6.97  | 46.00  | 37.75       | 27.04 | 5.52   | 31.28 | 100   | 29 Peak |
| 7  | 2132.60  | 51.64  |        |        | 71.79       | 31.47 | 6.29   | 57.91 | ---   | Peak    |
| 8  | 2498.00  | 43.87  | -30.13 | 74.00  | 62.69       | 31.93 | 6.91   | 57.66 | ---   | Peak    |
| 9  | 3958.00  | 45.41  | -28.59 | 74.00  | 58.79       | 33.45 | 10.08  | 56.91 | ---   | Peak    |
| 10 | 6252.00  | 44.47  | -29.53 | 74.00  | 53.39       | 34.68 | 14.31  | 57.91 | ---   | Peak    |
| 11 | 8458.00  | 44.89  | -29.11 | 74.00  | 55.69       | 35.70 | 12.61  | 59.11 | ---   | Peak    |
| 12 | 10112.00 | 45.52  | -28.48 | 74.00  | 53.36       | 36.87 | 14.56  | 59.27 | 100   | 73 Peak |
| 13 | 11604.00 | 44.99  | -29.01 | 74.00  | 49.84       | 37.87 | 14.91  | 57.63 | ---   | Peak    |



## 4. List of Measuring Equipment

| Instrument                           | Manufacturer | Model No.                    | Serial No.   | Characteristics | Calibration Date | Test Date     | Due Date      | Remark                |
|--------------------------------------|--------------|------------------------------|--------------|-----------------|------------------|---------------|---------------|-----------------------|
| EMI Receiver                         | R&S          | ESR7                         | 101630       | 9kHz~7GHz;      | Dec. 23, 2018    | Apr. 20, 2019 | Dec. 22, 2019 | Conduction (CO01-SZ)  |
| AC LISN                              | EMCO         | 3816/2SH                     | 00103912     | 9kHz~30MHz      | Oct. 18, 2018    | Apr. 20, 2019 | Oct. 17, 2019 | Conduction (CO01-SZ)  |
| AC LISN<br>(for auxiliary equipment) | EMCO         | 3816/2SH                     | 00103892     | 9kHz~30MHz      | Dec. 23, 2018    | Apr. 20, 2019 | Dec. 22, 2019 | Conduction (CO01-SZ)  |
| AC Power Source                      | Chroma       | 61602                        | 616020000891 | 100Vac~250Vac   | Jul. 18, 2018    | Apr. 20, 2019 | Jul. 17, 2019 | Conduction (CO01-SZ)  |
| EMI Test Receiver&SA                 | Agilent      | N9038A                       | MY52260185   | 20Hz~26.5GHz    | Aug. 30, 2018    | Apr. 17, 2019 | Aug. 29, 2019 | Radiation (03CH01-SZ) |
| SHF-EHF Horn                         | com-power    | AH-840                       | 101071       | 18Ghz~40GHz     | Mar. 30, 2019    | Apr. 17, 2019 | Mar. 29, 2020 | Radiation (03CH01-SZ) |
| Bilog Antenna                        | TeseQ        | CBL6112D                     | 35407        | 30MHz~2GHz      | Jun. 05, 2018    | Apr. 17, 2019 | Jun. 04, 2019 | Radiation (03CH01-SZ) |
| Double Ridge Horn Antenna            | ETS Lindgren | 3117                         | 119436       | 1GHz~18GHz      | Jun. 28, 2018    | Apr. 17, 2019 | Jun. 27, 2019 | Radiation (03CH01-SZ) |
| LF Amplifier                         | Burgeon      | BPA-530                      | 102209       | 0.01~3000Mhz    | Apr. 20, 2018    | Apr. 17, 2019 | Apr. 19, 2019 | Radiation (03CH01-SZ) |
| HF Amplifier                         | MITEQ        | AMF-7D-0010<br>1800-30-10P-R | 1707137      | 1GHz~18GHz      | Oct. 19, 2018    | Apr. 17, 2019 | Oct. 18, 2019 | Radiation (03CH01-SZ) |
| HF Amplifier                         | KEYSIGHT     | 83017A                       | MY53270104   | 0.5GHz~26.5GHz  | Dec. 22, 2018    | Apr. 17, 2019 | Dec. 21, 2019 | Radiation (03CH01-SZ) |
| HF Amplifier                         | MITEQ        | TTA1840-35-HG                | 1871923      | 18GHz~40GHz     | Jul. 17, 2018    | Apr. 17, 2019 | Jul. 16, 2019 | Radiation (03CH01-SZ) |
| AC Power Source                      | Chroma       | 61601                        | 616010001985 | N/A             | NCR              | Apr. 17, 2019 | NCR           | Radiation (03CH01-SZ) |
| Turn Table                           | EM           | EM1000                       | N/A          | 0~360 degree    | NCR              | Apr. 17, 2019 | NCR           | Radiation (03CH01-SZ) |
| Antenna Mast                         | EM           | EM1000                       | N/A          | 1 m~4 m         | NCR              | Apr. 17, 2019 | NCR           | Radiation (03CH01-SZ) |

NCR: No Calibration Required

## 5. Uncertainty of Evaluation

### Uncertainty of Conducted Emission Measurement (150 kHz ~ 30 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 2.6 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.8 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 5.0 dB |
|-------------------------------------------------------------------------|--------|

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

|                                                                         |        |
|-------------------------------------------------------------------------|--------|
| Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ ) | 4.3 dB |
|-------------------------------------------------------------------------|--------|