
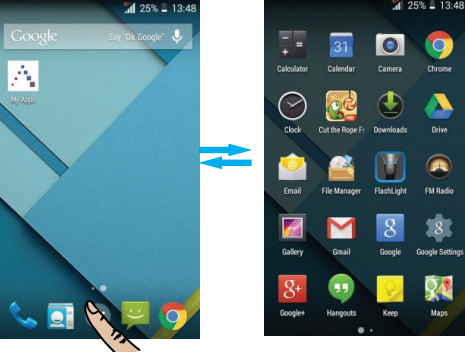


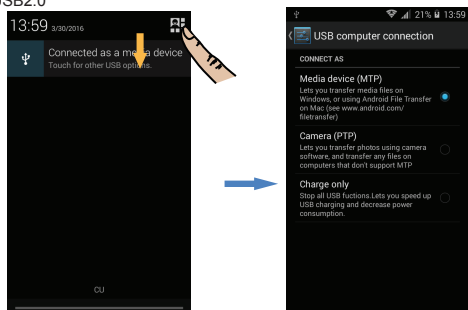
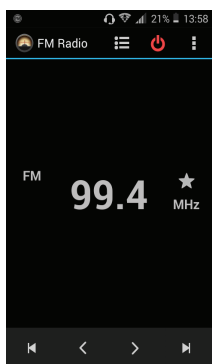


Safety In order to ensure the phone is used safely and correctly, please read the precautions below carefully before use. 1.1 General precaution • Your phone is only suitable for the battery and charger approved by our company or else it may cause the battery to leak, overheat, explode or even catch fire. • Do not knock, vibrate or throw the phone heavily to avoid malfunction, fire, overheating, explosion or fire. • If there are abnormal phenomena, like temperature rising, color change or distortion during the usage, charging or storage of the battery, please stop using it and replace it with a new battery. • It may burn the skin if liquid in the battery leaks onto skin or clothes. If this happens please flush with plenty of clean water immediately and go to a hospital at once. • Please keep the battery away from fire to avoid fire and explosion if the battery leaks or emits a strange smell. • Do not place expose the battery to moisture or it may cause overheating, fumes and corrosion. • Do not use or place the battery under direct sunlight, or in hot places or, it may cause leakage and overheating, thus reducing performance and shortening the lifespan. • Do not charge the battery for over 24 hours continuously. • Use careful with the earphone maybe possible excessive sound pressure from earphones and headphones can cause hearing loss 1.2 Precaution for the use of charger • Do not cause short circuit to the charger, or it may cause electric shock, fumes and damage to the charger. • Do not use the charger if the power wire is broken, or it may cause fire and electric shock. • Please remove accumulated dust on the power plug. • Do not put water containers next to the power supply to avoid overheating, fire, electric shock and malfunction in case they come into contact. • Do not disassemble or tamper with the charger or it may cause personal injury, electric shock, fire and the damage of the charger. • Do not use the charger in places of high humidity, like bathrooms, or it may cause electric shock, fire and damage of charger. • Do not touch the charger, power cord or power plug with wet hands or it can cause electric shock. • Do not put heavy objects on the power cord or change the power cord or it may cause electric shock and fire. • Please unplug the power socket before cleaning and maintenance.	• Please hold the charger to unplug the socket as pulling the power cord may damage the power wire and cause electric shock and fire. 1.3 Cleaning and maintenance • As the phone, battery and charger are not waterproof, do not use them in places of high humidity and avoid them being wet by rain. • Please clean the battery and charger with a soft dry cloth. • Never use alcohol, thinner or solutions, like benzene, to wipe the phone. • Dirty sockets can cause poor contact and power down, and even make recharging unavailable. So, please clean them periodically. 1.4 Common Precaution Mobile Phone: • Please use the phone in an environment with temperature between -10°C- 40°C and humidity of ≤75%. • Please use the phone far away from regular telephones, TV sets, radio sets and office automation equipment, to avoid affecting the normal use of these equipments and mobile phone. Battery: • Store the battery in cool and ventilated place without direct sunlight. • The battery has a limited lifespan. The usage of battery will be shortened progressively due to frequent charging. Once the battery is out of use, it means that its lifespan has ended, and you will need to replace it with an approved new battery. • Do not dispose of old batteries as household waste. Give them to specified disposal places and follow any stipulated instructions for disposal. CAUTION : RISK OF EXPLOSION IF BATTERY IS REPLACED BY AN INCORRECT TYPE. DISPOSE OF USED BATTERIES ACCORDING TO THE INSTRUCTIONS. Charger: • Do not charge under following conditions: → places with direct sunlight → places with ambient temperature less than -10°C or over 40°C, wet or dusty places with strong vibrations (it may cause malfunction); → places near electrical appliances (it may affect the audio and sound) like TV set, radio, etc. → Adapter shall be installed near the equipment and shall be easily accessible. The plug considered as disconnect device of adapter	Getting to know your touch phone 	Starting up the device To install the SIM card • Open the SIM card and Memory card rubber. • Locate the SIM card slot, and then insert the SIM card with its gold contacts facing up. Note: The phone support one SIM card. The card will support 4G card, 3G card and 2G card. If you need to use 4G/3G operation, please insert a 4G/3G card in the card slot To install a memory card • Open the SIM card and Memory card rubber. • Locate the Memory card slot, and then insert the Memory card with its gold contacts facing up.	Charging the Battery New batteries are shipped partially charged. Before you start using your device, it is recommended that you install and charge the battery. Some batteries perform best after several full charge/discharge cycles. Note: Only the AC adapter and USB sync cable provided with your device must be used to charge the device. Connect the USB connector of the AC adapter to the sync connector on your device, and then plug in the AC adapter to an electrical outlet to start charging the battery. As the battery is being charged while the device is on, a charging icon appears in the title bar of the Home screen. After the battery has been fully charged, a full battery icon appears in the title bar of the Home screen. Warning: • Do not remove the battery from the device while you are charging it using the AC or car adapter. • As a safety precaution, the battery stops charging before it overheats. Power on/off To power off your phone, press & hold POWER. On release, the Phone options menu opens. Select 'Power off' and confirm. To power on again, press & hold POWER.	SAR This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference. (2) This device must accept any interference received, including interference that may cause undesired operation. FCC ID: QPN-KOSUMI NOTE: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures: ---Reorient or relocate the receiving antenna. ---Increase the separation between the equipment and receiver. ---Connect the equipment into an outlet on a circuit different from that to which the receiver is connected. ---Consult the dealer or an experienced radio/TV technician for help. Body-worn Operation This device was tested for typical body-worn operations. To comply With RF exposure requirements, a minimum separation distance of 1.5cm must be maintained between the user's body and the handset, including the antenna. Third-party belt-clips, holsters, and similar including the antenna. Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided.	Specific Absorption Rate (SAR) information: This wireless phone meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. FCC RF Exposure Information and Statement The SAR limit of USA (FCC) is 1.6 W/kg averaged over one gram of tissue. Device types: H405F QPN-KOSUMI has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification for use at the head is 0.9975W/kg (1g) and when properly worn on the body is 1.1670W/kg (1g) . This device was tested for typical body-worn operations with the back of the handset kept 1cm from the body. To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 1cm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.
---	--	--	---	---	--	--

1. Switch MainMenu style (1) In default Home screen, slide your fingertip left and right along the screen to reveal the more home screen.  (2) On Home screen, click icon on the bottom of the screen (Main menu icon) to enter the main menu screen, slide your fingertip left and right along the screen to reveal the more applications. 	2. Home screen (1) Read your notifications When you see a notification in the status bar, touch the bar and slide your finger down the screen to open the list of notifications displayed in the sliding window. Ongoing notifications report activities such as call forwarding ON, current call status, song playing. Notifications report the arrival of new messages, calendar events, and alarms. You can clear notifications list by selecting 'Clear' notifications at the top of the notifications window. To open the message, reminder, or other notification, you can touch the items. To close the notifications window, slide your finger up the screen. (2) Create Home screen shortcuts and widgets: From the Home screen, touch and hold the blank screen, and select 'Widgets'. Enter the main menu screen, slide your fingertip left to reveal the widget, select a shortcut to some of your saved information (such as a play list), a widget (a clock) for your Home screen.  (3) Move objects on the Home screen • To move an icon or other item on the Home screen, you must first touch & hold it to enter move mode. The object will magnify when it's ready to be moved. • Without lifting your finger (or you'll drop out of move mode), drag the object to the new position. To move an item to a section of the Home screen not in view, move it to the edge of the screen and hold it there for a moment. The screen view will shift; position the object and release.	3. Camera All the pictures you can capture or view on your phone are stored on a memory card, which is the phone storage or the installed SD card in your phone. Before you use the Camera or view pictures in Gallery, make sure you have a card installed. 	4. GPRS/WLAN network Your device's networking capabilities allow you to access the Internet or your corporate network through WLAN, GPRS, or WCDMA (if SIM card supported). You can also add and set up a VPN or proxy connection. To use WLAN on your device, you need access to a wireless access point or "hotspot". Note: The availability and range of your device's WLAN signal depends on the number, infrastructure, and other objects through which the signal passes. To open the Browser you need to be connected to a network. 	5. U-disk storage This phone supports movable storage, i.e., the U-disk function. When the phone is switched on, you can see the icon in the status bar on the top of the screen when it's connected to a PC by a data line. Touch the bar and slide your finger down the screen to open the list of notifications displayed in the sliding window. Select [USB connected] and touch [Turn on USB storage] to confirm, then you can use the phone as a U-disk. The product shall only be connected to a USB interface of version USB2.0 	7. Bluetooth The phone supports Bluetooth(BT) functions, you can establish a wireless connection between the phone with other compatible devices, and data transmission, you can establish a wireless connection between devices in the phone with a distance of up to 10 meters. Bluetooth connection may be interference by obstacles, such as walls or other electronic device. 1. Enter the setting menu, Touch the Bluetooth to open the function, idle screen will display BT icon in the status bar. 2. Open the BT discoverable, and other devices can search the phone. 3. Before using the phone as a Bluetooth device, you need to pair the phone with the target device as follows: -Sure your phone has Bluetooth-enabled. -Touch "Scan for devices." Bluetooth devices within the range of the phone will start scanning. -Touch the device you want to pair, to confirm password to complete the pairing You can use Bluetooth to share the pictures, videos or music files with family and friends	9. FM radio The phone supports FM radio, but you need an earphone as antenna, please plug in earphone before searching for channels. 	Technical Specification Weight: 115g (Including battery) Dimensions: 121*64*11.3mm Battery Type: Li-ion Battery Voltage: 3.7V Battery Capacity: 1400mAh Talk Time: about 6h Standby Time: about 300h Battery Time (No prior or separate notice is required for capacity changes) HW version: V01 SW version: V01 Firmware version: Android 4.4 Handset: JWEP0847-M01, 3.5 4Pole 32ohm 2mW USB cable: AM MICRO5P, MIRCOSP 1M Charger: A31-500550, 5V550mA Operating Frequency Band (RF): GSM 850: 824.0~849.0 MHz(TX), 869.0~894.0 MHz(RX) EGSM 900: 880.0~915.0MHz(TX), 925.0~960.0MHz(RX) DCS 1800: 1710.0~1785.0MHz(TX), 1805.0~1880.0 MHz(RX) PCS 1900: 1850.0~1910.0MHz(TX), 1930.0~1990.0MHz(RX) WCDMA B1: 1920.0~1980.0MHz(TX), 2110.0~2170.0MHz(RX) WCDMA B2: 1850.0~1910.0MHz(TX), 1930.0~1990.0MHz(RX) WCDMA B5: 880.0~915.0 MHz(TX), 925.0~960.0 MHz(RX) Bluetooth: 2402-2480MHz(TX/RX) WIFI: 2412-2472M(TX/RX) GPS: 1575.42M(RX) FM: 65-108MHz Note: Actual operating conditions depend on the local network environment, SIM, and user behavior. Warning: Any consequence caused by misuse, abuse, or not following any and all of the above-written suggestions and instructions shall not hold the producer in any way responsible to any degree. Announcement: The manufacturer reserves the right to change or upgrade specifications or software versions without prior or separate notice. Trade marks mentioned or used in this material belong to their respective owners.	 User Guide www.MobiWire.com MobiWire® is a registered trademark of Mobiwire SAS.
---	--	--	---	---	---	--	--	---