


快速入门指南

Quick Start Guide

Buttons and Ports Labeled (Pictures are for reference only. The actual product may vary)

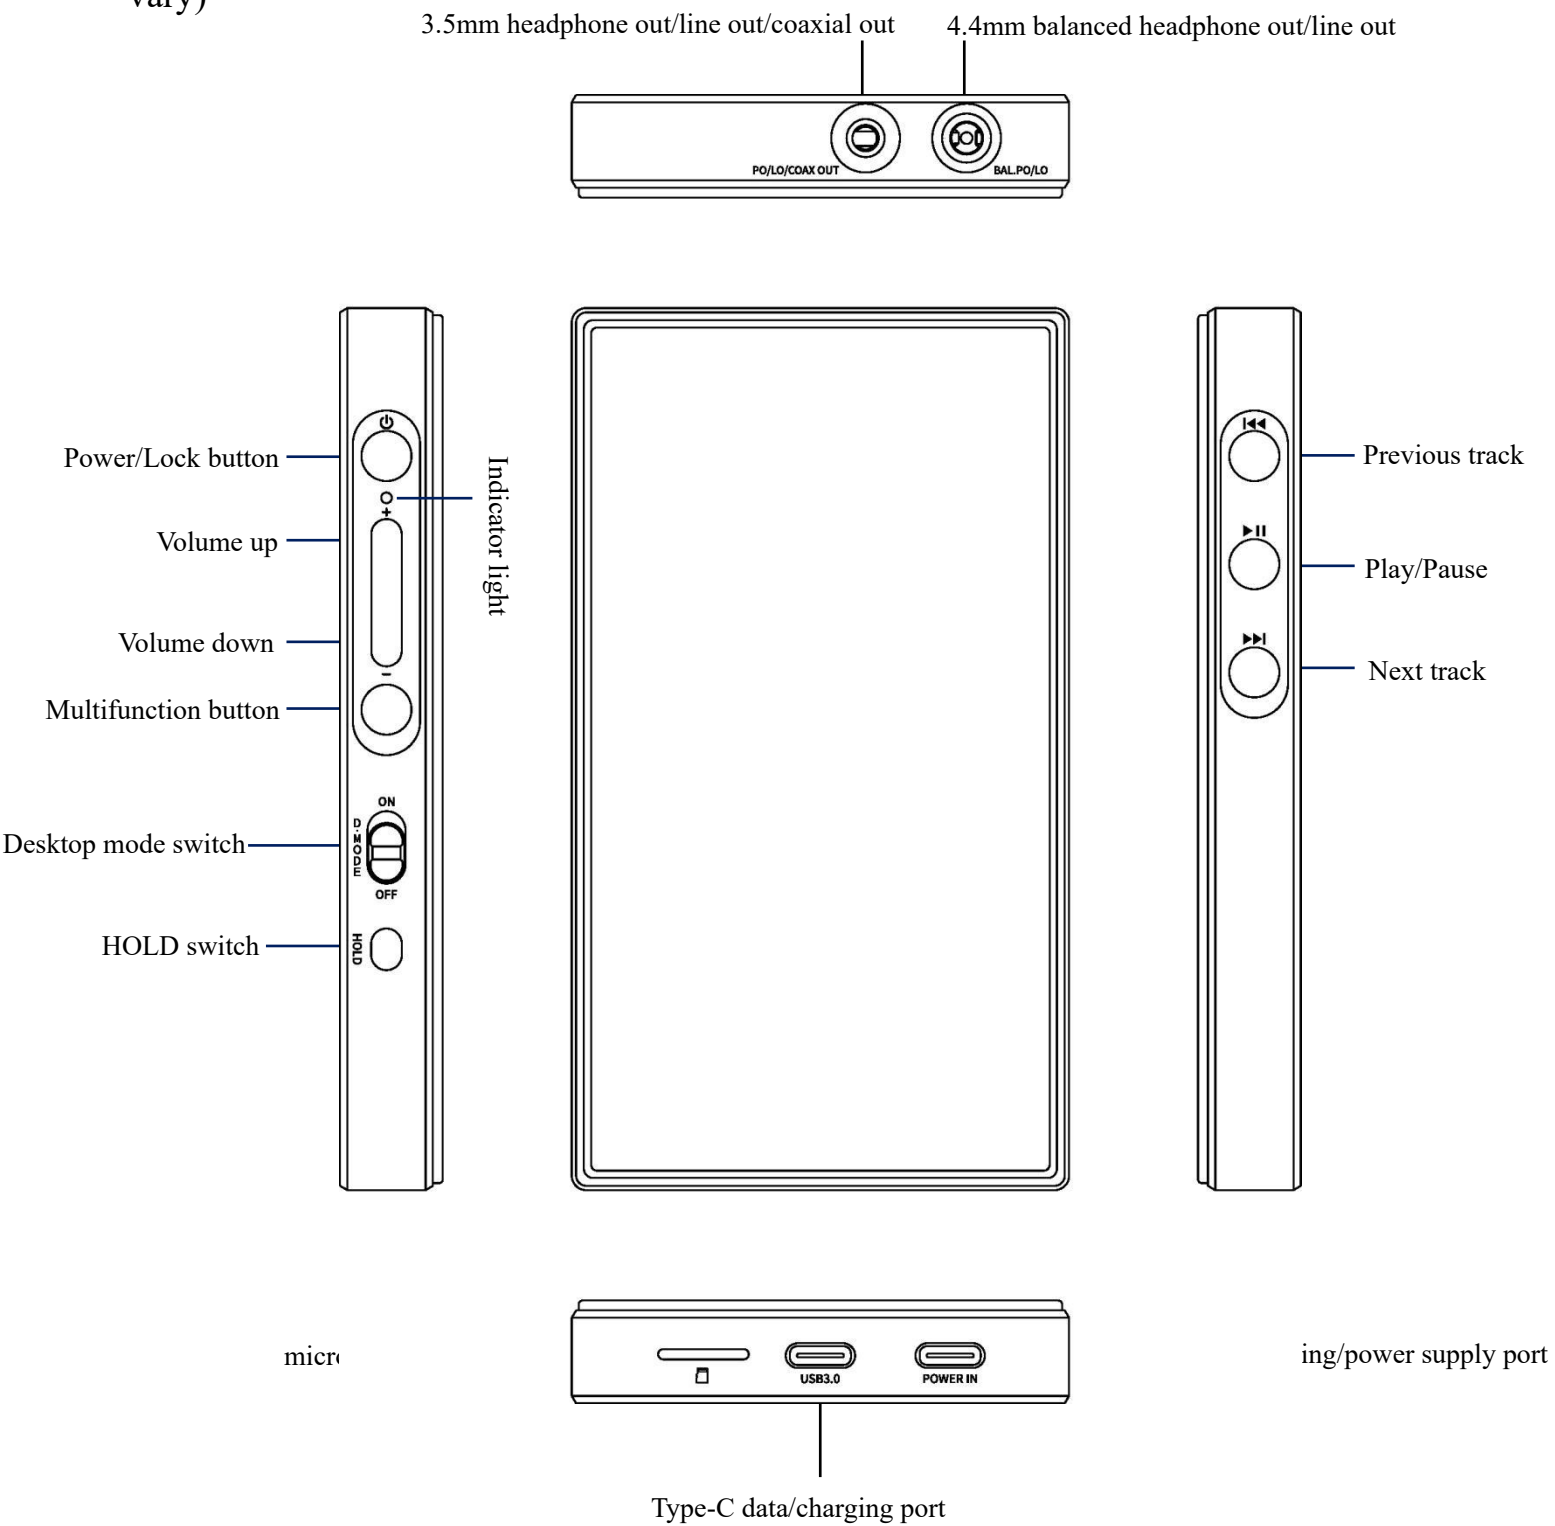

Power On/Off

Hold the Power/Lock button to turn on the M21 while it is off. On its first startup, tap the preferred language onscreen to enter the main UI. Hold the Power/Lock button while the M21 is on and a shutdown dialogue will pop up. You can select to turn off or reboot the player.

Charging

The bottom POWER IN port supports PD fast charging protocol. To achieve the designed charging time, it is recommended to use a PD3.0 or above power source.

Type-C Port

The bottom of the M21 has two Type-C ports. The one marked USB3.0 supports data transfer, common charging, USB HOST, USB OTG and so on. The other marked POWER IN only supports charging/power supply but not data transfer with computers.

Gesture Operation

Return to previous menu: Swipe right from the left edge of the screen, or swipe left from the right edge.

Return to homepage: Swipe up from the bottom edge of the screen.

Multitask managing: Swipe up from the bottom edge of the screen and then hold.

Working Modes Switch

The M21 has five working modes: Android mode, Pure Music mode, USB DAC mode, Bluetooth Receiving mode, and AirPlay mode. The M21 will default to enter Android mode when it powers on for the first time. You can switch to other working modes on the drop-down or Settings menu.

Android mode/Pure Music mode

Under the Android mode/Pure Music mode, the M21 can be connected to a computer for data transmission.

Note: The MTP driver for macOS can be downloaded via the following link:

https://www.fiiio.com/Driver_Download.

USB DAC mode

Before using the USB decoding mode for the first time, please visit our official website to download the USB DAC driver. Follow relevant instructions to install the driver before using the USB DAC function.

Bluetooth Receiving mode

When switching to the Bluetooth Receiving mode for the first time, the M21 will automatically enter the pairing state. The next time it enters Bluetooth Receiving mode, it will reconnect to the last connected device automatically.

AirPlay mode

The AirPlay mode requires a valid WiFi connection. Please confirm that the M21 is connected to an available network before entering the AirPlay mode.

Desktop Mode Switch (D.MODE)

When switching to ON, the desktop mode is enabled, and the battery will not be charged; when switching to OFF, the desktop mode is disabled, and the battery will be charged.

HOLD Switch

After the HOLD switch is enabled, the side buttons of the M21 will be locked to prevent unintended touches. You can select which buttons to lock in the settings menu or restore the button functionality by disabling the HOLD switch.

Super High Gain Mode

When a fast-charging power adapter is inserted in the M21 and is detected, the “Super High Gain mode” will show up on the GAIN settings menu. If the D.MODE switch is set to ON, a dialogue prompt of “Switch to Super High Gain mode?” will pop up, and you can decide whether to switch based on your needs or not.

Firmware Upgrade

OTA (Over-the-Air) online upgrade

Turn on the WiFi function on the M21 and connect it to an available network. It will

automatically detect if there is a new firmware. If no firmware is detected, please go to “Technical Support -> Firmware Update -> Online Upgrade” to check and upgrade the firmware manually.

Local upgrade

Please download the firmware on our website and follow relevant instructions to upgrade it.

Download link: <http://www.fiio.com/supports>

Notes and Precautions

★Please do not put the battery in a high-temperature environment. The battery is prohibited from use if it is soaked in water, or if it gets swollen. Please do not disassemble, hit, crush, or puncture the battery, and do not put it on fire.

★Please do not place the device in circumstances of excessive high/low temperatures (above 45°C or below 0°C), or in an enclosed high-temperature environment, such as in a car.

★Please do not repair or disassemble the device on your own and do not put it in water.

★Please charge the battery on a regular basis to secure the battery life if this device has not been used for a long time.

★You might not be able to hear the sound of the surroundings when using headphones. For your safety, please avoid using headphones in dangerous situations.

★It is recommended to use a suitable charger in case of a high-voltage adapter causing

damage to the device.

★In the likely event that the M21 hangs up, you may hold the “Power/Lock button” for over 10 seconds to force a reboot.

List of Items Included (please check if the following items are included)

1. M21
2. Screen protector (applied on the M21 in factory)
3. Protective case
4. USB data cable
5. Warranty card
6. Quick start guide

To Learn More

*For related video instructions of the M21 and FAQ (Frequently Asked Questions), please scan the QR code below.

*To learn more about the product, please visit our website: www.fiio.com

* For detailed instructions of the M21, please visit <https://www.fiio.com/supports>

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

MODIFICATION: Any changes or modifications not expressly approved by the grantee of this device could void the user's authority to operate the device.

This device meets the FCC radiation exposure requirements set forth for an uncontrolled environment. The requirements set a SAR limit of 1g 1.6 W/kg averaged over one gram of tissue.