Antenna Datasheet

Product OC: YEBT038WFA
Version: 0.1
Date: 2026-01-26
Status: Released

Product Name: External Wi-Fi/BT Antenna
Key Features:
Frequency band: 2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Peak efficiency: 50.12 %
Dimensions: Φ13 mm × 195 mm
RoHS Compliant

Overview

Quectel Wi-Fi/BT antenna covers BT, 2.4 GHz, 5 GHz, and up to 7 GHz bands, fully satisfying customers' requirements for BT, Wi-Fi 5, Wi-Fi 6, and Wi-Fi 6E/Wi-Fi 7. There are various antenna types, including built-in FPC/PCB antenna, ceramic patch antenna, and other external antennas of different shapes or sizes. The antenna performance meets the customers' demands for efficiency, gain, and radiation and ensures the superior experience of the customers' products in use.

Contents

Overview **1**

Contents **2**

1 Specification **3**
- 1.1. Electrical 3
- 1.2. Mechanical & Environmental 4

2 Drawing **5**

3 Detailed Performance **6**
- 3.1. S-Parameter Test 6
  - 3.1.1. VSWR 6
  - 3.1.2. Return Loss 8
- 3.2. Radiation Performance Test 9
  - 3.2.1. Efficiency 9
  - 3.2.2. Average Gain 10
  - 3.2.3. Peak Gain 11
  - 3.2.4. 3D & 2D Radiation Pattern 12
    - 3.2.4.1. Test Condition: Free Space 12

4 Packaging **15**

Contact Us **17**

Legal Notices **18**

Revision History **20**

1 Specification

Test Condition: Free Space

1.1. Electrical

Electrical	
Frequency Range	2400–2500 MHz, 5150–5850 MHz, 5925–7125 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional
Antenna Type	Dipole

Band / Freq. (MHz) / Specification	Wi-Fi 2G BT	Wi-Fi 5G				Wi-Fi 6G
	2400–2483	**5150–5250**	**5250–5350**	**5470–5725**	**5725–5850**	**5925–7125**
Max. VSWR	2.0	2.8	2.8	2.7	2.4	2.3
Max. Return Loss (dB)	-9.3	-6.6	-6.4	-6.7	-7.6	-8.0
AVG Eff. (%)	40.6	40.6	38.6	33.8	28.7	33.4
AVG. AVG Gain (dB)	-4.0	-3.9	-4.1	-4.7	-5.4	-4.8
Max. Peak Gain (dBi)	0.2 （2460MHz）	-0.7 （5155MHz）	-0.8 （5260MHz）	-1.2 （5480MHz）	-1.5 （5820MHz）	1.6 （6915MHz）
VSWR	≤ 2.8					
Return Loss	≤ -6.4 dB					
Peak Gain	≤ 1.6 dBi					

1.2. Mechanical & Environmental

Mechanical	
Antenna Dimensions	Φ13 mm × 195 mm
Material & Color	TPEE & Black
Connector Type	RP SMA Male
Mounting Type	Terminal
Weight	Typ. 18 g
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
RoHS Compliant	Yes

2 Drawing

3 Detailed Performance

- Network Analyzer: Keysight E5071C (Device number: QTB6331E; Calibration date: 2025-07-04; Due date: 2027-01-03)
- Chamber: OTA RayZone 2800 GTS (Device number: QTA0709; Calibration date: 2025-07-14; Due date: 2027-07-13)
- Testing Software: Libra
- Test Engineer: Damon Zhang
- Manufacturer: Quectel Wireless Solutions (Changzhou) Co., Ltd.
  Address: No.8 Nanhu West Road, Wujin District, Changzhou City, Jiangsu Province, China

3.1. S-Parameter Test

3.1.1. VSWR

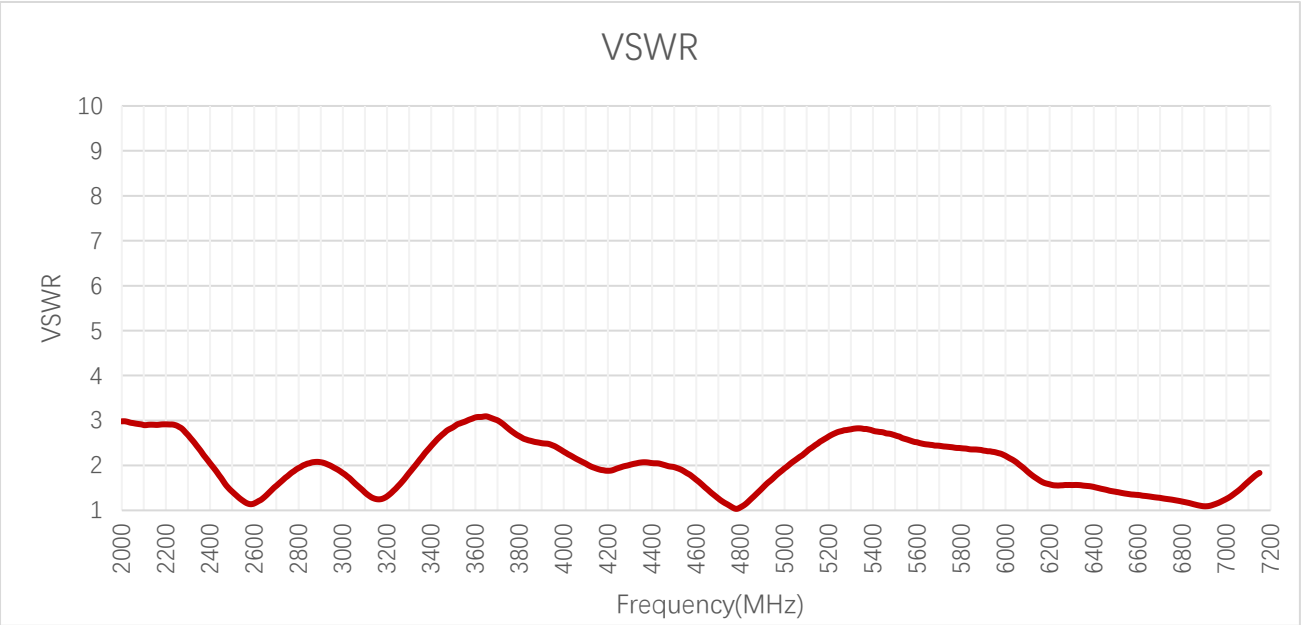

VSWR

Frequency (MHz)	2400	2450	2480	2500	5150	5155	5250	5260	5350
VSWR	2.0	1.7	1.5	1.4	2.5	2.5	2.8	2.8	2.8
Frequency (MHz)	5470	5480	5725	5820	5850	5925	6325	6725	6915
VSWR	2.7	2.7	2.0	2.4	2.4	2.3	1.6	1.3	1.1
Frequency (MHz)	7125								
VSWR	1.7								

3.1.2. Return Loss

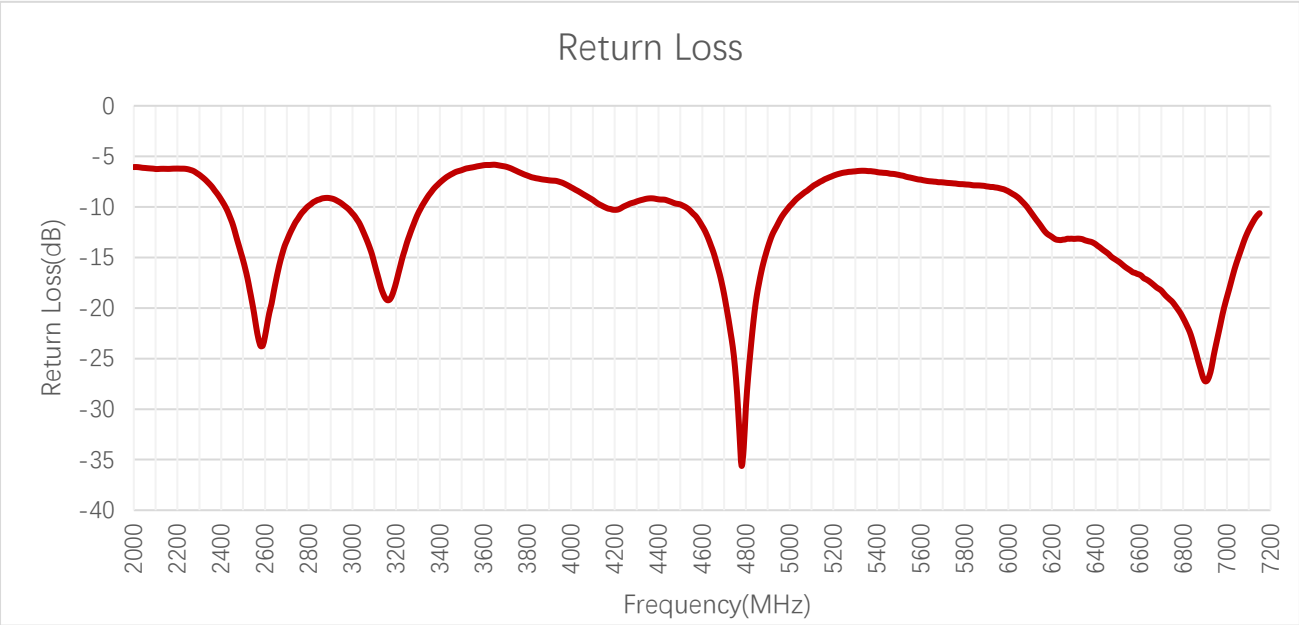

Return Loss (dB)

Frequency (MHz)	2400	2450	2480	2500	5150	5155	5250	5260	5350
Return Loss (dB)	-9.3	-11.5	-13.8	-15.3	-7.4	-7.4	-6.6	-6.6	-6.4
Frequency (MHz)	**5470**	**5480**	**5725**	**5820**	**5850**	**5925**	**6325**	**6725**	**6915**
Return Loss (dB)	-6.7	-6.7	-7.6	-7.8	-7.9	-8.0	-13.2	-19.0	-21.4
Frequency (MHz)	**7125**								
Return Loss (dB)	-11.1								

3.2. Radiation Performance Test

3.2.1. Efficiency

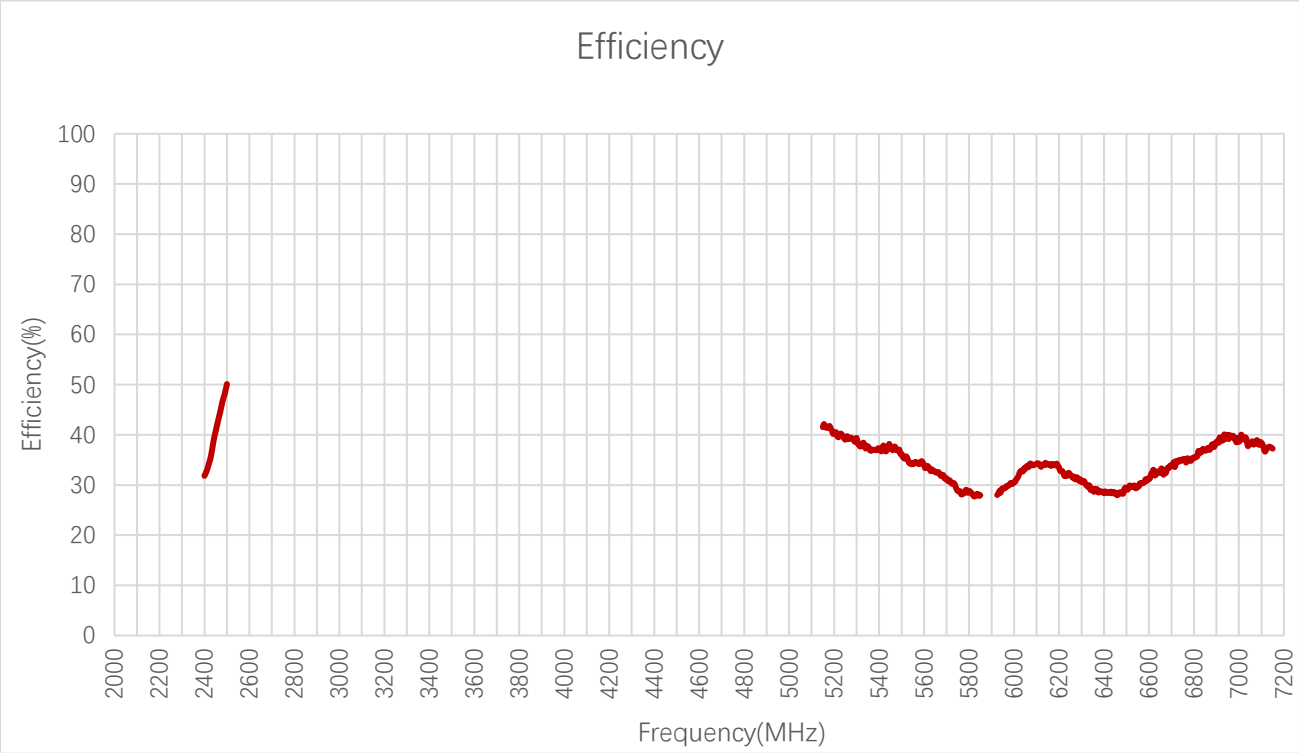

Efficiency (%)

Frequency (MHz)	**2400**	**2450**	**2480**	**2500**	**5150**	**5155**	**5250**	**5260**	**5350**
Efficiency (%)	31.8	40.7	46.4	50.1	41.5	42.2	39.1	39.7	37.7
Frequency (MHz)	**5470**	**5480**	**5725**	**5820**	**5850**	**5925**	**6325**	**6725**	**6915**
Efficiency (%)	37.7	37.1	30.2	27.8	28.0	28.0	30.0	34.6	39.5
Frequency (MHz)	**7125**								
Efficiency (%)	37.4								

3.2.2. Average Gain

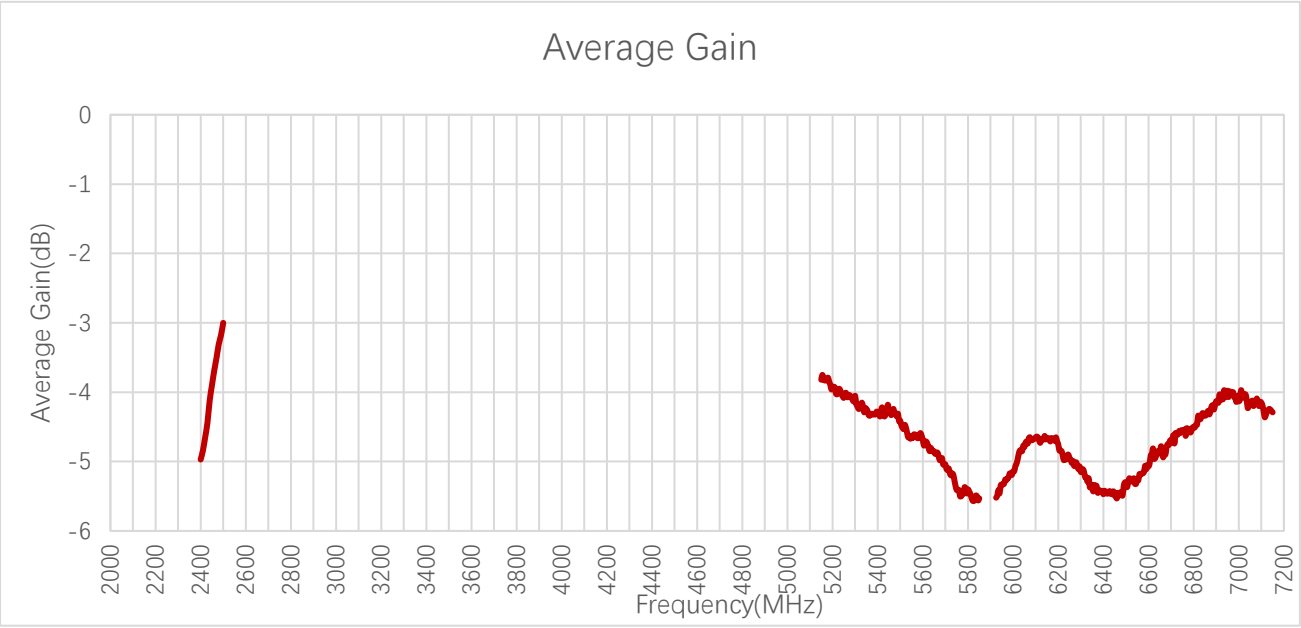

Average Gain (dB)

Frequency (MHz)	2400	2450	2480	2500	5150	5155	5250	5260	5350
Average Gain (dB)	-5.0	-3.9	-3.3	-3.0	-3.8	-3.8	-4.1	-4.0	-4.2
Frequency (MHz)	**5470**	**5480**	**5725**	**5820**	**5850**	**5925**	**6325**	**6725**	**6915**
Average Gain (dB)	-4.2	-4.3	-5.2	-5.6	-5.5	-5.5	-5.2	-4.6	-4.0
Frequency (MHz)	**7125**								
Average Gain (dB)	-4.3								

3.2.3. Peak Gain

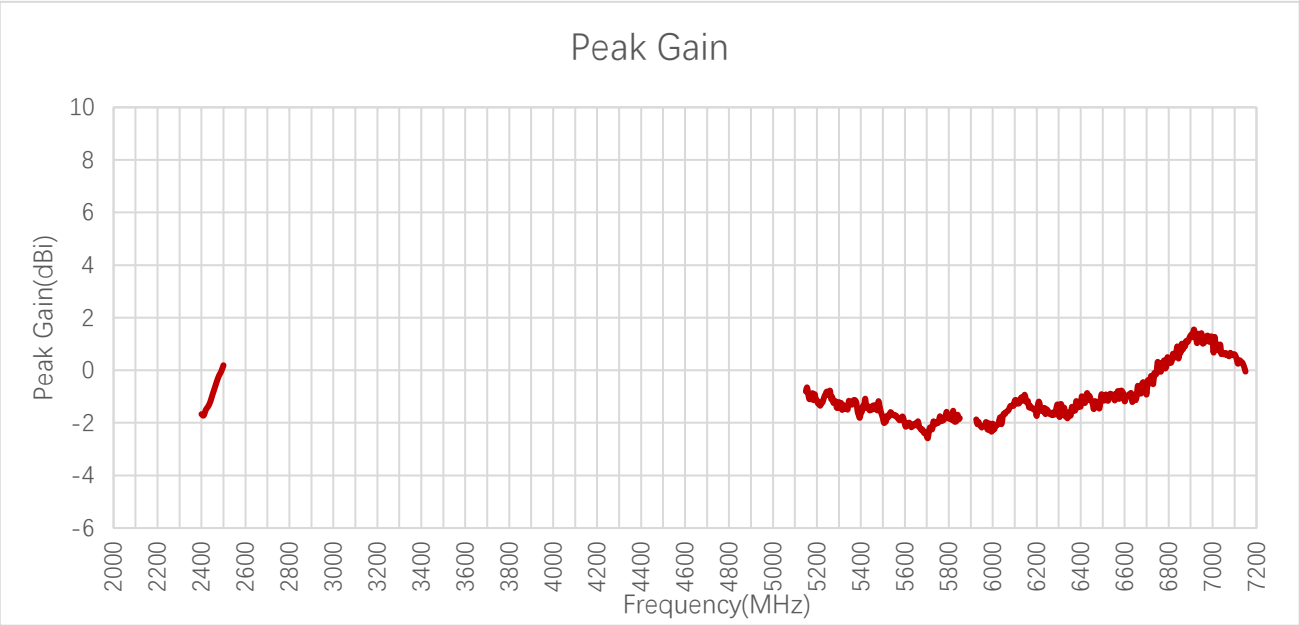

Peak Gain (dBi)

Frequency (MHz)	**2400**	**2450**	**2460**	**2500**	**5150**	**5155**	**5250**	**5260**	**5350**
Peak Gain (dBi)	-1.7	-0.1	0.2	0.3	-0.8	--0.7	-0.9	-0.8	-1.3
Frequency (MHz)	**5470**	**5480**	**5725**	**5820**	**5850**	**5925**	**6325**	**6725**	**6915**
Peak Gain (dBi)	-1.4	-1.2	-2.2	-1.5	-1.8	-1.9	-1.4	-0.3	1.6
Frequency (MHz)	**7125**								
Peak Gain (dBi)	0.4								

3.2.4. 3D & 2D Radiation Pattern

3.2.4.1. Test Condition: Free Space

- Test Chamber: HF-G-1

2450 MHz		5210 MHz	
			
			
5310 MHz		5590 MHz	
			
			

5785 MHz		5925 MHz	
			
			
6725 MHz		7125 MHz	
			
			

4 Packaging

Step	Packaging Picture / 2D Picture	Description
1	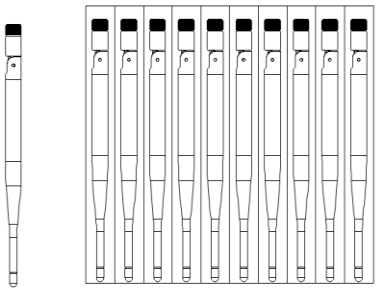 1 product 10 products / One-piece Bag	The product goes into a one-piece bag. (10 Antennas / One-piece Bag)
2	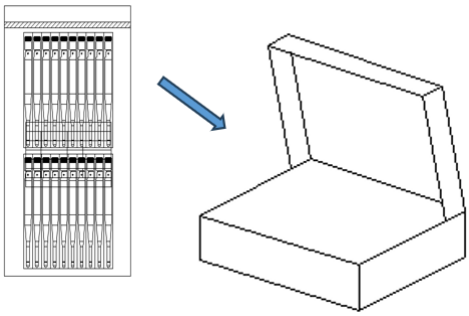	40 antenna products in a PE bag. 120 antenna products in an inner box.
3		(2 Inner Boxes / Carton Box) (240 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box. <u>Carton Size:</u> <u>L × W × H = 325 × 325 × 200 mm</u>

4	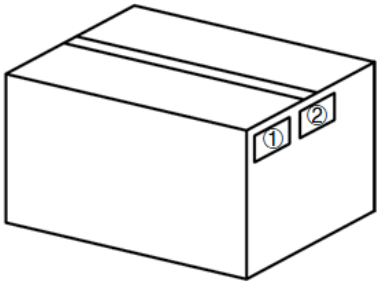	**Position for Attaching Labels** ① Carton Label ② Quality Label
5	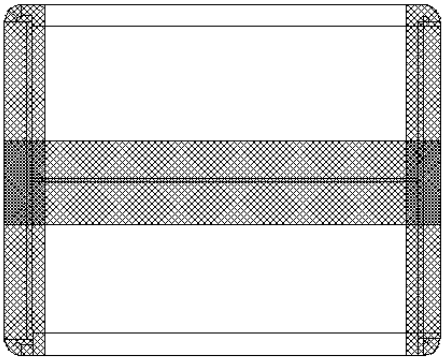	**Sealing Cartons** “工” type sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.
No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China
Tel: +86 21 5108 6236
Email: info@quectel.com

Or our local offices. For more information, please visit:
https://www.quectel.com/contact/.

For technical support, or to report documentation errors, please visit:
https://www.quectel.com/tech-support/.
Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2026-01-26	Damon Zhang	Creation of the document
0.1	2026-01-26	Damon Zhang	First official release

www.quectel.com