

Turning headset On / Off

Hold the **FCN** key for 4 ~ 7s to turn on the headset. When it is on, the receiver will sound two beeps and the indicator light will flash blue 5 times rapidly.

In standby or pairing mode, hold **FCN** for about 2s to turn the headset off. When turning it off, you will hear two beeps and the indicator light will quickly flash blue 5 times and then go out.

Notes: Please don't hold FCN for more than 8s, or the headset may go into pairing mode and the blue indicator light will keep flash rapidly and ceaselessly ;If that happens, turn off the headset, wait for 3 to 5 seconds, and repeat process to turn on the headset; or wait for about 2 minutes, the headset will go to standby mode automatically.

“pair” to your Bluetooth Phone

Before pairing, please put the headset near the Bluetooth phone. A distance less than 1meter would be better, and please ensure that there is no barrier between the phone and the headset. The metal barrier may cause failure.

Match Method 1:

- A. Ensure the headset is off
- B. Hold **FCN** for 8 ~ 10s until the indicator light flashes rapidly and ceaselessly. It will keep this status for about 2 minutes

Note: At the beginning 4 ~ 6s, the light would flash quickly for 5 times, but keep holding the key, or it will go into standby mode, not the pairing mode.

- C. Set your Bluetooth phone to “discover” Bluetooth device by following your phone’s instruction guide. Typically, the steps involve going to a “setup”, “connect”, or “Bluetooth” menu on your phone and then selecting the option to “discover” a Bluetooth device.
- D. Your phone will find the “BTH-003” headset and ask if you want to pair with it. Confirm this by pressing “yes” or “ok”, and then your headset will connect with your phone automatically.
- E. When finishing pairing and connecting, the indicator light will flash slowly (3 times for every 6 seconds), a unique and encrypted wireless link has been created between your headset and your phone. At the same time the phone displays ‘Pairing / Connection Successful’.
- F. If the light keeps flashing quickly, or the phone displays ‘Match / Connection Unsuccessful’, please repeat the process to try again.

Match Method 2:

Follow the steps A and B of method 1 to go into pairing mode, then press the FCN key once, your headset will go into Active Connecting Mode and begin to search for the Bluetooth device around actively. The indicator light will flash blue 2 times for every 6 seconds in this mode.


Notes:

1. When pairing, maybe need your phone password or PIN code. It depends on your phone model.
2. If there is no Bluetooth phone to match with the headset in 2 minutes, it will exit the pairing mode and go into standby mode. The last successful match information will be kept in the headset memory.

How to wear

You can wear the headset on the left or right ear. Adjust the headset hanger as shown in the following pictures. Also you can wear the headset without the hanger, pick the hanger off in the way as shown in the middle picture below.

Headset Hanger

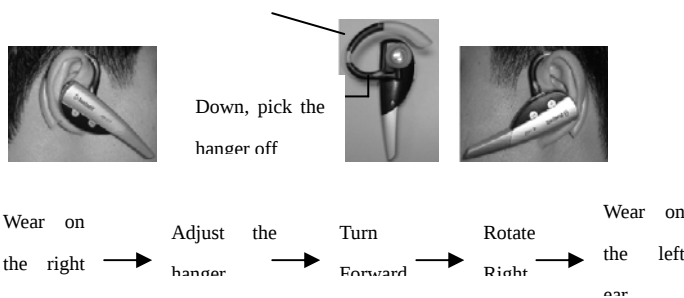

Notes:

1. For optimal performance, please put the headset and the phone on the same side of your body. Generally speaking, if there are no barrier between the phone and headset, you will get better performance.
2. The adjustment of the hanger depends on the built-in flexible metal tinsel, but the tinsel is easily to damage, so please be careful when adjusting.

Basic Operations

You can use the headset when it is on and has been connected with your Bluetooth mobile phone.

Making a Call

1. Using phone's keypad

Dial number on keyboard, and then press phone's "send" key.

2. Voice Dialing

Please ensure that you've set up voice tags on your phone.

Press the FCN key once, you will hear the voice-activated tone, then say the related voice command of the number you want to dial.

3. Voice Redialing

Please make sure that your phone supports the voice redialing and has already set up the redialing voice command.

Press **FCN** once; you will hear the voice-activated tone; say the redialing voice command to redial.

4. Manual Redialing

Please ensure that your phone supports headset redialing manually.

In standby mode, press **VOL-** (the volume down key) for 2s and release. When you hear one short beep, redialing begins.

Note: To improve the successful rate of the voice dialing, please use the headset to record the voice command.

Ending a Call

Press **FCN** to end or end the call from phone's keyboard.

Answering a Call

After you hear the ring tone, press **FCN** once.

Or you can answer the call by using the keyboard, but maybe you need to press **FCN** once to transfer the voice from the phone to the headset.

It depends on your phone; please refer to the phone's user manual for more details.

Note: Generally speaking, the ring of the headset comes later than the ring of the phone.

Rejecting a Call

Hold **FCN** for 2s, you'll hear two beeps, and then release the key; or you can reject the call through the phone directly.

Note: Call rejecting, diverting or waiting needs the support of your phone, and the cue tone may also vary with different phones. For more details, please refer to the phone's user manual.

Transferring call

When using the headset to answer the call, hold **VOL+** (the volume up key) until you hear one short beep, the call will be transferred to the phone. Press **FCN** once to switch the call back.

Call-Waiting

During a call, if there is another call coming, you will hear two beeps from your headset, and at this time you can press **FCN** once to end the current call, and press **FCN** once again to get the new call.

Volume Adjusting

In standby mode, use the volume up & down key to adjust the volume. **VOL+** to up and **VOL-** to down. There are 16 levels to be adjusted. The volume cannot be adjusted in standby mode.

Headset Status

The following table shows the different statuses of the receiver and indicator light when the headset works in different mode.

Status	What you hear	What you see
Standby Mode	No tone	Flash blue once for every 6s
Talk Mode	Ring	Flash blue 4 times for every 6s
Connecting Mode	No tone	Flash blue 3 times for every 6s
Low Battery	Three alert beeps	Dim out
Active Connecting Mode	No tone	Flash blue twice for every 6s

Notes:

- 1. Your headset is in standby mode when it's on, but not connecting with the phone.**
- 2. in active connecting mode, your headset will search for Bluetooth devices around actively.**

Resetting your headset

If the headset is no responding or the blue light will not turn on or off after pairing or flashes abnormally, you may need to Reset your headset.

- Insert the charging plug of the AC adapter into the USB charging socket of the headset.
- Insert the power adapter into the AC power socket.
- Cut the power after 3 seconds.
- Unplug the adapter from the headset.