
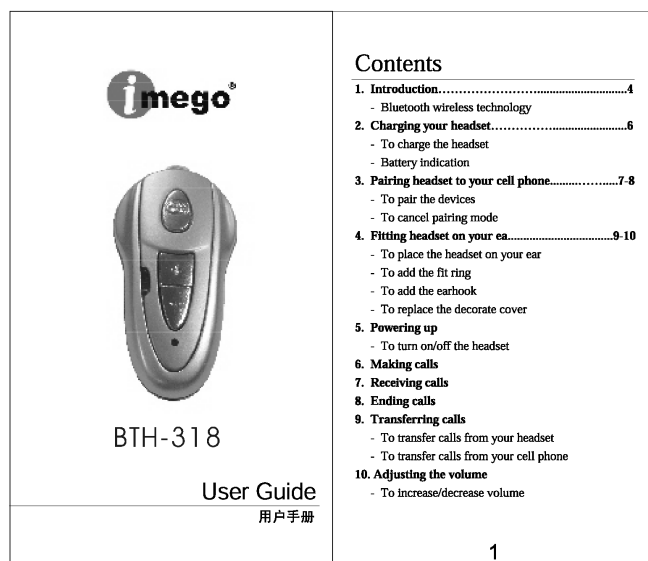
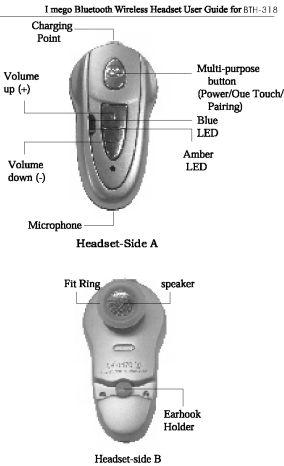


1.6 User Manual



11. Muting/un-muting headset 12. Visual and audible indicators - Visual indicators - Audible indicators 13. Customer information 14. Disclaimer 15. Technical specifications 16. Accessory 2	I mego Bluetooth Wireless Headset User Guide for BTH-318  Headset-Side A Headset-side B 3
---	---


Introduction Thank you for purchasing Imego bluetooth BTH-318 Your Imego bluetooth is a sleek cordless headset that enables comfortable handsfree communication with your bluetooth cell phone.  (A) Headset 4	Imego Bluetooth Wireless Headset User Guide for BTH-318 Charging your headset Before using headset, you must charge the headset for approximately two hours. when fully charged, the battery provides up to 4 hours of talk time and up to 100 hours of standby time. To charge the headset 1. plug AC adapter into headset charging point (as shown here). 2. plug AC adapter other end into a wall outlet. When the headset is charging, the amber LED will light. 3. Unplug the charger cable from the wall outlet and the headset after charge finish, the amber LED will dim out. Battery indication: The amber LED will turn off after charging, this indicated user can use this headset. However, it needs to take two hours to fully charge the battery.  5
--	---

Pairing headset to your cell phone Pairing is the process of linking the headset with your Bluetooth cell phone. Before you use headset with your cell phone you must pair the devices. After this process is completed, you can use the headset only with its paired cell phone. The pairing process only need to be done once for continuous usage. If you wish to use the headset with a different cell phone, you must repeat the pairing process with the new cell phone. In this case, the headset will no longer work with the original cell phone. Before you pair the headset, ensure that the battery is fully charged. To pair the devices 1. With the headset turned off, press and hold the TALK button for five seconds. The blue and amber LEDs will flash alternately, and you will hear the PAIRING tone. 2. Release the TALK button. The headset is now in pairing mode. 3. Turn on the cell phone and place it within 10 feet of the headset. 4. Initiate the device discovery feature on the cell phone. Refer to the cell phone user guide for instructions for initiating this feature.	I mego Bluetooth Wireless Headset User Guide for BT-H-318 5. When prompted by the cell phone, enter the headset pin code 1000. When pairing is complete, the blue LED on the headset will flash at three-second intervals and the headset will be placed in standby mode, ready to make and receive calls. If disconnection or lost links occur, it may be due to the following reasons: 1. The range over 10 feet between both headset and cell phone. 2. Cell phone to disconnect the link in order to save the power or other purpose. 3. Either device has been switched off. Note: The headset will keep the connection with cell phone at all times if both connection links have been built up. To cancel pairing mode While you are in pairing mode, you can cancel the pairing process and turn off the headset. Press and hold the TALK button for three seconds. Both LEDs will turn off and you will hear the OFF tone.
6	7

Earhook go around the ear comfortably  Fitting Headset on your ear Headset is designed to fit comfortably in your ear. For added comfort, you can add the optional earhook and/or fit ring. To place the headset on your ear. Place the headset speaker in your ear with the micro-phone angled toward your mouth as shown. The headset should fit snugly in your ear. However, if the speaker is too small for your ear, you can change to other size of the fit ring that is provided with your headset. To add the fit ring Stretch the fit ring around the end of the speaker as shown. To add the earhook 1. To wear headset on your right ear, insert earhook into earhook holder, pushing until it stops. 2. To wear headset on your left ear, insert earhook into earhook holder near the microphone, pushing until it stops.	I mego Bluetooth Wireless Headset User Guide for 5114-318 3. To remove the earhook, gently pull the earhook away from the holder until it separates from the headset. To replace the decorate cover Accessory include 5 piece attachment decorate covers, you may choose one of them, and replace it as shown. Powering Up To turn ON the headset Press and hold the Talk button for four seconds. You will hear the ON tone or blue light flash. The headset turns on and is placed in standby mode, ready to make and receive calls. To turn OFF the headset When the headset is on, press and hold the Talk button for four seconds. You will hear the OFF tone or blue light off. The headset turns off. Making Calls You can make calls from your cell phone, or directly from your headset using voice dialing commands (if this feature is supported by your cell phone). To make calls from your cell phone Dial the call from your cell phone. The call is automatically connected to your headset.
8	9

	I mego Bluetooth Wireless Headset User Guide for BTH-318
To make calls using voice dialing (if supported by your cell phone) 1. Press the Talk button on your headset. 2. Speak the name of the person you wish to call. The call is automatically connected to your headset. Receiving Calls You must configure your cell phone to answer calls directly on your headset. Refer to the cell phone user guide for instructions for initiating this feature. When your cell phone rings, press the Talk button on your headset. The call is automatically connected to your headset. Ending Calls When you have finished your call, press the Talk button on your headset. The call will be disconnected. Transferring Calls You can transfer calls connected to your headset back to your cell phone, or from your cell phone to your headset. To transfer calls from your headset (phone dependent) To transfer calls from your cell phone With the call connected to your cell phone, press the Talk button on your headset.	Adjusting The Volume To increase the volume Press the volume button "+" to increase the volume by 1 level, repeat this procedure until you have reached the desired level. To decrease the volume Press the volume button "-" to decrease the volume by 1 level, repeat this procedure until you have reached the desired level. Muting/Un-muting Headset You can mute and un-mute the microphone temporarily so that you cannot be heard by the connected party. To mute the headset Press and hold the volume button for three seconds. To un-mute the headset When the microphone is muted, press and hold the volume button for three seconds.
10	11

	1 mega Bluetooth Wireless Headset User Guide for BT-H-318																		
Visual And Audible Indicators Visual Indicators Two LEDs (blue and amber) indicate the status of the headset: <table><tr><th>Status</th><th>Indication</th></tr><tr><td>Battery is low</td><td>Amber LED works</td></tr><tr><td>Headset is off</td><td>Both LEDs are off</td></tr><tr><td>Headset is in standby mode, ready to make and receive calls second-three intervals</td><td>Blue LED flashes at</td></tr><tr><td>Headset is in pairing mode</td><td>Blue and amber LEDs flash alternately.</td></tr></table> Audible Indicators Tones heard through the headset provide an audible indication of a requested action: <table><tr><th>Request</th><th>Indication</th></tr><tr><td>On</td><td>Headset has been on</td></tr><tr><td>Off</td><td>Headset has been off</td></tr><tr><td>Pairing</td><td>Headset has been put into pairing mode</td></tr></table>	Status	Indication	Battery is low	Amber LED works	Headset is off	Both LEDs are off	Headset is in standby mode, ready to make and receive calls second-three intervals	Blue LED flashes at	Headset is in pairing mode	Blue and amber LEDs flash alternately.	Request	Indication	On	Headset has been on	Off	Headset has been off	Pairing	Headset has been put into pairing mode	Customer Information This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Caution: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. Disposition of the non-replaceable Lithium polymer battery Dispose of batteries according to local regulations. Do not dispose as household waste.
Status	Indication																		
Battery is low	Amber LED works																		
Headset is off	Both LEDs are off																		
Headset is in standby mode, ready to make and receive calls second-three intervals	Blue LED flashes at																		
Headset is in pairing mode	Blue and amber LEDs flash alternately.																		
Request	Indication																		
On	Headset has been on																		
Off	Headset has been off																		
Pairing	Headset has been put into pairing mode																		
12	13																		

Disclaimer Any misuse and modification to the equipment that is not stipulated in this user guide shall render all warranty void. The manufacturer shall not be held liable for any loss, injuries or death resulting from the above stated scenario. Technical Specifications <table><tr><td>Model Number</td><td>PBT18T72C1M-E</td></tr><tr><td>Bluetooth Compliance</td><td>Bluetooth 1.1 specification,</td></tr><tr><td></td><td>2.4GHz ISM band</td></tr><tr><td>Supported Bluetooth Profiles</td><td>Bluetooth Hands-Free Profile 1.0</td></tr><tr><td></td><td>Bluetooth Headset Profile 1.1</td></tr><tr><td>Security</td><td>Encrypted link</td></tr><tr><td>Operation Range</td><td>10-15 meters</td></tr><tr><td>Connection</td><td>Point to Point</td></tr><tr><td>Paired Device</td><td>Up to 7 one at a time</td></tr><tr><td>Talking Time</td><td>Up to 4 Hours</td></tr><tr><td>Standby Time</td><td>Up to 100 Hours</td></tr><tr><td>Operating Temperature</td><td>-10 to 45C</td></tr><tr><td>Battery</td><td>Rechargeable Li-Polymer Battery</td></tr><tr><td>Charging Time</td><td>Up to 2 Hours 50 Minutes</td></tr><tr><td>Compatibility</td><td>Bluetooth Enabled Phones</td></tr><tr><td>Weight</td><td></td></tr><tr><td>Size</td><td>55*10*3mm</td></tr><tr><td>Category</td><td>Quantity</td></tr><tr><td>Manual</td><td>1</td></tr><tr><td>Mobile charge kit</td><td>1</td></tr><tr><td>Color cover</td><td>5</td></tr></table>	Model Number	PBT18T72C1M-E	Bluetooth Compliance	Bluetooth 1.1 specification,		2.4GHz ISM band	Supported Bluetooth Profiles	Bluetooth Hands-Free Profile 1.0		Bluetooth Headset Profile 1.1	Security	Encrypted link	Operation Range	10-15 meters	Connection	Point to Point	Paired Device	Up to 7 one at a time	Talking Time	Up to 4 Hours	Standby Time	Up to 100 Hours	Operating Temperature	-10 to 45C	Battery	Rechargeable Li-Polymer Battery	Charging Time	Up to 2 Hours 50 Minutes	Compatibility	Bluetooth Enabled Phones	Weight		Size	55*10*3mm	Category	Quantity	Manual	1	Mobile charge kit	1	Color cover	5	I mego Bluetooth Wireless Headset User Guide for 8TH-318 Remove all components from the package. (A) Headset (B) Fit Ring (C) Charging Kit AC Adapter  (C) Charging Kit AC Adapter NOTE: The AC A dapter Plug is country dependent.
Model Number	PBT18T72C1M-E																																										
Bluetooth Compliance	Bluetooth 1.1 specification,																																										
	2.4GHz ISM band																																										
Supported Bluetooth Profiles	Bluetooth Hands-Free Profile 1.0																																										
	Bluetooth Headset Profile 1.1																																										
Security	Encrypted link																																										
Operation Range	10-15 meters																																										
Connection	Point to Point																																										
Paired Device	Up to 7 one at a time																																										
Talking Time	Up to 4 Hours																																										
Standby Time	Up to 100 Hours																																										
Operating Temperature	-10 to 45C																																										
Battery	Rechargeable Li-Polymer Battery																																										
Charging Time	Up to 2 Hours 50 Minutes																																										
Compatibility	Bluetooth Enabled Phones																																										
Weight																																											
Size	55*10*3mm																																										
Category	Quantity																																										
Manual	1																																										
Mobile charge kit	1																																										
Color cover	5																																										