

Quick Start Guide



2K (3MP) Wi-Fi Window Camera

Model: VC160

What's in the box?



Camera



Power adaptor



Glass

Mounting pad




Illuminator



User Manual

Camera Overview

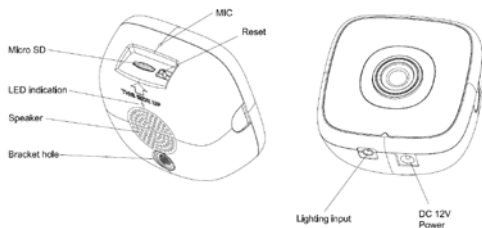

Getting Started

Go to the App Store or Google Play, download and install **AView** on your smartphone, then follow the on-screen instructions to register your account.



Set up the camera

1). Power on the VC160 camera. You should hear the voice prompt: “The device has started, please open the mobile app to set up WiFi.”

If you do not hear this prompt, press and hold the reset button on the camera until the voice prompt says “Device reset successful.”

2). Enable Bluetooth on your phone, and ensure that it is connected to your home router via Wi-Fi.

3). Open AView App, press “Add Device”



Accept pop up permissions (see follows)



Then app will show following, press
“One-click Add”



In next step, input WiFi password, waiting for the app to add the camera to your home router.

Name your Device

Device ID:
a11dYHduFUG@lvd6bOmGcURzNBieAZMq

Enter device name

Quick naming

Kitchen

Living ro...

Bedroom

Lounge

Countyard

doorway

Select group [Add group](#)


☒ Default (0 devices)

 Device QR code
Important information, please

Save QR code


Save

Name your device and save. Press the arrow in live view screen, you will see the camera live view

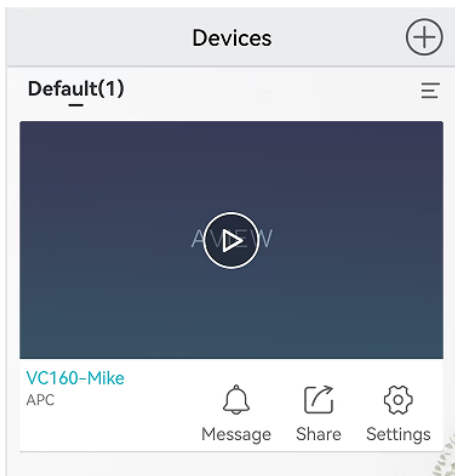

Mounting the camera

- 1). Clean window glass where you want to mount the camera
- 2). Peel off the protection film of the glass mounting pad, stick on the window glass.
- 3). Mount the camera on the glass mounting pad, try to align the camera center to the mounting pad hole as possible as you can.




If you want to use the illuminator, pls mount the illuminator at least 20cm/8 inch away from the camera to avoid reflection.

Using the Camera

Live View:

In camera list, press the arrow in live view screen, you will see camera live view.

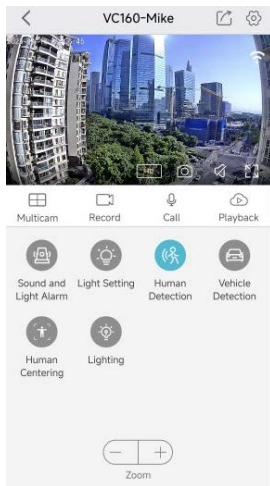

Press  Record and  you can record current live view video and take snapshot.

In device list page, go to **User** (bottom right corner)—**Album**, you can check the recordings and snapshots.

When an illuminator connected to your camera, you can press the icon  to turn

on the illuminator when it is too dark outside of the window.

Press the  icon to enable or

disable human

detection,


Press the icon



to enable vehicle

detection so when a vehicle is detected,
system will trigger recording or an alarm.

You can also go to Settings--Smart Alarm to
set Mootion Detection, Area Detection,
Bundary Crossing Detection etc.

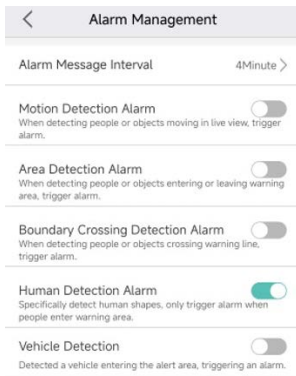

Press “Call” icon you can talk to camera.

Go to **Settings—Picture and Sound**, to change the intercom mode, adjust the camera speaker volume and modify the microphone sensitivity.



Recording Setup

On the Live View page, go to **Settings-Recording and Storage**. You can choose the recording mode: Event Recording or schedule Recording, and set recording quality as needed.



Playback

On the Live View page, press “Playback” icon to go to playback page,

Press “Alarm Type” to sort playback by different detection modes and view specific recordings.




Share your device to your family members or friends

In device list page, select the device you want to share, press share button, two methods to share the device to others.


QR code sharing:

Select the permissions as follows and confirm, an QR code generated.

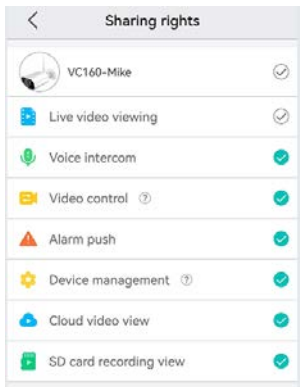

In the account to be shared, select ADD DEVICE in App, scan the generated QR code and add the device to his account.

Add User—Input the account name you want to share with and press OK (see following), in next step, select the permission as above. In other account to be shared, open App, press “Message” in left bottom,

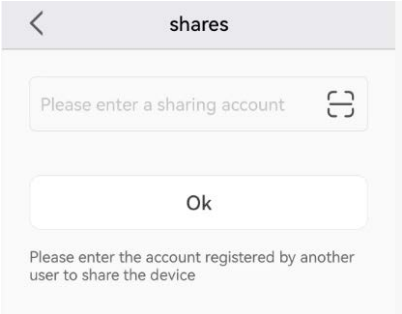

<

shares


Please enter a sharing account



Ok

Please enter the account registered by another user to share the device

Select “Agree” to add the shared device.

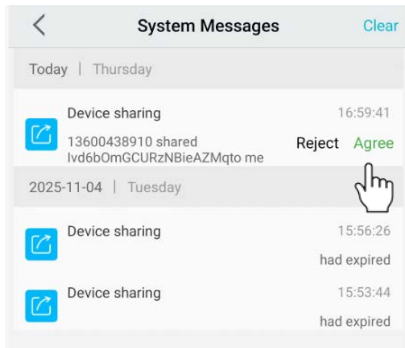

Trouble shooting

The video Image is too dark:

If the video is too dark in a completely dark environment:

- 1). Tap the “**Lighting**” icon below the live view screen, or
- 2). Set the light mode to **Auto Light On**.

The video image is not smooth:

- 1). Move the camera as close to your home router as possible.

2). In Live View, tap the UHD/HD/SD button and select a lower resolution to improve streaming smoothness.

Camera cannot see the desired area:

Get the optional mounting bracket.

Video quality becomes unclear after extended use

please wipe the window glass and the camera lens regularly.

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) this device may not cause harmful interference

(2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio

communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the

radiator your body: Use only the supplied antenna.

FCC ID: SJ8-VC160