

Main Features

- An audio amp in the design of the JAZZ CHORUS guitar amp loved by countless guitarists.
- **Bluetooth** connectivity and a built-in lithium-ion rechargeable battery let you enjoy music anywhere.
- Use the three-band equalizer to obtain the tone you prefer.
- Input to the AUDIO IN jack can be mixed with the playback from a **Bluetooth** device (*).
- Hands-free conversation is supported.



(*) A device that can output audio via **Bluetooth**, such as a smartphone or audio player.

Panel Descriptions

[VOLUME] knob

Adjusts the overall volume.

Three-band equalizer

[TREBLE] knob

Adjusts the character of the high range.

[MIDDLE] knob

Adjusts the character of the mid-range.

[BASS] knob


Adjusts the character of the low range.

MEMO

If you want the sound to be uncolored, set each knob to the "5" position.

[Talk] button

Lets you conduct a hands-free conversation via your smartphone.
➔ See "Hands-Free Conversation."



[PAIRING] button

➔ See "Registering a **Bluetooth** Device (Pairing)."

Bluetooth indicator

Indicates the **Bluetooth** connection status.

Indicator	Explanation
Lit	Connected
Blinking	Connecting in progress
Rapid blinking	Pairing in progress
Unlit	Not connected

[POWER] button

Turns the power on/off.

Power indicator

Indicates the power supply status.
➔ See "Charging."

AUDIO IN jack

Sound from an audio player connected here can be played through this unit.


To adjust the volume, use the [VOLUME] knob or make adjustments on the audio player.

About the auto-off function

The power of this unit automatically turns off if nothing is connected to the AUDIO IN jack and approximately 15 minutes have elapsed without a **Bluetooth** device being connected (Auto Off function).

Charging

- * Use a standard USB AC adaptor (5 V $\overline{\text{---}}$ /over 1.8 A) for charging.
- Before using this unit for the first time, connect the included micro USB charging cable to the rear panel 5 V $\overline{\text{---}}$ port and charge it.

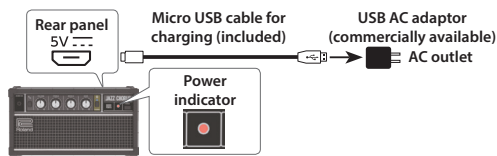

The power indicator shows the status of the power supply.

Indicator	Explanation
Lit red	Remaining battery capacity is more than half, or charging is complete
Blinking red	Remaining battery capacity is less than half
Lit orange	Charging (power is on)
Blinking orange	Charging (power is off)

Registering a Bluetooth Device (Pairing)

What is pairing?

"Pairing" is the procedure by which the **Bluetooth** device that you want to use is registered on this unit (the two devices recognize each other).

Make settings so that music data saved on the **Bluetooth** device can be played wirelessly via this unit.



MEMO

- Once a **Bluetooth** device has been paired with this unit, there is no need to perform pairing again. If you want to connect this unit with a **Bluetooth** device that has already been paired, refer to "Connecting an Already-Paired **Bluetooth** Device."
- The following steps are one possible example. For details, refer to the owner's manual of your **Bluetooth** device.

1. Place the **Bluetooth** device that you want to connect nearby this unit.

MEMO

If you have more than one unit of this model, power-on only the unit that you want to pair (power-off the other units).


2. Press the [POWER] button to power-on this unit.

* This unit is equipped with a protection circuit. A brief interval (a few seconds) after turning the unit on is required before it will operate normally.

3. Continue holding down the [PAIRING] button until the **Bluetooth** indicator blinks rapidly.

This unit's **Bluetooth** function turns on, and pairing begins.

4. Turn on the **Bluetooth** function of the **Bluetooth** device.



5. Select "Roland JC-01" that is shown in the **Bluetooth** device screen of your **Bluetooth** device.

When pairing succeeds, this unit's **Bluetooth** indicator is lit.

MEMO

If the **Bluetooth** device's screen asks you to enter a "Pass Key," enter "0000" (four zeros).

Connecting an Already-Paired Bluetooth Device

1. Perform steps 1, 2 of "Registering a **Bluetooth** Device (Pairing)."
2. Press the [PAIRING] button to turn on this unit's **Bluetooth** function.
This unit's **Bluetooth** indicator blinks.
3. Turn on the **Bluetooth** function of the **Bluetooth** device.
When connection succeeds, this unit's **Bluetooth** indicator is lit.

MEMO

- If connection does not succeed, select "Roland JC-01" in the **Bluetooth** device screen of the **Bluetooth** device.
- The connection is automatically ended if the **Bluetooth** device does not play for approximately 15 minutes.
- To disconnect, press the [PAIRING] button, or turn off the **Bluetooth** function of the **Bluetooth** device.

Listening to Music

1. Play back music on your **Bluetooth** device.

To adjust the volume, use the [VOLUME] knob or make adjustments on your **Bluetooth** device.

MEMO

The playback from an audio player connected to the AUDIO IN jack can be mixed with the sound of the **Bluetooth** device.
To set the volume balance, make adjustments on each device.

Hands-Free Conversation

Using this unit's built-in mic and speaker, you can conduct a hands-free conversation via your smartphone.



Making a call

1. Make a call from your smartphone.

To hang up, press the [Talk] button.

Receiving a call

1. When a ring tone occurs, press the [Talk] button.

To hang up, press the [Talk] button once again.

Troubleshooting

Problem	Items to check	Action
Power does not turn on	Is the internal lithium-ion rechargeable battery charged?	Charge this unit.
No sound / Insufficient volume	Could the volume be turned down on this unit or on a connected device?	
Bluetooth sound is interrupted / Noise is heard	Could you be using the unit near a microwave oven or a wireless device such as a Wi-Fi router?	Move the unit as far as possible away from microwave ovens or wireless devices such as Wi-Fi routers.
This unit does not appear in the Bluetooth device list of your Bluetooth device.	Did pairing occur successfully?	Press the [PAIRING] button to begin pairing.
Can't connect via Bluetooth	Could this unit and the Bluetooth device be too far apart? This unit can connect with a Bluetooth device at a maximum distance of 10 m (30 ft).	Move this unit and the Bluetooth device closer to each other.
	If this unit is visible as a device in the Bluetooth settings of the Bluetooth device	Delete the device registration for this unit, and then perform pairing once again.
	If this unit is not visible as a device	Turn the Bluetooth function of the Bluetooth device off and then on again; then begin pairing from this unit to pair the devices once again.

Main Specifications

Roland JC-01: Bluetooth Audio Speaker

Speaker	5 cm (2 inches) x 2	
	Passive radiator	
Bluetooth	Bluetooth technology	Bluetooth Ver 3.0
	Transmitting Power	Specification Power Class 2 (Line of sight range 10 m (30 ft))
	Profile Support	A2DP, HFP
	Codec	SBC (Support to the content protection of the SCMS-T method)
Connectors	AUDIO IN jack (Stereo miniature phone type) (*1)	
	5 V $\overline{\text{---}}$ port (USB micro-B type)	
	*1: This product is not designed to connect a guitar directly.	
Power Supply	Lithium-ion rechargeable battery	
	Supplied from the 5 V $\overline{\text{---}}$ port	
Current Draw	Max. 1.8 A (5 V $\overline{\text{---}}$)	
Continuous playback time using the battery	Approx. 7 hours (Audio playback of the Bluetooth connection)	
	* These figures will vary depending on the actual conditions of use.	
Dimensions	187 (W) x 69 (D) x 97 (H) mm	
	7-3/8 (W) x 2-3/4 (D) x 3-7/8 (H) inches	
Weight	650 g/1 lbs 7 oz	
Accessories	Owner's manual	
	Leaflet "USING THE UNIT SAFELY"	
	Leaflet "Attaching the Ferrite Core"	
	Micro USB cable for charging (*2)	
	Ferrite core x 2	
	*2: Use a standard USB AC adaptor (5 V $\overline{\text{---}}$ /over 1.8 A) for charging.	

* In the interest of product improvement, the specifications and/or appearance of this unit are subject to change without prior notice.

For the USA

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

For the USA

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- this device may not cause harmful interference, and
- this device must accept any interference received, including interference that may cause undesired operation.

Caution!

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For Canada

CAN ICES-3 (B)/NMB-3 (B)

For Canada

CAN ICES-3 (B)/NMB-3 (B)

For Korea

사용자 안내문

기종별

사용자 안내문

B 급 기기

이 기기는 가정용(B 급) 전자기파합기로서 주로 가정에서 사용하는 것을 목적으로 하며, 모든 지역에서 사용할 수 있습니다.

For C.A. US (Proposition 65)

WARNING

This product contains chemicals known to cause cancer, birth defects and other reproductive harm, including lead.

For EU Countries

UK

This symbol indicates that in EU countries, this product must be collected separately from household waste, as defined in each region. Products bearing this symbol must not be discarded together with household waste.

DE

Dieses Symbol bedeutet, dass dieses Produkt in EU-Ländern gesammelt vom Hausmüll gesammelt werden muss gemäß den regionalen Bestimmungen. Mit diesem Symbol gekennzeichnete Produkte dürfen nicht zusammen mit den Hausmüll entsorgt werden.

FR

Ce symbole indique que dans les pays de l'Union européenne, ce produit doit être collecté séparément des ordures ménagères selon les directives en vigueur dans chacun de ces pays. Les produits portant ce symbole ne doivent pas être mis au rebut avec les ordures ménagères.

IT

Questo simbolo indica che nei paesi della Comunità europea questo prodotto deve essere smaltito separatamente dai normali rifiuti domestici, secondo la legislazione in vigore in ciascun paese. I prodotti che riportano questo simbolo non devono essere smaltiti insieme ai rifiuti domestici. Ai sensi dell'art. 13 del D.Lgs. 25 luglio 2005 n. 151.

ES

Este símbolo indica que en los países de la Unión Europea este producto debe recogerse aparte de los residuos domésticos, tal como está regulado en cada zona. Los productos con este símbolo no se deben depositar con los residuos domésticos.

PT

Este símbolo indica que nos países da UE, a recolha deste produto deverá ser feita separadamente do lixo doméstico, de acordo com os regulamentos de cada região. Os produtos que apresentem este símbolo não deverão ser eliminados juntamente com o lixo doméstico.

NL

Di symbol geeft aan dat in landen van de EU dit product gescheiden van huishoudelijk afval moet worden aangeboden, zoals bepaald per gemeente of regio. Producten die van dit symbol zijn voorzien, mogen niet samen met huishoudelijk afval worden verworpen.

DK

Dette symbol angiver, at i EU-lande skal dette produkt opgaves adskilt fra husholdningsaffald, som defineret i hver enkelt region. Produkter med dette symbol må ikke smides ud sammen med husholdningsaffald.

NO

Dette symbolet indikerer at produktet må behandles som spesialavfall i EU-land, iht. til retningslinjer for den enkelte regionen, og ikke kastes sammen med vanlig husholdningsavfall. Produkter som er merket med dette symbolet, må ikke kastes sammen med vanlig husholdningsavfall.

For EU Countries

SE

Symbolen anger att i EU-länder måste den här produkten kasseras separat från hushållsavfall, i enlighet med varje regions bestämmelser. Produkter med den här symbolen får inte kasseras tillsammans med hushållsavfall.

FI

Tämä merkinä ilmaisee, että tuote on EU-maissa kerättävä erillään kotitalousjätteistä kunakin alueen voimassa olevien määräysten mukaisesti. Tällä merkillä varustettuja tuotteita ei saa hävittää kotitalousjätteen mukana.

HU

Ez a szimbólum azt jelenti, hogy az Európai Unióban ez a termék a háztartási hulladéktól elkülönítve, az adott régióban érvényes szabályozás szerint kell gyűjtieni. Az ezzel a szimbólummal ellátott termékeket nem szabad a háztartási hulladék közé dobni.

PL

Symbol oznacza, że zgodnie z regulacjami w odpowiednim regionie, w krajach UE produkty nie należy wyrzucać z odpadami domowymi. Produkty opatrzone tym symbolem nie można wyrzucać razem z odpadami domowymi.

CZ

Tento symbol udává, že v zemích EU musí být tento výrobek sbírán odděleně od domácího odpadu, jak je určeno pro každý region. Výrobky nesoucí tento symbol se nesmí vyhadzoat spolu s domácím odpadem.

SK

Tento symbol vyjadruje, že v krajinách EÚ sa musí zber tohto produktu vykonávať oddelene od domového odpadu, podľa nariadení platných v konkrétnej krajine. Produkty s týmto symbolom sa nesmú vyhazovať spolu s domovým odpadom.

EE

See symbol näitab, et EL-i maades tuleb see toode olmpigusti eraldi koguda, nii nagu on igas piirkonnas määratletud. Selle sümbolina märgitud tooteid ei tohi ära visata koos olmpigustiga.

LT

Šis simbolis rodo, kad ES šalyse šis produktas turi būti surenkamas atskirai nuo buitinių atliekų, kaip nustatyta kiekvienoje regione. Šiuo simboliu paženklinoti produktai neturi būti šalinami kartu su buitiniomis atliekomis.

LV

Šis simbols norāda, ka ES valstīs šo produktu jāievieč atsevišķi no mājsaimniecības atkritumiem, kā noteikts katrā reģionā. Produktus ar šo simbolu nedrīkst izmest kopā ar mājsaimniecības atkritumiem.

SI

Ta simbol označuje, da je treba proizvod v državah EU zbirati ločeno od gospodinjinskih odpadkov, tako kot je določeno v vsaki regiji. Proizvoda s tem znakom ni dovoljeno odlagati skupaj z gospodinjinskimi odpadki.

GR

Το σύμβολο αυτό υποδηλώνει ότι στις χώρες της Ε.Ε. το συγκεκριμένο προϊόν πρέπει να συλλέγεται χωριστά από τα υπολείμματα οικιακών απορριμμάτων, σύμφωνα με όσα προβλέπονται σε κάθε περιοχή. Τα προϊόντα που φέρουν το συγκεκριμένο σύμβολο δεν πρέπει να απορριπτούν μαζί με τα οικιακά απορρίμματα.

For China

有关产品中所含有害物质的说明

本资料就本公司产品中所含的特定有害物质及其安全性予以说明。

本资料适用于 2007 年 3 月 1 日以后本公司所制造的产品。

环保使用期限

此标志适用于在中国国内销售的电子信息产品，表示环保使用期限的年数，所谓环保使用期限是指在自制造日起的规定期限内，产品中所含的有害物质不致引起环境污染，不会对人身、财产造成严重的不良影响。

环保使用期限仅在遵照产品使用说明书，正确使用产品的条件下才有效。

不当的使用，将会导致有害物质泄漏的危险。

产品中有毒有害物质或元素的名称及含量

部件名称	有毒有害物质或元素					
	铅(Pb)	汞(Hg)	镉(Cd)	六价铬(Cr(VI))	多溴联苯(PBB)	多溴二苯醚(PBDE)
外壳（壳体）	×	○	○	○	○	○
电子部件（印刷电路板等）	×	○	×	○	○	○
附件（电源线、交流适配器等）	×	○	○	○	○	○

○：表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T11363-2006 标准规定的限量要求以下。

×：表示该有毒有害物质在该部件所有均质材料中的含量超出 SJ/T11363-2006 标准规定的限量要求。

因根据现有的技术水平，还没有什么物质能够代替它。

For Canada

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

For Canada

Canada Statement

This device complies with Industry Canada's licence-exempt RSSs. Operation is subject to the following two conditions:

- (1) This device may not cause interference; and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage;
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 2.5 de RSS 102 et la conformité à l'exposition de RSS-102 rf, utilisateurs peut obtenir l'information canadienne sur l'exposition et la conformité de rf.

For EU countries

European Community Declaration of Conformity

Hereby, Roland Corporation, declares that this JC-01 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

English	Hereby, Roland Corporation, declares that this JC-01 is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.
Bulgarian	Състоящото, Roland Corporation, декларира, че JC-01 е в съответствие със съществените изисквания и другите приложими разпоредби на Директива 1999/5/EC.
Czech	Roland Corporation tímto prohlašuje, že JC-01 splňuje základní požadavky a všechna příslušná ustanovení Směrnice 1999/5/ES.
Danish	Undertegnede Roland Corporation erklærer herved, at følgende udstyr JC-01 overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.
German	Hiermit erklärt Roland Corporation, dass sich das Gerät JC-01 in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet..
Estonian	Käesolevaga kinnitab Roland Corporation seadme JC-01 vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
Greek	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Roland Corporation δηλώνει ότι JC-01 ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 1999/5/ΕΚ.
Spanish	Por la presente, Roland Corporation, declara que este JC-01 cumple con los requisitos esenciales y otras exigencias relevantes de la Directiva 1999/5/EC.
French	Par la présente, Roland Corporation déclare que l'appareil JC-01 est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.
Italian	Con la presente Roland Corporation dichiara che questo JC-01 è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.
Latvian	Ar šo Roland Corporation deklarē, ka JC-01 atbilst Direktīvas 1999/5/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lithuanian	Šiuo Roland Corporation deklaruoją, kad šis JC-01 atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas
Hungarian	A Roland Corporation ezzenel kijelenti, hogy a JC-01 típusú beren-dezest teljesíti az alapvető követelményeket és más 1999/5/EK irányelvben meghatározott vonatkozó rendelkezéseket.
Dutch	Hierbij verklaart Roland Corporation dat het toestel I JC-01 in overeenstemming is met de essentiële eisen en de andere relevante bepaling-gen van richtlijn 1999/5/EG.
Polish	Niniejszym Roland Corporation deklaruje że JC-01 jest zgodny z zasadniczymi wymaganiami i innymi właściwymi postanowieniami Dyrektywy 1999/5/EC.
Portuguese	Eu, Roland Corporation, declaro que o JC-01 cumpre os requisitos essenciais e outras provisões relevantes da Directiva 1999/5/EC.
Romanian	Prin prezenta, Roland Corporation, declară că aparatul JC-01 este în conformitate cu cerințele esențiale și cu alte prevederi pertinente ale Directivei 1999/5/CE.
Slovak	Roland Corporation týmto vyhlasuje, že JC-01 spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.
Slovenian	Roland Corporation izjavlja, da je ta JC-01 v skladu z bistvenimi zahtevami in drugimi relevantnimi določili direktive 1999/5/ES.
Finish	Roland Corporation vakauttaa täten että JC-01 tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Swedish	Härmed intygar Roland Corporation att denna JC-01 står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

The Declaration of Conformity may be consulted in Downloads menu of this product at www.roland.com.

Information

When you need repair service, call your nearest Roland Service Center or authorized Roland distributor in your country as shown below.

AFRICA

REUNION

MARCEL FO-YAM Sarl

25 Rue Jules Hermann, Chaudron - BP79 97 401 Ste Citilike Cedex, REUNION/ISLAND

TEL: 0202 234-849

SOUTH AFRICA

Paul Bothner(PTY)Ltd.

Royal Cape Park, Unit 24 Londonsdery Road, Ottery 7800 Cape Town, SOUTH AFRICA

TEL: 021 799 4900

ASIA

CHINA

Roland Shanghai Electronics Co.,Ltd.

3F, No.500 Pingfang Road, Yangpu Shanghai 200090, CHINA

TEL: 021 5580-0000

Toll Free: 4007-888-010

Roland Shanghai Electronics Co.,Ltd. (BEIJING OFFICE)

35, Suijue Fortune Building 63 West Dawang Road, Chaoyang Beijing, CHINA

TEL: 010 5960-2660/077

Toll Free: 4007-888-010

Zeelandia Music Center Inc.

Oranienweg 30 Curaçao, Netherlands Antilles

TEL: (305) 5926866

HONG KONG

Tom Lee Music

11/F, Silvercord Tower 1 30 Canton Rd, Tsimshatsui, Kowloon, HONG KONG

TEL: 852-2731-7688

Parsons Music Ltd.

8th Floor, Railway Plaza, 39 Chatham Road South, T.S.T., Kowloon, HONG KONG

TEL: 852-2333-1863

INDIA

Rivera Digital India Pvt. Ltd.

411, Nirman Kendra Mahakarmi Calle Roberto Pastora 8/25 Sanchez Naco Santo Domingo, DOMINICAN REPUBLIC

TEL: 0809 685 0305

MARTINIQUE

Musique & Son

Z.Les Mangée 97232 Le Lamentin, MARTINIQUE FWJL

TEL: 596 596 4286

TRINIDAD

AMR Ltd

Ground Floor Maritime Plaza Barataria TRINIDAD WIL

TEL: 0868 638 6385

INDONESIA

PT. Citra Intirano

Ruko Garden Shopping Arcade Unit 8 CK, Poldomoro City Rungkut, J.S.Panam Kar-28 Jakarta Barat 11470, INDONESIA

TEL: 021 5698-5519/5320

KAZAKHSTAN

Aleasu Dilyaryar

141 Atybai-Shan ave., 1st floor, 050000 Almaty, KAZAKHSTAN

TEL: 7273 2725477

FAX: 727 2720730

KOREA

Cosmos Corporation

27, Bampo-dae-ro, Seocho-gu, Seoul, KOREA

TEL: 02 3486-8855

MALAYSIA

Roland Asia Pacific Sdn. Bhd.

45/1 Block C2, Jalan PJU 1/39, Dataran Prima, 47301 Petaling Jaya, Selangor, MALAYSIA

TEL: 03 7805-3263

MYANMAR

THAW AND ZIN FAMILY CO., LTD.

406-406/2, Taw Win Centre, Level-5, Yangon, MYANMAR

TEL: 09 3107044 / 09 5061300

PHILIPPINES

G.A. Yunganco & Co. Inc.

239 Gil J. Poyat Avenue Makati, Metro Manila 1200, PHILIPPINES

TEL: 02 831 999 9801

SINGAPORE

Sweet Lee Service Centre

12 Jalan Kilang Barat #01-00 Singapore 159354

TEL: +65 6376 6141

TAIWAN

ROLAND TAIWAN ENTERPRISE CO., LTD.

3F-S, No. 112 Chung Shan North Road Sec. 2, Taipei 104, TAIWAN

TEL: 262-0788

THAILAND

Theresa Music Co., Ltd.

100-108 Soi Veng Nakornkham, New Road, Sumpantawong Bangkok 10100, THAILAND

TEL: 02 224-8821

VIENT NAM

VIET THUONG CORPORATION

386 CACH MANG THANG TAM ST. DKT.3, HO CHI MINH CITY, VIET NAM

TEL: 081 9316540

AFRICA

CHINA

Roland Shanghai Electronics Co.,Ltd.

3F, No.500 Pingfang Road, Yangpu Shanghai 200090, CHINA

TEL: 021 5580-0000

Toll Free: 4007-888-010

Roland Shanghai Electronics Co.,Ltd. (BEIJING OFFICE)

35, Suijue Fortune Building 63 West Dawang Road, Chaoyang Beijing, CHINA

TEL: 010 5960-2660/077

Toll Free: 4007-888-010

Zeelandia Music Center Inc.

Oranienweg 30 Curaçao, Netherlands Antilles

TEL: (305) 5926866

HONG KONG

Tom Lee Music

11/F, Silvercord Tower 1 30 Canton Rd, Tsimshatsui, Kowloon, HONG KONG

TEL: 852-2731-7688

Parsons Music Ltd.

8th Floor, Railway Plaza, 39 Chatham Road South, T.S.T., Kowloon, HONG KONG

TEL: 852-2333-1863

INDIA

Rivera Digital India Pvt. Ltd.

411, Nirman Kendra Mahakarmi Calle Roberto Pastora 8/25 Sanchez Naco Santo Domingo, DOMINICAN REPUBLIC

TEL: 0809 685 0305

MARTINIQUE

Musique & Son

Z.Les Mangée 97232 Le Lamentin, MARTINIQUE FWJL

TEL: 596 596 4286

TRINIDAD

AMR Ltd

Ground Floor Maritime Plaza Barataria TRINIDAD WIL

TEL: 0868 638 6385

INDONESIA

PT. Citra Intirano

Ruko Garden Shopping Arcade Unit 8 CK, Poldomoro City Rungkut, J.S.Panam Kar-28 Jakarta Barat 11470, INDONESIA

TEL: 021 5698-5519/5320

KAZAKHSTAN

Aleasu Dilyaryar

141 Atybai-Shan ave., 1st floor, 050000 Almaty, KAZAKHSTAN

TEL: 7273 2725477

FAX: 727 2720730

KOREA

Cosmos Corporation

27, Bampo-dae-ro, Seocho-gu, Seoul, KOREA

TEL: 02 3486-8855

MALAYSIA

Roland Asia Pacific Sdn. Bhd.

45/1 Block C2, Jalan PJU 1/39, Dataran Prima, 47301 Petaling Jaya, Selangor, MALAYSIA

TEL: 03 7805-3263

MYANMAR

THAW AND ZIN FAMILY CO., LTD.

406-406/2, Taw Win Centre, Level-5, Yangon, MYANMAR

TEL: 09 3107044 / 09 5061300

PHILIPPINES

G.A. Yunganco & Co. Inc.

239 Gil J. Poyat Avenue Makati, Metro Manila 1200, PHILIPPINES

TEL: 02 831 999 9801

SINGAPORE

Sweet Lee Service Centre

12 Jalan Kilang Barat #01-00 Singapore 159354

TEL: +65 6376 6141

TAIWAN

ROLAND TAIWAN ENTERPRISE CO., LTD.

3F-S, No. 112 Chung Shan North Road Sec. 2, Taipei 104, TAIWAN

TEL: 262-0788

THAILAND

Theresa Music Co., Ltd.

100-108 Soi Veng Nakornkham, New Road, Sumpantawong Bangkok 10100, THAILAND

TEL: 02 224-8821

VIENT NAM

VIET THUONG CORPORATION

386 CACH MANG THANG TAM ST. DKT.3, HO CHI MINH CITY, VIET NAM

TEL: 081 9316540

AFRICA

CHINA

Roland Shanghai Electronics Co.,Ltd.

3F, No.500 Pingfang Road, Yangpu Shanghai 200090, CHINA

TEL: 021 5580-0000

Toll Free: 4007-888-010

Roland Shanghai Electronics Co.,Ltd. (BEIJING OFFICE)

35, Suijue Fortune Building 63 West Dawang Road, Chaoyang Beijing, CHINA

TEL: 010 5960-2660/077

Toll Free: 4007-888-010

Zeelandia Music Center Inc.

Oranienweg 30 Curaçao, Netherlands Antilles

TEL: (305) 5926866

HONG KONG

Tom Lee Music

11/F, Silvercord Tower 1 30 Canton Rd, Tsimshatsui, Kowloon, HONG KONG

TEL: 852-2731-7688

Parsons Music Ltd.

8th Floor, Railway Plaza, 39 Chatham Road South, T.S.T., Kowloon, HONG KONG

TEL: 852-2333-1863

INDIA

Rivera Digital India Pvt. Ltd.

411, Nirman Kendra Mahakarmi Calle Roberto Pastora 8/25 Sanchez Naco Santo Domingo, DOMINICAN REPUBLIC

TEL: 0809 685 0305

MARTINIQUE

Musique & Son

Z.Les Mangée 97232 Le Lamentin, MARTINIQUE FWJL

TEL: 596 596 4286

TRINIDAD

AMR Ltd

Ground Floor Maritime Plaza Barataria TRINIDAD WIL

TEL: 0868 638 6385

INDONESIA

PT. Citra Intirano

Ruko Garden Shopping Arcade Unit 8 CK, Poldomoro City Rungkut, J.S.Panam Kar-28 Jakarta Barat 11470, INDONESIA

TEL: 021 5698-5519/5320

KAZAKHSTAN

Aleasu Dilyaryar

141 Atybai-Shan ave., 1st floor, 050000 Almaty, KAZAKHSTAN

TEL: 7273 2725477

FAX: 727 2720730

KOREA

Cosmos Corporation

27, Bampo-dae-ro, Seocho-gu, Seoul, KOREA

TEL: 02 3486-8855

MALAYSIA

Roland Asia Pacific Sdn. Bhd.

45/1 Block C2, Jalan PJU 1/39, Dataran Prima, 47301 Petaling Jaya, Selangor, MALAYSIA

TEL: 03 7805-3263

MYANMAR

THAW AND ZIN FAMILY CO., LTD.

406-406/2, Taw Win Centre, Level-5, Yangon, MYANMAR

TEL: 09 3107044 / 09 5061300

PHILIPPINES

G.A. Yunganco & Co. Inc.

239 Gil J. Poyat Avenue Makati, Metro Manila 1200, PHILIPPINES

TEL: 02 831 999 9801

SINGAPORE

Sweet Lee Service Centre

12 Jalan Kilang Barat #01-00 Singapore 159354

TEL: +65 6376 6141

TAIWAN

ROLAND TAIWAN ENTERPRISE CO., LTD.

3F-S, No. 112 Chung Shan North Road Sec. 2, Taipei 104, TAIWAN

TEL: 262-0788

THAILAND

Theresa Music Co., Ltd.

100-108 Soi Veng Nakornkham, New Road, Sumpantawong Bangkok 10100, THAILAND

TEL: 02 224-8821

VIENT NAM

VIET THUONG CORPORATION

386 CACH MANG THANG TAM ST. DKT.3, HO CHI MINH CITY, VIET NAM

TEL: 081 9316540

AFRICA

CHINA

Roland Shanghai Electronics Co.,Ltd.

3F, No.500 Pingfang Road, Yangpu Shanghai 200090, CHINA

TEL: 021 5580-0000

Toll Free: 4007-888-010

Roland Shanghai Electronics Co.,Ltd. (BEIJING OFFICE)

35, Suijue Fortune Building 63 West Dawang Road, Chaoyang Beijing, CHINA

TEL: 010 5960-2660/077

Toll Free: 4007-888-010

Zeelandia Music Center Inc.

Oranienweg 30 Curaçao, Netherlands Antilles

TEL: (305) 5926866

HONG KONG

Tom Lee Music

11/F, Silvercord Tower 1 30 Canton Rd, Tsimshatsui, Kowloon, HONG KONG

TEL: 852-2731-7688

Parsons Music Ltd.

8th Floor, Railway Plaza, 39 Chatham Road South, T.S.T., Kowloon, HONG KONG

TEL: 852-2333-1863

INDIA

Rivera Digital India Pvt. Ltd.

411, Nirman Kendra Mahakarmi Calle Roberto Pastora 8/25 Sanchez Naco Santo Domingo, DOMINICAN REPUBLIC

TEL: 0809 685 0305

MARTINIQUE

Musique & Son

Z.Les Mangée 97232 Le Lamentin, MARTINIQUE FWJL

TEL: 596 596 4286

TRINIDAD

AMR Ltd

Ground Floor Maritime Plaza Barataria TRINIDAD WIL

TEL: 0868 638 6385

INDONESIA

PT. Citra Intirano

Ruko Garden Shopping Arcade Unit 8 CK, Poldomoro City Rungkut, J.S.Panam Kar-28 Jakarta Barat 11470, INDONESIA

TEL: 021 5698-5519/5320

KAZAKHSTAN

Aleasu Dilyaryar

141 Atybai-Shan ave., 1st floor, 050000 Almaty, KAZAKHSTAN

TEL: 7273 2725477

FAX: 727 2720730

KOREA

Cosmos Corporation

27, Bampo-dae-ro, Seocho-gu, Seoul, KOREA

TEL: 02 3486-8855

MALAYSIA

Roland Asia Pacific Sdn. Bhd.

45/1 Block C2, Jalan PJU 1/39, Dataran Prima, 47301 Petaling Jaya, Selangor, MALAYSIA

TEL: 03 7805-3263

MYANMAR

THAW AND ZIN FAMILY CO., LTD.

406-406/2, Taw Win Centre, Level-5, Yangon, MYANMAR

TEL: 09 3107044 / 09 5061300

PHILIPPINES

G.A. Yunganco & Co. Inc.

239 Gil J. Poyat Avenue Makati, Metro Manila 1200, PHILIPPINES

TEL: 02 831 999 9801

SINGAPORE

Sweet Lee Service Centre

12 Jalan Kilang Barat #01-00 Singapore 159354

TEL: +65 6376 6141

TAIWAN

ROLAND TAIWAN ENTERPRISE CO., LTD.

3F-S, No. 112 Chung Shan North Road Sec. 2, Taipei 104, TAIWAN

TEL: 262-0788

THAILAND

Theresa Music Co., Ltd.

100-108 Soi Veng Nakornkham, New Road, Sumpantawong Bangkok 10100, THAILAND

TEL: 02 224-8821

VIENT NAM

VIET THUONG CORPORATION

386 CACH MANG THANG TAM ST. DKT.3, HO CHI MINH CITY, VIET NAM

TEL: 081 9316540

AFRICA

CHINA

Roland Shanghai Electronics Co.,Ltd.

3F, No.5