Side A

APP USER GUIDE

FEIT Electric

Wi-Fi Smart Plug

Feit Electric

24/7 HELP For 24/7 customer support, visit **feit.com/help**


System Requirements
Minimum: iOS 9.3, Android™ 4.4 KitKat® or higher
- Dedicated 2.4GHz Wi-Fi Network -

Your screen images may differ from this user guide.

BEFORE USING THIS USER GUIDE SEE INCLUDED INSTALLATION GUIDE FOR PROPER PRODUCT INSTALLATION.

NOTE: Only works with **2.4GHz** Wi-Fi networks.

Go to your Wi-Fi settings and connect your phone to your 2.4GHz Wi-Fi network.






Set Up Device

1 Download the **Feit Electric** app.

Download on the App Store | GET IT ON Google Play

2 Launch the **Feit Electric** app. Enter an email address to register, then tap **Continue.** A verification code will be sent to your email.



3 Create a password then tap **Done.**




4 Permissions & Location Access


Allow notifications (highly recommended).



5 **Allow** the **Feit Electric** app to access your location to help connect your smart plug.




6 **Enable Bluetooth** on your smart device to facilitate simple pairing.

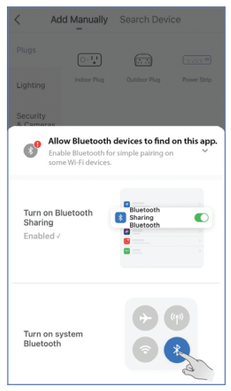

Simple Pairing Mode

1 Make sure the smart plug is blinking, then tap **Add Device** or the plus icon (+) on the upper right corner.




NOTE: If the smart plug is not blinking, then press and hold the button for 5 seconds. LED indicator blinking rapidly means plug is in pairing mode.


2 The Smart Plugs name will appear in a small window for simple pairing enabled devices. Tap **Go to add.**



3 Select one smart plug from the list. Tap the plus icon (+).



4 After confirming that you are on a 2.4GHz Wi-Fi network, enter your password then tap **Confirm.**

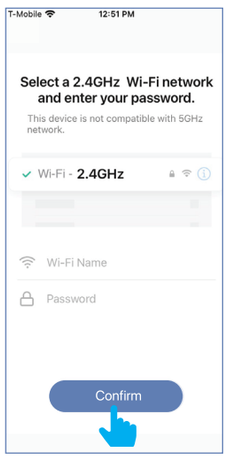

5 The status window will appear and show progress toward set-up.



NOTE: If 'Failed to Add' appears on the screen. Confirm. Then restart the pairing process by unplugging then re-plugging in the smart plug and repeating steps 1 - 4.


6 To rename the smart plug, tap the **Pen** icon, enter the new name and tap **Done.** The smart plug is now ready to be controlled with the **Feit Electric** app.



NOTE: Constant power to the smart plug(s) is required at all times.


Alternative Set-up Method EZ Mode

1 Tap the plus icon (+) in the upper right corner.



NOTE: Use **EZ Mode** to set-up multiple smart products at the same time or if there are issues with Simple Pairing.

2 Tap **Plugs,** then select **Smart Plug.**




3 Tap upper right corner and make sure you have **EZ Mode** selected. Follow steps 4-6 from **Simple Pairing Mode** to complete setup.




Alternative Set-up Method AP Mode

1 Tap the plus icon (+) in the upper right corner.




NOTE: AP Mode is an alternate method to connect your device if **Simple Pairing Mode** and **EZ Mode** are not successful.

2 Tap **Plugs,** then select **Smart Plug.**



3 Choose **AP Mode.**
Make sure your smart plug is in AP pairing mode (smart plug should flash one time every three seconds). Tap **Confirm** then tap **Next** to go on to the next step.




NOTE: If smart plug is flashing rapidly, press and hold the button for 5 seconds. LED indicator blinking slowly, means plug is in AP Mode.

4 Enter the name of your 2.4GHz Wi-Fi network, enter your password and tap **Next** to begin connecting.




NOTE: Your Wi-Fi network name and password are case sensitive.

5 Tap **Go connect.** In your smart device's Wi-Fi settings, choose the **SmartLife-XXXX** network.

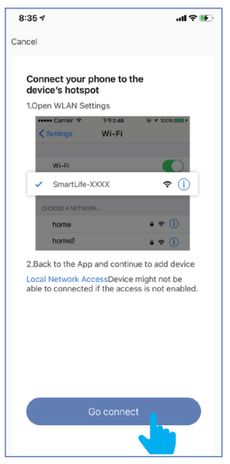


6 In your smart device's Wi-Fi settings, choose the **SmartLife-XXXX** network. After you have connected to **SmartLife,** return to the **Feit Electric** app.




NOTE: After connecting the smart plug, your smart device will automatically rejoin your original 2.4GHz network.

7 Your device should begin connecting using **AP Mode.**



8 If you see this screen your device was added successfully.



Features

1 Individual Smart Plug On/Off


Tap the Smart Plug icon to turn the Smart Plug On/Off.

2 Individual Smart Plug Operation


Press and hold the Smart Plug icon for two seconds to enter operation.

Schedule

3 Tap on **Schedule.**



A Tap **Add Schedule.**




B Choose a Start Time (On) and End Time (Off). To repeat on certain days of the week, tap **Repeat** otherwise the schedule will only occur once.

C Tap on the day(s) of the week you would like the schedule to repeat, then tap back "←" then **Save.**

Timers

4 Select **Timer.**
Set the time then select **Confirm.**



Settings

5 **Power State:** Plug will return to its previous state in case of a power outage.
LED Indicator Light: Manage the LED indicator light.
Lock Mode: Press the switch four consecutive times to unlock.

Groups

1 Tap the **Groups** icon at the bottom of the app home screen.

NOTE: To create groups you will need at least two Smart Plugs. You can only group a smart plug with other smart plugs.

2 Tap on **Create Group.**

3 Tap on **Smart Plug.**

4 Select the smart plugs that you want to group.

5 Tap the group name and enter the name of the group.

6 Once the group is named and the smart plugs are selected, tap **Save** in the upper right corner.

NOTE: Smart plugs with different functionalities can be grouped. However, the app will only be able to control the Smart Plugs' intended capabilities.

7 Manage Groups

Tap the **Groups** icon.

8 Tap the context menu in the upper right corner **(•••).**

9 Tap **Manage Group.**

10 Select the group to edit.

11 Once selected, tap **Edit** in the upper right hand corner.

12 Rename the group or remove a smart plug from the group. Once complete, tap **Save** in the upper right corner.

13 Delete Groups

Tap the **Groups** icon.

14 Tap the context menu in the upper right corner **(•••).**

15 Tap **Delete Group.**