

User's Guide

DIGITAL SATELLITE RECEIVER

XTC 5080PVR



XTC MOTORSPORTS INC.

**ADDRESS : 205 CHAMPAGNE DRIVE UNIT 3, TORONTO, ON, M3L 2C6,
CANADA**

DIGITAL SATELLITE RECIEVER

FCC ID : TYV-XTC5080PVR

MODEL NO : XTC 5080PVR

POWER : Input Voltage 90 - 250V AC @ 50Hz/60Hz±5%

The socket-outlet shall be installed near the equipment and shall be easily accessible.

This device complies with part 15 of the FCC Rules, Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Ⓞ Reorient or relocate the receiving antenna.
- Ⓞ Increase the separation between the equipment and receiver.
- Ⓞ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Ⓞ Consult the dealer or an experienced radio/TV technician for help.


Modifications not expressly approved by the manufacturer could void the user's authority to operated the equipment under FCC rules.

"IMPORTANT SAFETY INSTRUCTIONS", or the equivalent. The safety instructions shall include, as applicable to the particular apparatus, the information and warnings listed below:

- 1) Read these instructions.
- 2) Keep these instructions.
- 3) Heed all warnings.
- 4) Follow all instructions.
- 5) Do not use this apparatus near water.
- 6) Clean only with a dry cloth.
- 7) Do not block any of the ventilation openings. Install in accordance with the manufacturer's instructions.
- 8) Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
- 9) Do not defeat the safety purpose of the polarized or grounding type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong is provided for your safety. When the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
- 10) Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
- 11) Only use the attachments/accessories specified by the manufacturer.
- 12) Use only with a cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.



- 13) Unplug this apparatus during lightning storms or when unused for long periods of time.
- 14) Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.

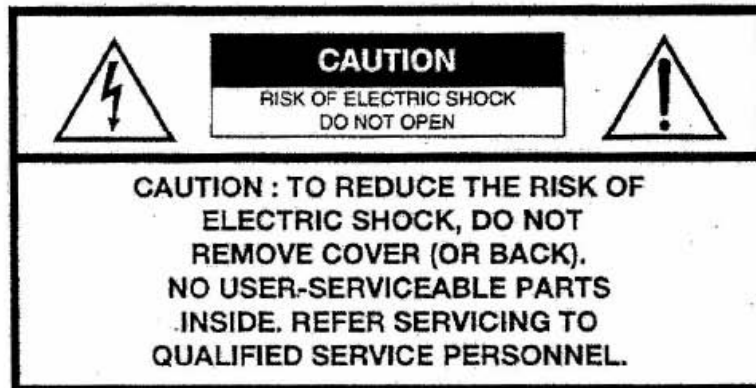

This symbol is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

XTC 5080PVR – Digital Satellite Receiver

CONTENTS

Page

Page

GENERAL INFORMATION	4	GENERAL FUNCTION	27
Main Feature	4	Select Channel	27
For your Safety	5	Pause the Frame	28
Unpacking	6	Previous Channel Recall	28
General Operation	6	TV&Radio mode	28
Remote Control Unit	7	TV&VCR mode	28
Front Panel	8	Channel Information	29
Rear Panel	9	Volume&Audio Control	29
		Position	30
INSTALLATION	10	CHANNEL MANAGER	31
Connecting to Antenna & TV	10	Channel Manager	31
Connecting to TV using RF support	10	Favorite Channel	32
Connecting to TV using RCA support	11	Move Channel	32
Connecting to TV using Component	11	Lock Channel	33
Connecting to Digital Amplifier	12	Rename Channel	33
		Delete Channel	34
		Sort Channel	34
INSTALLATION WIZARD	13	Hard Disk Recorder	35
		Semi Twin PVR mode	35
MAIN PAGE	14	Pre-Recording mode	36
		Recording mode	37
USER INSTALLATION	15	Play back mode	39
Antenna setup - 1) DiSEqC 1.2	15	Timer Recording	40
Antenna setup - 2) Fixed	17	EPG Recording	40
Antenna setup - 3) USALS	18	File List	41
Channel search -1) DiSEqC 1.2	19	HDD Manager	41
Channel search -2) Fixed	21	Move	41
Channel search - 3) USALS	22	Lock/ Rename/ Delete	42
Multi-SAT Search	23	Skip/ Split/ Merge	43
System setting	24	Format HDD/ 7-Segment display	44
Parental Lock	25	EPG (Electronic Program Guide)	45
Factory Default	26		
		TIMER	46
		ANTENNA DIRECTION HELP	47
		RECEIVER INFORMATION	48
		FRONT PANEL DISPLAY	48
		TROUBLE SHOOTING	49
		SYSTEM SPECIFICATION	51

GENERAL INFORMATION

A XTC 5080PVR is a convenient product that allows you to view a variety of programs provided through satellite. This user's guide covers the installation of the XTC 5080PVR and the necessary steps to implement various features. This also explains special features available only in this XTC 5080PVR in detail, which will allow you to make full use of these features.

Main Feature

- Fully MPEG2, DVB compliant
- 44 Hours recording with built in 80GB HDD (Hard Disk Drive) in 4Mbps stream
- Within the same TP it is possible to record one channel and view another channel
- At the time of watching the live mode, pre-recording motion by time-shift default supported
- Automatic restoration ability for all files that were in process of recording at the time of an electricity failure
- Recording current program while playing back earlier program simultaneously
- Recording reservation function on Timer and EPG
- Recording and playback with time delay (Time-Shift function)
- 3 steps (x4, x8, x16) Fast forward and Rewind function
- Pause and step playback function
- HDD management function (Play, Move, Lock, Rename, Delete, Format)
- Various playback function (Jump, Repeat, Shuffle, Slow playback)
- Digital Audio with AC-3 support by SPDIF
- PIG (Picture In Graphic) support
- Provide friendly and easy-to-use menu system
- Various channel editing function
(favorite, moving, locking, renaming, deleting and sorting)
- Stores up to 5000 channels
- Easy and speedy software upgrade through RS-232 port
- Plug-and-play data transfer system (DSR to DSR)
- Timer function, automatically turns On/Off by setting function
(daily, weekly, monthly and one time)
- Automatic reserved channel moving system
- Provide Electronic Program Guide (EPG)
- More than 800 pages OSD Teletext (DVB ETS 300 706) and Subtitle function support
- Support for various video output : CVBS, S-VHS, YUV
- 256 colors On-Screen-Display
- PAL/NTSC automatically conversion
- Last channel automatically saving

GENERAL INFORMATION

For Your Safety

This XTC 5080PVR has been manufactured to meet international safety standards. Please read all of the safety and operating instructions before operating the product. And keep all safety and operating instructions for future reference.

1. Main Supply : 90-250V AC, 50/60Hz, 30W
2. Overloading

Do not overload a wall outlet, extension cord, or adapter as this may result in fire electric shock.

3. Liquids

Do not expose the XTC 5080PVR to rain or moisture. The apparatus shall not be exposed to dripping or splashing water and that no objects filled with liquids, such as vases, shall be placed on the apparatus.

4. Cleaning

Disconnect the XTC 5080PVR from the wall outlet before cleaning. Do not use liquid cleaners or aerosol cleaners. Use a light damp cloth for cleaning.

5. Ventilation

The slots on top of the XTC 5080PVR must be left uncovered to allow proper airflow to the unit. Do not stand the XTC 5080PVR on soft furnishing carpets. Do not expose the XTC 5080PVR to direct sunlight or do not place it near a heater. Do not stack electronic equipments on top of the Brand Name. Keep distance about minimum 10cm from the wall when it's installed.

6. Attachments

Do not use any attachments not recommended by product manufacturer as they may cause hazards.

7. Connection to the Satellite Dish LNB

Disconnect the XTC 5080PVR from the mains before connecting or disconnecting the cable from the satellite dish. FAILURE TO DO SO CAN DAMAGE THE LNB.

8. Connection to the TV

Disconnect the XTC 5080PVR from the mains before connecting or disconnecting the cable from the TV. FAILURE TO DO SO CAN DAMAGE THE TV.

9. Earthing

The LNB cable MUST BE EARTHED to the system earth for the satellite dish. The earth system must comply with SABS 061.

10. Location

Place the XTC 5080PVR indoors in order to prevent potential damage from lightning, rain, or direct sunlight.

11. Servicing

Do not attempt to service this product yourself, as opening or removing covers may expose you to dangerous voltage or other hazards. Refer all servicing to qualified service personnel.

WARNING RISK OF ELECTRIC SHOCK DO NOT OPEN	To reduce the risk of electric shock, do not remove cover (or back). No user serviceable parts inside. Refer servicing to qualified service personnel.
 This symbol indicates "dangerous voltage" inside the product that presents a risk of electric shock or personal injury	 This symbol indicates important instructions accompanying the product

GENERAL INFORMATION

Unpacking

Make sure you have received all the items in the XTC 5080PVR Satellite Receiver carton.

XTC 5080PVR

Remote Control Unit

User's Guide

Batteries

RCA CABLE

General Operation

Throughout this manual you will notice that the everyday operation of your XTC 5080PVR is based on a series of user friendly on screen display and menus. These menus will help you get the most from your Brand Name, guiding you through installation, channel organizing, viewing and many other functions.

All function can be carried out using the buttons on the RCU, and some of the function can also be carried out using the buttons on the front panel.

If at any time when you using the menus you want to return to the normal TV mode, press the TV/AV button.

The XTC 5080PVR is easy to use, always at your command and adaptable for future advances.

Please be aware that new software may change the functionality of the Brand Name.

In the case of your facing difficulties with the operation of your Brand Name, please consult the relevant section of this manual, including the Problem Shooting, or alternatively call your dealer or a customer service adviser.

GENERAL INFORMATION

Remote Control Unit (RCU)



Key	Function
	Turns power ON/OFF of the DSR
	When watching a channel, mutes the sound
0 ~ 9	Enter number of the required menu item or select a channel number to watch.
TV/RADIO	Switches between TV and Radio mode
←PR	Switches back to previous channel
FAV	Display the favorite channel list
INFO	Shows information of the current channel
MENU	Press this key one time to run menu on screen, and call command box
▲▼	Moves up / down a page in the channel list
OK, LIST	Executes the selected item in the menu screen, or enters the desired value in any input mode.
PR+, PR-	When watching a channel, change channels, or moves to the next higher or lower item in the menu.
	When watching a channel, adjust the volume, or move to the left or right item in menu
EXIT	Returns to the previous menu on the menu screen or escape from the menu
ALT-AUDIO	When watching a channel, switches the audio languages
EPG	Calls up the EPG (Electronic Program Guide)
	Selects the different audio modes.
TV/AV	Switches between TV or AV mode.
Position	Display position bar on the screen to adjust the antenna or for manual search.
	Switches to subtitle and teletext mode.
UHF	Switches to UHF tuning mode
PAUSE	Press once to pause the screen picture, press once again to go to the normal mode
4:3/16:9	Selectable 4:3 letter box and 16:9 screen mode

GENERAL INFORMATION


Front Panel



Key	Function
MENU	Shows the main menu and command box on the screen.
OK	Executes the selected item in the menu.
EXIT	Returns to the previous menu on the menu screen.
	Turns on and off the power of the receiver.
CH	When watching, changing to the previous and next channel, or moves to the next higher or lower item in the menu.
VOL	When watching a channel, adjust the volume or move to the left or right item in the menu.

General Information


Rear Panel

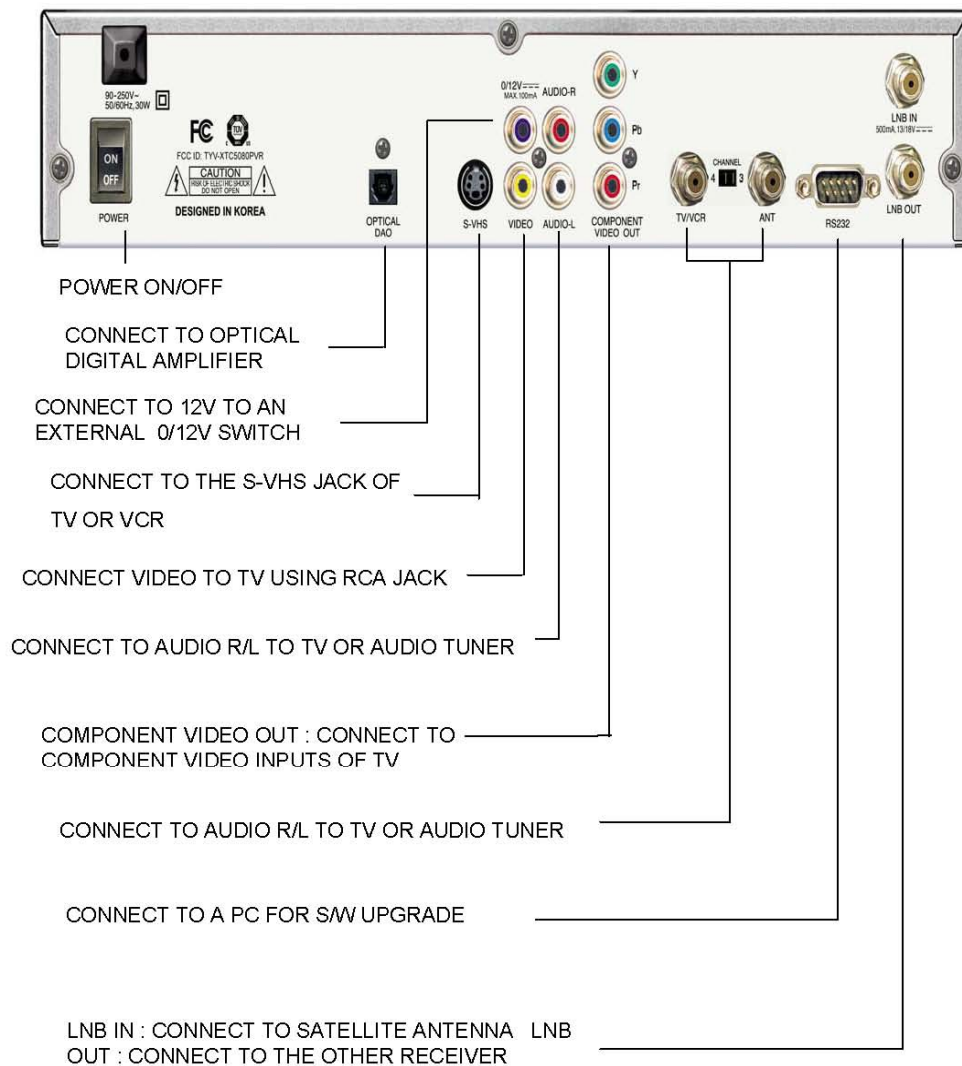


Installation

This section explains the installation of XTC 5000. Refer to the manuals supplied with the equipment for the installation of outdoor equipment such as the dish antenna. When adding new equipment, be sure to refer to the related parts of the manual for the installation.

Connecting to ANTENNA & TV

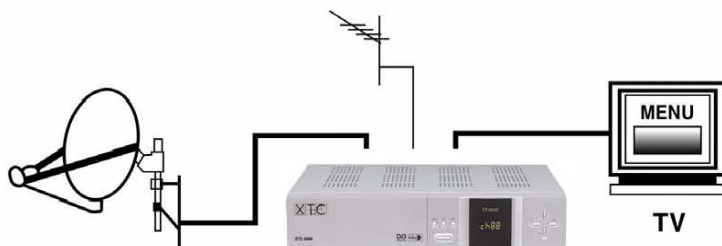


Connecting to TV using RF support

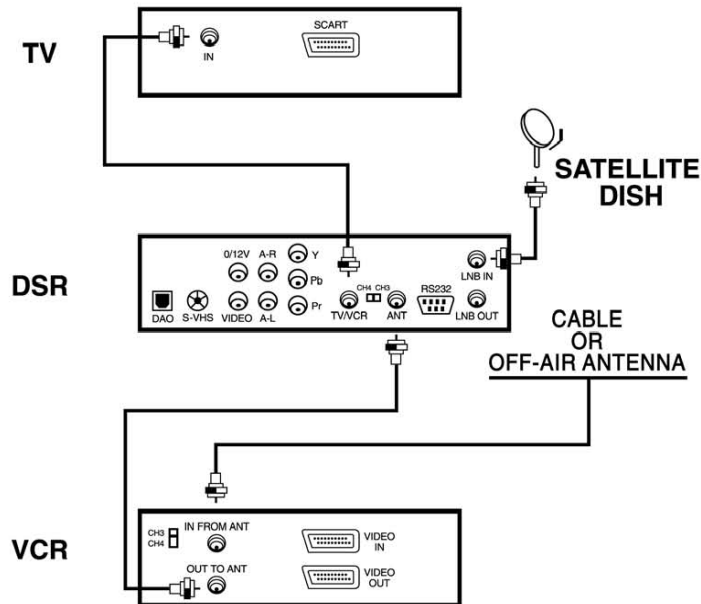


Installation

Connecting to TV using RCA support

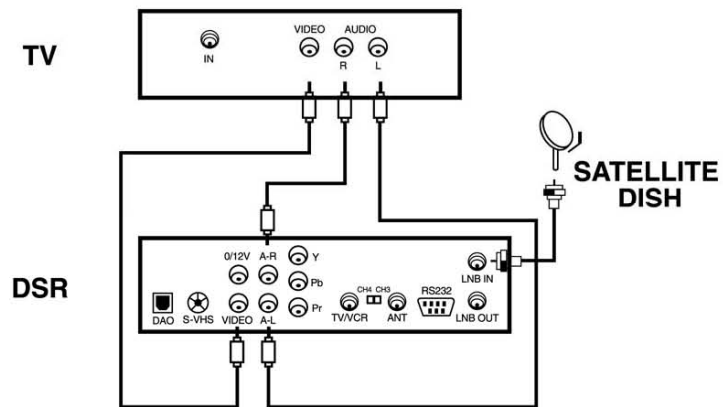


Connecting to TV using Component support

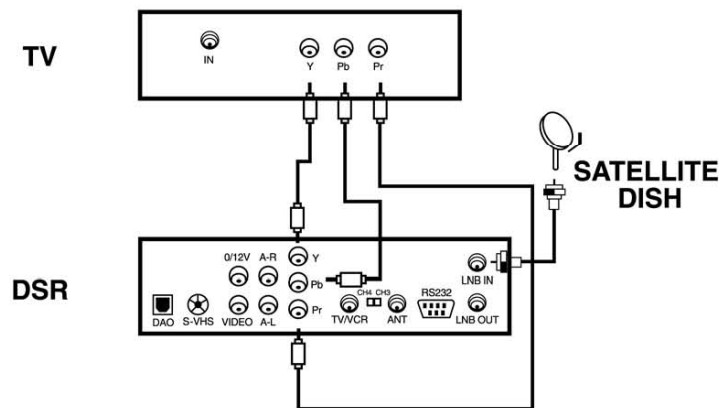

Installation

Connecting to Digital Amplifier

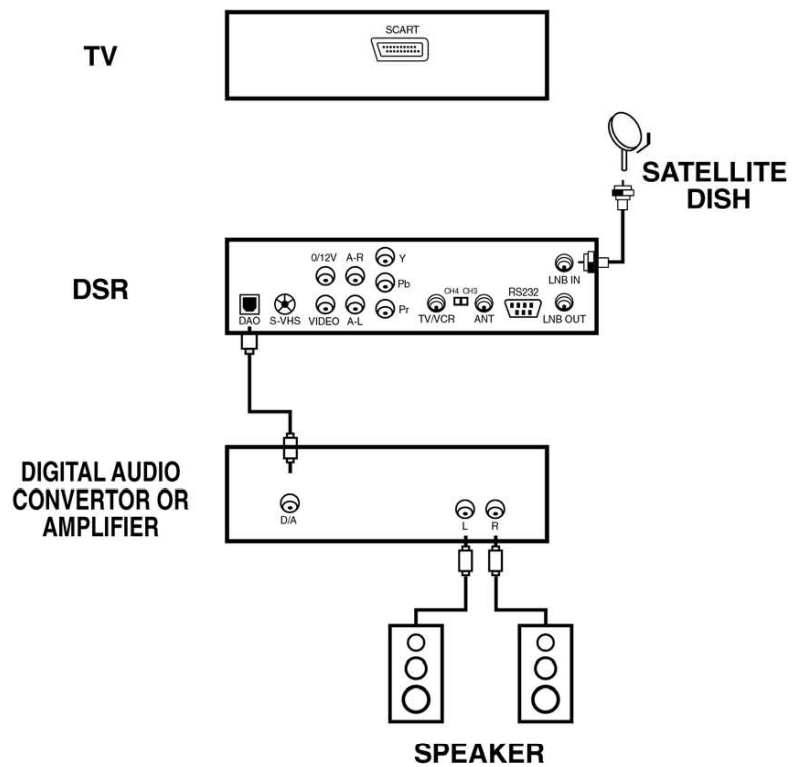

INSTALLATION WIZARD

Once you properly install and connect cables of the receiver and turn the power on, the Installation wizard will be automatically displayed as below.

You can start from this Installation wizard which enables end-users to set up the receiver from a factory default or you can push CANCEL to set up the receiver from the main page.



You can choose your preference for language and you can push NEXT to move to next step or simply push CANCEL to go to a main page.

In next page, you can set up a timer and see a full list of satellite and push NEXT to set up an Antenna set up and channel search through this installation wizard.

