

SUNRISE ALARM CLOCK SPEAKER

X-01

User Manual

Thank you for choosing our product.
Please read this manual carefully before using it!

IMPORTANT SAFETY INSTRUCTIONS

WARNING- TO reduce the risk of FIRE, ELECTRIC SHOCK, OR INJURY TO PERSON:

- Please keep this manual for future reference.
- This product is for indoor use only.
- Do not press two or more buttons at the same time.
- Unplug the device during a light storm or when unused for long period of time to prevent damage to the product.
- Do not attempt to disassemble the device.
- Make sure you are using the correct power supply: plug the device into the outlet with the appropriate power supply as described in the manual.
- Do not drip or splash water on the device.
-

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.


However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the


interference by one or more of the following measures:

- ☐ Reorient or relocate the receiving antenna.
- ☐ Increase the separation between the equipment and receiver.
- ☐ Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- ☐ Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20cm between the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Overview

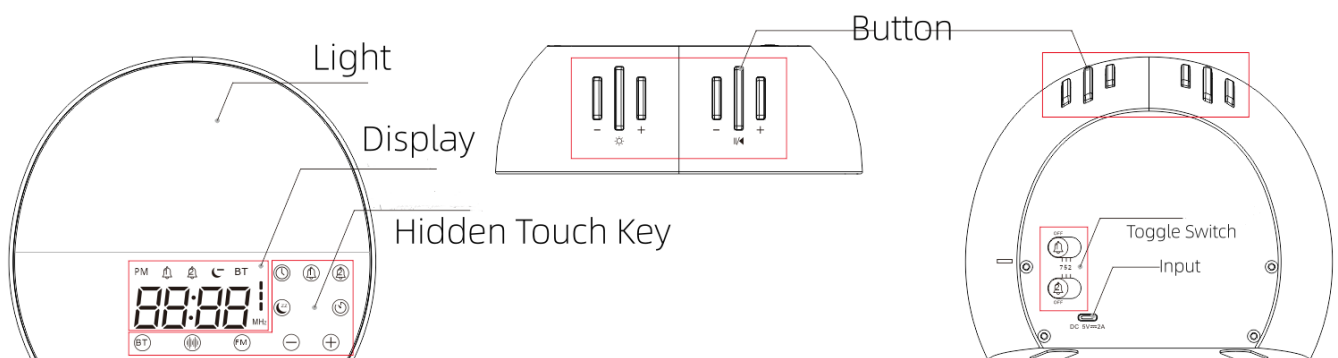

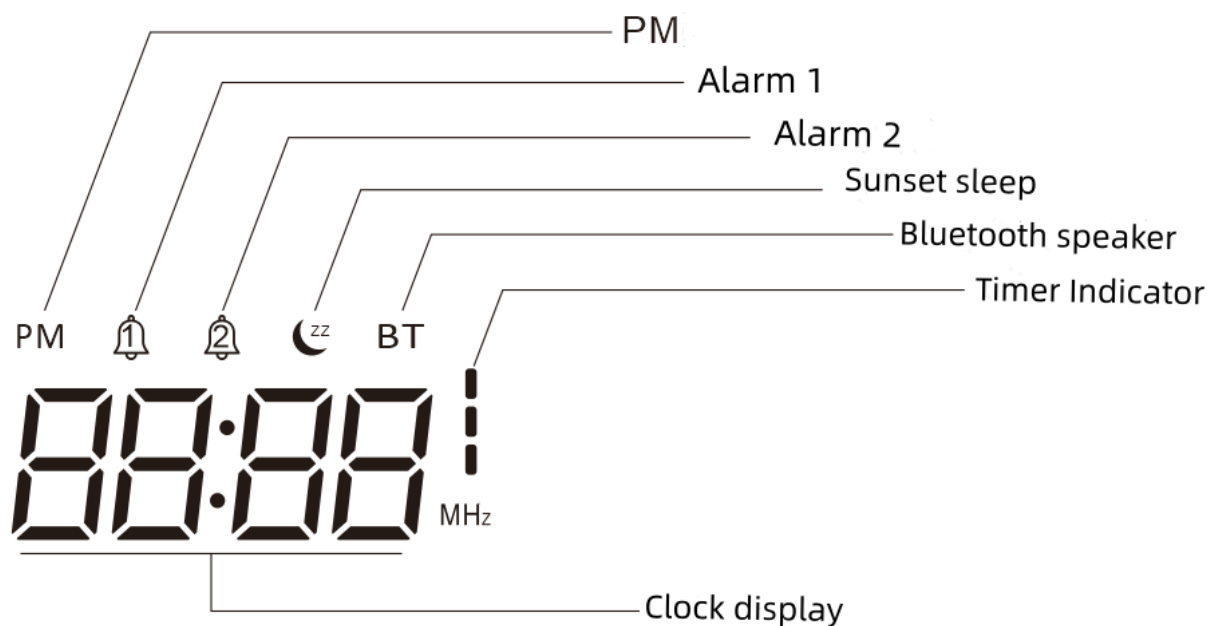

1.What is in the box

- 1×Wake Up Light
- 1×USB A-C Cable
- 1×User Manual

2.First use

- 1.Pull-out the battery insulating sheet.
- 2.Connect the type-c cable to DC 5V  2A adaptor and then plug into the mains socket.

3.Clock

You can connect bluetooth and automatically update the current time or you can activate the hidden touch button to set the time.

Purpose	Action/Findings
Set 12/24H	Hold and touch  1) Use + or - button to set hour format 2) Touch  button to confirm and continue
Set clock time	The hour indication starts to flash 3) Use + or - button to set the clock time 4) Press  button to confirm
Set the day of the week	Use + or - button to set the day of the week from 1-1(Monday) to 1-7 (Sunday)

Set the display brightness	Touch the clock time display to set the brightness, it's 5 levels: 100%-50%-20%-5%-off
Resume clock time setting	To activate the hidden touch button, hold and touch  , then repeat the setting as above

4. Light

Purpose	Action/Findings
Turn on/ off light	Press  button
Set light brightness	Use + or - button (beside the  button), to set brightness from Λ-01 to Λ-31

Note: The appliance will memory the light brightness for last time

5. Dual alarm

Purpose	Action/Findings
Activate or deactivate alarm	Touch  or  button and turn on the toggle switch at the back When alarm is activated, icon ① or ② appears on the display
Set alarm time	1) Touch and hold  or  button until the hour indication starts to flash 2) Use + or - button to set the alarm time 3) Touch  or  button to confirm and continue
Set alarm sound	4) Use + or - button to select alarm sound from S01-S10 and P01 (P01 is the FM radio) 5) Touch  or  button to confirm and continue
Set wake up light duration time	6) Use + or - button to select the duration time from 01 to 60 minutes, OFF is no wake up light 7) Touch  or  button to confirm and continue
Set alarm volume	8) Use + or - button to select alarm volume from U01-U15 9) Touch  or  button to confirm and finish setting
Simulate sunrise	Wake up light will light up at the setting time before alarm and brightness increase gradually
Stop alarm sound and wake up light	Alarm sound and/or light would turn off automatically after 2 minutes when no operation Press or hold any button on the top can stop alarm sound and/or light
Snooze	Tap the appliance to snooze 9 minutes No snooze times limited

Note:

- 1) No operation after 30 seconds, the numbers will stop flashing and the interface would drop out and setting would not be saved
- 2) Touch  or  to check the pre-set alarm time, 3 seconds will return to the current time

6. Sunset sleep timer

Purpose	Action/Findings
Set sleep timer	1) Long press  button until display flashes 2) Use + or - button to set the timer minutes from 15, 30, 45 and 60 minutes

	3)Press  button to confirm
Set sleep sound	4)Use  or  button to select sound from S01-S10 and P01(P01 is FM radio) 5)Press  button to confirm 6)Use  or  button on the top to set sunset sleep volume
Set sunset light ON/OFF	7)Use  button on the top to set sunset light ON or OFF 8)Use  or  button on the top to set sunset light brightness
Activate or deactivate sleep timer	9)Press  Icon  appears on the display when sunset sleep timer is activated

7.White Noise

Purpose	Action/Findings
Turn On/Off white noise	Touch  button
Set white noise sound	Use  or  button to select sound from S01-S10
Set volume and Pause/Play	Use Volume  or  button and Pause /play button on the top 

8.Bluetooth Speaker

Purpose	Action/Findings
Turn On/Off Bluetooth	Touch BT button, select “X-01” on your device to connect
Set volume and Pause/Play	Use Volume  or  and Pause /play button on the top 

9.FM Radio

Purpose	Action/Findings
Turn On/Off FM Radio	Touch FM button
Search FM Stations	Touch and hold FM button to start to searching FM radio stations,once stations are located, they will be saved as P01,P02, up to P30. Touch  or  to select the stations
Set volume and Pause/Play	Use Volume  or  and Pause /play button on the top 

10.Timer

Purpose	Action/Findings
Activate Timer	Touch  button Only when the light/Bluetooth speaker/white noise/FM radio is on,the timer function can be activated.
Select timer minutes	Continue touch  button to select timer minutes 30/60/90/off and indicator light's up.

11.Specification

Input	Type-C 5V  2A
Power consumption	10W
Bluetooth version	5.1