

Antenna

QDM047NA Datasheet

Antenna Services

Version: 1.0

Date: 2022-11-30

Status: Preliminary



At ikotek, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Ikotek Wireless Solutions Co., Ltd.

Building 2, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by ikotek or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties (“third-party materials”). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to ikotek's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. ikotek, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © ikotek Wireless Solutions Co., Ltd. 2022. All rights reserved.

About the Document

Revision History

Version	Date	Author	Note
V1.0	2022-11-25	Morris MA	Creation of the document

Contents

About the Document.....	3
Contents.....	4
1 Product Description.....	5
2 Product Features.....	5
3 Product Specifications.....	5
4 Overall Performance	7
4.1. Test Environment.....	7
4.2. VSWR.....	8
4.3. Efficiency.....	15
4.4. Gain	20
4.5. Radiation Pattern	24
5 Product Size.....	37

1 Product Description

The antenna is designed for superior performance, and can be widely used for wireless applications.

We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

2 Product Features

- WWAN 4*4 、WIFI 2.4G*2、WiFi5G *4
- High efficiency
- Excellent performance

3 Product Specifications

Passive Electrical Specifications(MAIN_ANT)

Frequency Range	600–960 MHz,1710–4200 MHz
Input Impedence	50 Ω
VSWR	≤ 3.5
Gain	≤ 3.53 dBi
Polarization Type	Linear

Passive Electrical Specifications(AUX_ANT)

Frequency Range	600–960 MHz,1710–4200 MHz
Input Impedence	50 Ω
VSWR	≤ 3
Gain	≤ 3.24 dBi
Polarization Type	Linear

Passive Electrical Specifications(MIMO1_ANT)

Frequency Range	600–960 MHz,1710–4200 MHz
Input Impedence	50 Ω
VSWR	≤ 4
Gain	≤ 3.13 dBi
Polarization Type	Linear

Passive Electrical Specifications(MIMO2_ANT)

Frequency Range	600–960 MHz,1710–4200 MHz
Input Impedence	50 Ω

VSWR	≤ 3.5
Gain	≤ 2.95 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 2.4G_ANT1)

Frequency Range	2400–2500 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 2.61 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 2.4G_ANT2)

Frequency Range	2400–2500 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 1.57 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 5G_ANT1)

Frequency Range	5150-5850 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 2.33 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 5G_ANT2)

Frequency Range	5150-5850 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 2.49 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 5G_ANT3)

Frequency Range	5150-5850 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 2.14 dBi
Polarization Type	Linear

Passive Electrical Specifications(WIFI 5G_ANT4)

Frequency Range	5150-5850 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 2.17 dBi
Polarization Type	Linear

4 Overall Performance


4.1. Test Environment

- KEYSIGHT ENA Network Analyzer E5063A 100 kHz – 8.5 GHz
- RayZone® 2800 Chamber 5G (FR1) SISO/MIMO, 600 MHz – 8.5 GHz



4.2. VSWR


NR0(ant1):

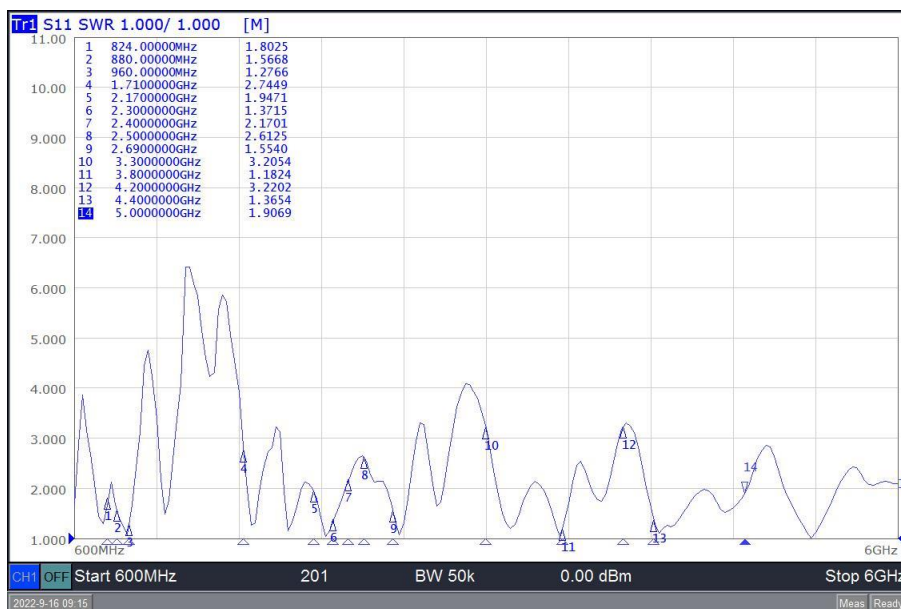

Frequency (MHz)	824	880	960	1710	2170	2300	2400	2500	2690
VSWR	1.80	1.56	1.27	2.74	1.94	1.37	2.17	2.61	1.55

Frequency (MHz)	3300	3800	4200	4400	5000
VSWR	3.20	1.18	3.22	1.36	1.90


NR1(ant2):

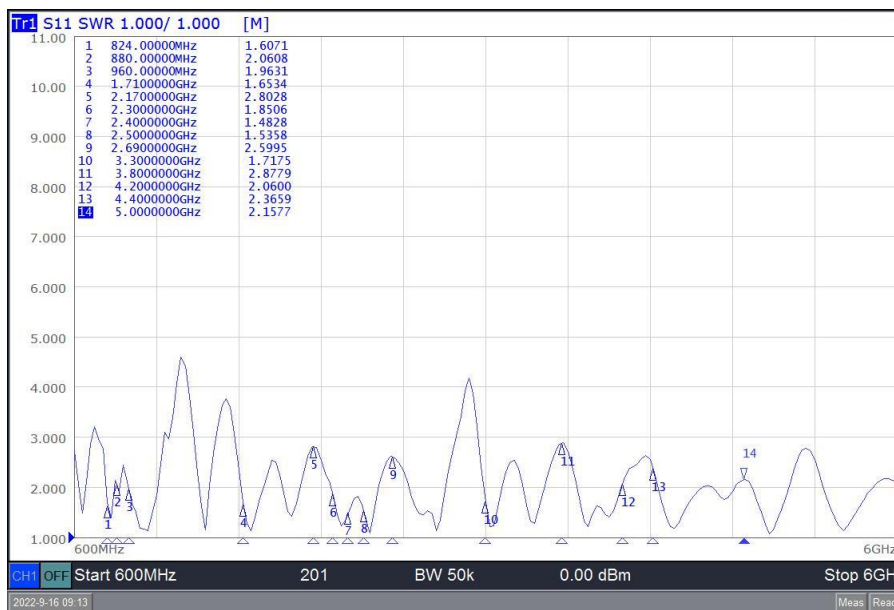

Frequency (MHz)	824	880	960	1710	2170	2300	2400	2500	2690
VSWR	1.60	2.06	1.96	1.65	1.65	1.85	1.48	1.53	2.59

Frequency (MHz)	3300	3800	4200	4400	5000
VSWR	1.17	2.87	2.06	2.36	2.15


NR2(ant3):

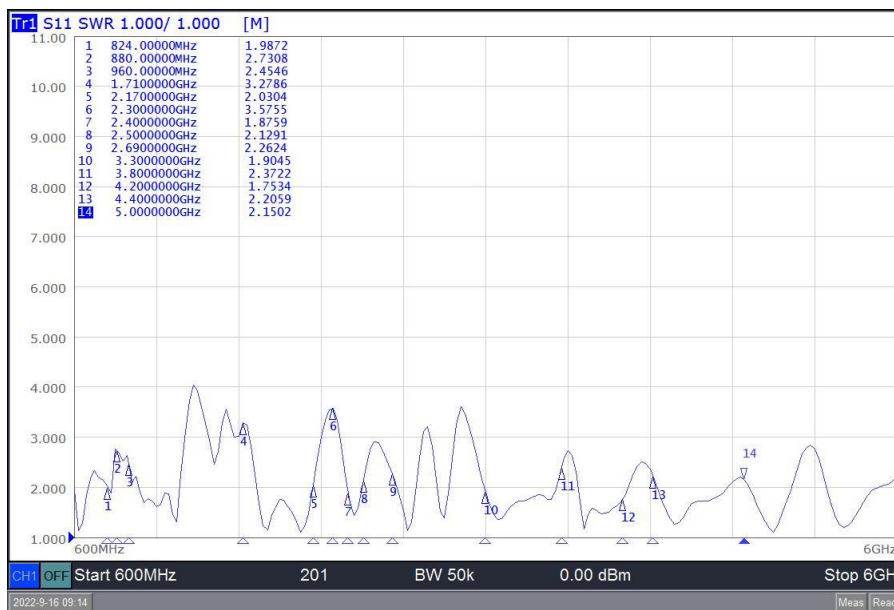

Frequency (MHz)	824	880	960	1710	2170	2300	2400	2500	2690
VSWR	1.98	2.73	2.45	3.27	2.03	3.57	1.87	2.12	2.26

Frequency (MHz)	3300	3800	4200	4400	5000
VSWR	1.90	2.37	1.75	2.20	2.15


NR3(ant0):

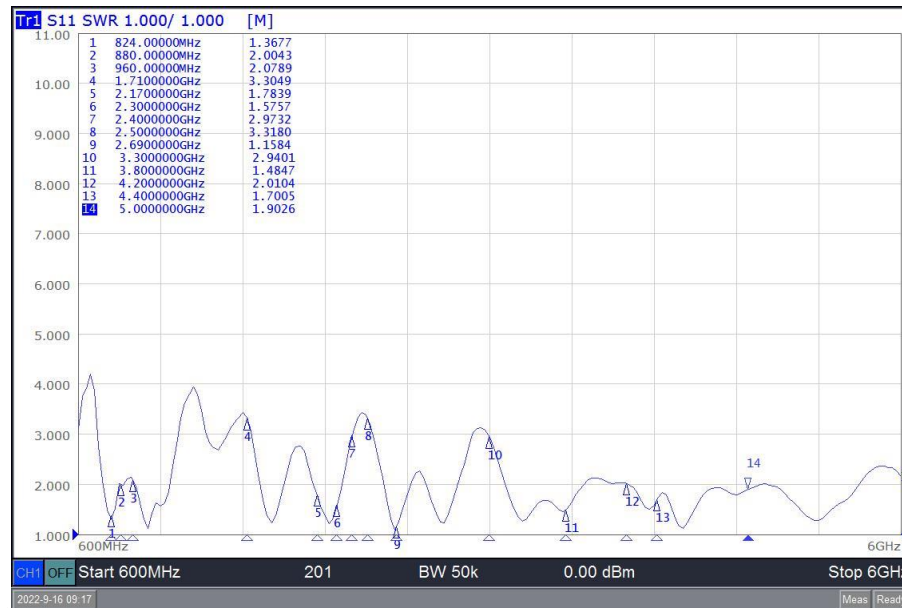

Frequency (MHz)	824	880	960	1710	2170	2300	2400	2500	2690
VSWR	1.36	2.00	2.07	3.30	1.78	1.57	2.97	3.31	1.15


Frequency (MHz)	3300	3800	4200	4400	5000
VSWR	2.94	1.48	2.01	1.70	1.90

WIFI 1:

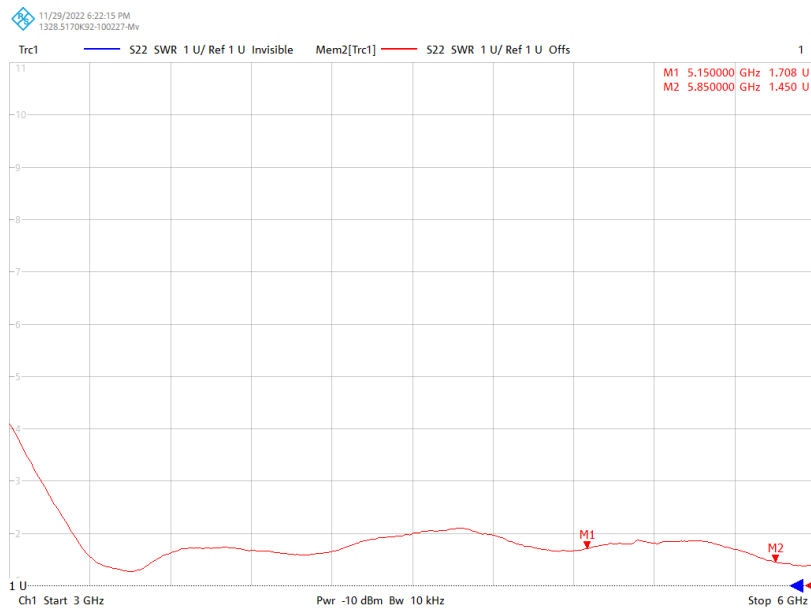


Frequency (MHz)	5150	5850
VSWR	1.78	1.45

WIFI 2:

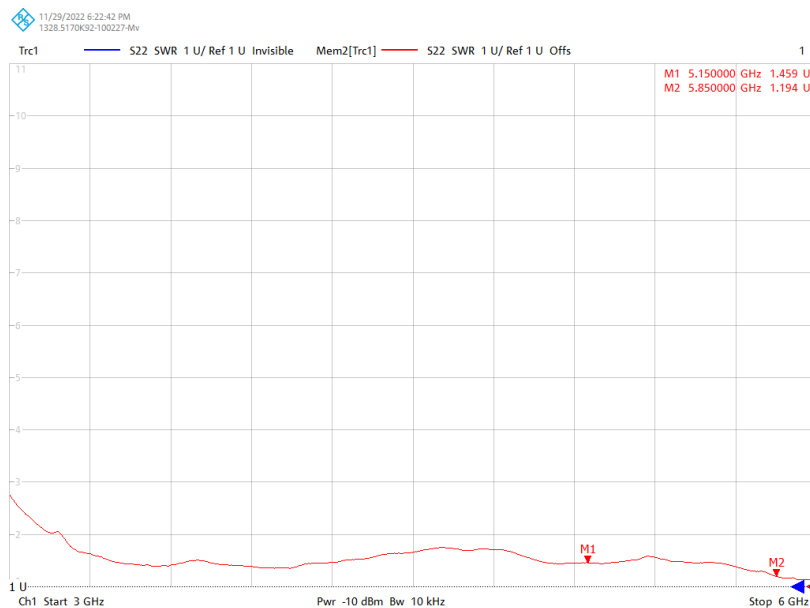

Frequency (MHz)	5150	5850
VSWR	1.45	1.19

WIFI 1-2.4G

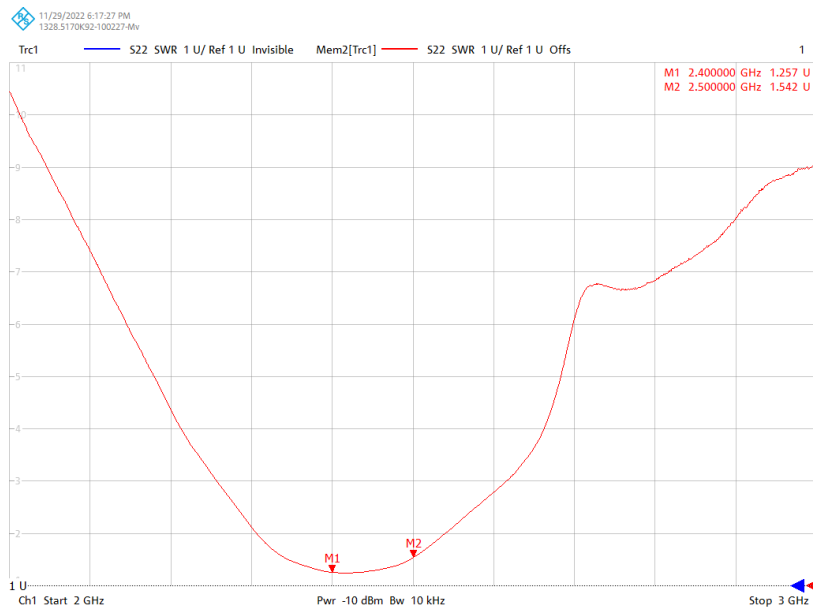


Frequency (MHz)	2400	2500
VSWR	1.25	1.54

WIFI 1-5G:




Frequency (MHz)	5150	5850
VSWR	1.30	2.26

WIFI 2-2.4G

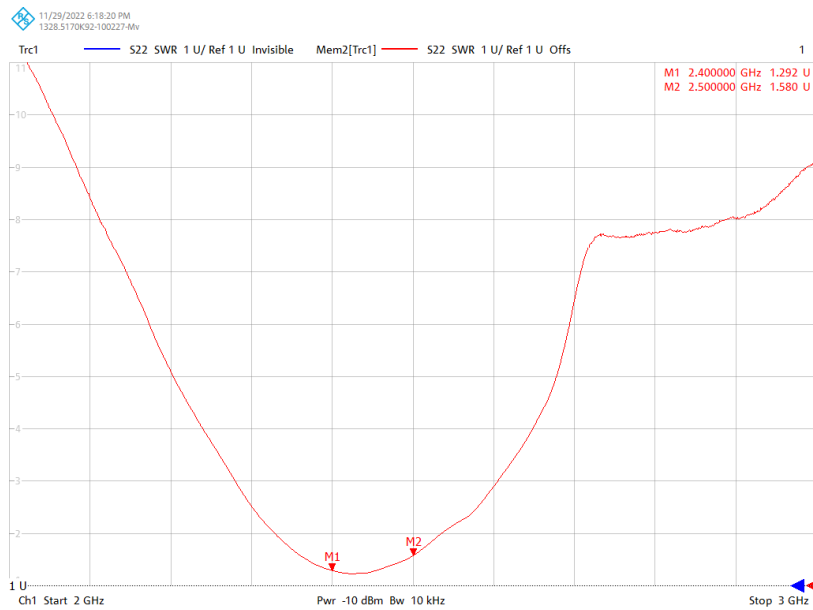

Frequency (MHz)	2400	2500
VSWR	1.29	1.58


WIFI 2-5G:

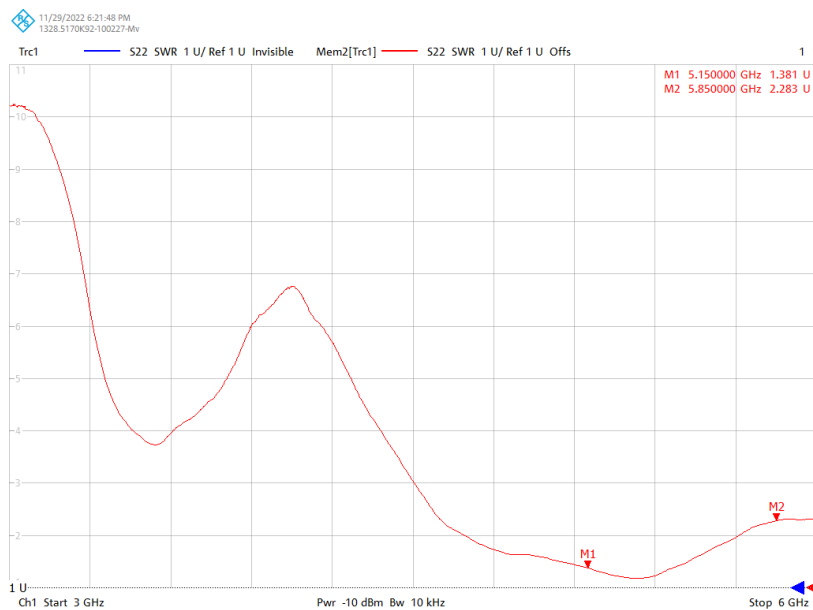

Frequency (MHz)	5150	5850
VSWR	1.38	2.28


4.3. Efficiency

NR0(ant1):

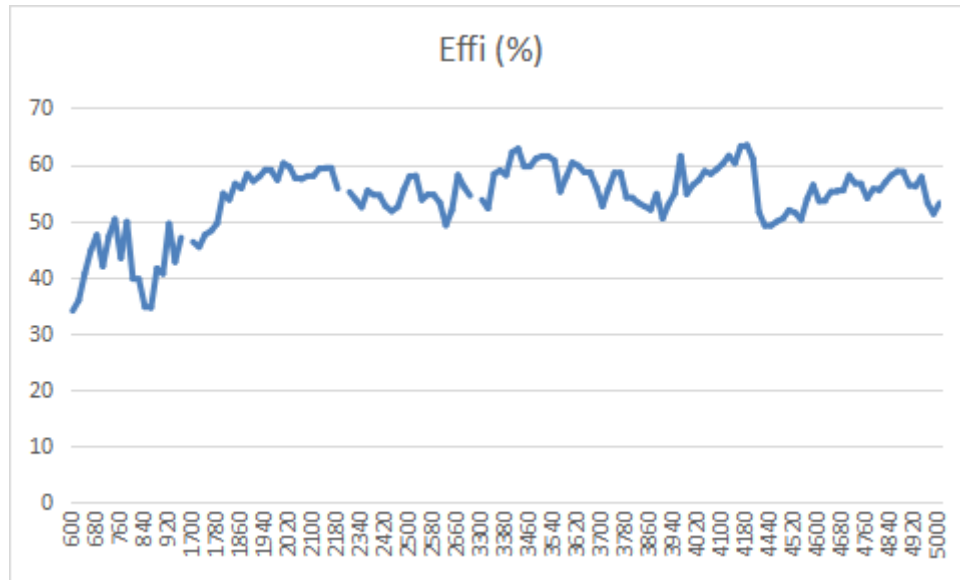


Frequency (MHz)	600	960	1700	2180	2300	2700	3300	3800	4200	5000
Efficiency (%)	33.96	46.95	46.19	55.69	55.06	54.44	53.67	53.97	60.99	53.09

NR1(ant2):

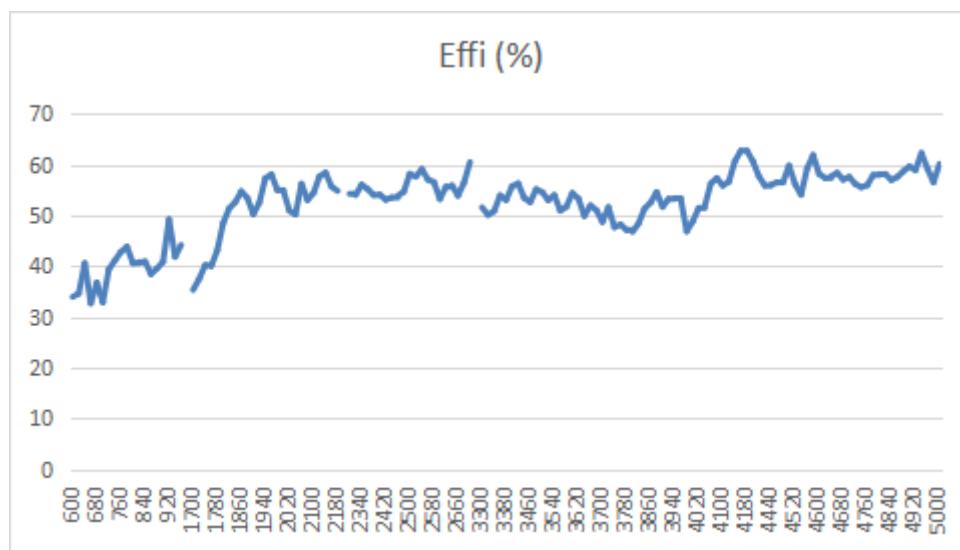


Frequency (MHz)	600	960	1700	2180	2300	2700	3300	3800	4200	5000
Efficiency (%)	33.99	44.21	35.38	54.87	54.3	60.54	51.63	46.79	60.7	60.17

NR2(ant3):

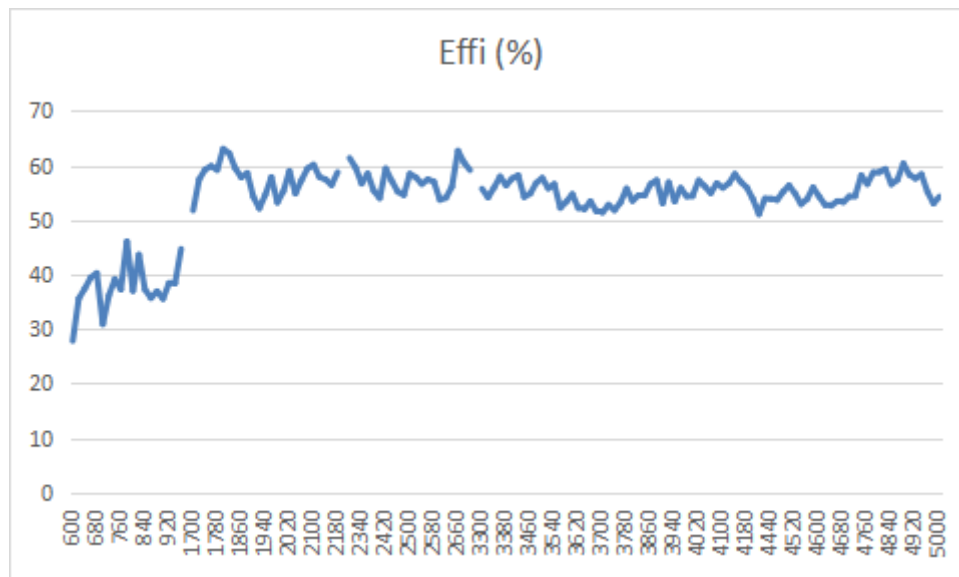


Frequency (MHz)	600	960	1700	2180	2300	2700	3300	3800	4200	5000
Efficiency (%)	27.82	44.69	51.78	58.77	61.39	59.17	55.74	53.54	53.84	54.3

NR3(ant0):

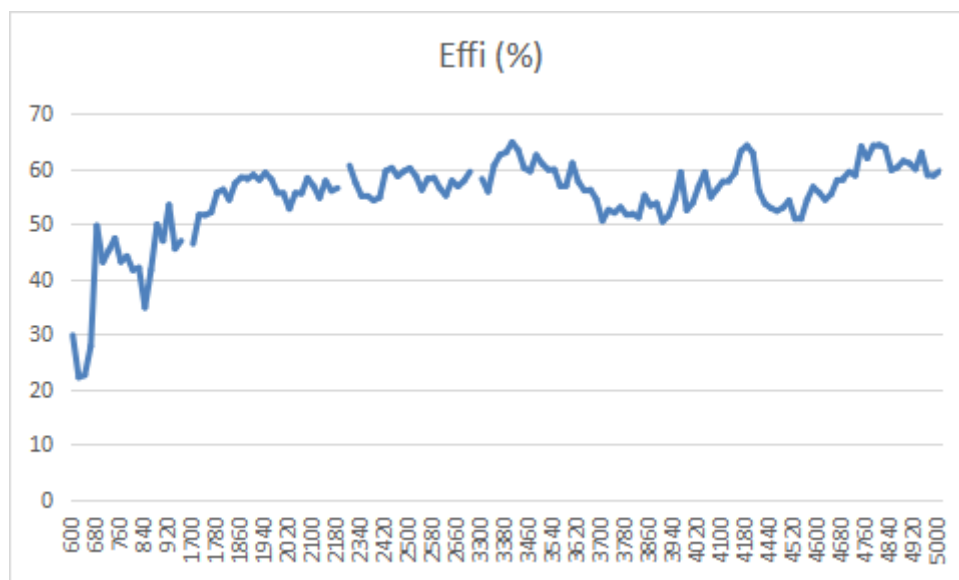


Frequency (MHz)	600	960	1700	2180	2300	2700	3300	3800	4200	5000
Efficiency (%)	29.81	46.97	46.45	56.55	60.64	59.52	58.22	51.95	62.93	59.64

WIFI1:

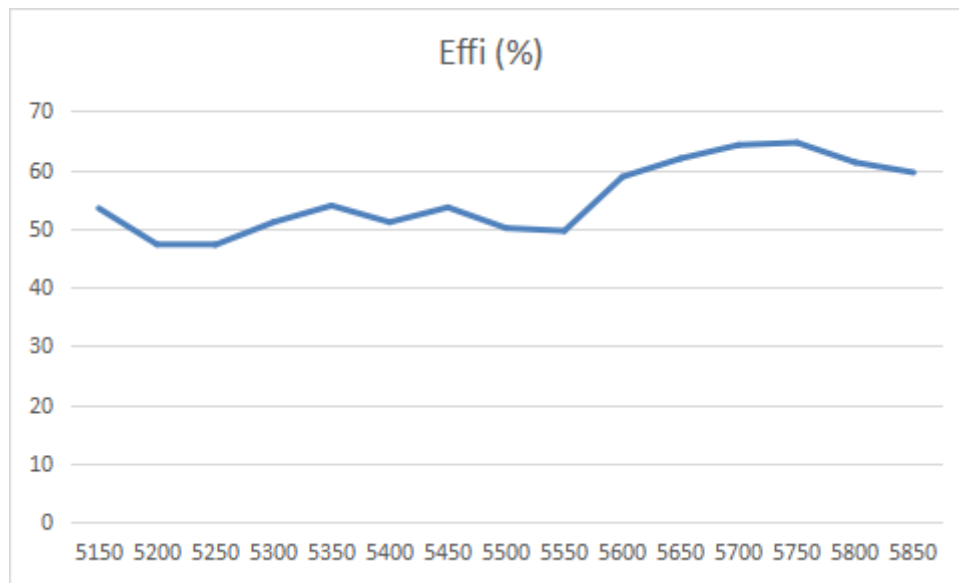


Frequency (MHz)	5150	5500	5850
Efficiency (%)	53.47	50.1	59.58

WIFI2:

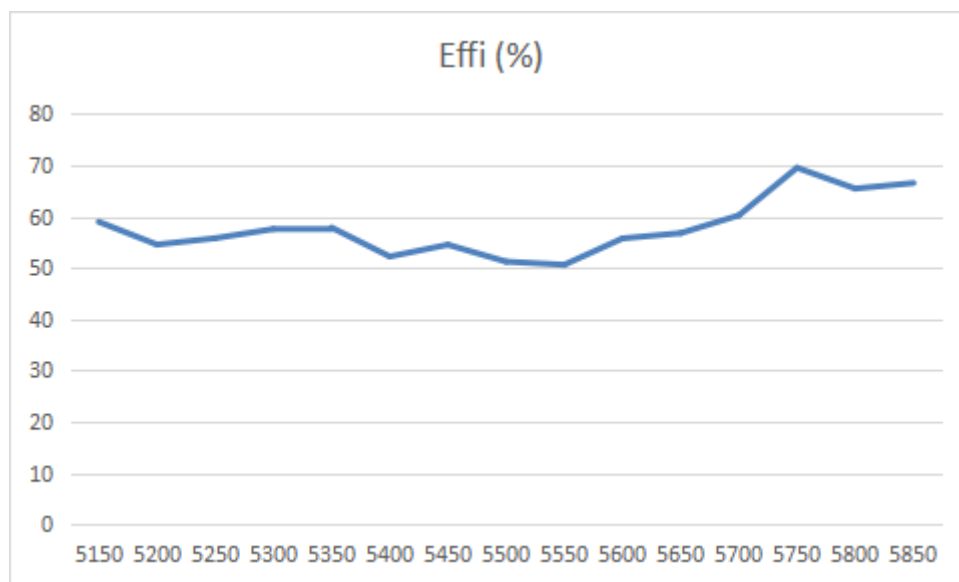


Frequency (MHz)	5150	5500	5850
Efficiency (%)	58.99	51.23	66.56

WiFi1-2.4G:

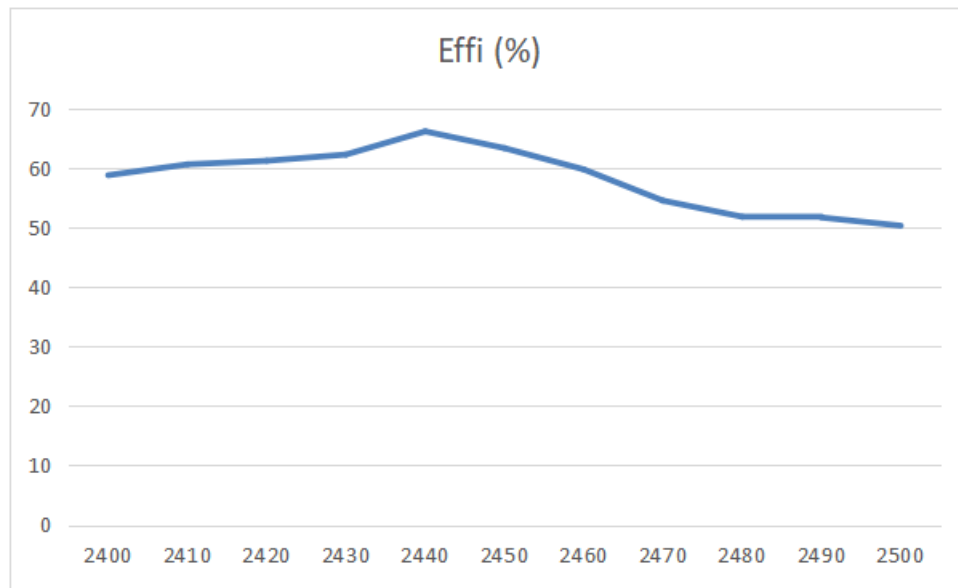


Frequency (MHz)	2400	2500
Efficiency (%)	58.88	50.38

WiFi1-5G:

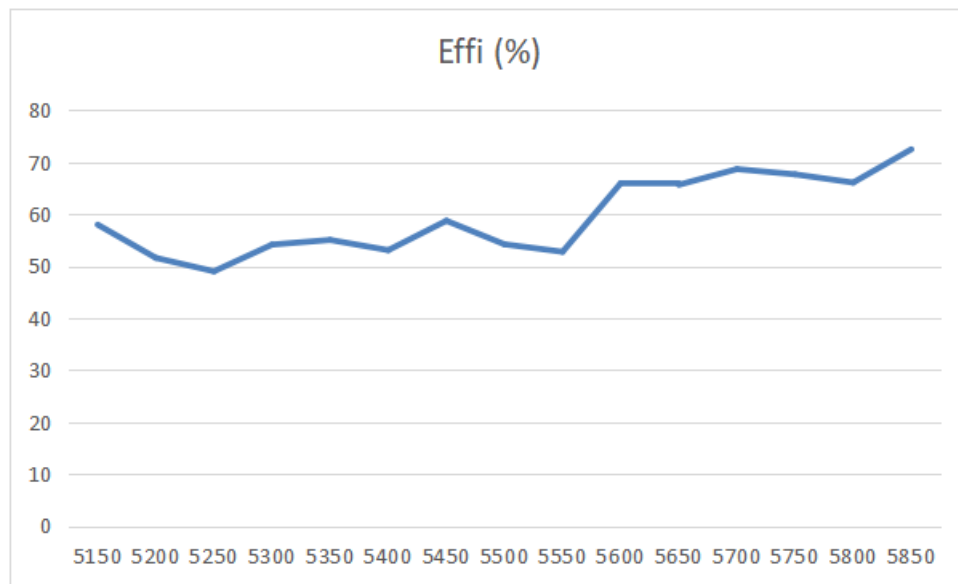


Frequency (MHz)	5150	5500	5850
Efficiency (%)	57.97	54.19	72.47

WiFi2-2.4G:

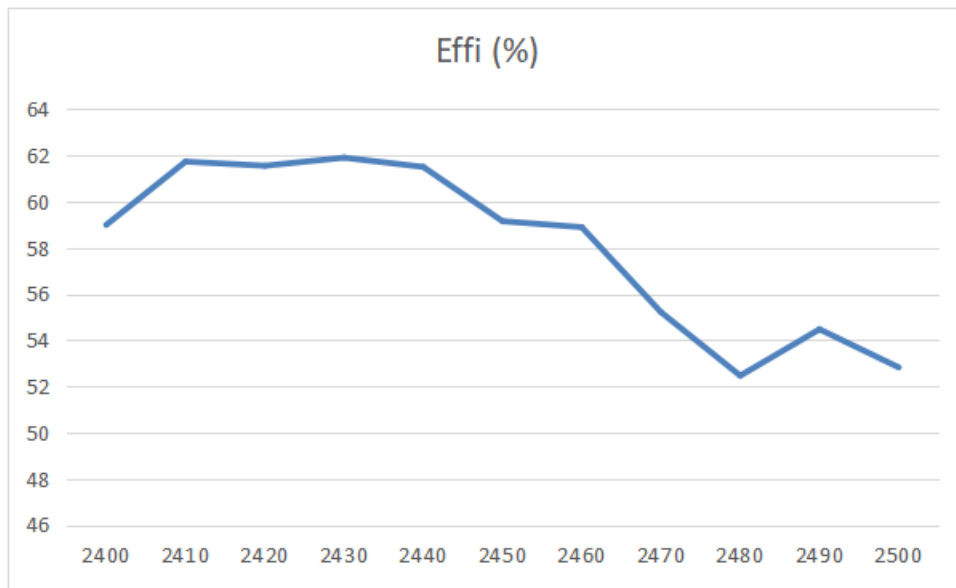

Frequency (MHz)	2400	2500
Efficiency (%)	58.99	52.82

WiFi2-2.4G:

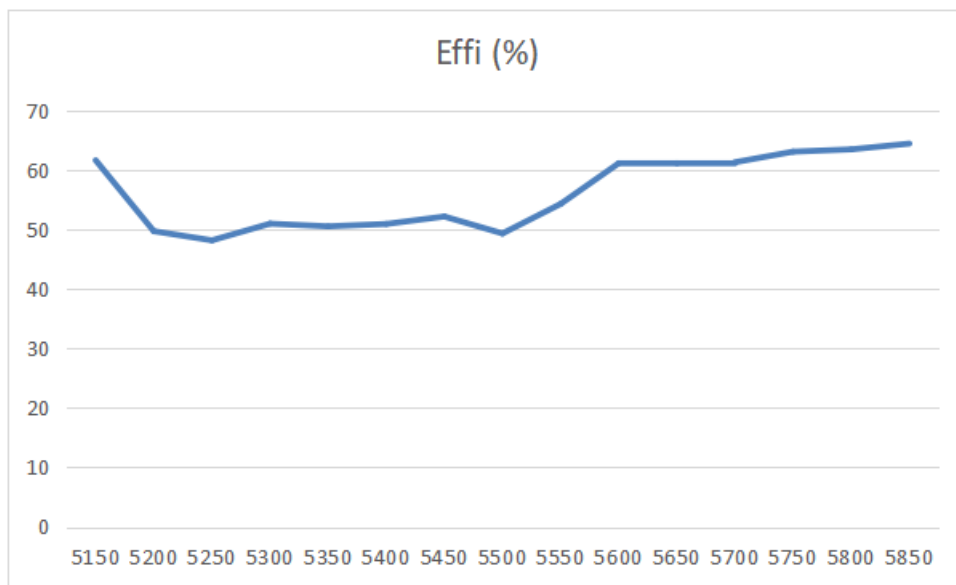

Frequency (MHz)	5150	5500	5850
Efficiency (%)	61.73	49.41	64.54

4.4. Gain

NR0(ant1):

Freq(MHz)	Gain(dBi)
600~800	1.57
800~960	1.6
1710~2170	2.4
2300~2690	2.36
3300~4200	2.75
4200~5000	2.95

NR1(ant2):

Freq(MHz)	Gain(dBi)
600~800	1.73
800~960	1.69
1710~2170	3.13
2300~2690	2.69
3300~4200	2.96
4200~5000	2.99

NR2(ant3):

Freq(MHz)	Gain(dBi)
600~800	1.32
800~960	1.47
1710~2170	3.09
2300~2690	2.84
3300~4200	2.76
4200~5000	3.24

NR3(ant0):

Freq(MHz)	Gain(dBi)
600~800	1.64
800~960	1.94
1710~2170	3.53
2300~2690	3.24
3300~4200	3.33
4200~5000	3.37

WIFI1:

Freq	Gain
(MHz)	(dBi)
5150	1.49
5200	1.31
5250	1.27
5300	1.11
5350	1.63
5400	1.59
5450	1.62
5500	0.97
5550	0.24
5600	1.18
5650	1.09
5700	1.64
5750	2.07
5800	2.33
5850	2.22

WIFI2:

Freq	Gain
(MHz)	(dBi)
5150	1.44
5200	0.93
5250	1.04
5300	0.47
5350	0.26
5400	1.02
5450	0.6
5500	0.73
5550	1
5600	2.01
5650	1.59
5700	2.12
5750	2.49
5800	1.95
5850	1.66

WiFi1-2.4G:

Freq	Gain
(MHz)	(dBi)
2400	1.63
2410	1.95
2420	2.13
2430	2.31
2440	2.61
2450	2.43
2460	2.3
2470	1.85
2480	1.77
2490	1.37
2500	0.98

WiFi1-5G:

Freq	Gain
(MHz)	(dBi)
5150	1.79
5200	0.51
5250	0.28
5300	0.73
5350	0.82
5400	1.34
5450	1.5
5500	1.01
5550	0.73
5600	1.39
5650	1.35
5700	2.05
5750	2.1
5800	2.12
5850	2.14

WiFi1-2.4G:

Freq	Gain
(MHz)	(dBi)
2400	1.57
2410	1.53
2420	1.49
2430	1.26
2440	1.39
2450	1.27
2460	1.02
2470	0.58
2480	0.87
2490	1.1
2500	1.47


WiFi1-5G:



Freq	Gain
(MHz)	(dBi)
5150	1.63
5200	1.28
5250	1.25
5300	1.14
5350	0.98
5400	0.97
5450	1.17
5500	0.56
5550	0.77
5600	1.34
5650	1.89
5700	1.25
5750	2.3
5800	2.17
5850	2.11

4.5. Radiation Pattern


- Test condition: free space.




NR0(ant1):

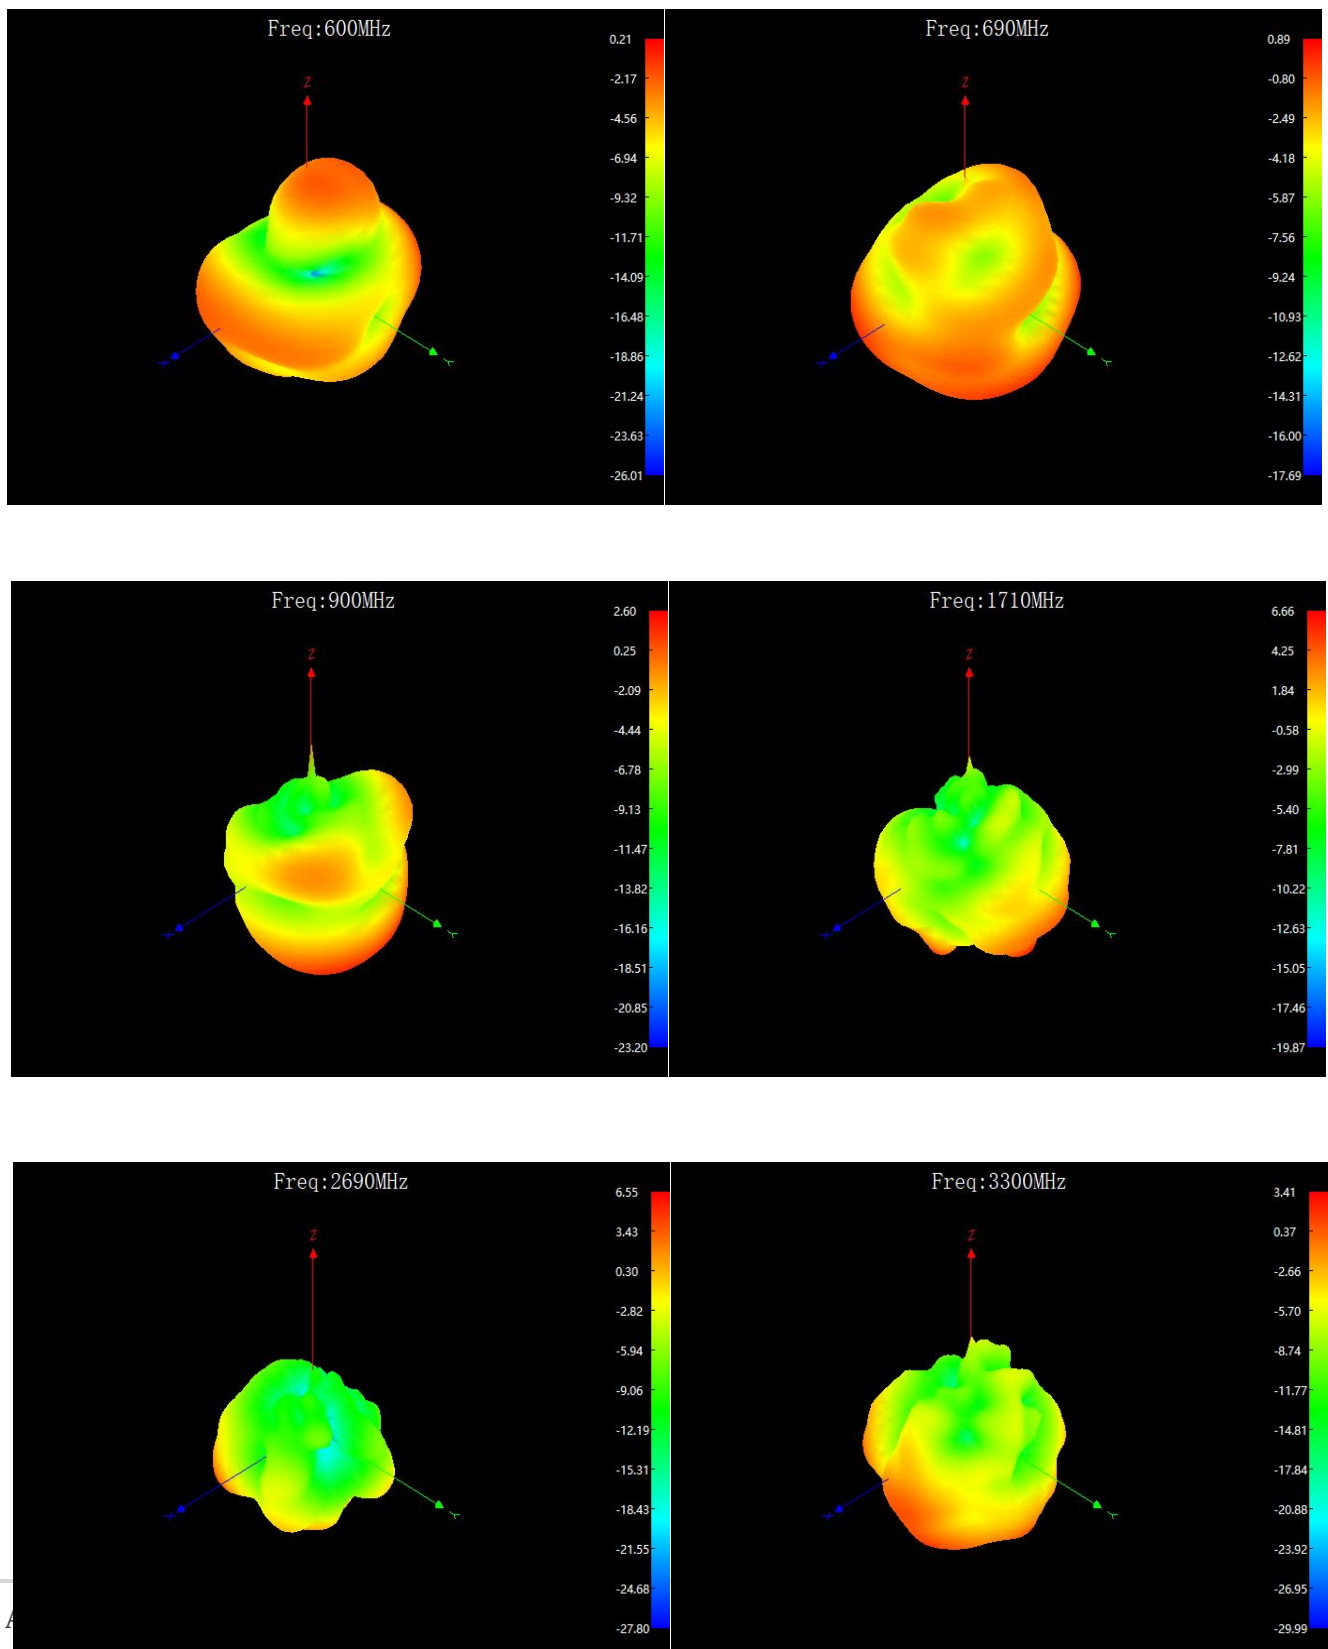


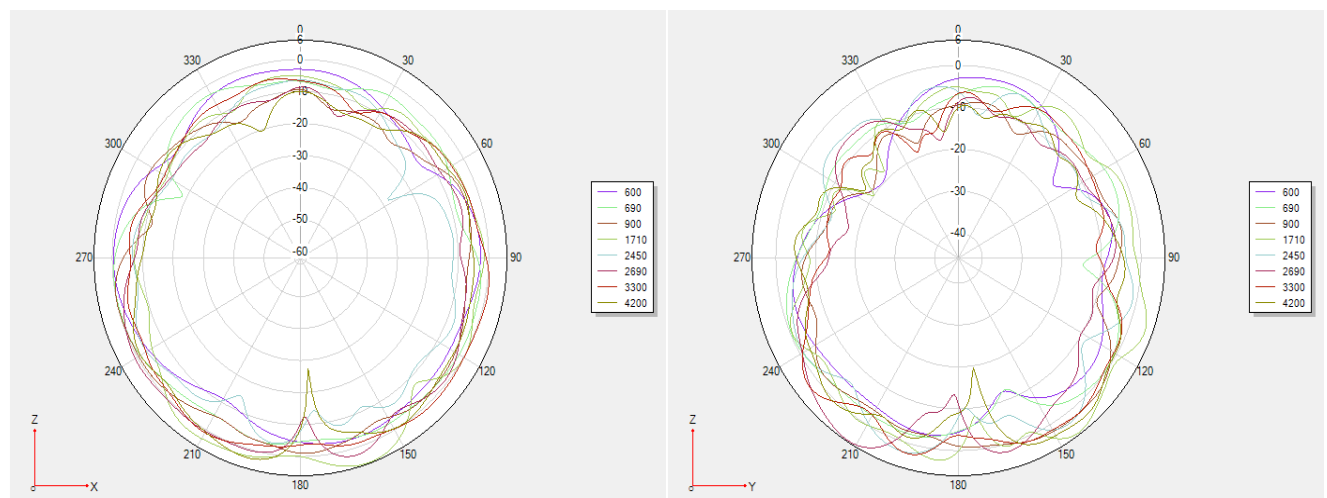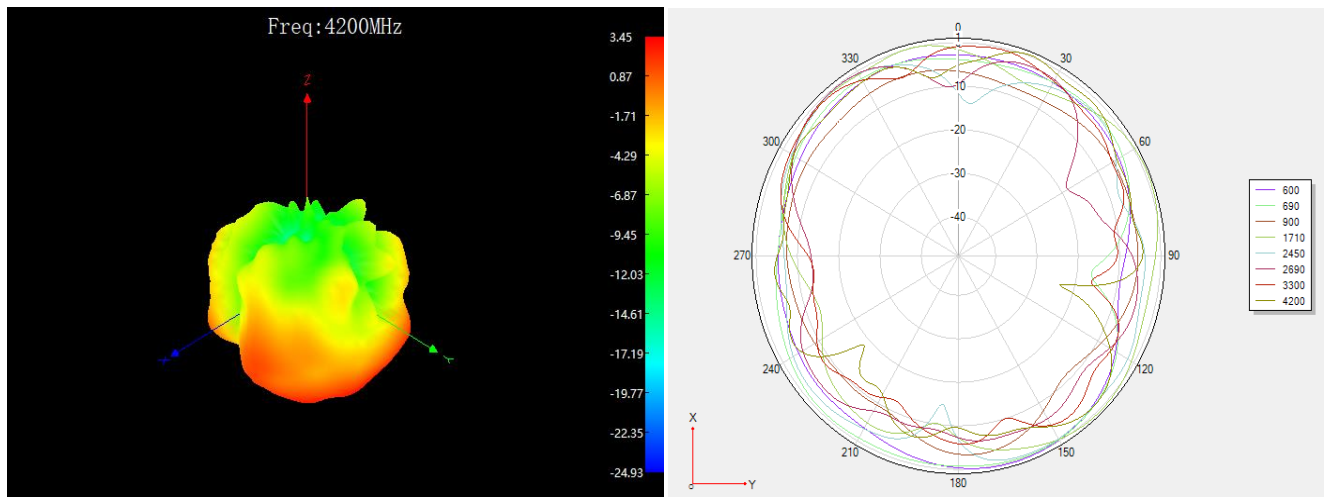



NR1(ant2):



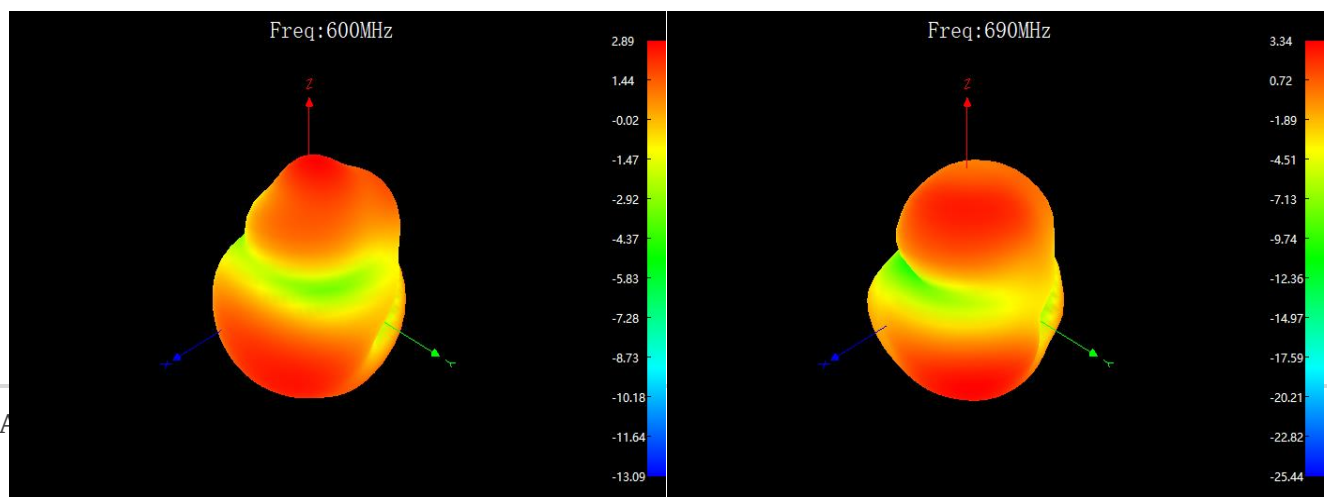


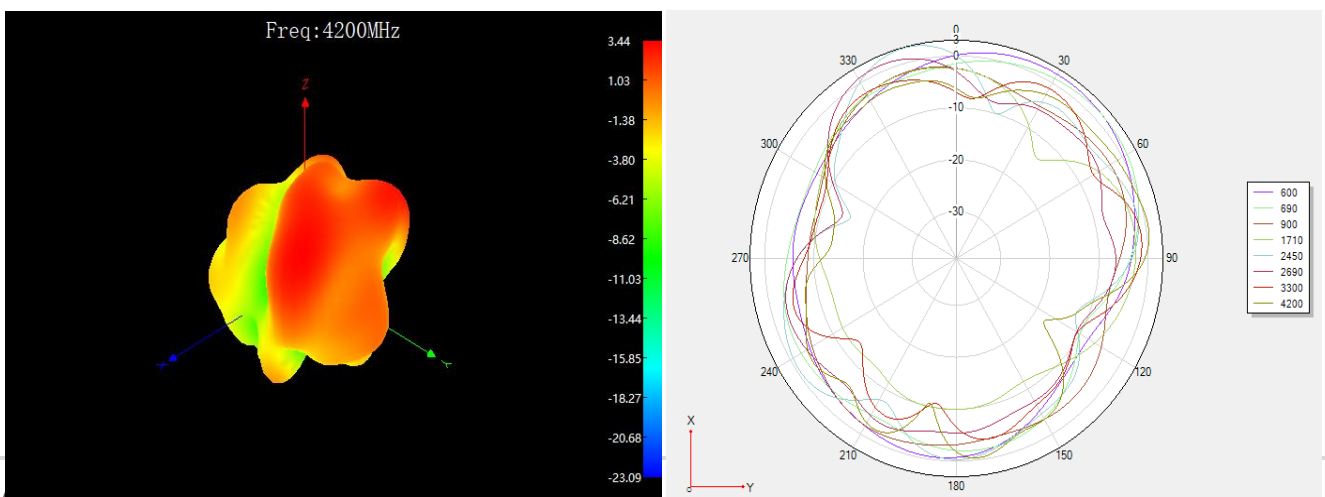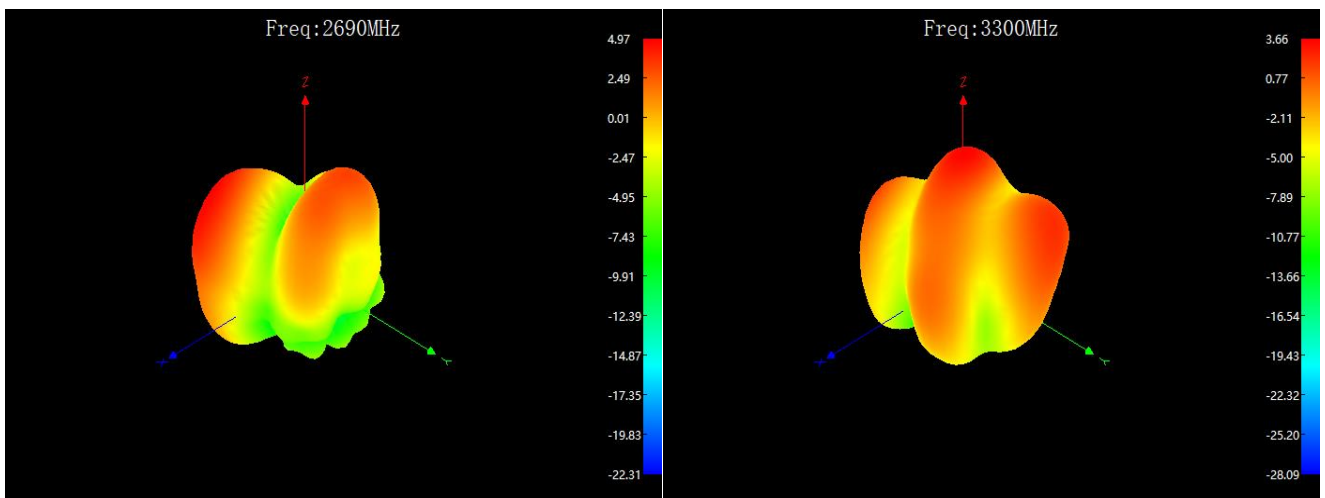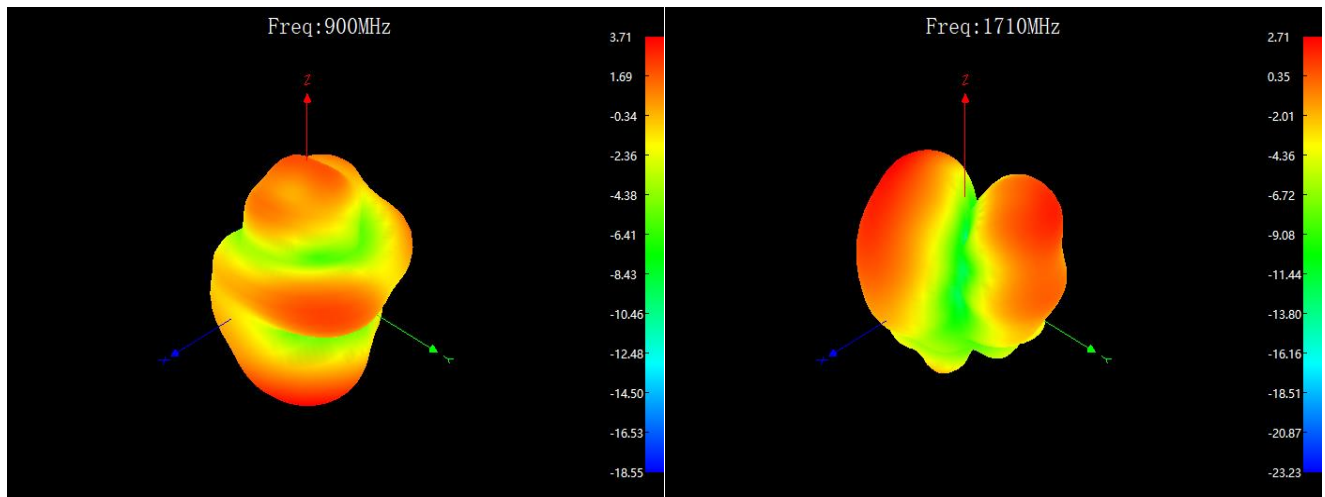



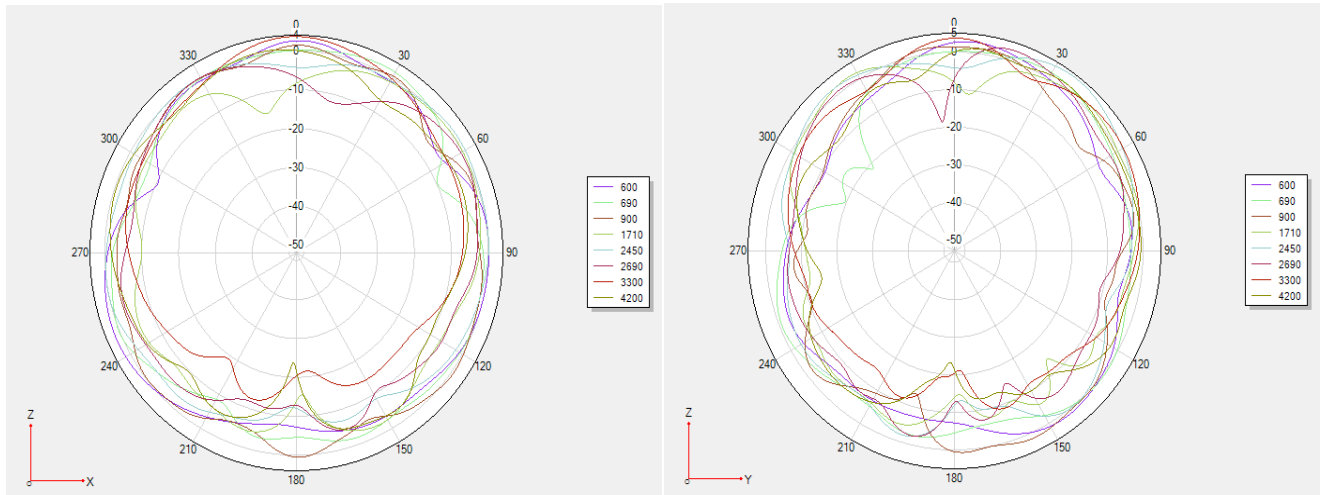




NR2(ant3):

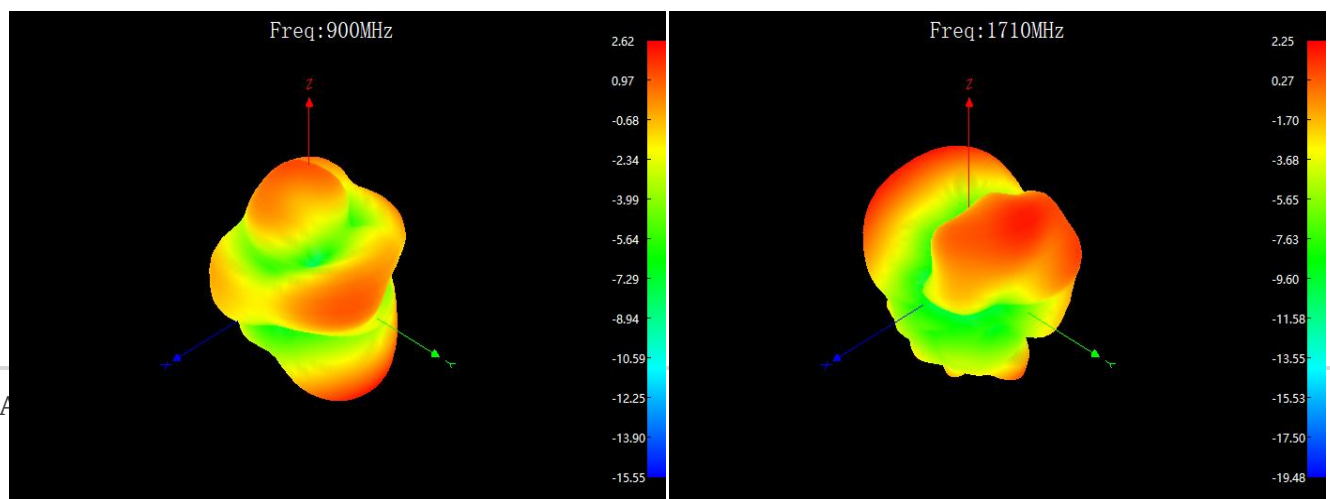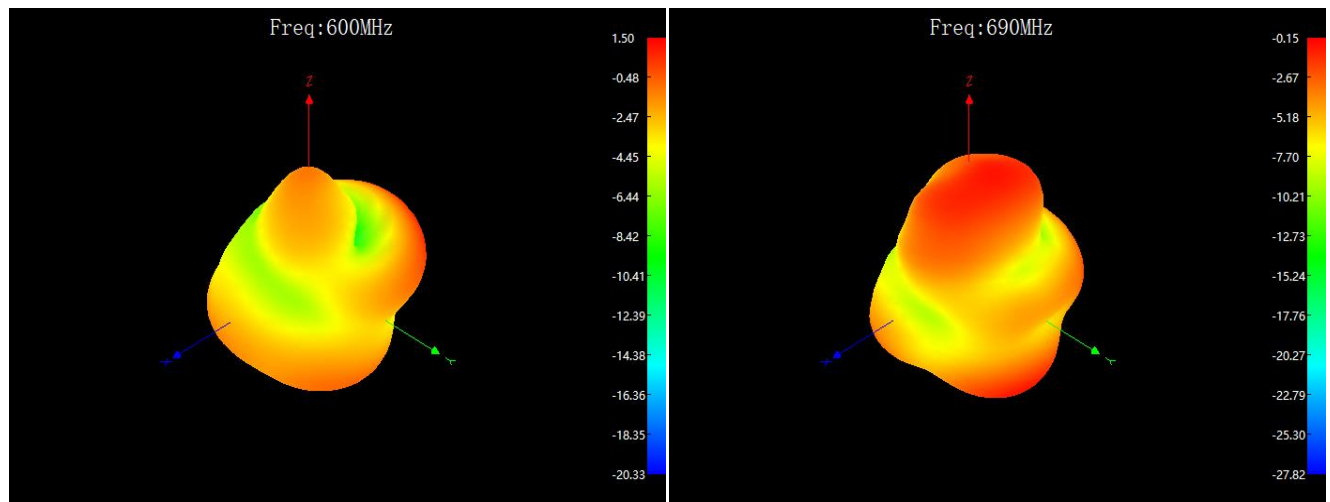

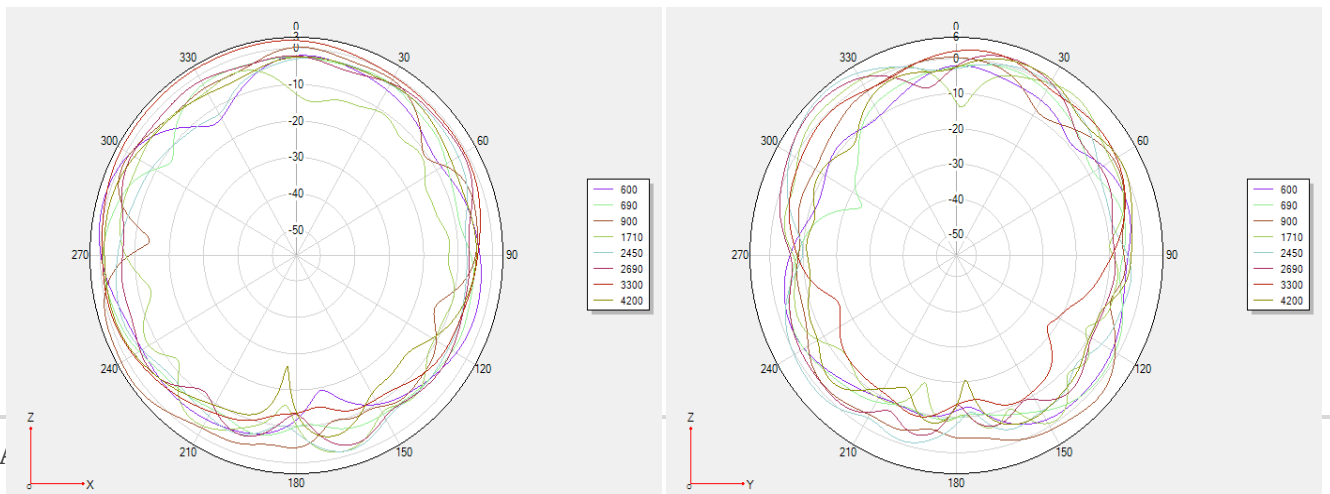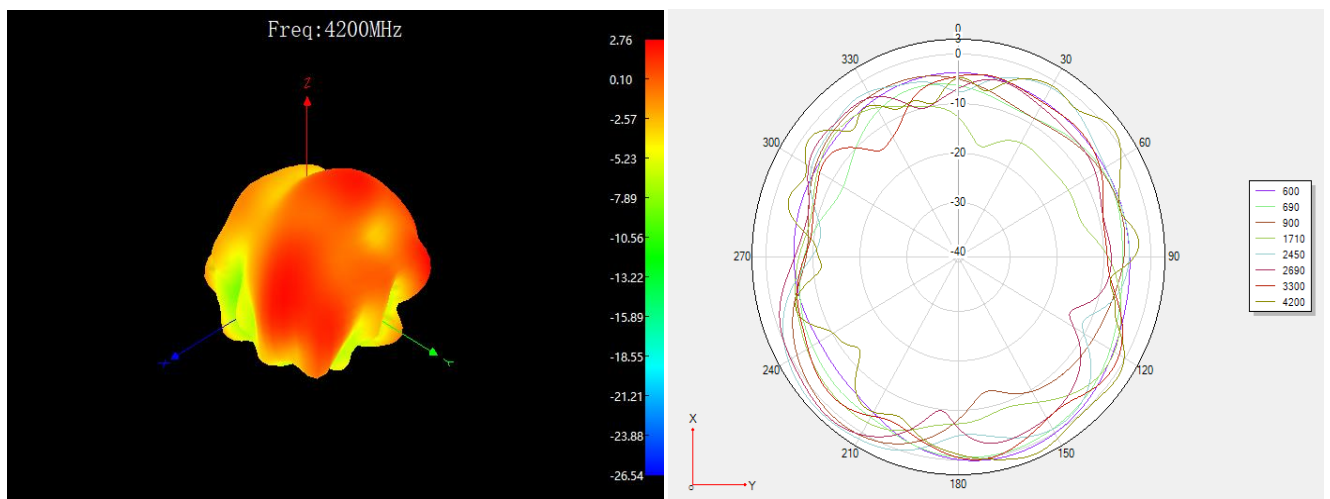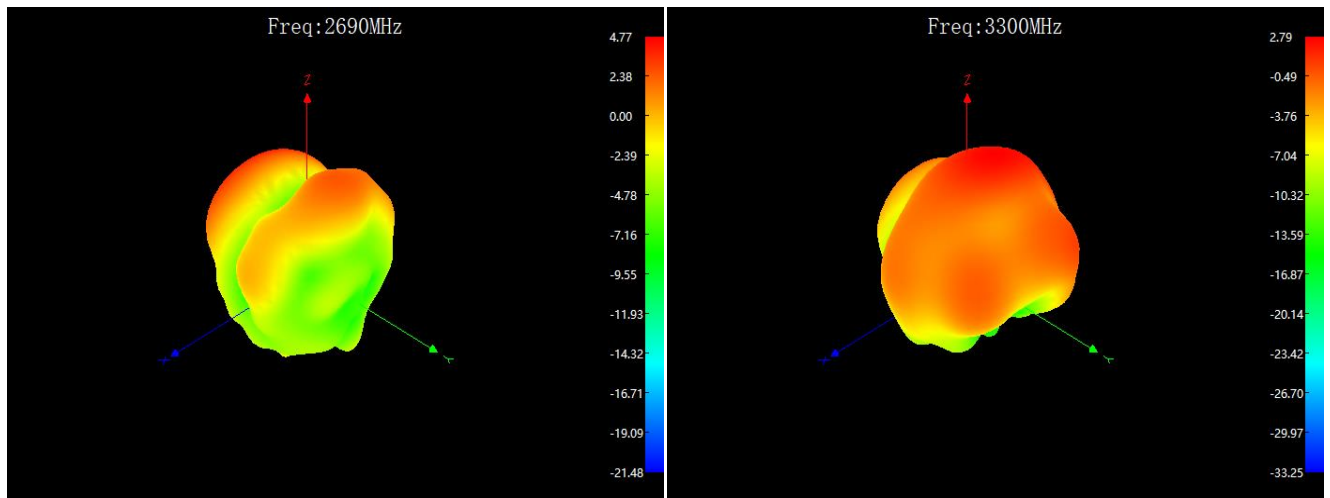





NR3(ant4):

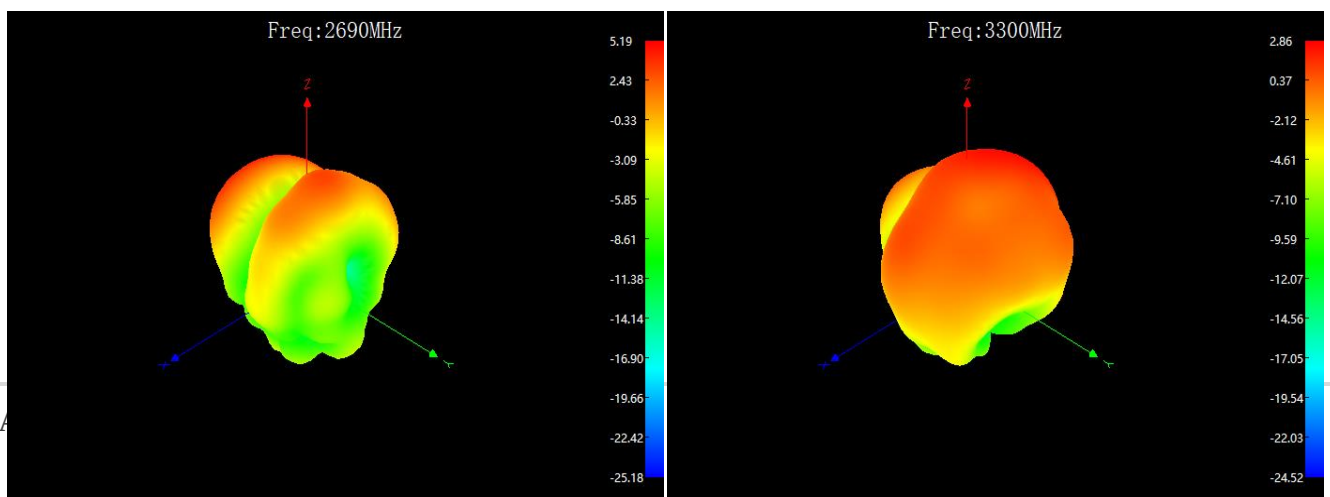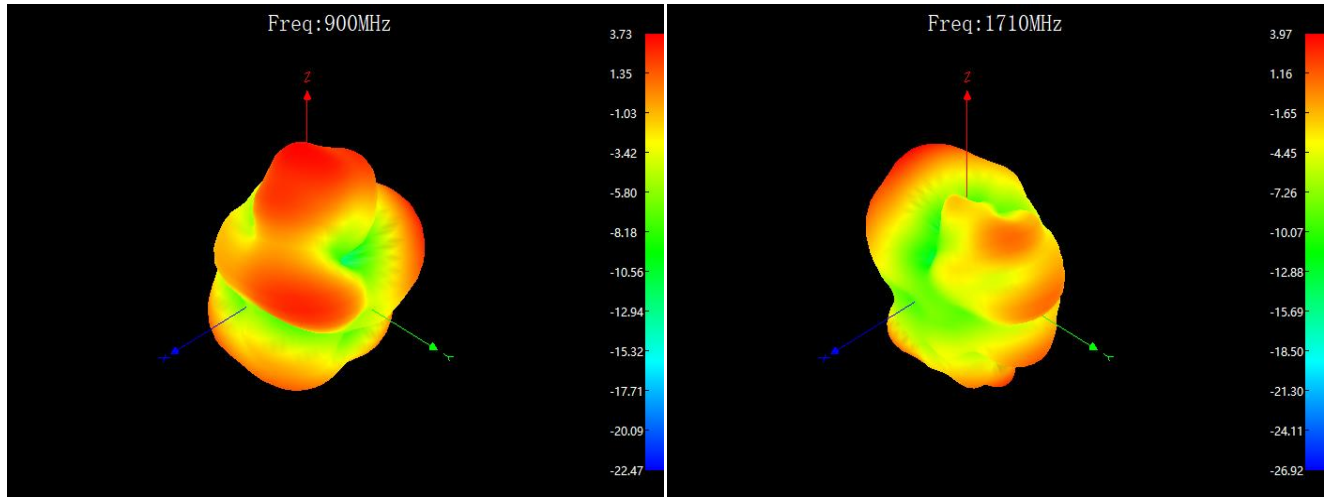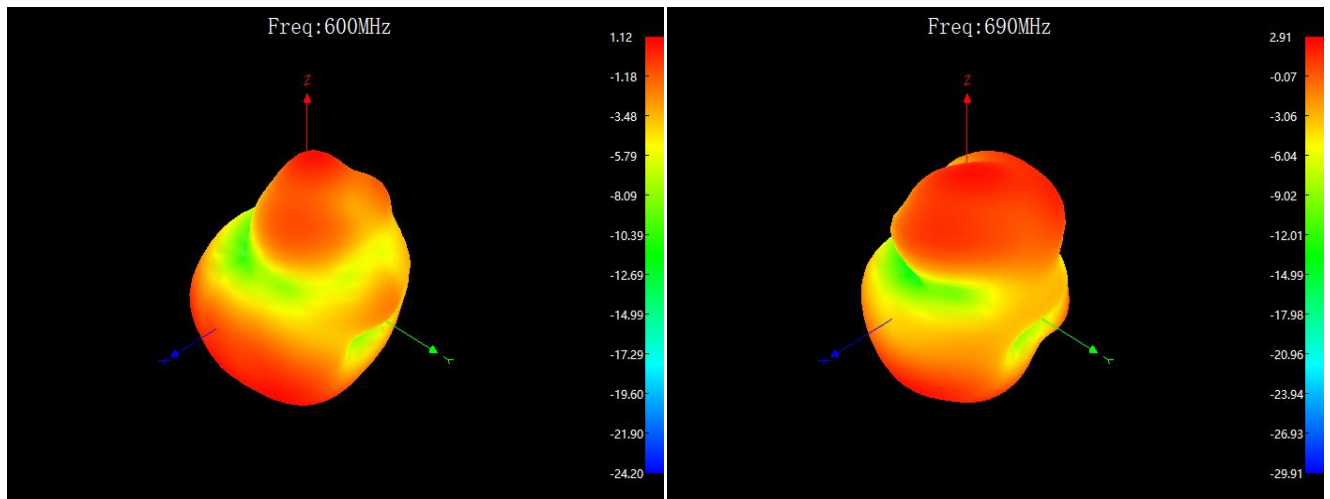

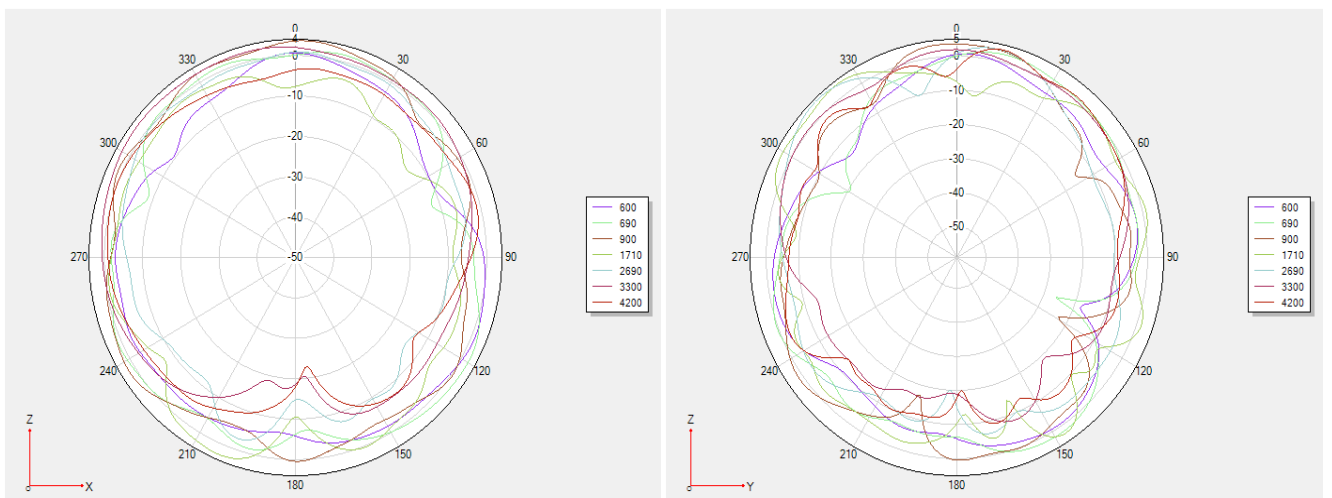
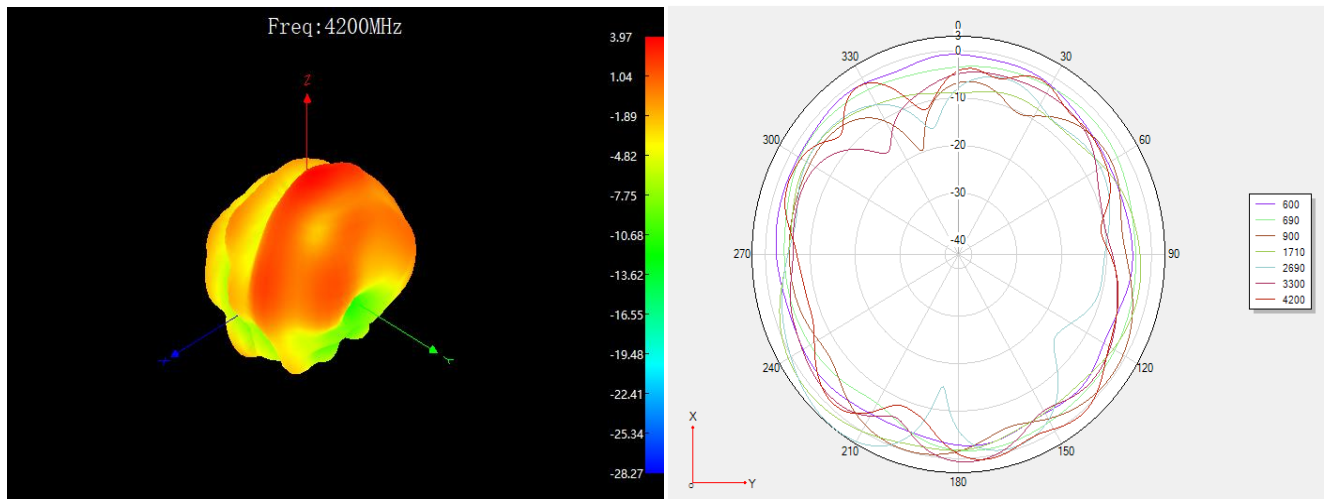





WIFI 1:

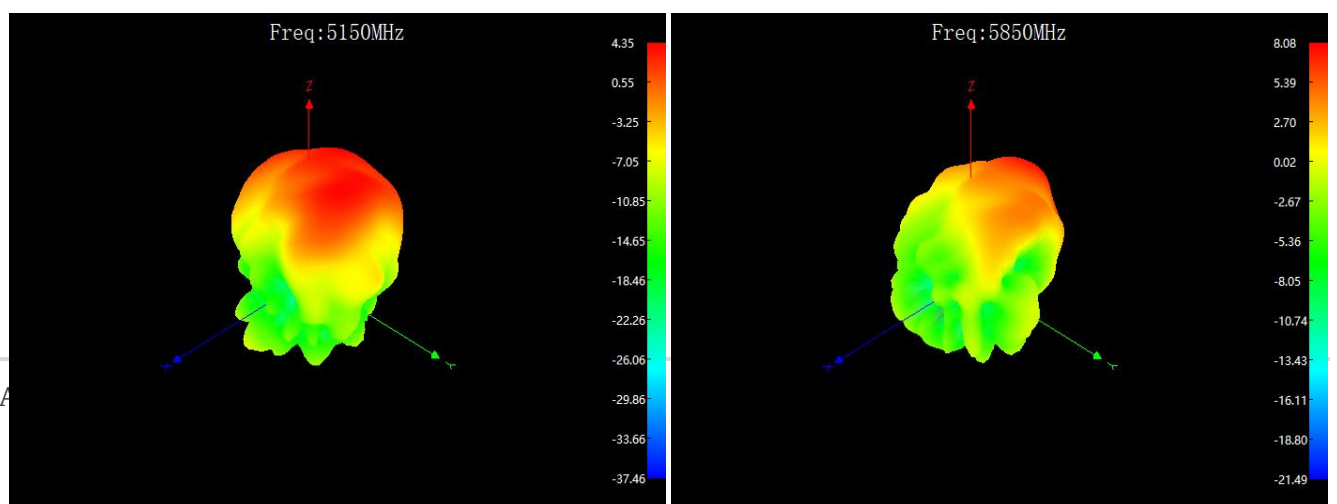

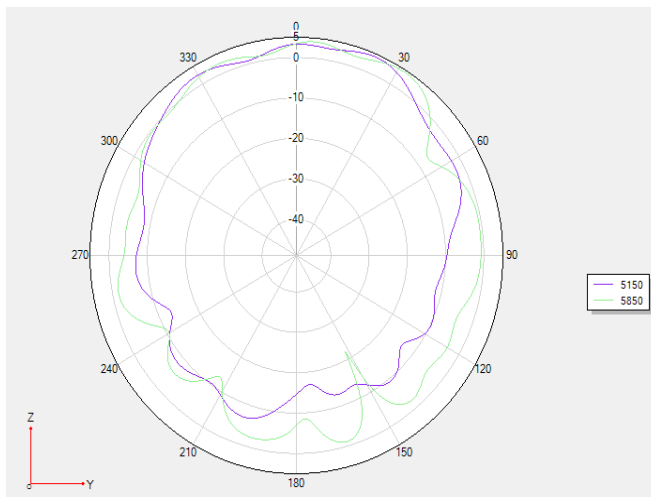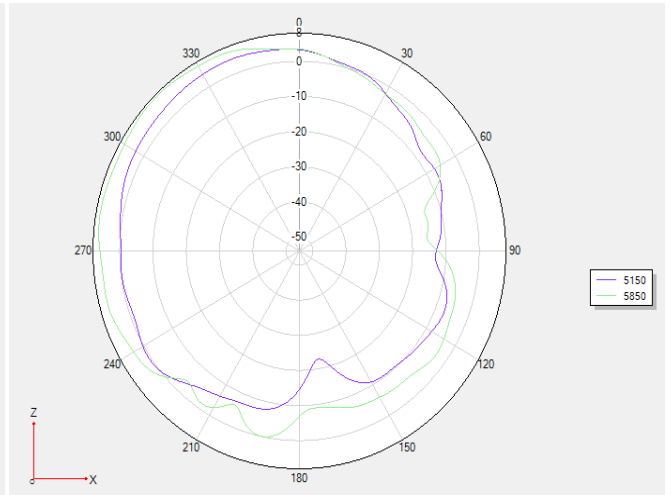
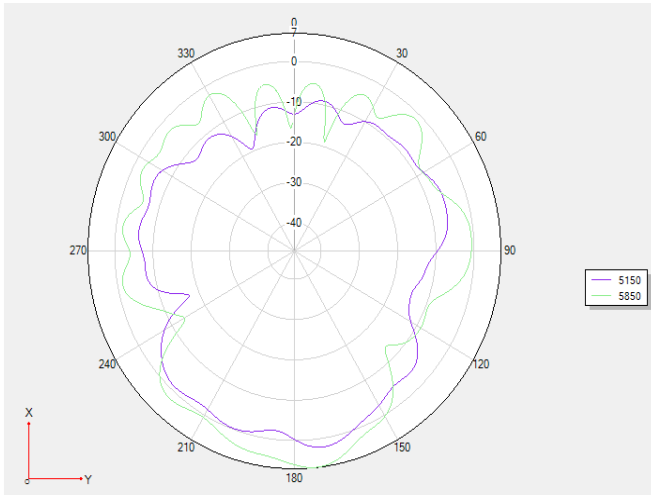



WIFI 2

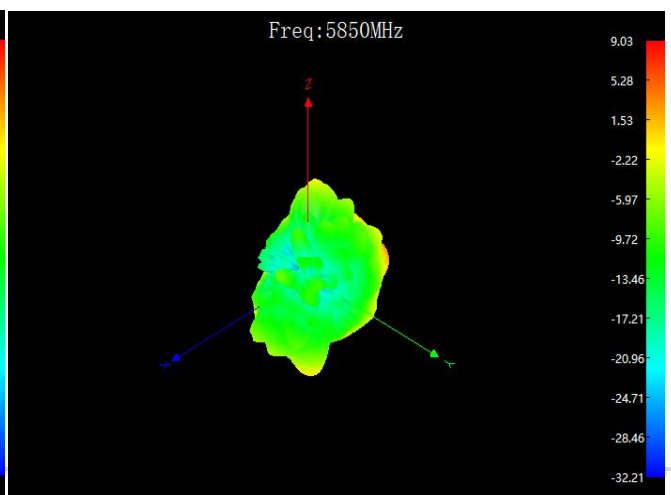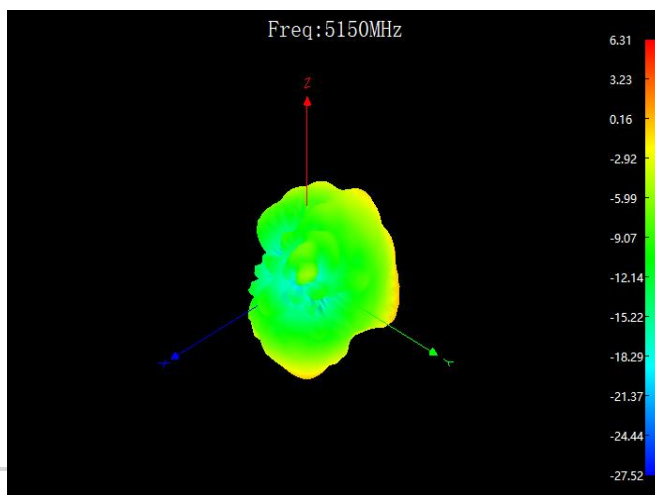

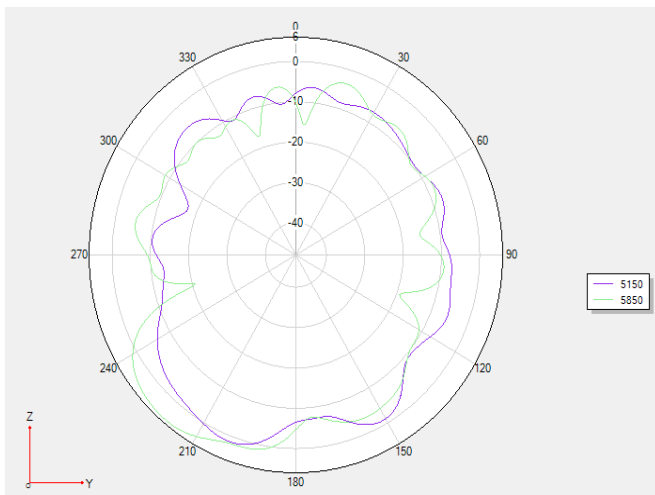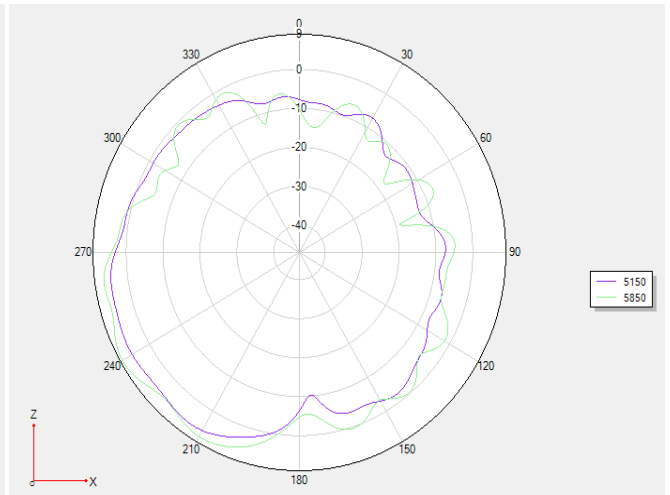
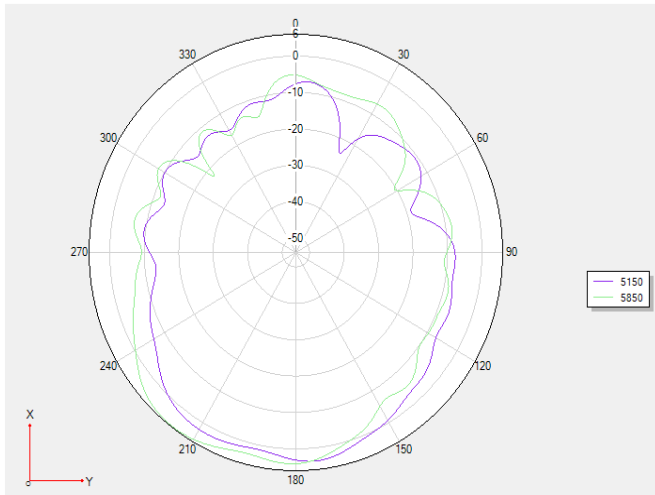



WIFI 1-2.4G:

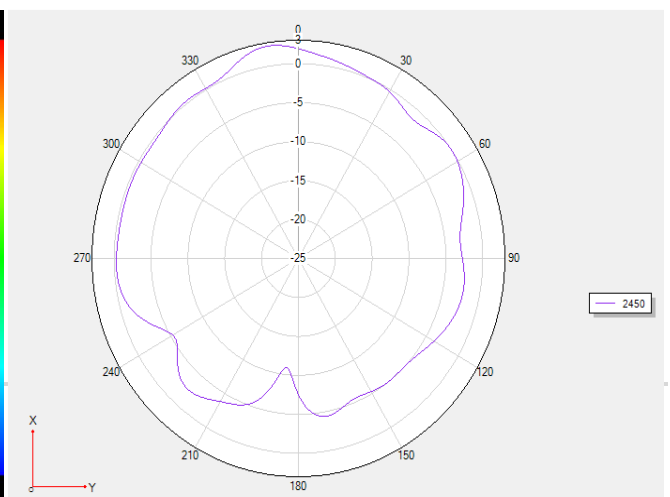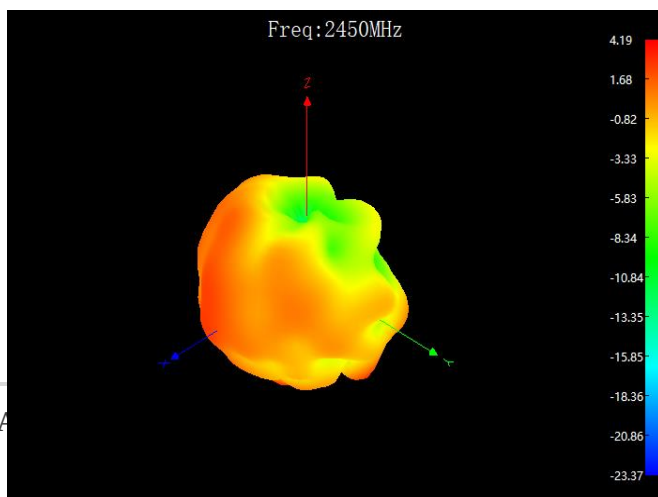




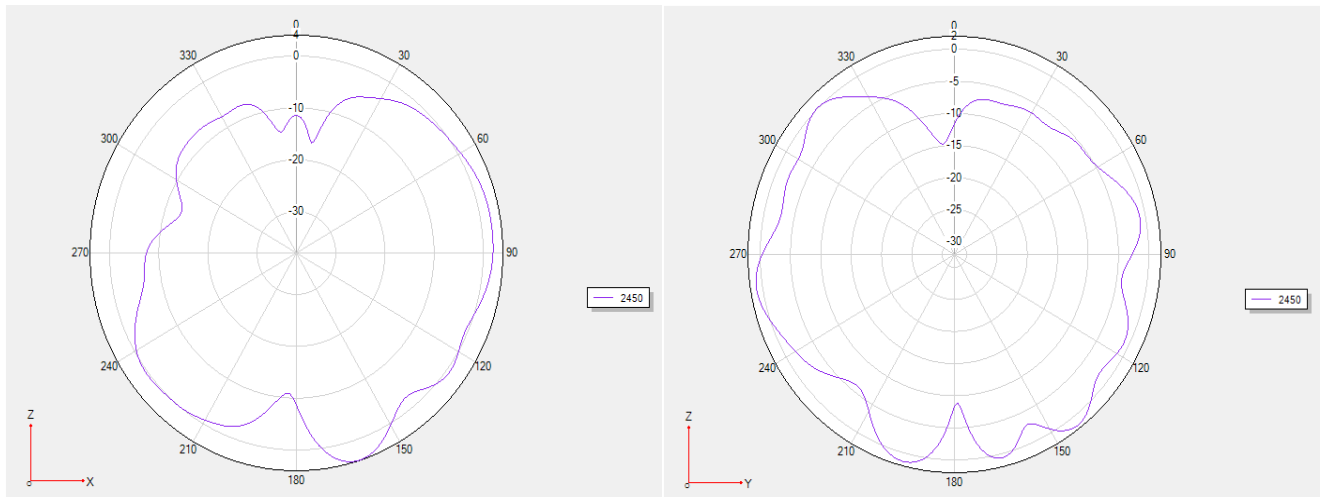


WIFI 1-5G:



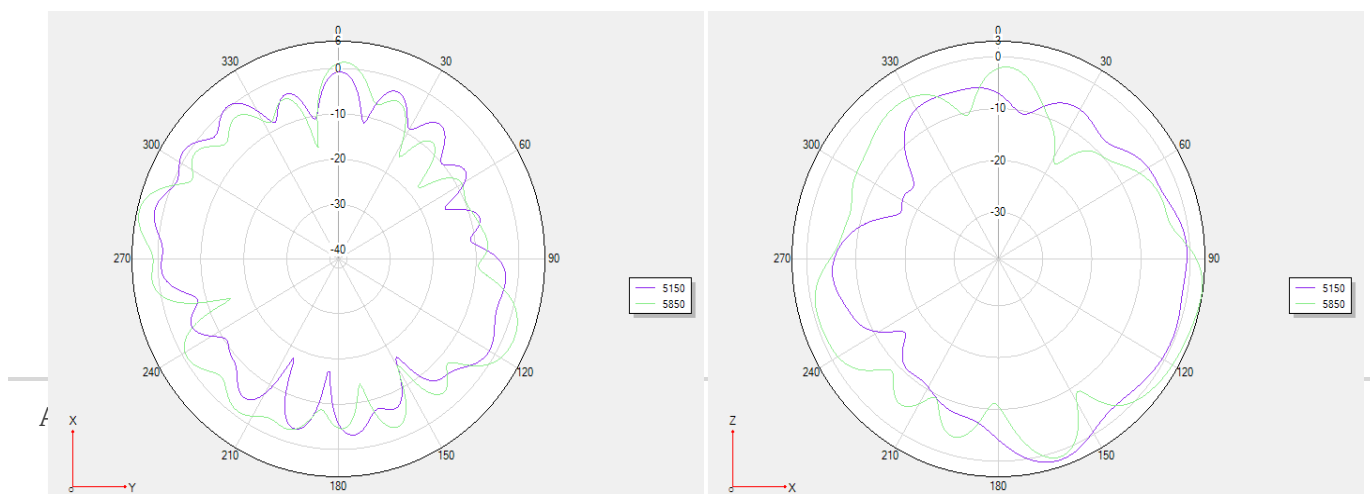
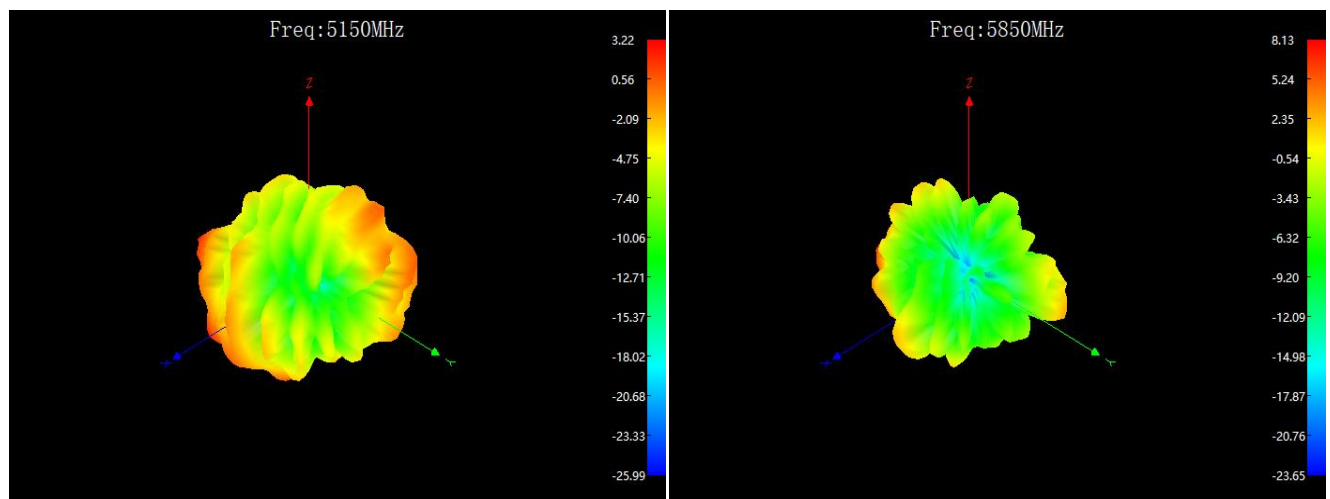


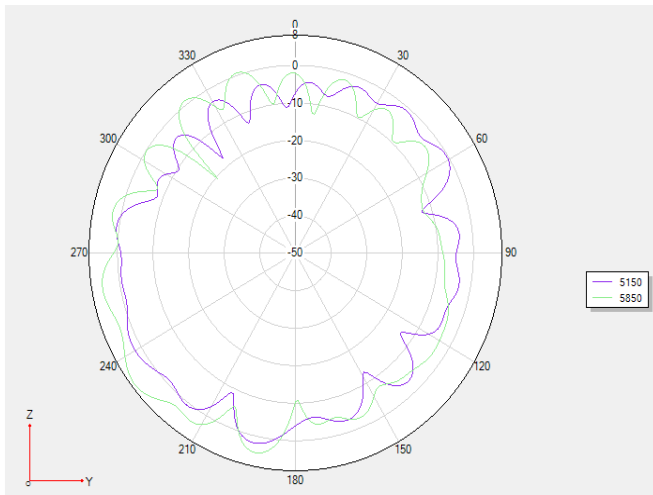


WIFI 2-2.4G:

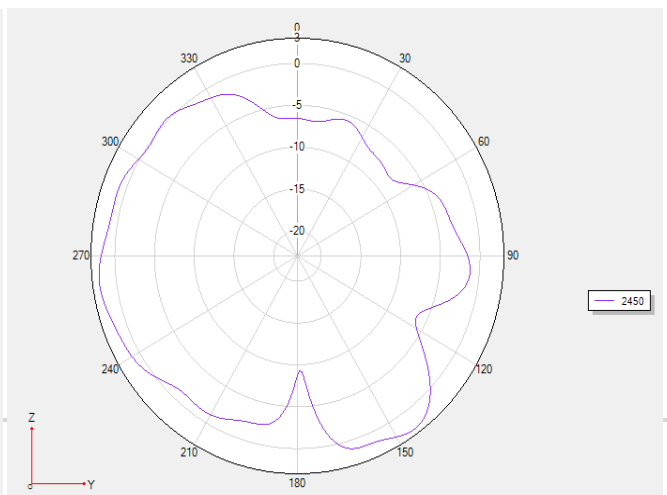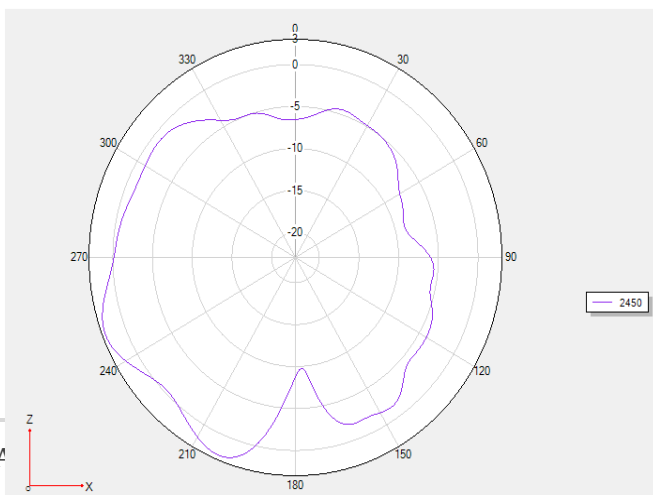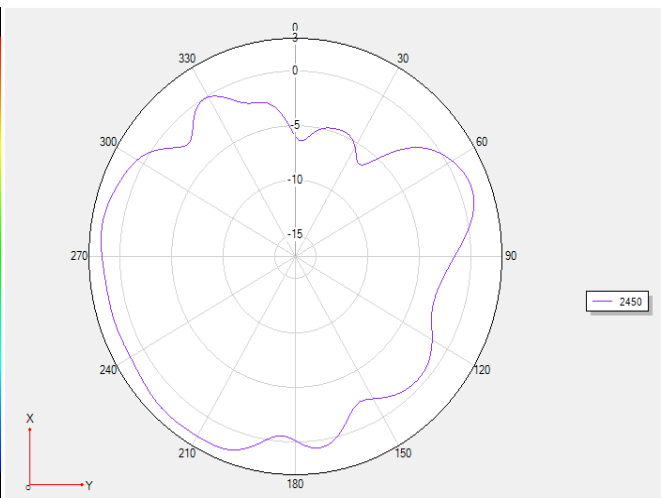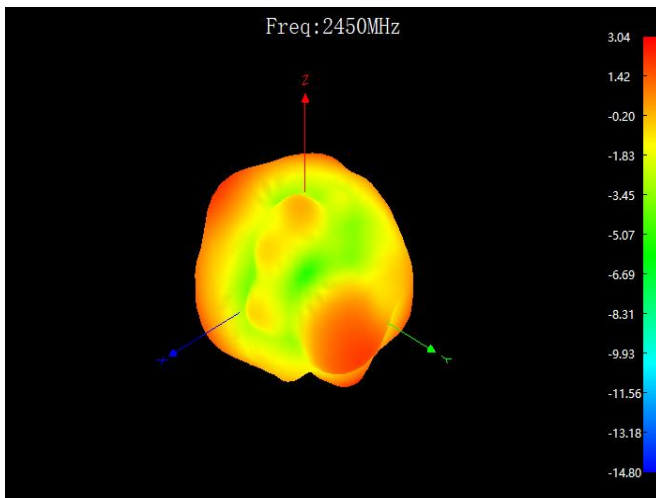



WIFI 2-5G:

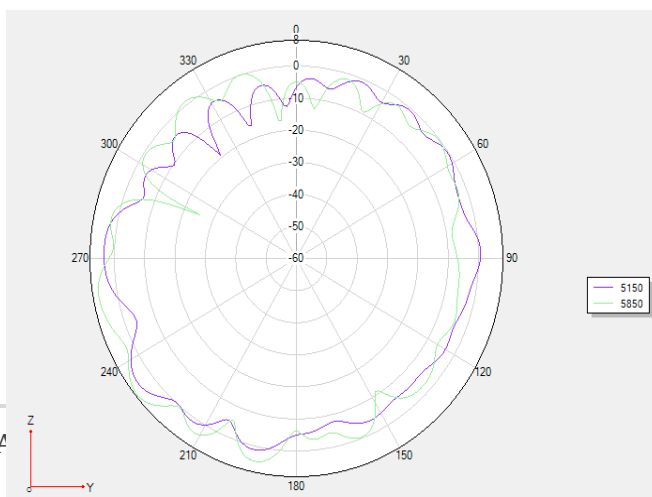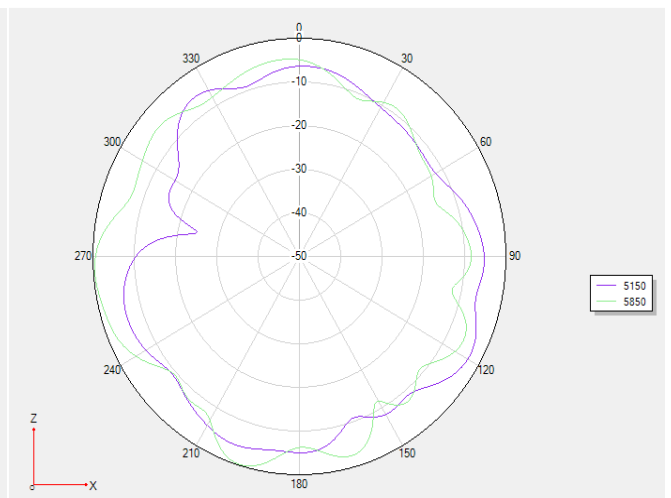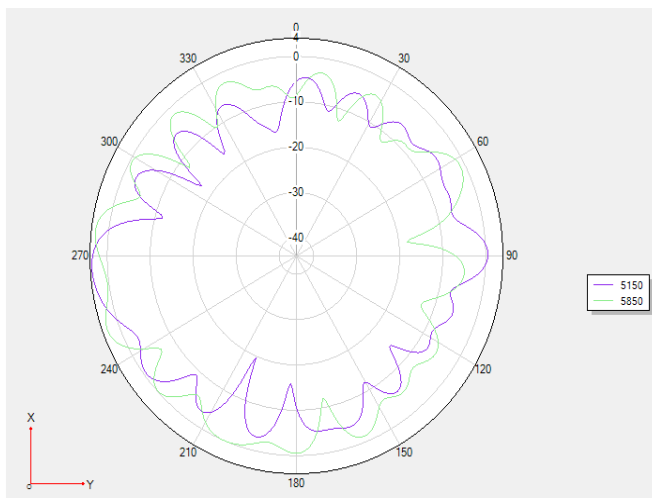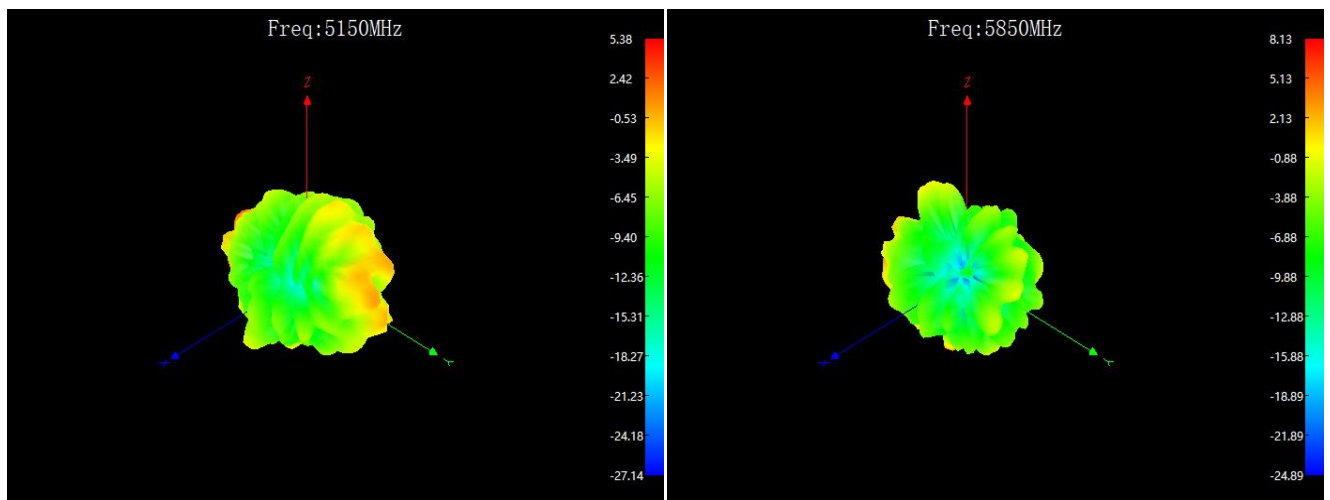


5 Product Size

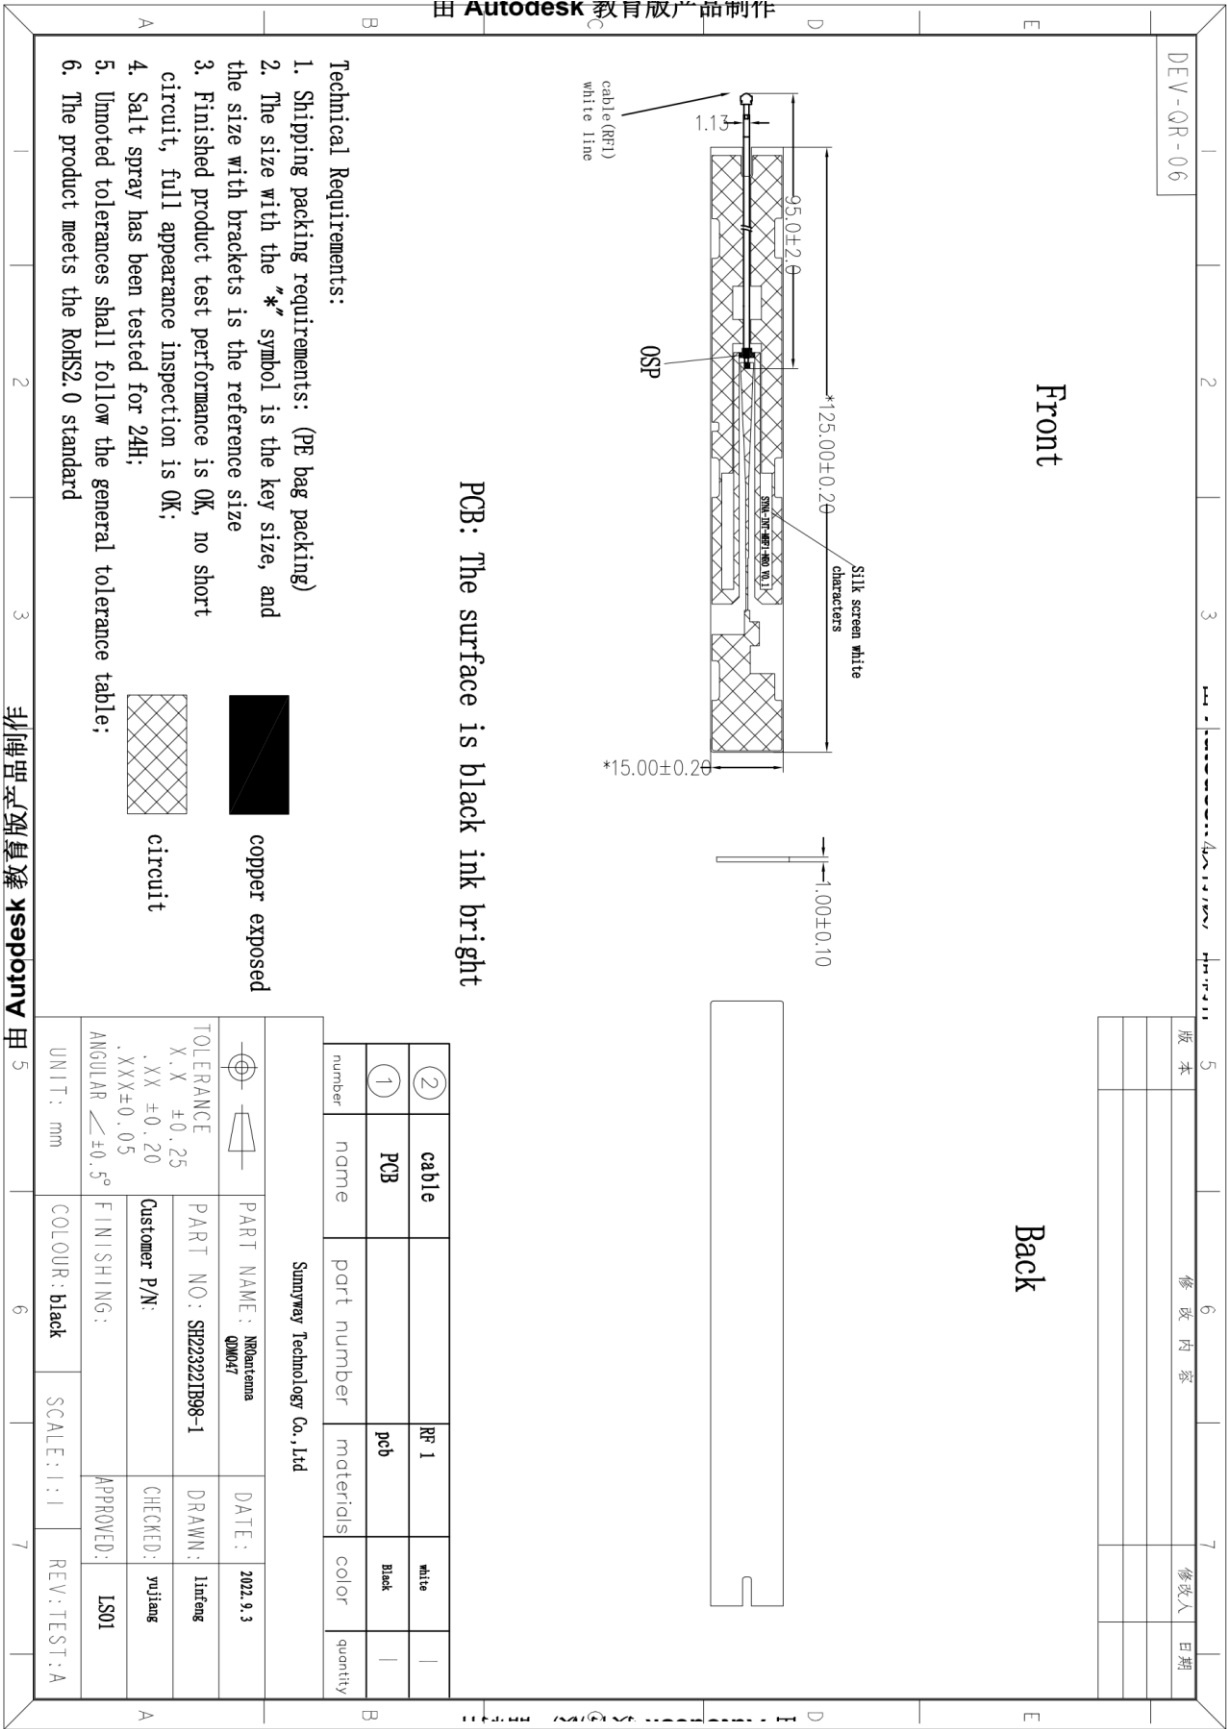

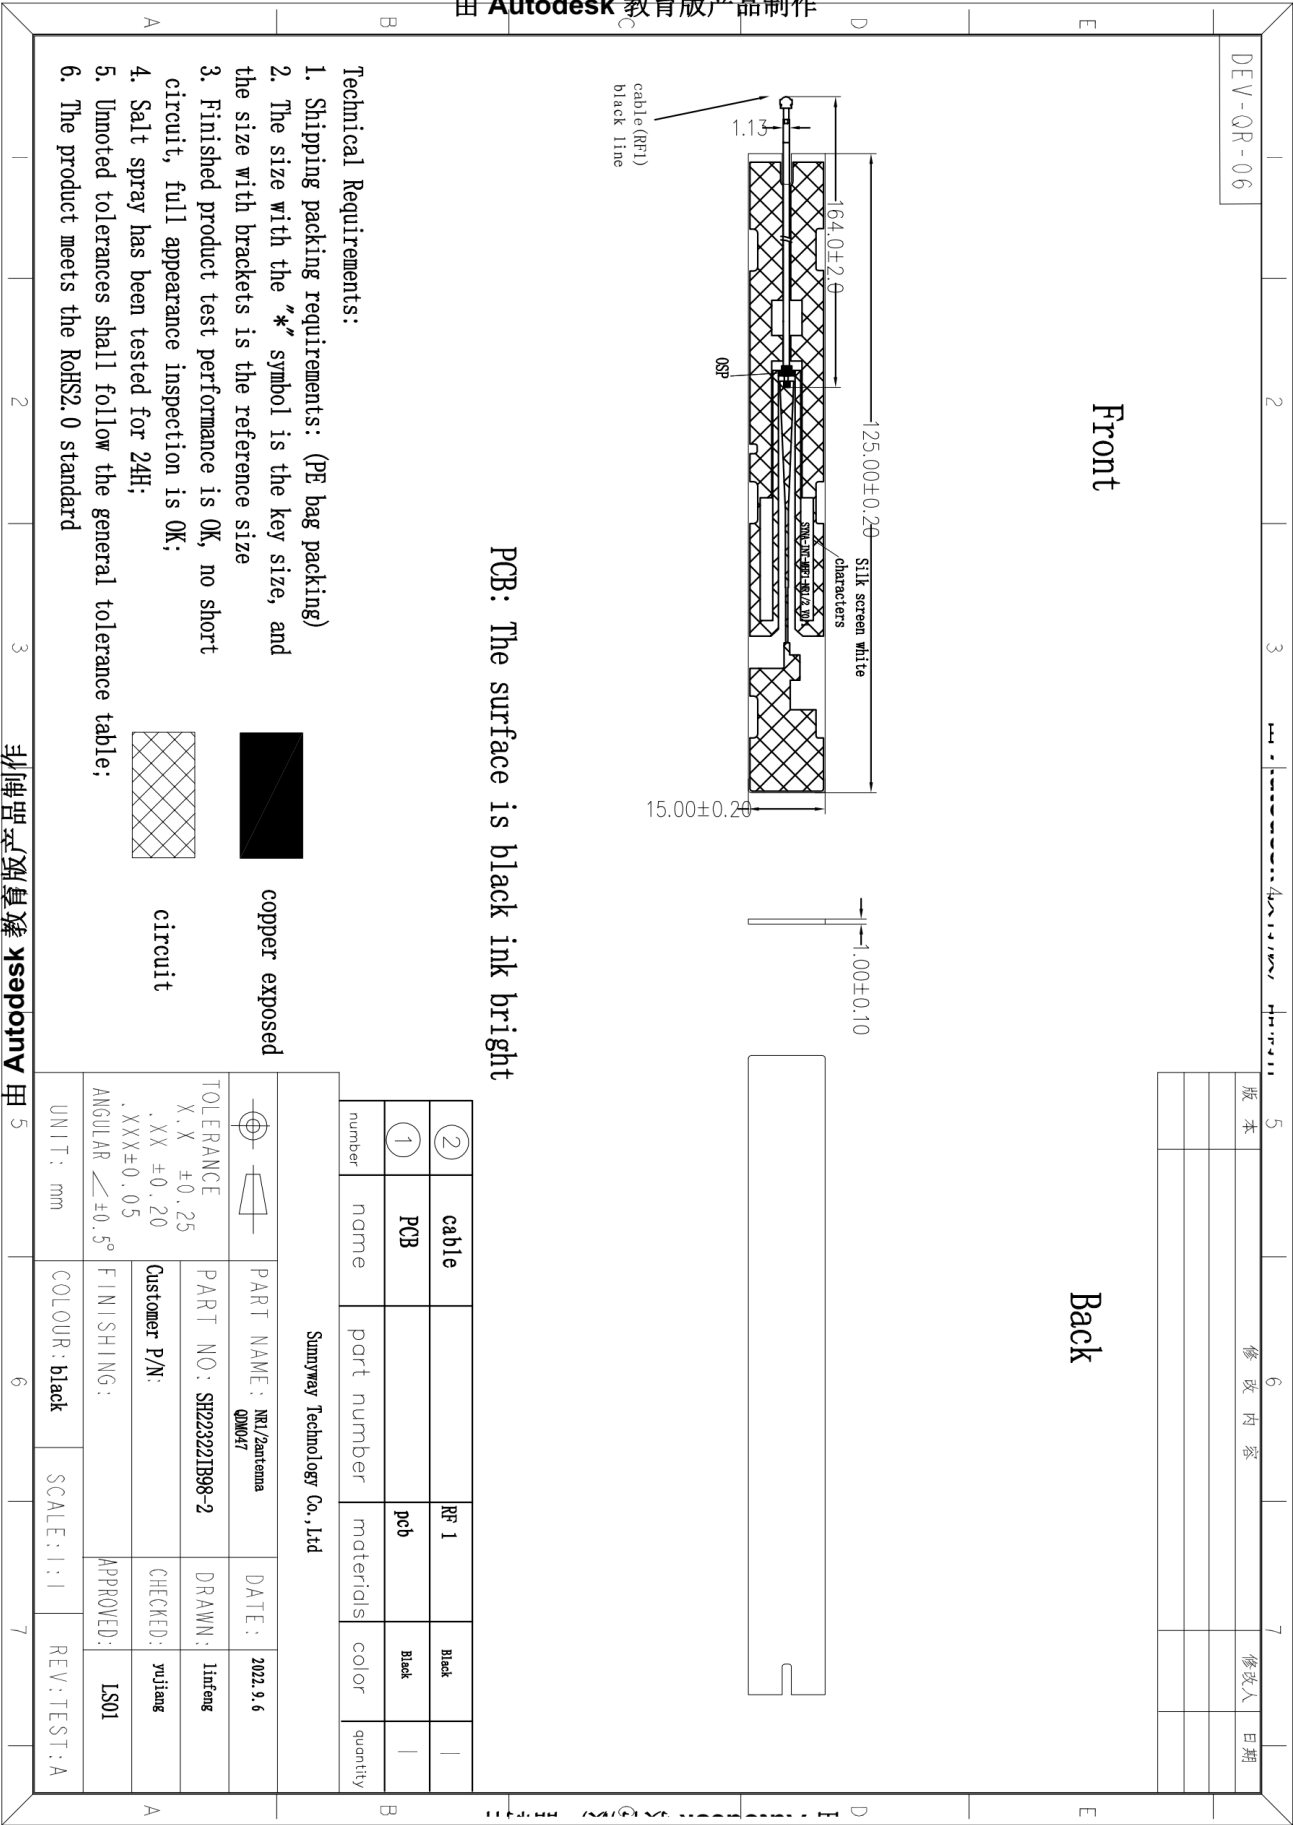

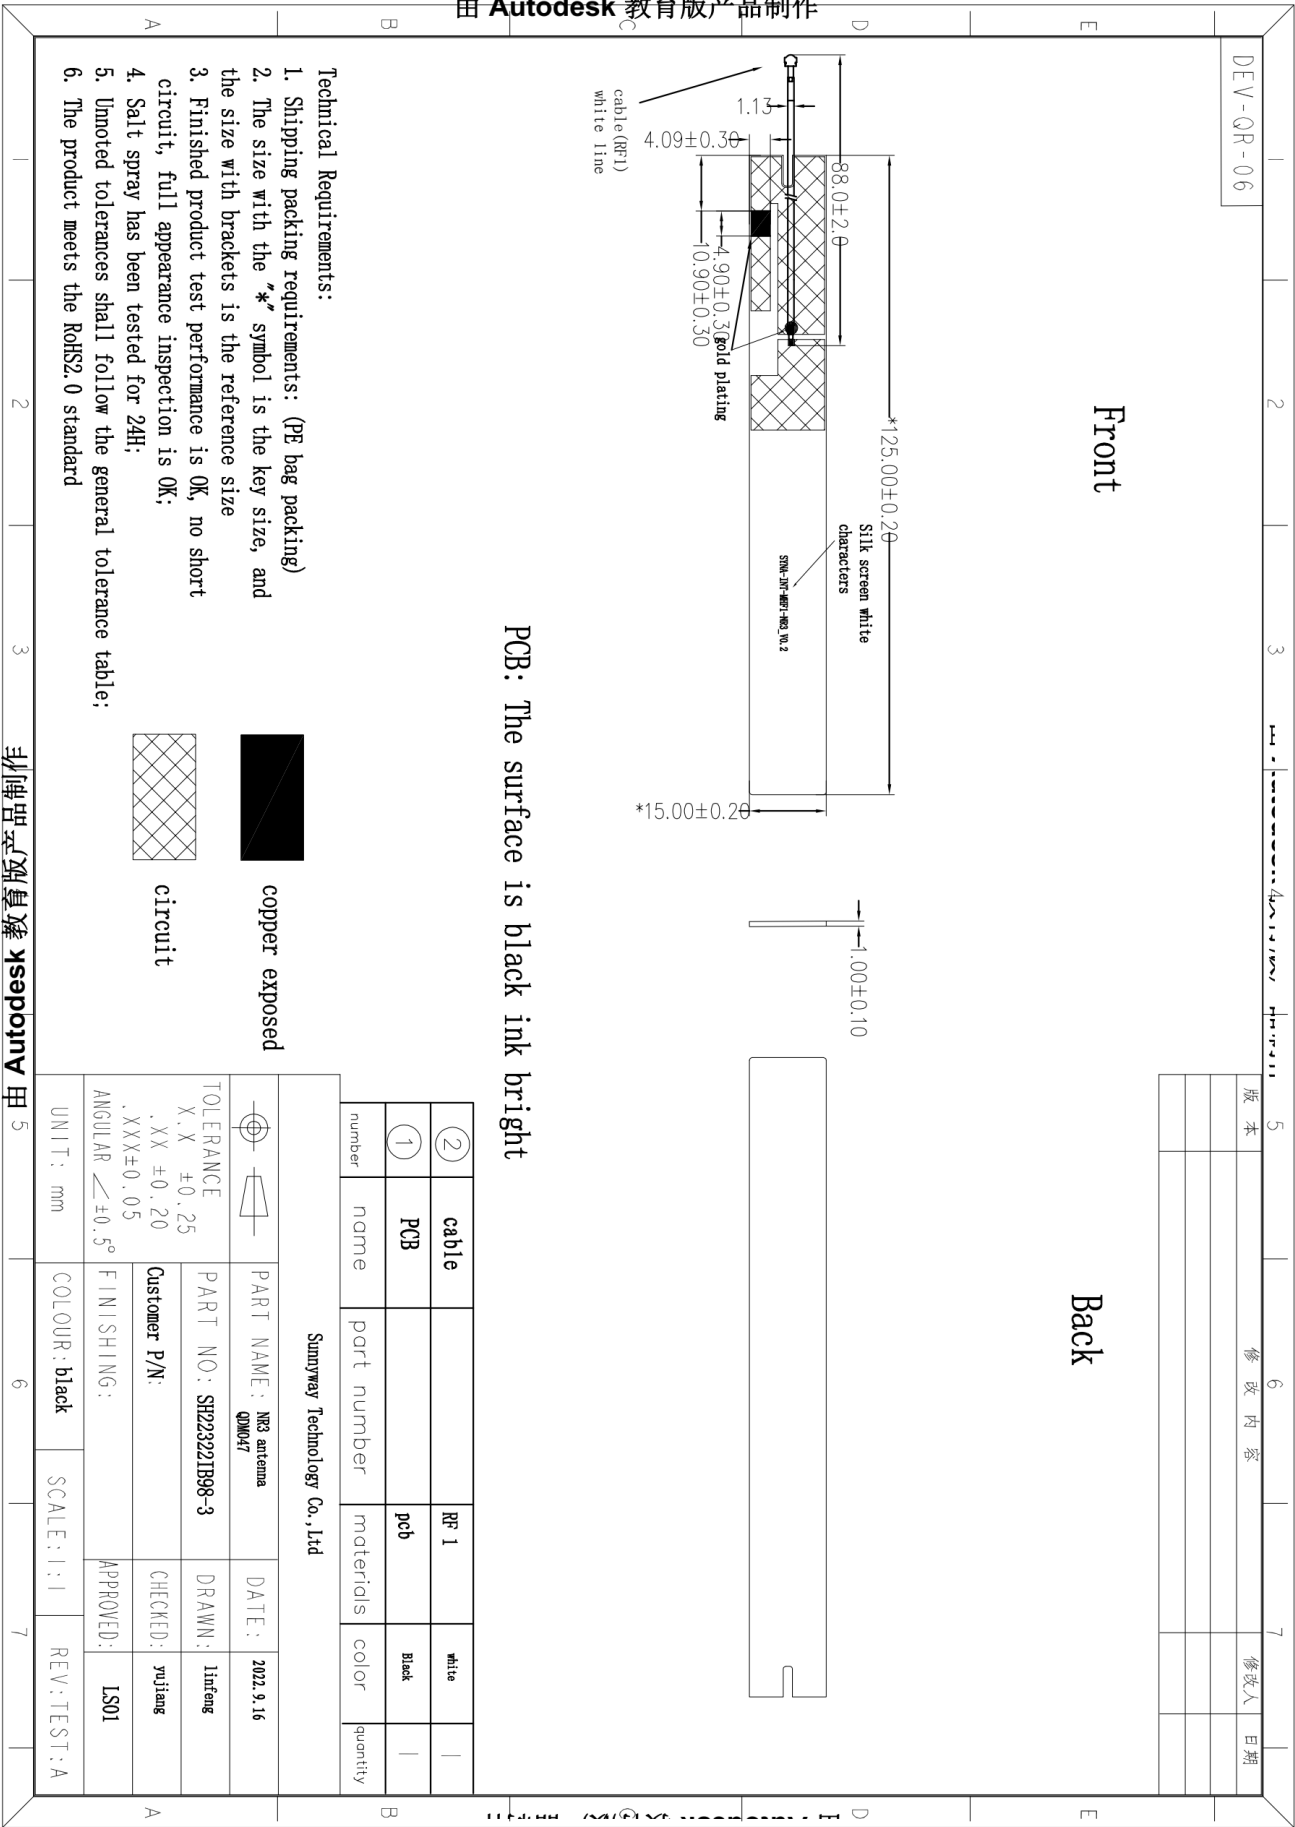


Autodesk 教育版 产品制作

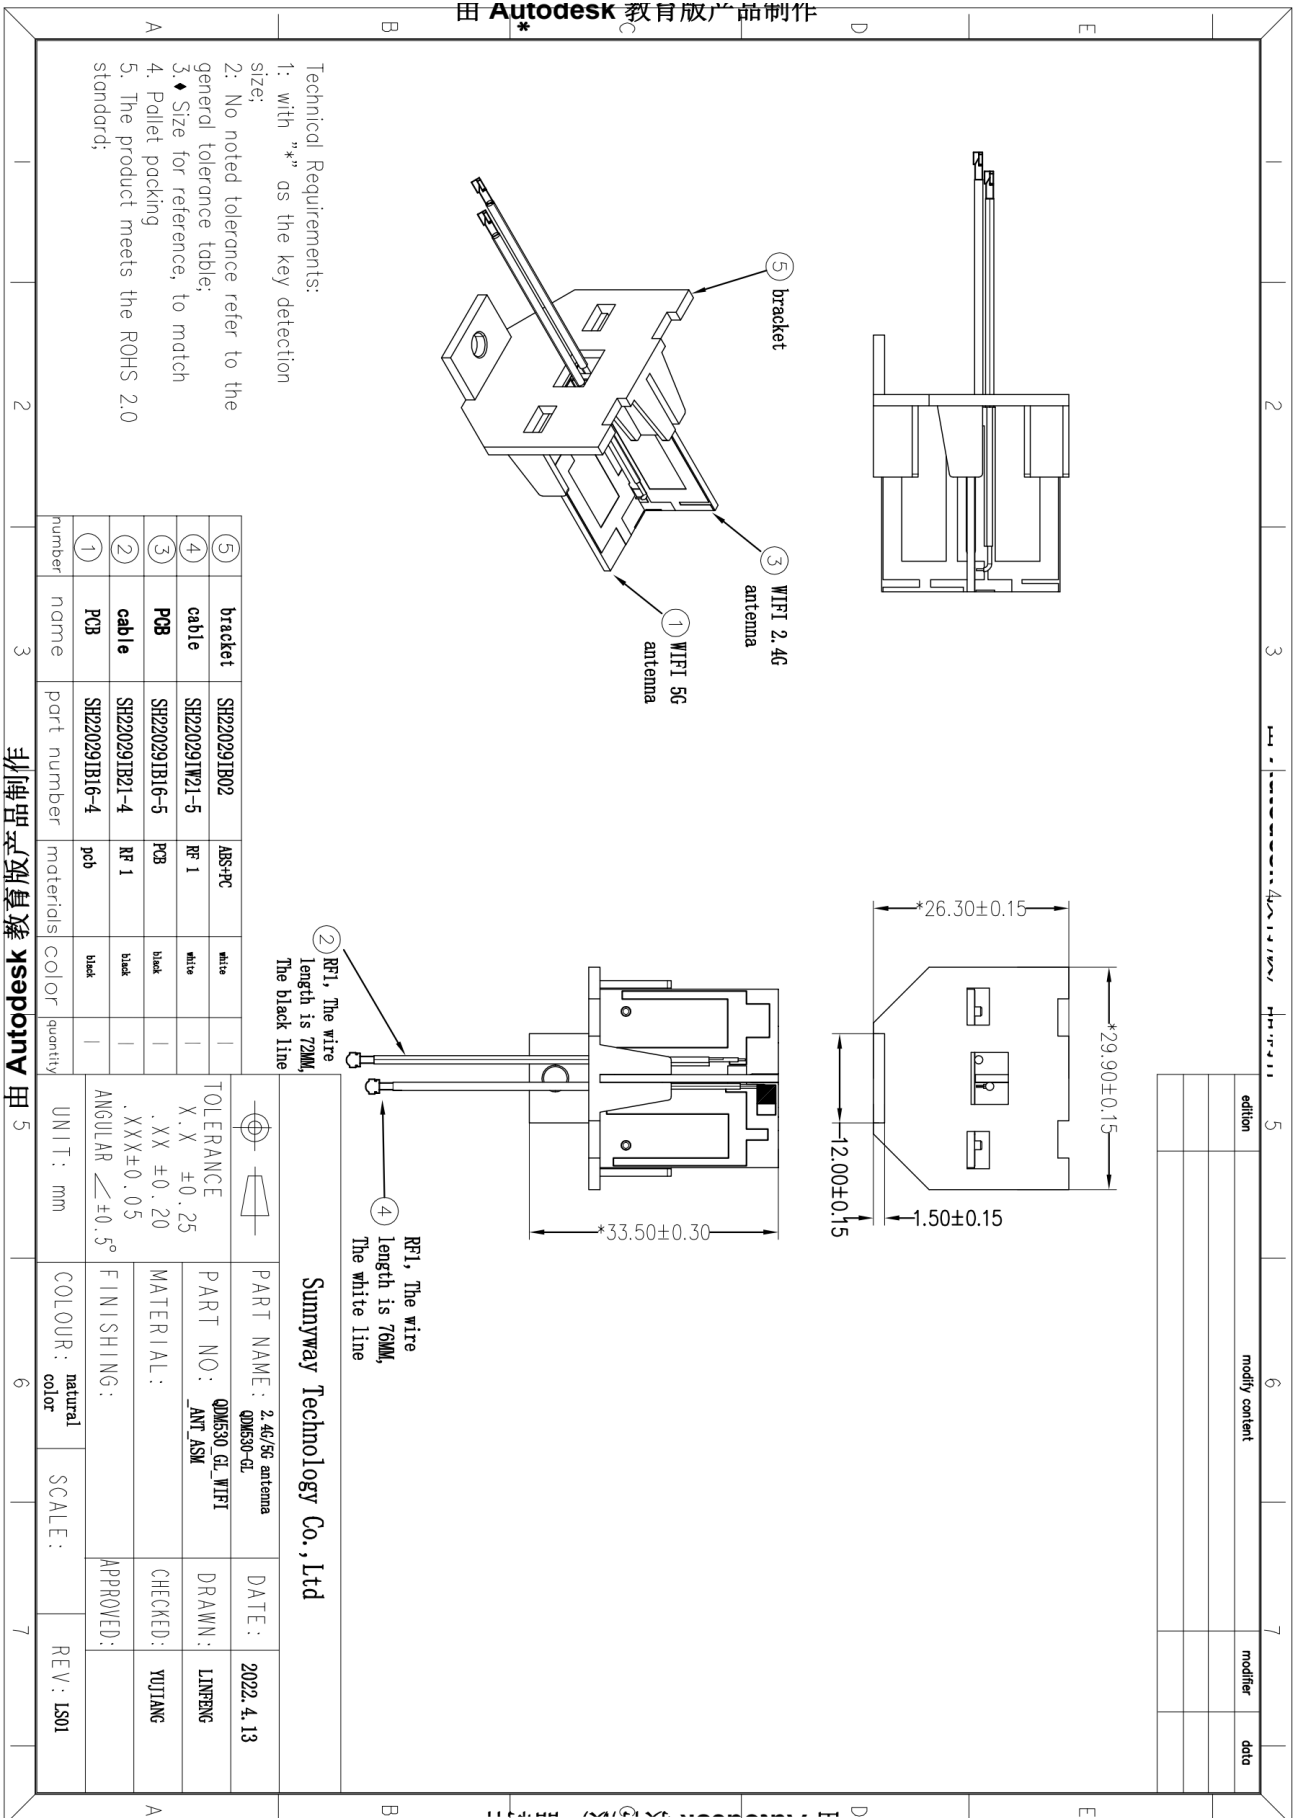

5	6	7
版本	修改内容	修改人 日期

Back

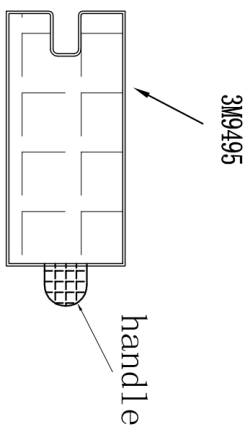

PCB: The surface is black ink bright

1. Material: yellow core material;

-

③	adhesive	SH220291A05	3M9495		
②	cable	SH220291B21-3	RF 1		black
①	PCB	SH220291B16-3	pcb		black
number	name	part number	materials	color	quantity

Sunnyway Technology Co., Ltd				
	PART NAME: WIFI1/Zanteema QM530-GL		DATE: 2022.3.12	
TOLERANCE X.X ±0.25 .XX ±0.20 .XXX±0.05 ANGULAR ∠±0.5°	PART NO.: QM530-GL_WIFI1_5G_ANT_ASM		DRAWN: Lifeng	
	MATERIAL:		CHECKED: yujiang	
	FINISHING:		APPROVED: L501	
UNIT: mm	COLOUR:	SCALE: 1:1	REV: TEST: A	