



Antenna Datasheet

Product OC (Antenna Only): YXU00A0AA

Product OC (Antenna + Rectangular EVB): YXU00A0EVBA

Version: 0.1

Date: 2026-04-29

Status: Preliminary

Product Name: Wi-Fi SMD Antenna

Key Features:

Frequency Band: 2400–2500 MHz; 5150–7125 MHz

Dimensions: 8.0 mm × 6.6 mm × 1.6 mm

Efficiency: Up to 71%

RoHS and Compliant

Overview

Quectel Wi-Fi antenna covers 2.4 GHz, 5 GHz, and up to 7 GHz bands, fully satisfying customers' requirements for Wi-Fi 5, Wi-Fi 6, and Wi-Fi 6E/Wi-Fi 7. There are various antenna types, including built-in FPC/PCB antenna, ceramic patch antenna, and other external antennas of different shapes or sizes. The antenna performance meets the customers' demands for efficiency, gain, and radiation and ensures the superior experience of the customers' products in use.

Contents

Overview.....	1
Contents	2
1 Specification.....	3
1.1. Electrical.....	3
1.2. Mechanical & Environmental	4
2 Drawing	5
2.1. Antenna.....	5
2.2. Rectangular EVB.....	7
3 Detailed Performance	8
3.1. S-Parameter Test	8
3.1.1. VSWR	8
3.1.2. Return Loss	9
3.2. Radiation Performance Test.....	10
3.2.1. Efficiency.....	10
3.2.2. Average Gain	11
3.2.3. Peak Gain	12
3.3.4. 3D & 2D Radiation Pattern	13
4 Schematic Symbol and Pin Definition	16
5 Transmission Line	17
6 Recommended PCB Layout.....	18
7 Matching Circuit.....	19
7.1. 60 × 50 mm EVB.....	19
8 Soldering Temperature.....	20
9 Reflow Profile	21
10 Packaging	22
Contact Us.....	24
Legal Notices	24
Revision History	27

1 Specification

Test Condition: Assembled on 60 × 50 mm EVB

1.1. Electrical

Electrical	
Frequency Range	2400–2500 MHz; 5150–7125 MHz
Impedance	50 Ω
Polarization	Linear
Radiation Pattern	Omni-directional
Antenna Type	PIFA


Specification	Band	Band	Wi-Fi 2.4G	Wi-Fi 5G	Wi-Fi 6e
		Freq. (MHz)	2400–2500	5150–5850	5925–7125
Max. VSWR		FS	2.1	2.4	3.3
Max. Return Loss (dB)		FS	-9.0	-7.6	-5.4
AVG Eff. (%)		FS	54.4	67.0	50.8
AVG Gain (dB)		FS	-2.6	-1.7	-3.0
Max. Peak Gain (dBi)		FS	0.5	2.4	3.6
VSWR		FS	≤ 3.3		
Return Loss		FS	≤ -5.4 dB		
Peak Gain		FS	≤ 3.6 dBi		

1.2. Mechanical & Environmental


Mechanical	
Antenna Size	8.0 × 6.6 × 1.6 mm
Antenna Material & Color	PCB & Black
Antenna Weight	Typ. 0.18 g
Mounting Type	SMD
Recommended EVB Size	60 × 50 × 1.6mm
Environmental	
Operation Temperature	-40 °C to +85 °C
Storage Temperature	-40 °C to +85 °C
RoHS & Compliant	Yes

2 Drawing

2.1. Antenna

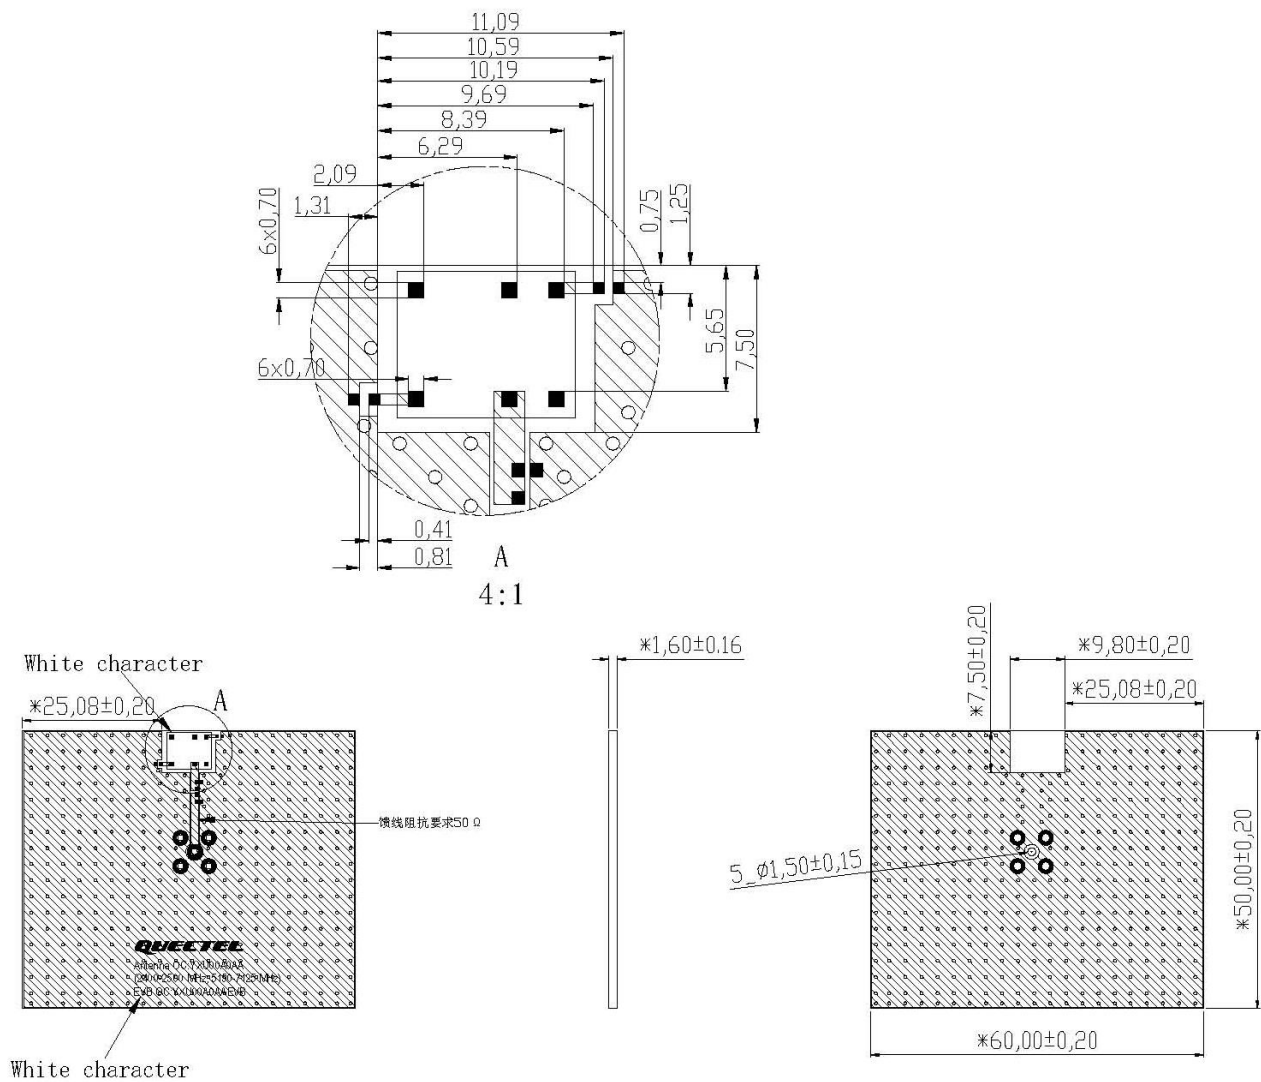


ROHS

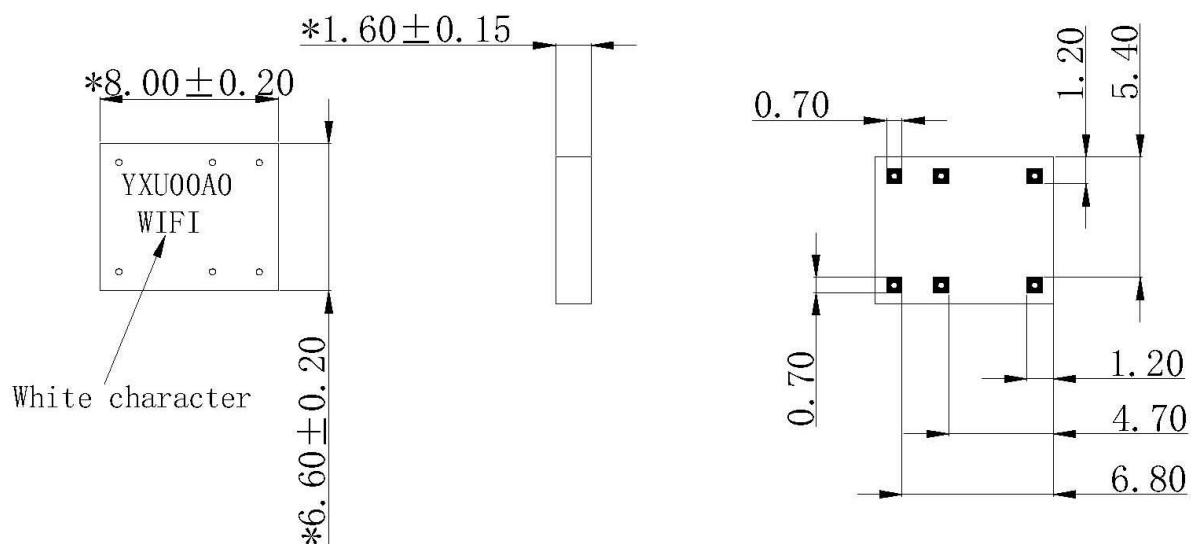

Name	Material	Brand	QTY	Model
Antenna	FR4 1.6t	Quectel	1	YXU00A0AA
PCB	FR4 1.6t	Quectel	1	YXU00A0AA EVB
SMA Female Connector	Brass	Quectel	1	-
1.8 nH	Ceramics	Murata	1	LQG15HS1N8B02D
1.5 pF	Ceramics	Murata	1	GJM1555C1H1R5BB01
0Ω	Ceramics	Murata	1	-


2.2. Rectangular EVB

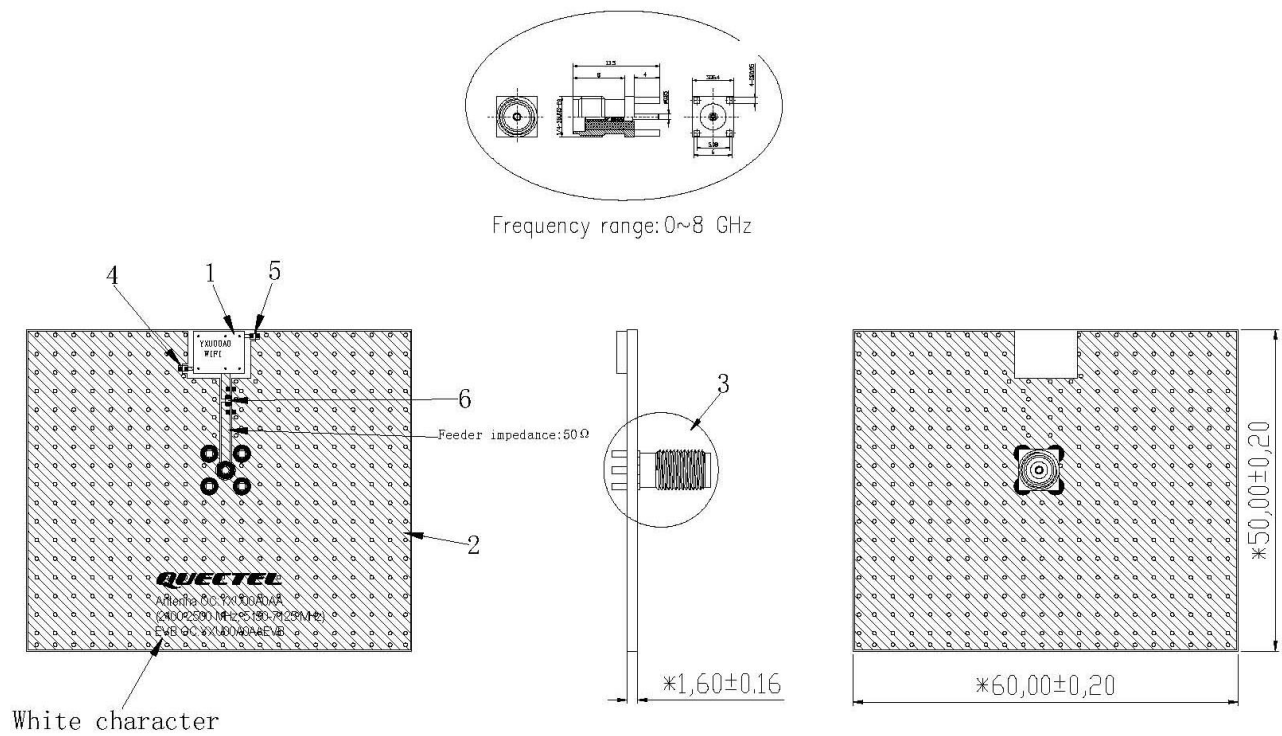

3 Detailed Performance

3.1. S-Parameter Test


3.1.1. VSWR

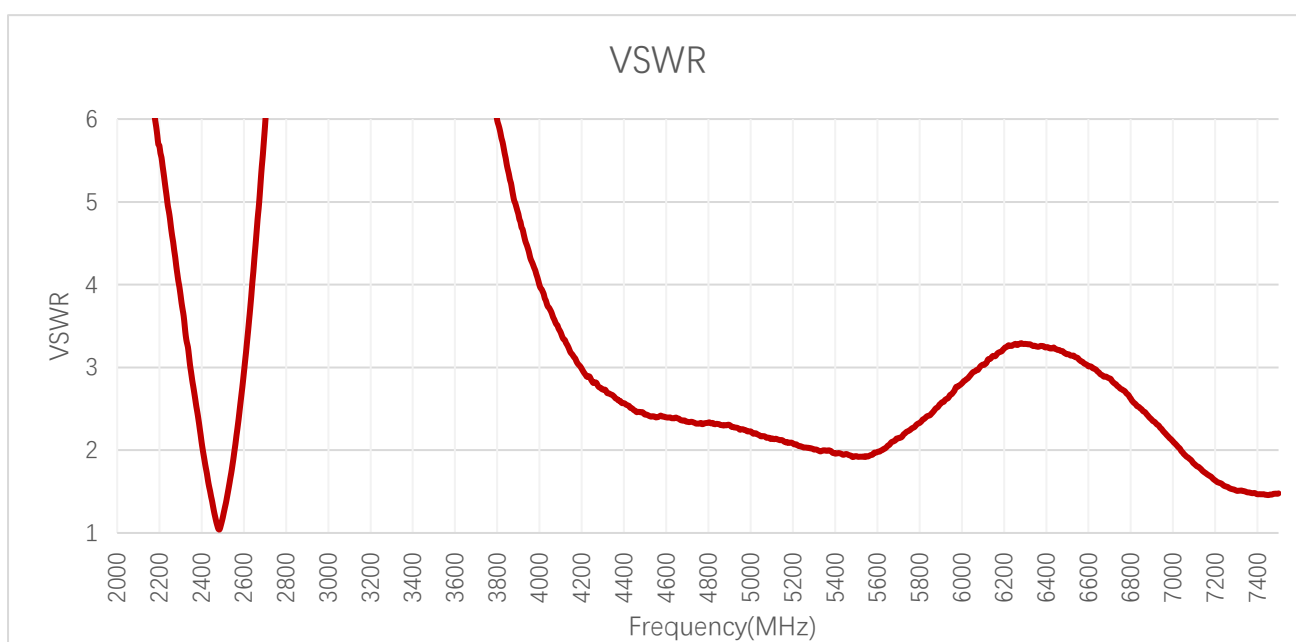

VSWR

Frequency (MHz)	2400	2450	2485	5150	5480	5850	5925	6325	7005	7125
VSWR	2.1	1.4	1.0	2.1	1.9	2.4	2.6	3.3	2.1	1.8

3.1.2. Return Loss

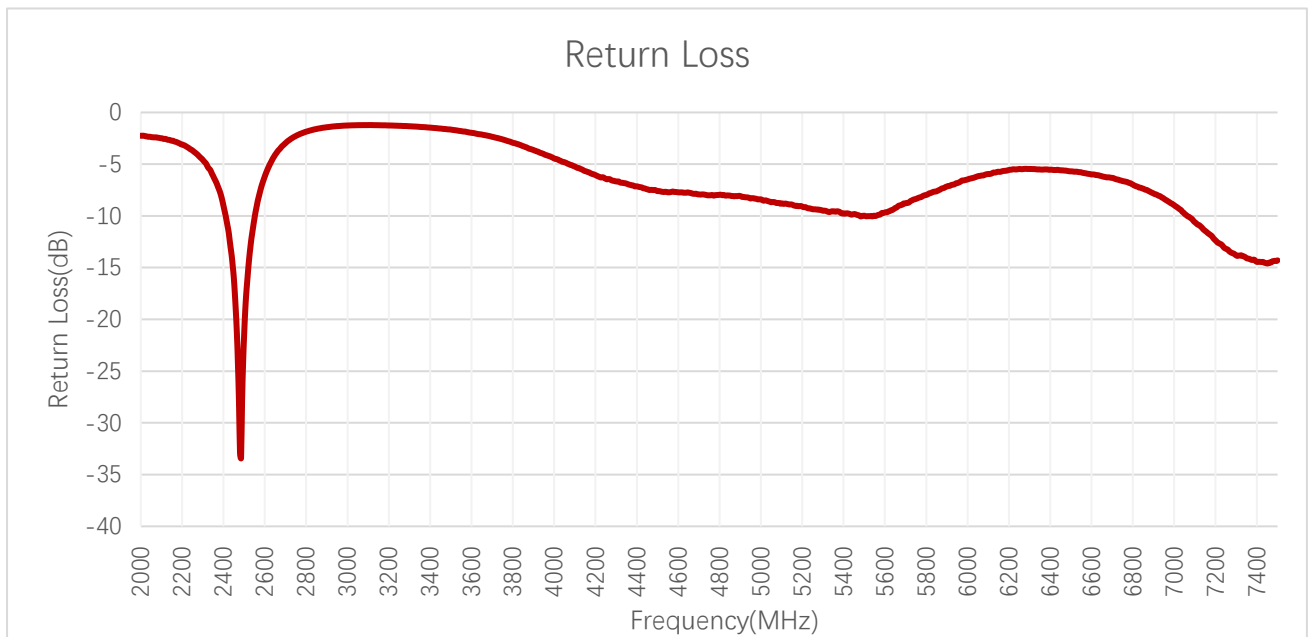


Return Loss (dB)

Frequency (MHz)	2400	2450	2485	5150	5480	5850	5925	6325	7005	7125
Return Loss (dB)	-9.0	-16.0	-33.4	-8.9	-10.0	-7.6	-7.0	-5.5	-9.0	-11.0

3.2. Radiation Performance Test


3.2.1. Efficiency

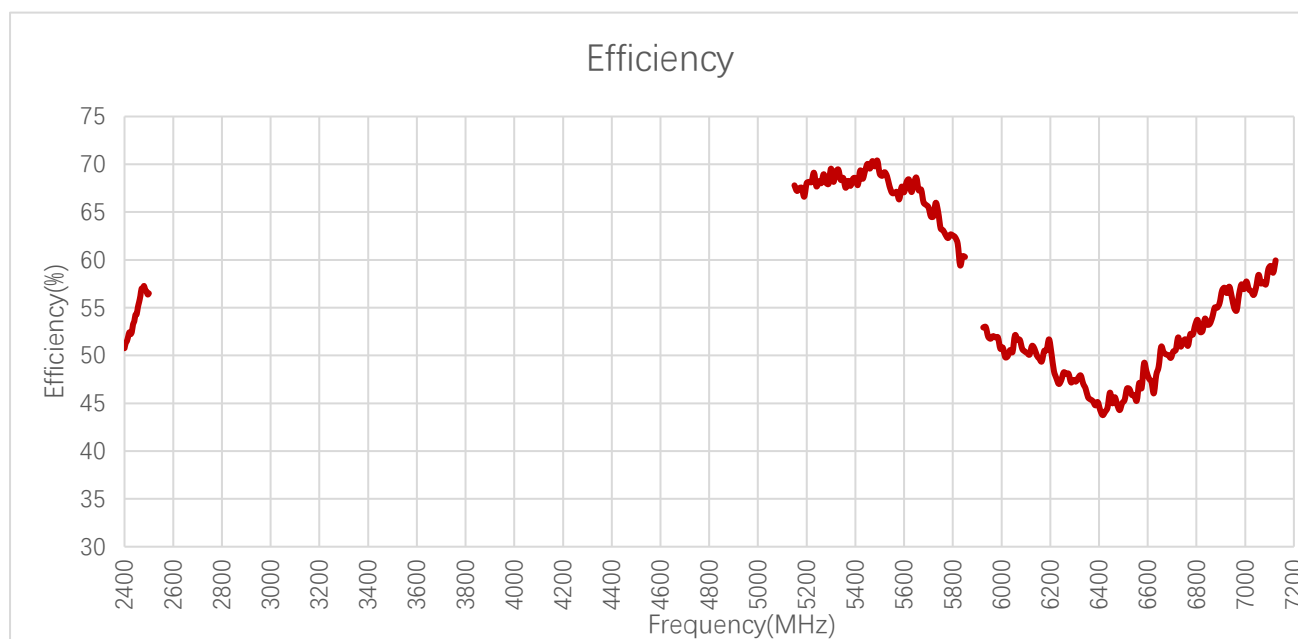

Efficiency (%)

Frequency (MHz)	2400	2450	2485	5150	5480	5850	5925	6325	7005	7125
Efficiency (%)	50.8	54.3	56.9	67.8	69.8	60.3	52.9	47.9	57.8	60.0


3.2.2. Average Gain

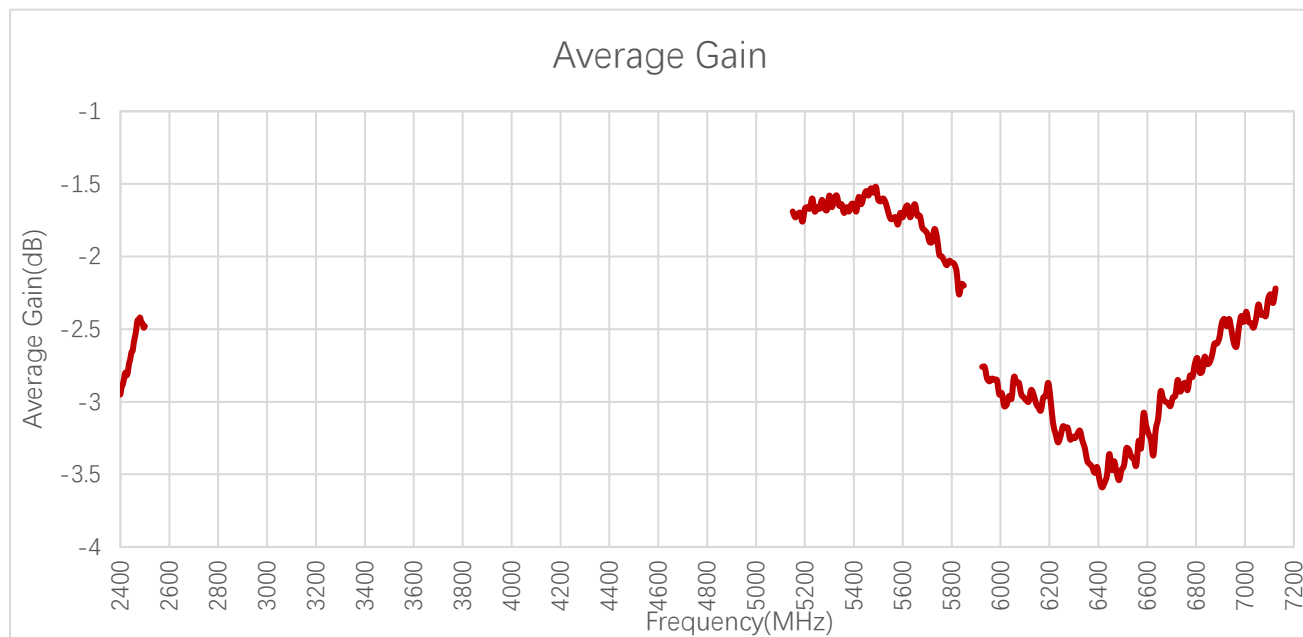

Average Gain (dB)

Frequency (MHz)	2400	2450	2485	5150	5480	5850	5925	6325	7005	7125
Average Gain (dB)	-3.0	-2.7	-2.5	-1.7	-1.6	-2.2	-2.8	-3.2	-2.4	-2.2

3.2.3. Peak Gain

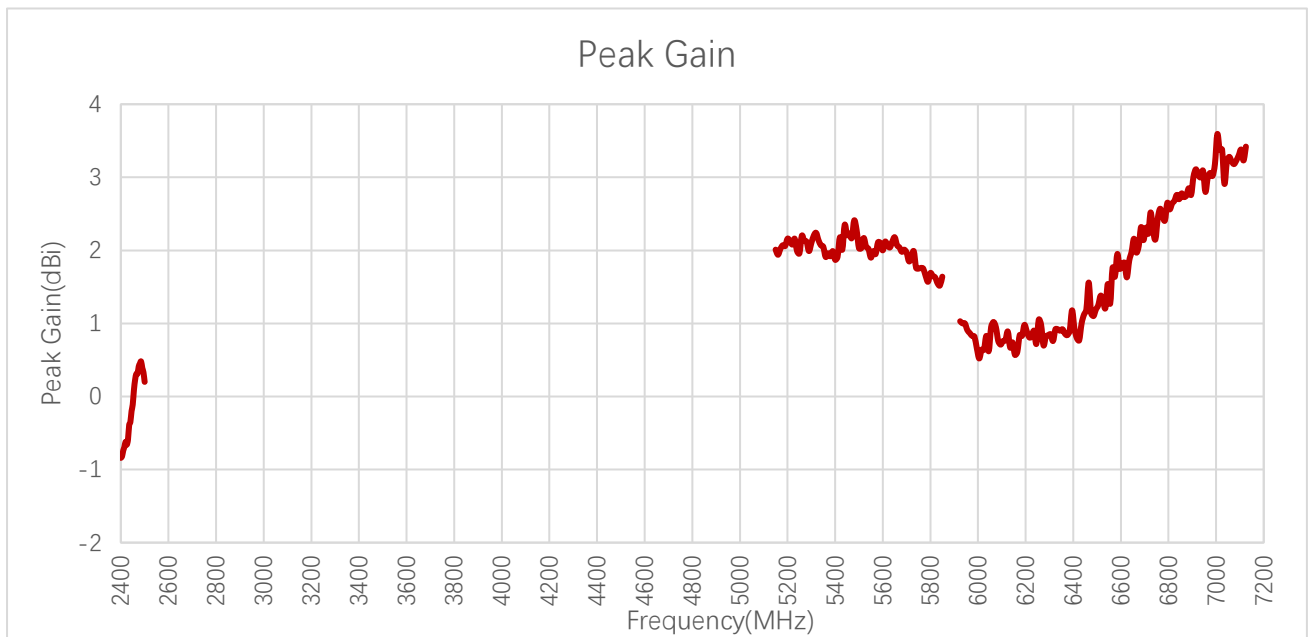



Peak Gain (dBi)


Frequency (MHz)	2400	2450	2485	5150	5480	5850	5925	6325	7005	7125
Peak Gain (dBi)	-0.8	-0.1	0.5	2.0	2.4	1.6	1.0	0.9	3.6	3.4

3.3.4. 3D & 2D Radiation Pattern

- Test Status: Assembled on 60 × 50 mm EVB

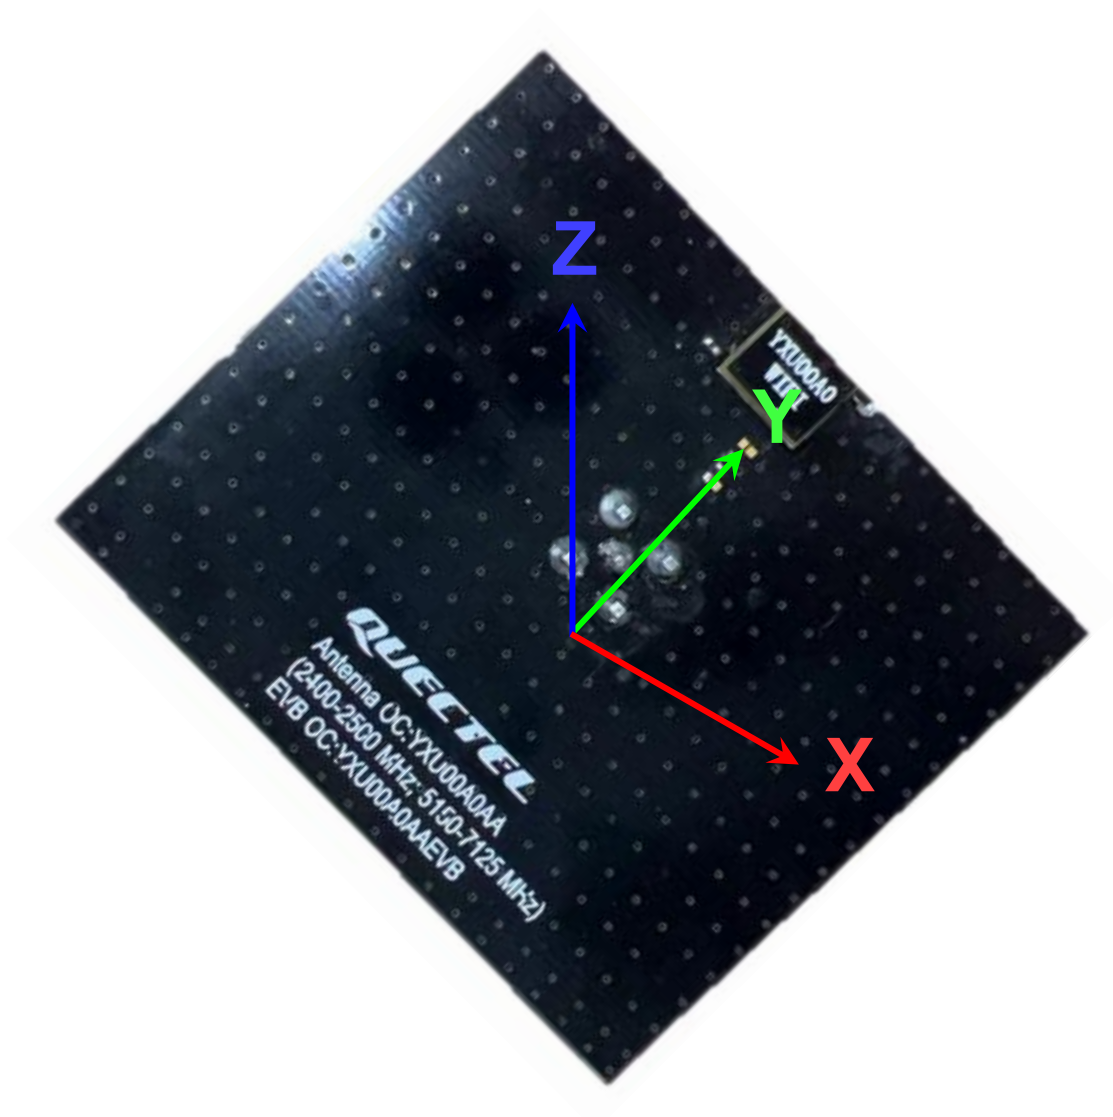


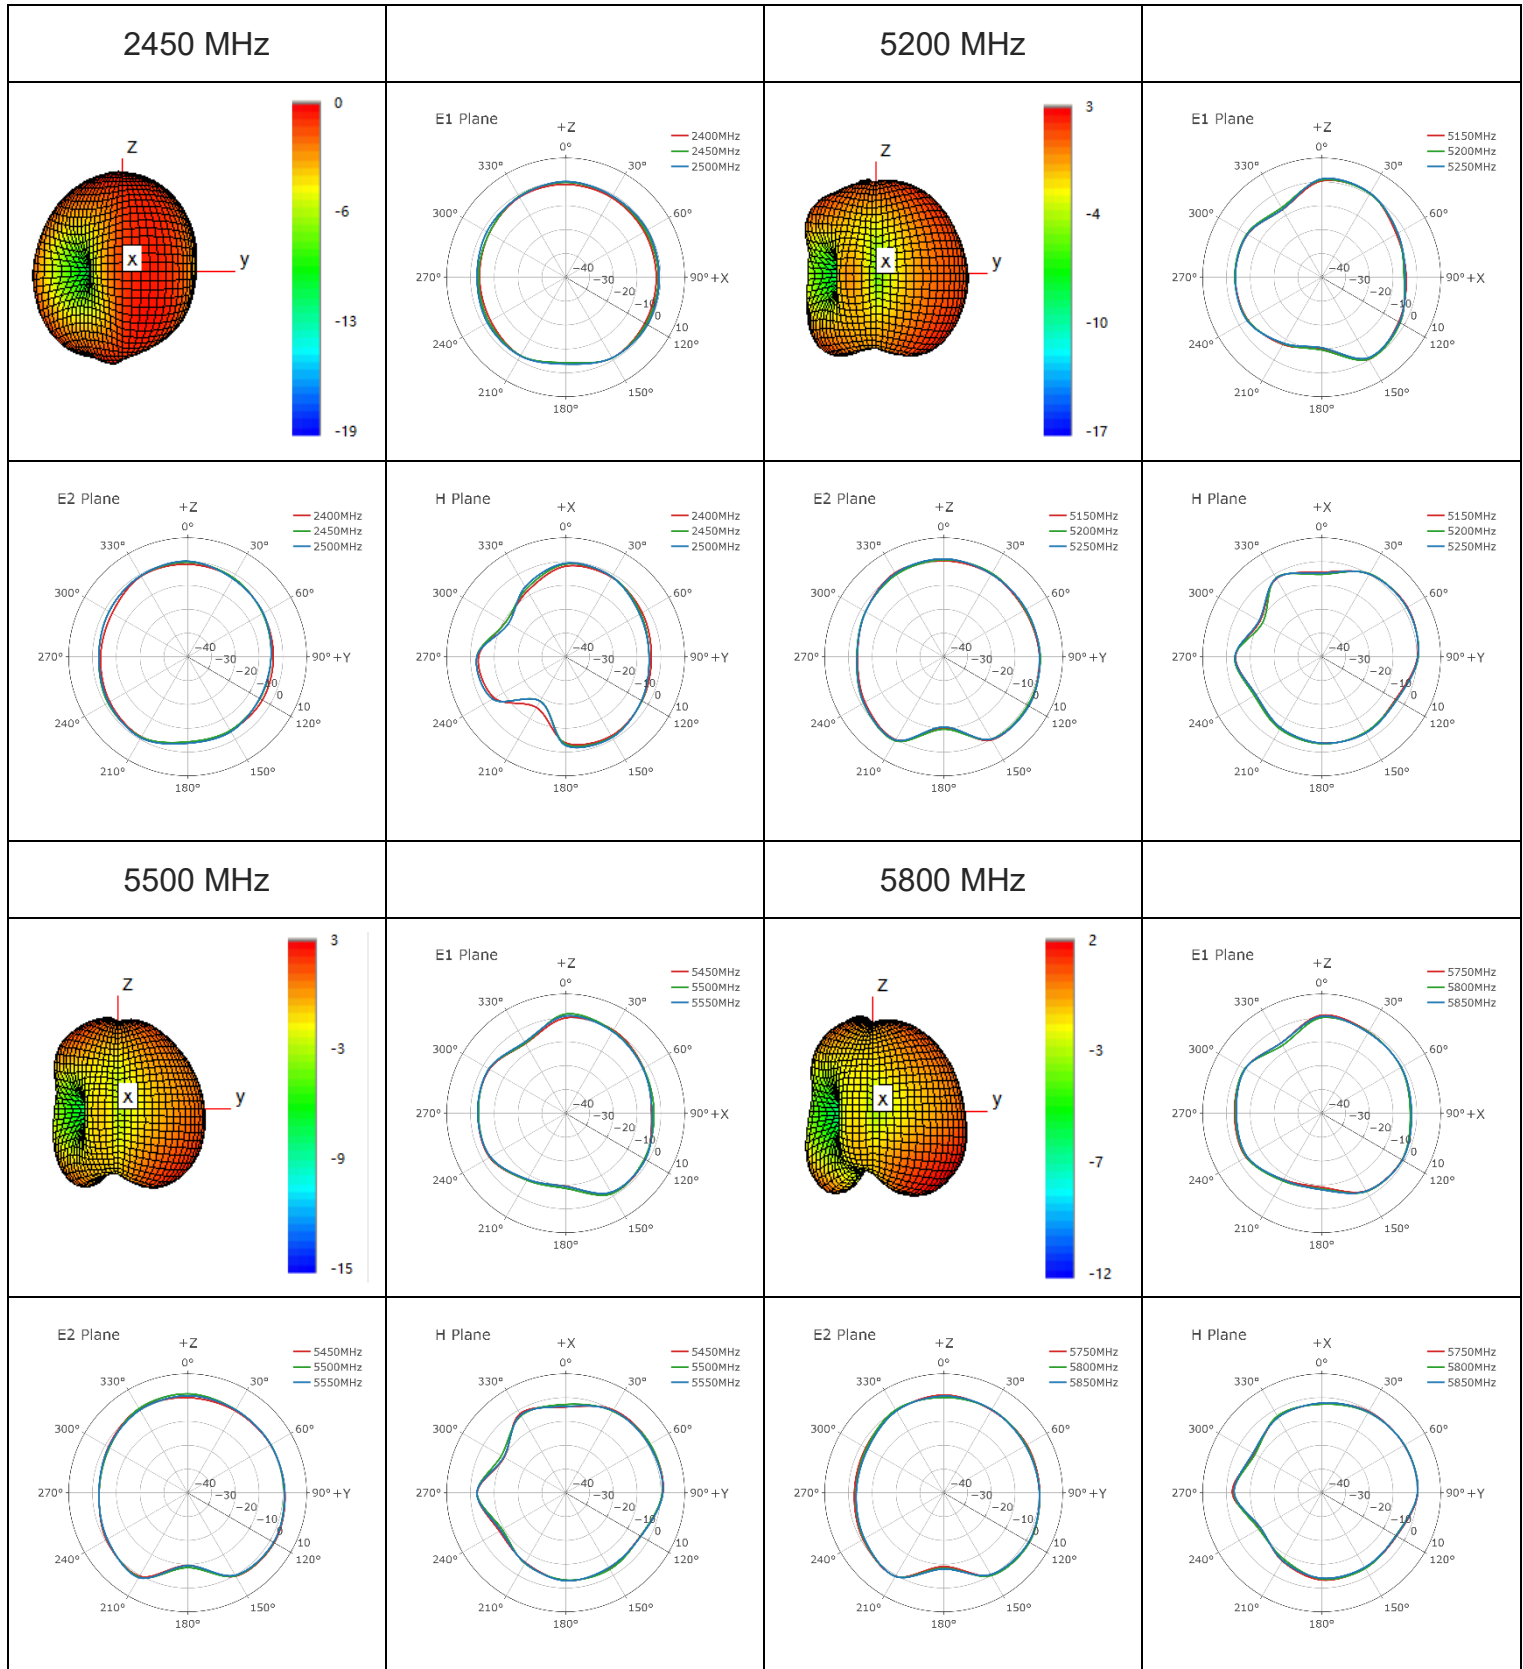

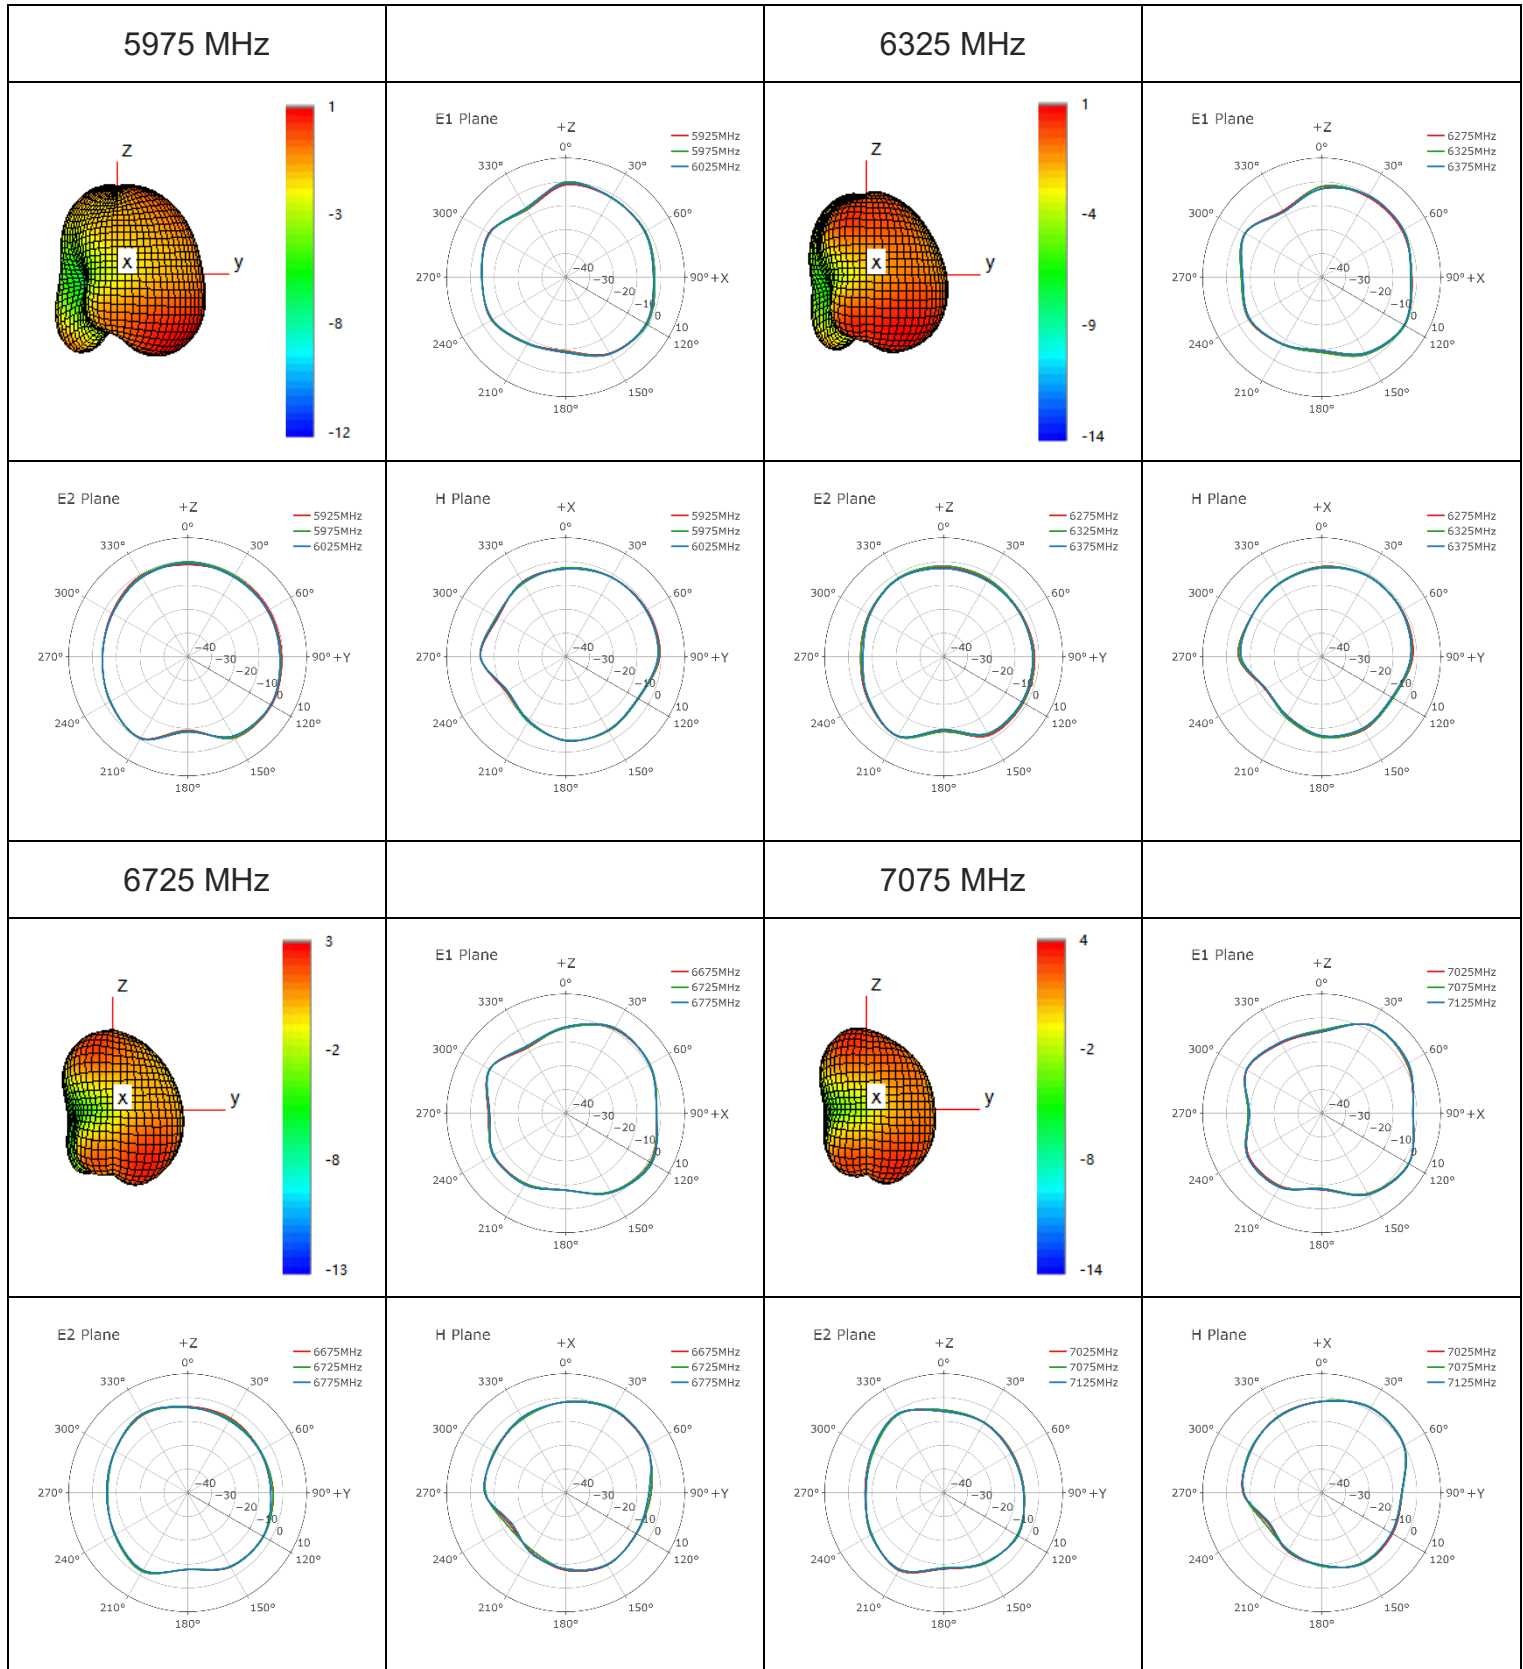

4 Schematic Symbol and Pin Definition

- The pin assignment for the antenna is as follows.
- The antenna has 6 pins and only three work.
- All other pins are designed for mechanical strength.

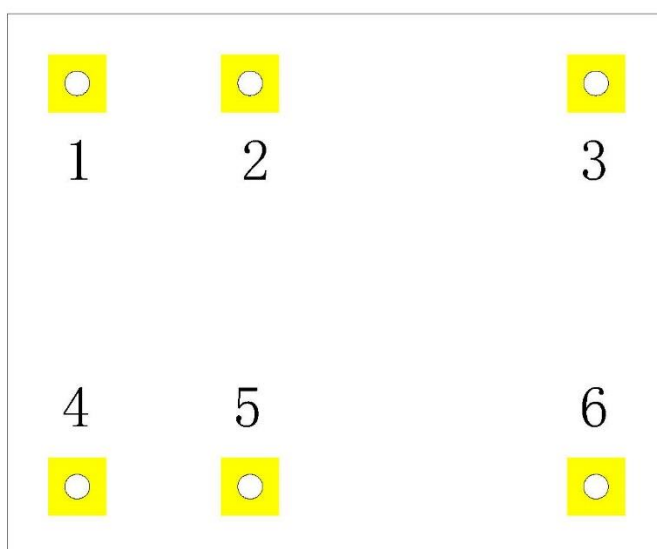

Pin No.	Description
1, 6	Antenna Tuning
2, 3, 4	Not used (Mechanical only)
5	FEED

5 Transmission Line

The characteristic impedance of all transmission lines shall be designed as 50 Ω .

- The length of the transmission lines should be kept as short as possible.
- Any other part of the RF system, such as transceiver, power amplifiers, etc., shall also be designed with an impedance of 50 Ω .


Once the material for the PCB has been chosen (PCB thickness and dielectric constant), a coplanar transmission line can easily be designed using any of the commercial software packages for transmission line design. For the chosen PCB thickness, copper thickness and substrate dielectric constant, the program will calculate the appropriate transmission line width and gaps on either side of the track so the characteristic impedance of the coplanar transmission is 50 Ω .

The host PCB must be designed using the PCB footprint shown with the correct clearances. An example of the PCB layout shows the antenna footprint. Please note this clearance area is critical to the performance of the antenna and must be applied through all layers of the PCB.



7 Matching Circuit


7.1. 60 × 50 mm EVB

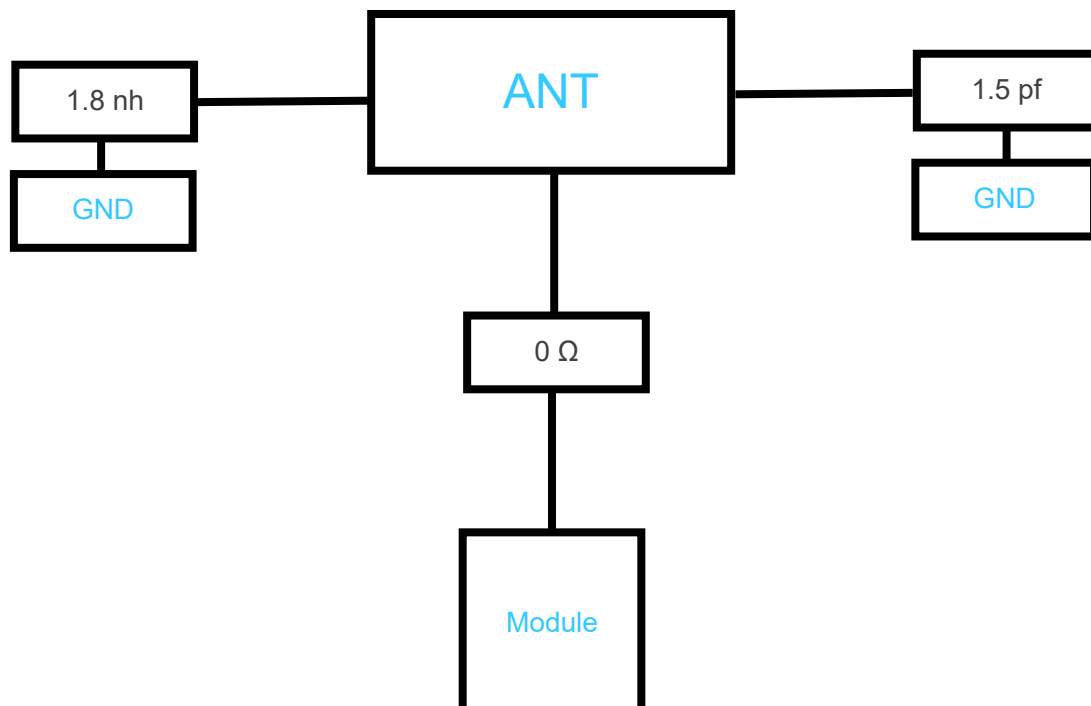




8 Soldering Temperature


Phase	Profile Features	PB-Free Assembly
RAMP-UP	Avg. Ramp-up Rate (T _{smax} to T _p)	3 °C/second (Max.)
PREHEAT	Temperature Min (T _{smin}) Temperature Max (T _{smax}) Time (t _{smin} to t _{smax})	150 °C 190 °C 110 seconds (Max.)
REFLOW	Temperature (T _L) Total Time above T _L (t _l)	220 °C 90 seconds (Max.)
PEAK	Temperature (T _p)	230–250 °C
RAMP-DOWN	Rate	-1 °C/second (Max.)

9 Reflow Profile

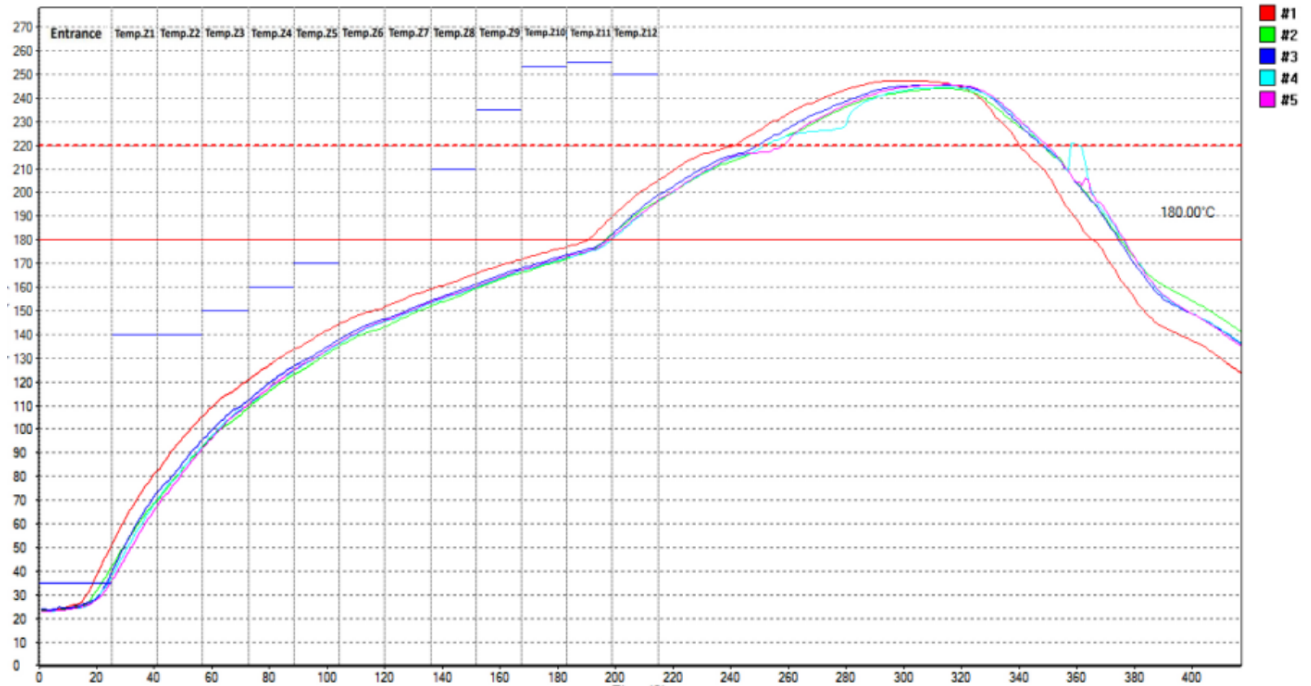

10 Packaging

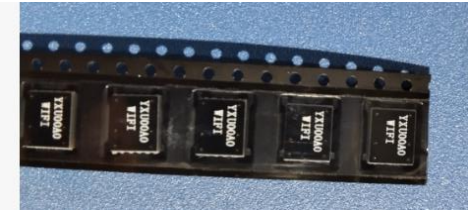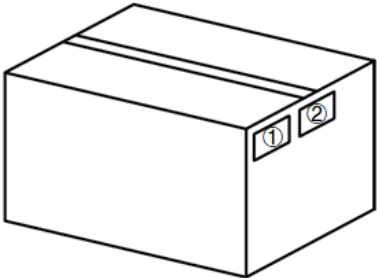Step	Packaging Picture / 2D Picture	Description
1		Reel
2		One reel of products is placed in an inner box. (2500 Antennas / Reel) (5000 Antennas / Inner Box)
3		(2 Inner Boxes / Carton Box) (10000 Antennas / Carton Box) Estimated quantity Products that cannot fill the entire carton box are packed in a suitable size carton box <u>Carton Size:</u> <u>L × W × H = 370 × 370 × 174 mm</u>
4		Position for Attaching Labels ① Carton Label ② Quality Label

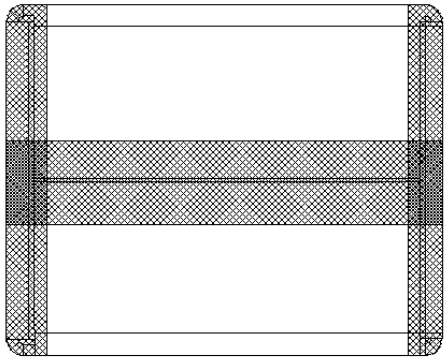5		Sealing Cartons H-shaped sealing cartons
Note	The initial packaging method described above is for reference only, and the final actual packaging method shall be subject to the actual shipping packaging.	

Contact Us

At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

No. 8 Waipojing Road, Sijing Town, Songjiang District, Shanghai 201601, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<https://www.quectel.com/contact/>.

For technical support, or to report documentation errors, please visit:

<https://www.quectel.com/tech-support/>.

Or email us at: support@quectel.com.

Legal Notices

We provide this document to support your product design. You are required to design your products based on the specifications and parameters set forth herein. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an “as available” basis. You acknowledge and agree that we may add to, amend, or restate this document at any time at our sole discretion without any prior notice to you, and such additions, amendments, or restatements shall be binding upon you.

Use and Disclosure Restrictions

License Agreements

The recipient of any hardware, software, materials, or documentation provided by us shall keep such content confidential, unless expressly authorized by us. The recipient shall not disclose, access, or use any part of the received content for any purpose other than the execution and implementation of the

intended project.

Copyright

Our and third-party products hereunder may contain copyrighted materials, including but not limited to protected content, hardware, software, and documentation owned by us or applicable third parties. Unless prior written consent is obtained, you shall not access, use, or disclose any documents or information provided by us, nor shall you copy, reproduce, republish, display, translate, distribute, merge, modify, or create derivative works from any such copyrighted materials. We and the applicable third party retain exclusive rights to all copyrighted materials. No license to any patents, copyrights, trademarks, or service marks shall be granted or transferred. For the avoidance of doubt, no form of purchase shall be construed as granting any license beyond a normal, non-exclusive, royalty-free license to use the product. We reserve the right to pursue legal action against any violation of confidentiality obligations, unauthorized use, or any other unlawful or malicious use of the aforementioned documents and information.

Trademarks

Unless otherwise expressly provided, nothing in this document shall be construed as conferring any rights to use any trademark, trade name, name, abbreviation, or counterfeit thereof owned by us or any third party in advertising, publicity, or any other contexts.

Third-Party Rights

You understand that this document may refer to hardware, software, and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials is subject to all applicable restrictions and obligations set forth herein.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing, course of performance, or usage of trade.

Privacy Policy

To enable product functionality, certain device data may be uploaded to our or third-party servers, including those operated by carriers, chipset suppliers, or servers designated by you. We strictly comply with applicable laws and regulations and will retain, use, disclose, or otherwise process relevant data solely for the purpose of enabling product functionality, or as permitted by applicable laws. Before interacting with any third party regarding data exchange, please be informed of and understand their privacy and data security policies.

Disclaimer

- a) We shall not be liable for any damages resulting from failure to comply with applicable operational or design specifications.
- b) We shall bear no liability for any inaccuracies or omissions in this document, nor for any damages arising from the use of the information contained herein.
- c) While we make every effort to ensure the integrity, accuracy, and timeliness of the features and functions under development, errors or omissions may nevertheless occur. Unless otherwise provided in a valid written agreement, we make no warranties of any kind, express, implied, or statutory, and disclaim all liability for any loss or damage arising from the use of any features or functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage is foreseeable.
- d) We assume no legal responsibility for the accessibility, safety, accuracy, availability, legality, or completeness of any information, content, advertising, commercial offers, products, services, or materials on third-party websites or third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2026. All rights reserved.

Revision History

Version	Date	Author	Note
-	2022-01-19	Raoul Rao	Creation of the document
0.1	2022-01-19	Raoul Rao	First official release



www.quectel.com