

Bluetooth Digital Watch HD-236



Specifications

RECEIVE NOTIFICATIONS ON YOUR WRIST AND STAY IN TOUCH BY KEEPING YOUR PHONE OUT OF SIGHT, WITHOUT MISSING IMPORTANT CALLS

ANSWER INCOMING CALLS ON YOUR WATCH, SHOW INCOMING CALL NUMBER

BUILT IN MICROPHONE FOR HANDS FREE CALLING

LISTEN AND PLAY YOUR MUSIC ON THE GO.

AUDIO PLAY TIME: 2HRS

PAIRS WITH BLUETOOTH ENABLED DEVICES

OLED SCREEN SIZE: 1.5 INCH

CHARGING TIME: 2HRS

STANDBY TIME: 120HRS

TALKING TIME: 5HRS

WATCH SIZE: 4.5*4.1CM, WRISTBAND: 25CM

TRANSMIT RANGE: 10M


BLUETOOTH V3.0 EDR;

BLUETOOTH PROFILES: A2DP + HFP1.5 + HSP1.2;

BUILT-IN 250MAH LITHIUM BATTERY

SPEAKER: 0.5W, 8Ω

Description Of Parts

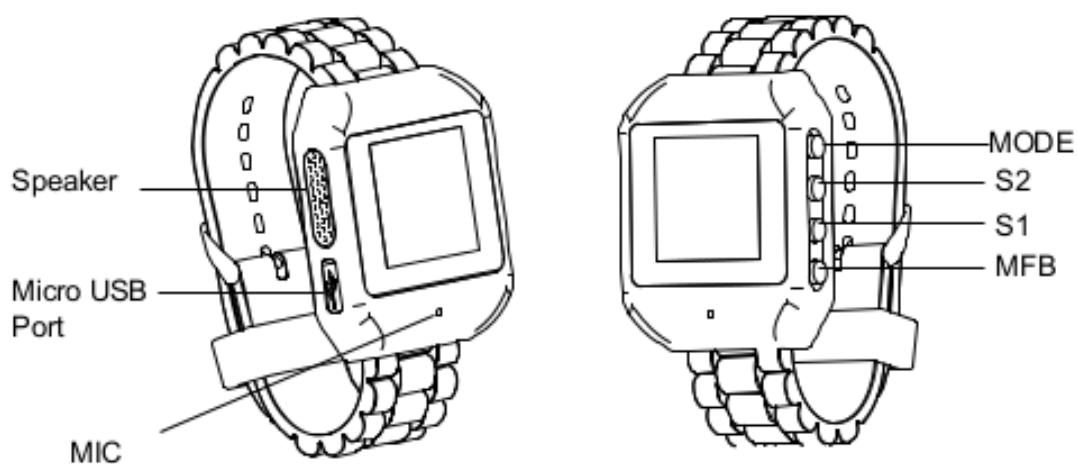

1.Turing the Bluetooth ON

Press and hold "MFB" button for 3 seconds, the screen will display Bluetooth icon and flashing, with a beep sound, it is indicating that the device has been switched ON, and ready to pairing.

2.Turing the Bluetooth OFF

Press and hold "MFB" button for 3 seconds, the Bluetooth icon will disappear on the screen with a beep sound, the device would turn OFF.

3.Pairing the Bluetooth watch with a Bluetooth enabled device.

Long press "MFB" button for 3 seconds, the Bluetooth icon will display and flashing, the device is now in pairing mode. Activate the Bluetooth function on your Bluetooth device (Mobile phone or Tablet). Please refer to manufacturer's instructions for instructions on enabling Bluetooth on your device.

Once you have activated Bluetooth on your device, select the device name "Proscan" from the list of available Bluetooth devices. If required, enter the password "0000" to confirm to finalize pairing. The Bluetooth icon would light up on the screen and don't flashing, it is indicating successful connection.

When you connect this Bluetooth watch with your smart phone, the screen will display "Sync Phonebook", press "MFB" means NO, press "MODE" means YES.

If you sync your phonebook on the Bluetooth watch, when you check your call logs on the Bluetooth watch, you can see the Caller-ID is the same with your phonebook in your smart phone.

4.Play Music wirelessly on Bluetooth Watch

Once your Bluetooth enabled device (For example iPhone or Android Smart phone) is paired with this Bluetooth watch, play music from your phone and it would stream music wirelessly

through the Bluetooth watch speakers. Press "S1" once to volume up, long press to the Next Track; Press "S2" once to volume down, long press to the Previous Track..

5.Answering a call

OLED screen would show Caller-ID when you get incoming phone call. Press the "MODE" button once to answer the call, and the screen will display "Calling" indicating that you are now on a Call. During the phone conversation, press "MODE" button to switch between Phone or Bluetooth watch to talk. Press "S1" once to volume up, Press "S2" once to volume down.

Remark: The Bluetooth watch will show Caller-ID which phone books store in your phone, but it will only show incoming call number without caller-ID if you store it in your SIM card, not on your phone.

6.Ending a call

Press the "MFB" button once when you finish your phone conversation, and you have now ended your phone call.

7.Rejecting a call

When you get an incoming phone call, press the "MFB" button once to reject the incoming phone call.

8.Check the call logs

Press "MODE" button, you can see all the call records, Press "S1" is the next phone call record, Press "S2" for the previous phone call record. Choose the phone number you want to redial, and press "MODE" to dial the CALL, Press "MFB" to Back to the Time display.

9.Setting Mode

Press the "MODE" button and hold for 3 seconds, the screen will display setting list as below:

Set Timer

Set Alarm

Language

Press "S1" or "S2" to choose the above 3 menus which one you want to setting.

(1) Set Timer

Choose "Set Timer" and press "MODE" to input the Year-Month-Date- Hour-Minute, and press "MFB" to exit the time setting mode.

(2) Set Alarm

Choose "Set Alarm" and press "MODE" to input the Hour-Minute, choose "Alarm on", the Alarm icon will on the display. Choose "Alarm off", the Alarm icon will disappear on the display.

When the time is up, you can hear "DUDUDU" alarm ringing, and press any button to stop the ringing.

(3) Language

Choose "Language" to switch between "Simplified Chinese" and "English".

10.Charging the watch

The USB charging port is on the left side of the Bluetooth watch, insert the Micro USB plug here and other end of the USB port to any USB charging port (Computer or USB AC charging socket/DC 5V). It may take up to 2 or 3 hours for a full charge.

INSTRUCTION MANUAL

 This lightning flash and arrowhead within the triangle is a warning sign alerting you of "dangerous voltage" inside the product.	CAUTION RISK OF ELECTRIC SHOCK DO NOT OPEN CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (ON BACK). NO USER SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.	 The exclamation point within the triangle is a warning sign alerting you of important instructions
---	--	---

WARNING: TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE

FCC STATEMENT

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.