






11AC40MIMO_Ant1_5670

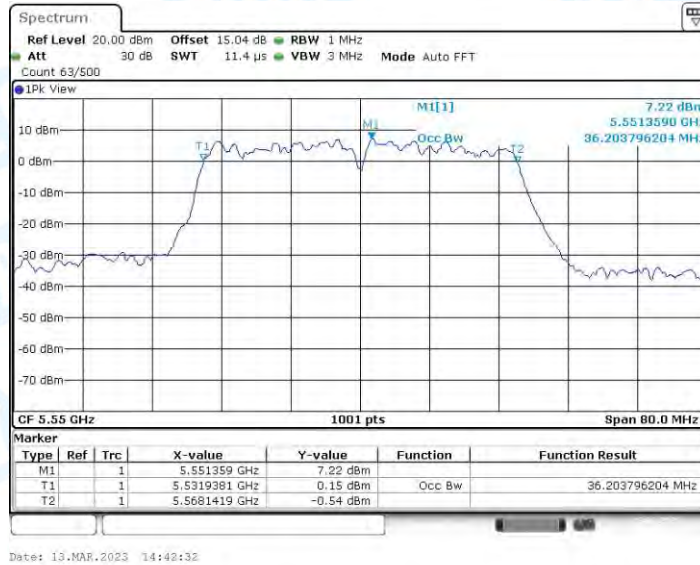


11AC40MIMO_Ant2_5670

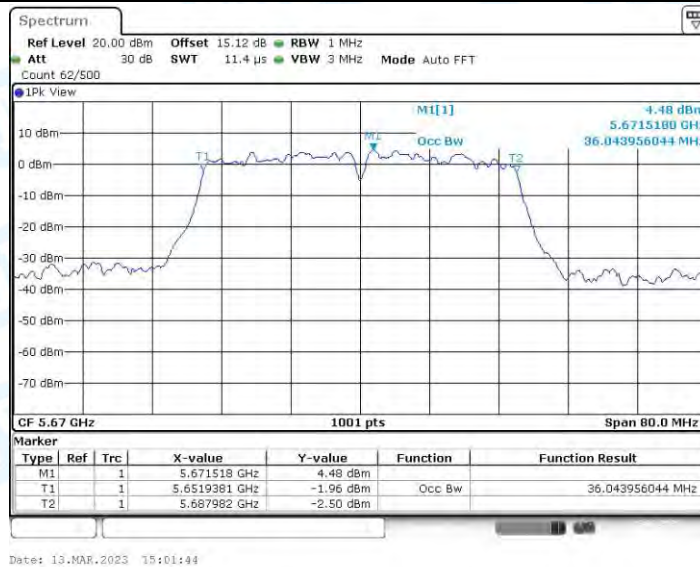

11AC40MIMO_Ant1_5755

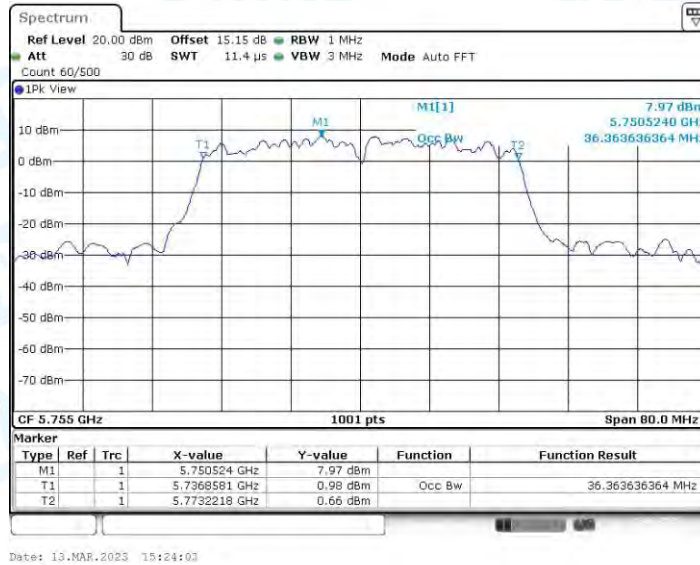


11AC40MIMO_Ant2_5755

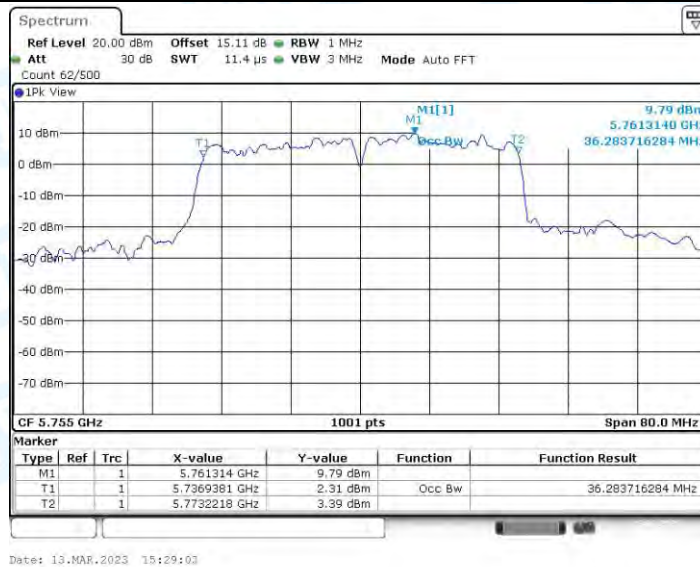


11AC40MIMO_Ant1_5795




11AC40MIMO_Ant2_5795

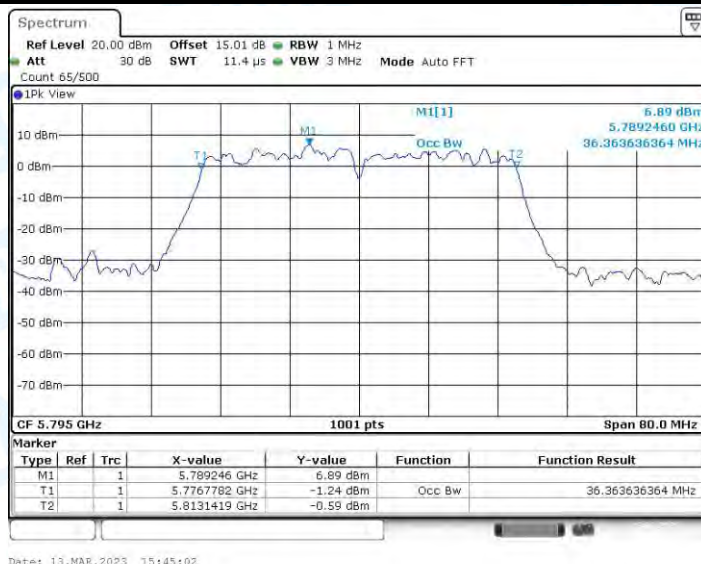


11AC80MIMO_Ant1_5210

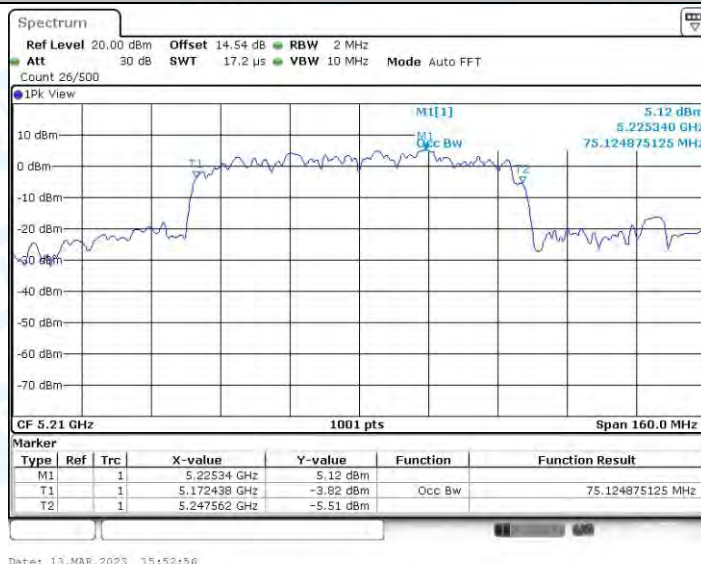


11AC80MIMO_Ant2_5210

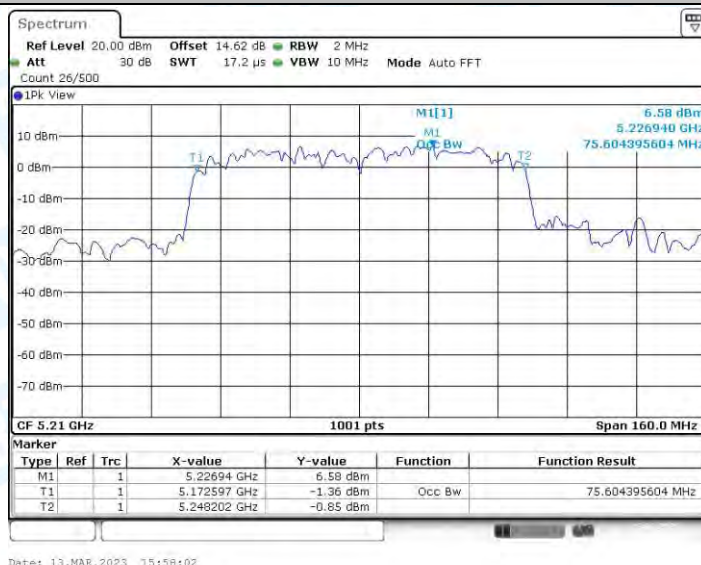


11AC80MIMO_Ant1_5290

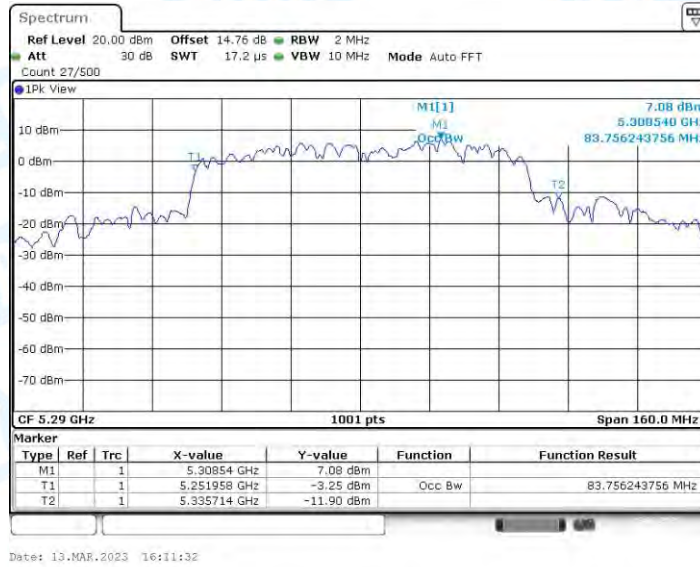


11AC80MIMO_Ant2_5290

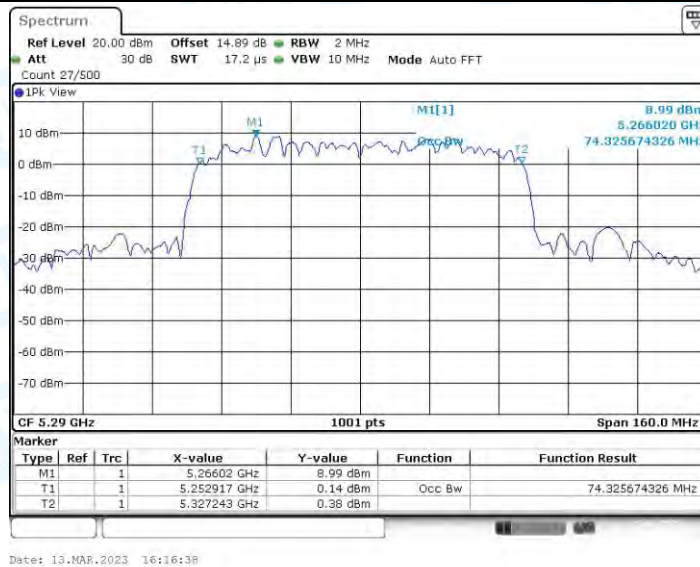


11AC80MIMO_Ant1_5530

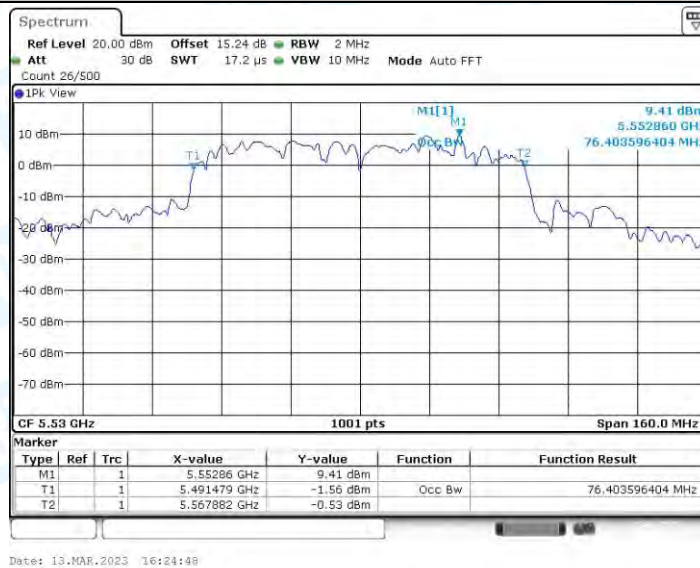


11AC80MIMO_Ant2_5530

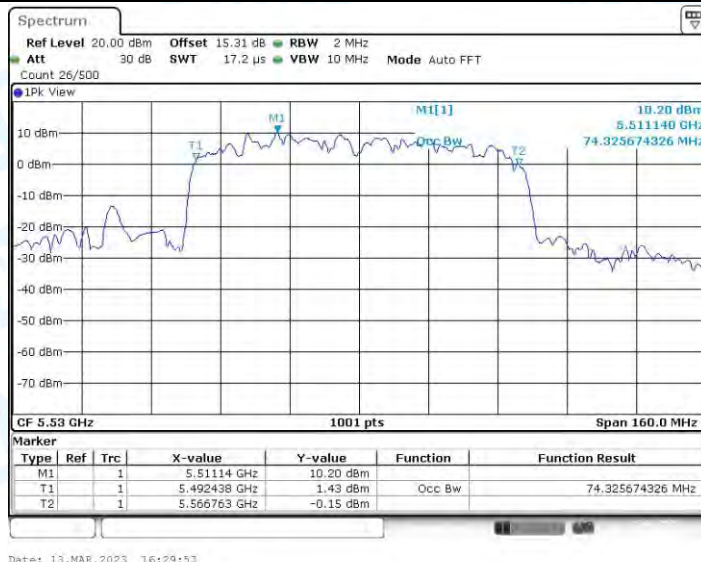


11AC80MIMO_Ant1_5610

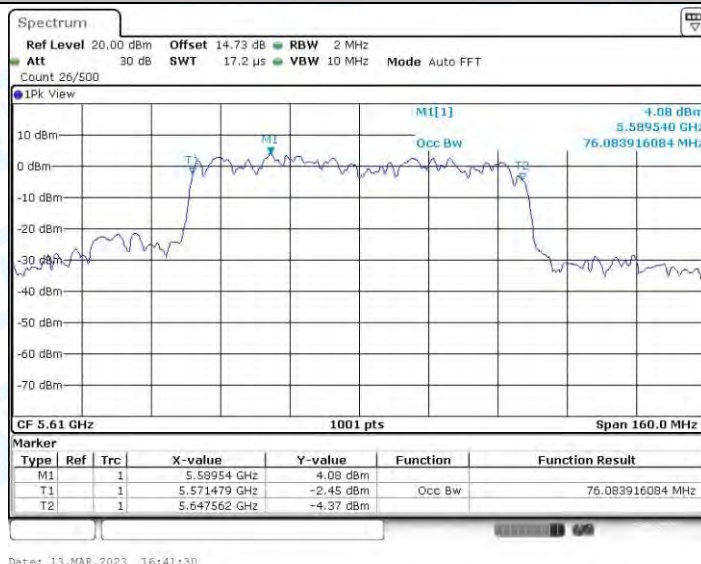

11AC80MIMO_Ant2_5610

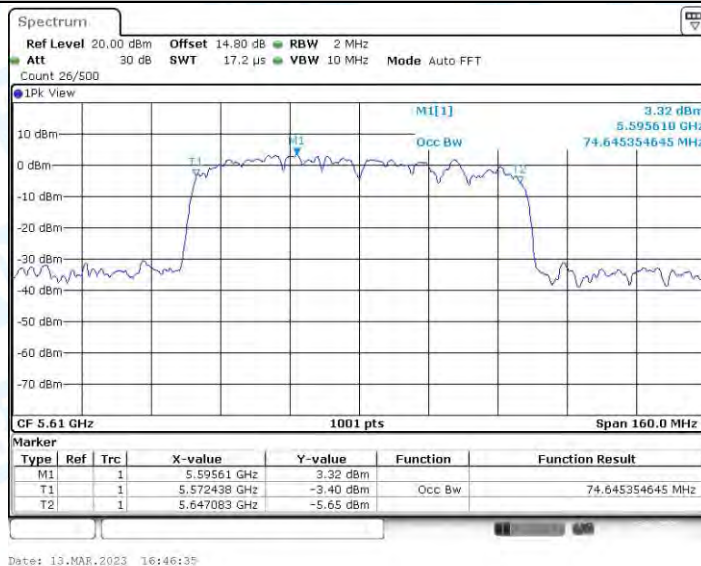


11AC80MIMO_Ant1_5775

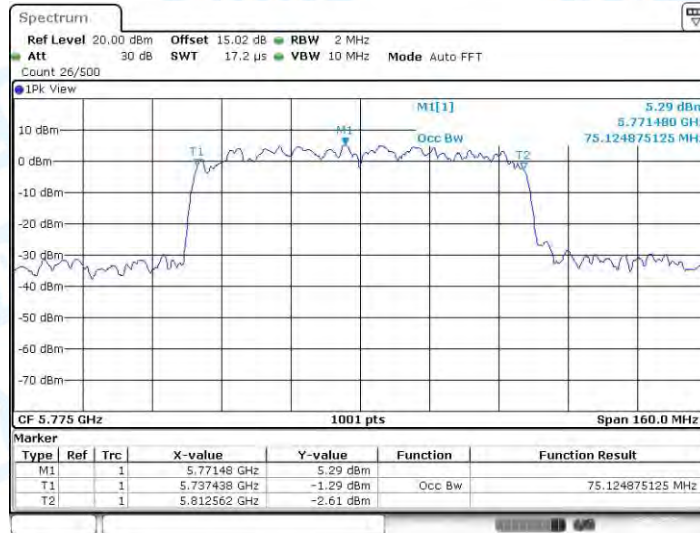

Date: 13.MAR.2023 16:57:30

11AC80MIMO_Ant2_5775

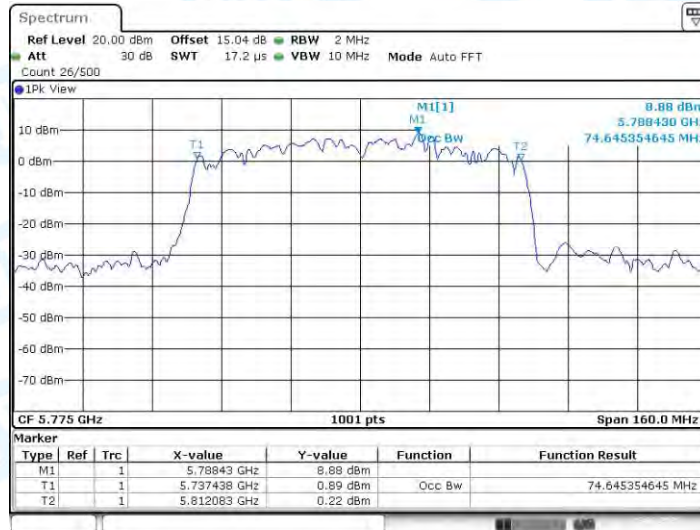

Date: 13.MAR.2023 17:02:29


3. Min emission bandwidth

3.1. Test Result


TestMode	Antenna	Channel	6db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A	Ant1	5745	16.52	5736.76	5753.28	0.5	PASS
	Ant2	5745	16.32	5736.84	5753.16	0.5	PASS
	Ant1	5785	16.36	5776.80	5793.16	0.5	PASS
	Ant2	5785	16.40	5776.80	5793.20	0.5	PASS
	Ant1	5825	15.68	5816.84	5832.52	0.5	PASS
	Ant2	5825	16.44	5816.72	5833.16	0.5	PASS
11N20MIMO	Ant1	5745	17.60	5736.24	5753.84	0.5	PASS
	Ant2	5745	17.56	5736.28	5753.84	0.5	PASS
	Ant1	5785	17.60	5776.24	5793.84	0.5	PASS
	Ant2	5785	17.16	5776.64	5793.80	0.5	PASS
	Ant1	5825	17.56	5816.24	5833.80	0.5	PASS
	Ant2	5825	16.92	5816.28	5833.20	0.5	PASS
11N40MIMO	Ant1	5755	28.16	5741.88	5770.04	0.5	PASS
	Ant2	5755	35.68	5737.48	5773.16	0.5	PASS
	Ant1	5795	35.52	5777.40	5812.92	0.5	PASS
	Ant2	5795	35.76	5776.84	5812.60	0.5	PASS
11AC20MIMO	Ant1	5745	17.52	5736.28	5753.80	0.5	PASS
	Ant2	5745	17.56	5736.24	5753.80	0.5	PASS
	Ant1	5785	17.56	5776.24	5793.80	0.5	PASS
	Ant2	5785	17.56	5776.24	5793.80	0.5	PASS
	Ant1	5825	17.56	5816.24	5833.80	0.5	PASS
	Ant2	5825	17.56	5816.24	5833.80	0.5	PASS
11AC40MIMO	Ant1	5755	33.84	5738.76	5772.60	0.5	PASS
	Ant2	5755	35.84	5737.32	5773.16	0.5	PASS
	Ant1	5795	34.88	5777.72	5812.60	0.5	PASS
	Ant2	5795	35.12	5777.48	5812.60	0.5	PASS
11AC80MIMO	Ant1	5775	70.08	5739.96	5810.04	0.5	PASS
	Ant2	5775	62.56	5747.48	5810.04	0.5	PASS

3.2.Test Graphs




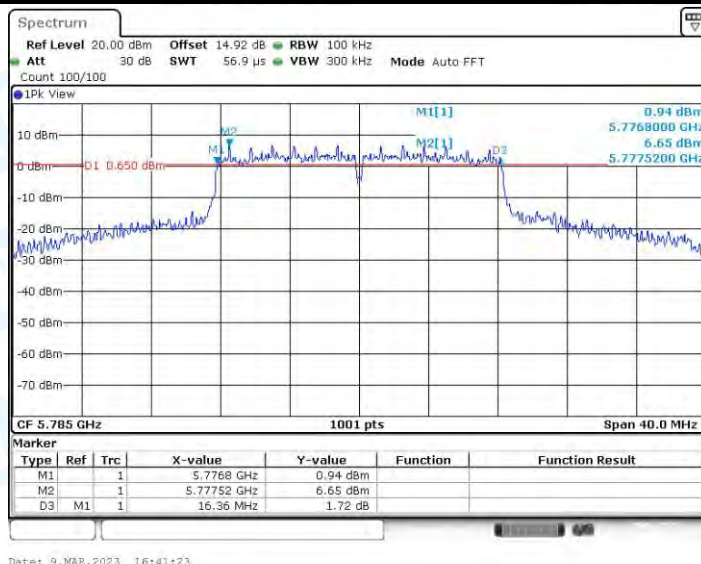


11A_Ant2_5785

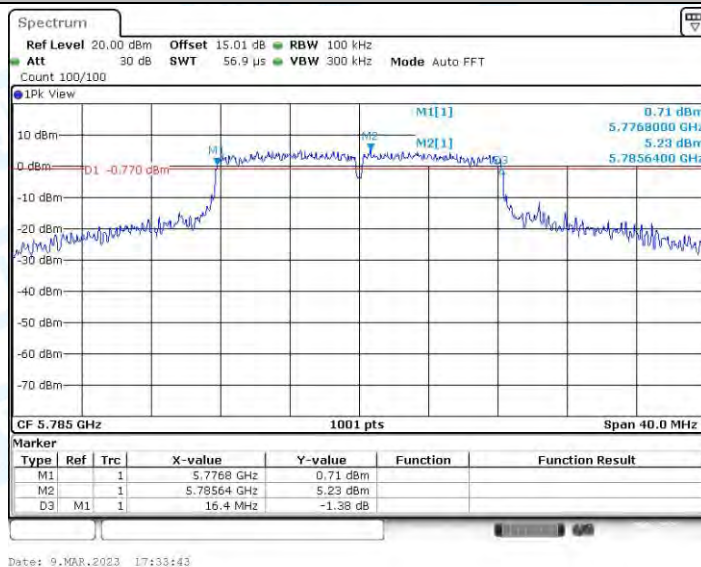


11A_Ant1_5825

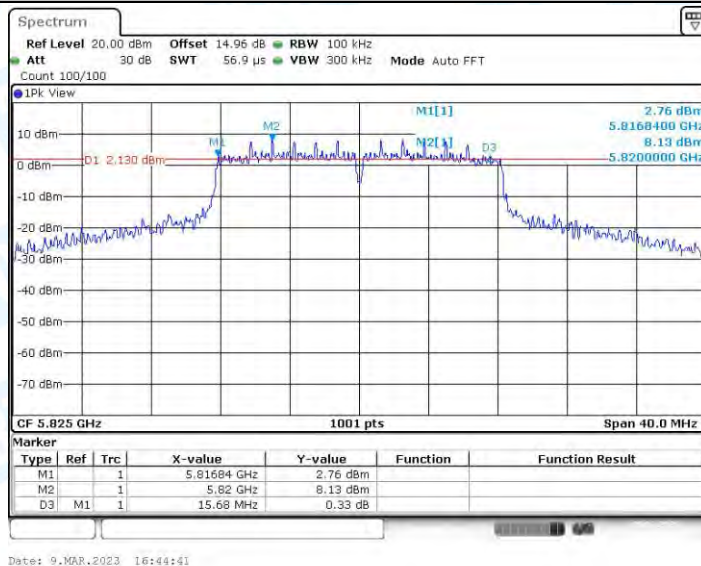


11A_Ant2_5825

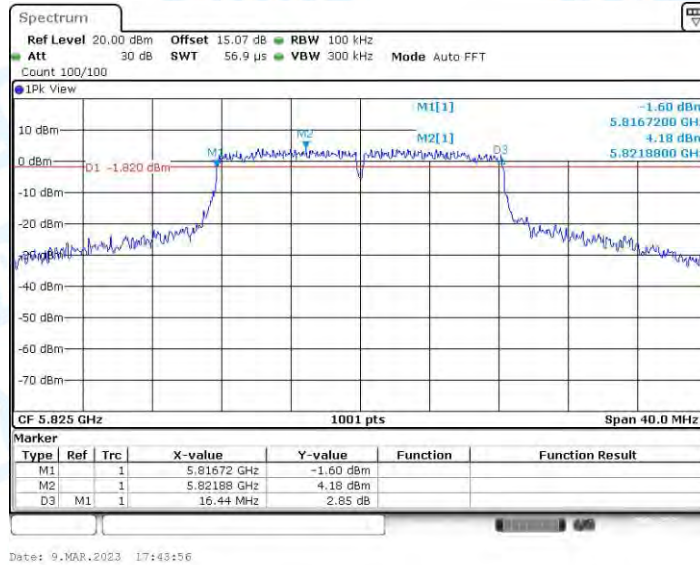


11N20MIMO_Ant1_5745

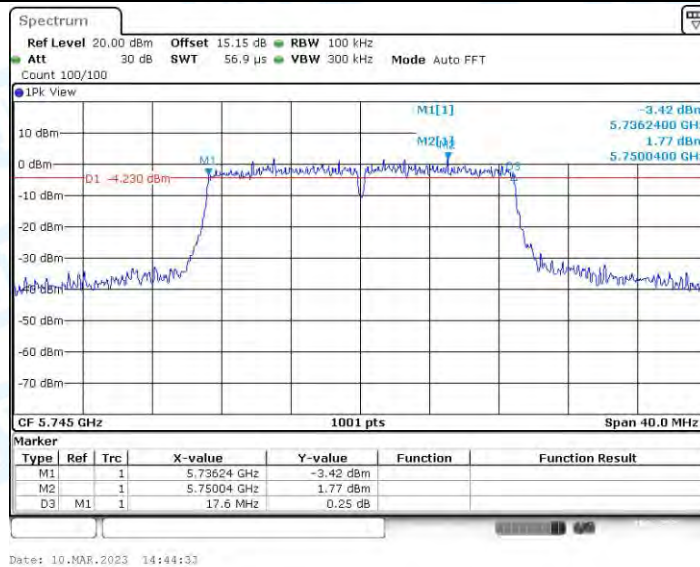


11N20MIMO_Ant2_5745

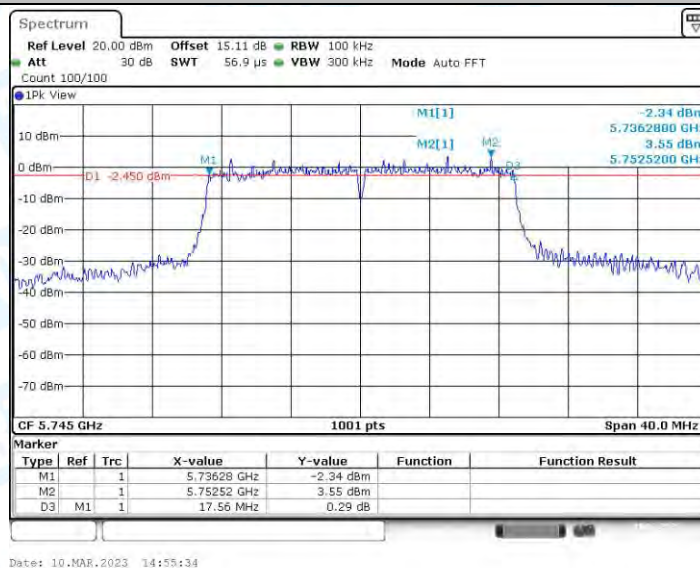


11N20MIMO_Ant1_5785

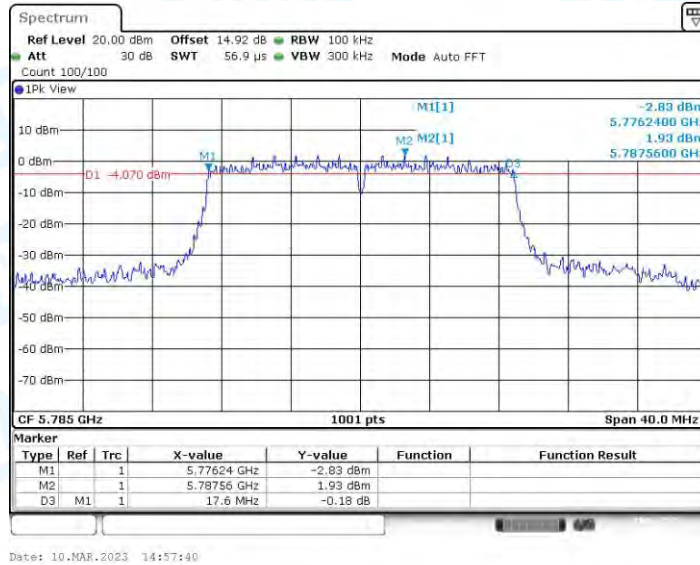


11N20MIMO_Ant2_5785

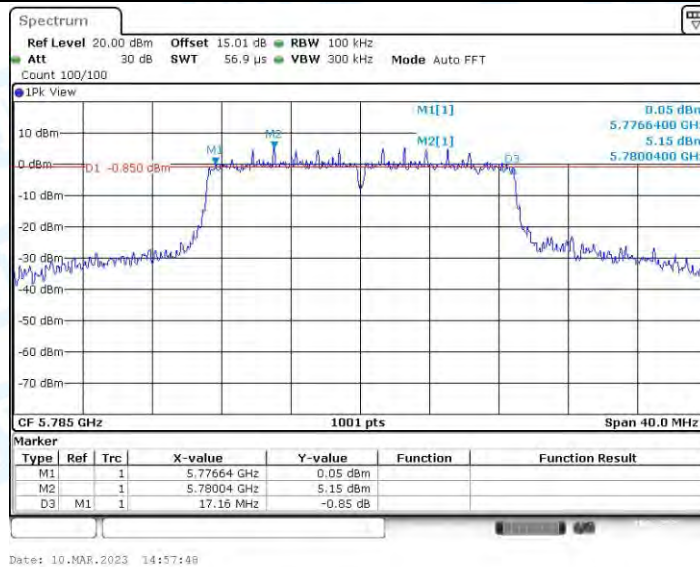


11N20MIMO_Ant1_5825

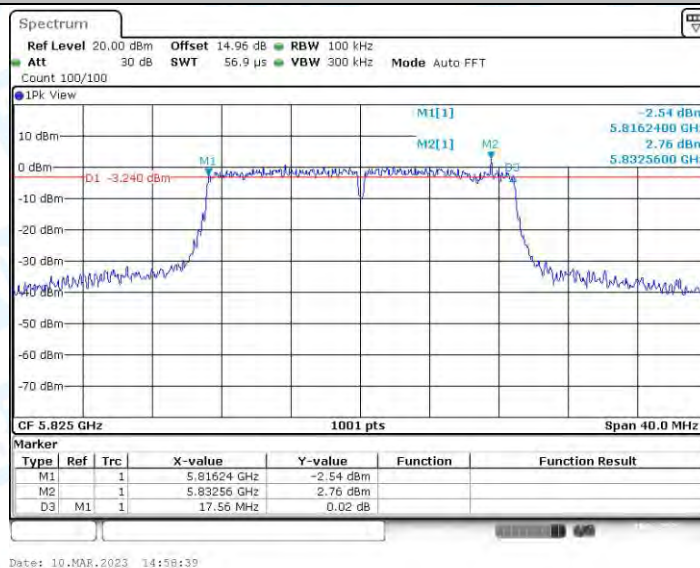


11N20MIMO_Ant2_5825

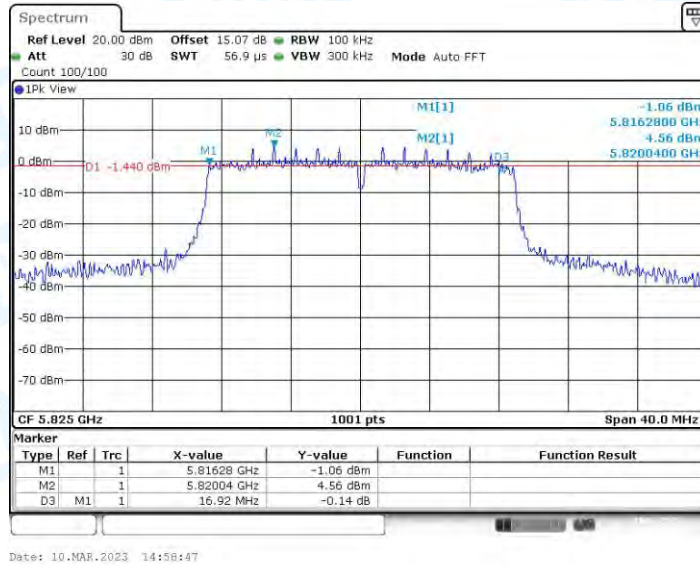


11N40MIMO_Ant1_5755

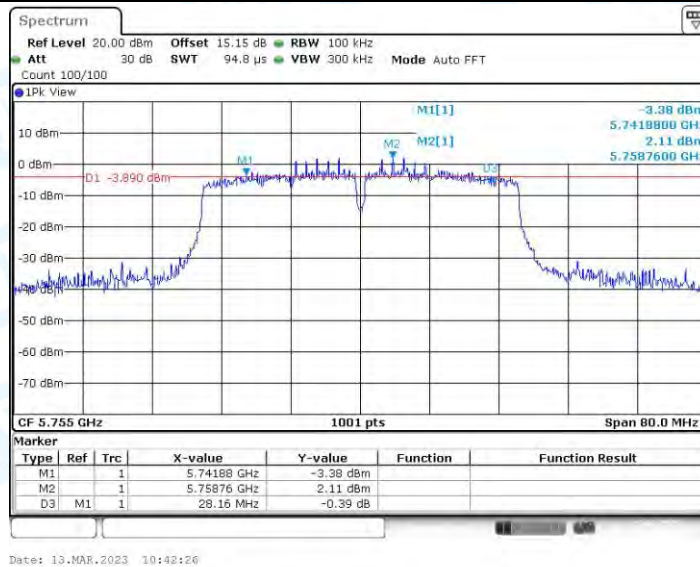


11N40MIMO_Ant2_5755

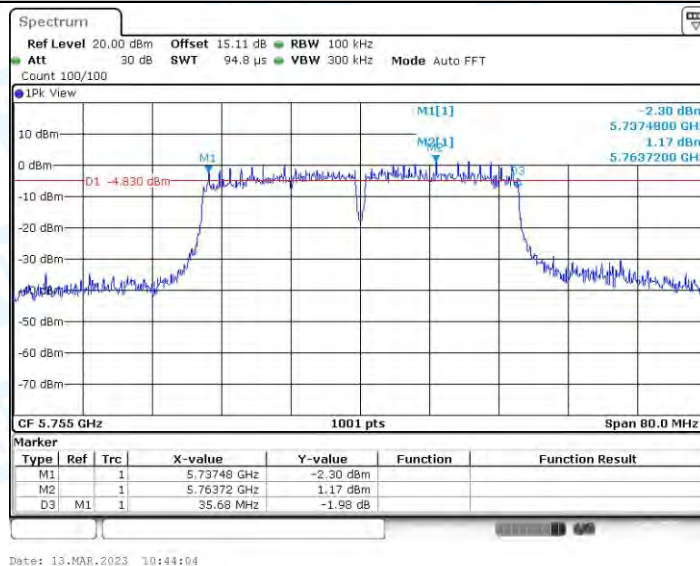


11N40MIMO_Ant1_5795

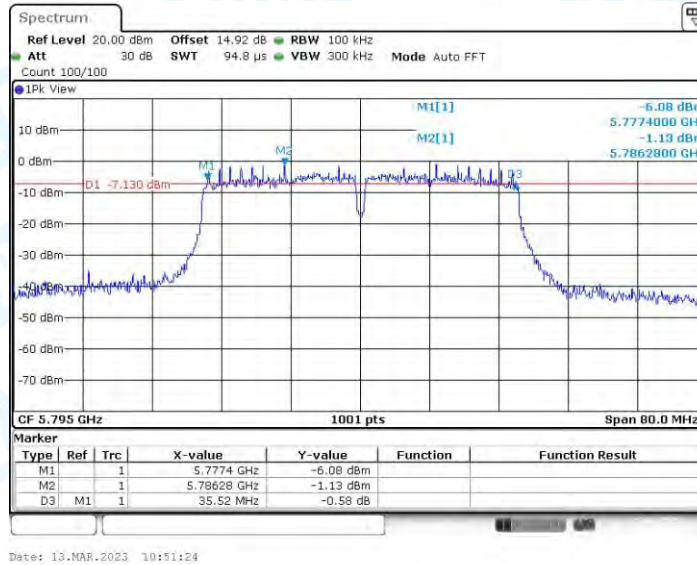


11N40MIMO_Ant2_5795

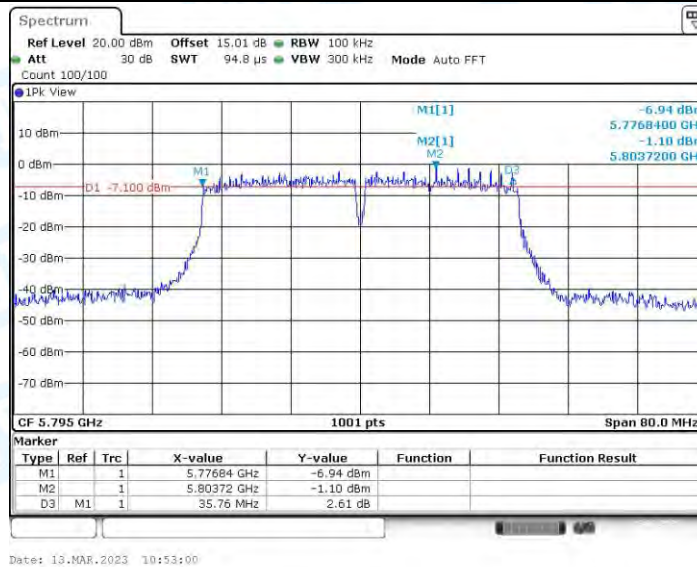


11AC20MIMO_Ant1_5745

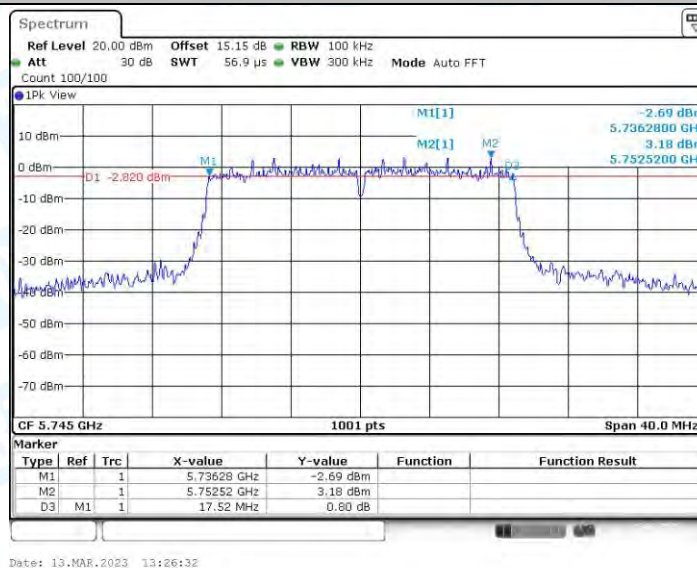


11AC20MIMO_Ant2_5745

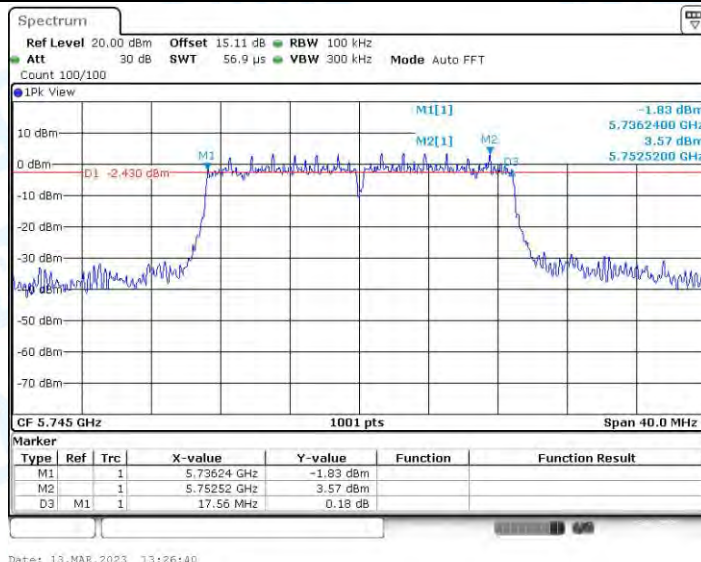


11AC20MIMO_Ant1_5785

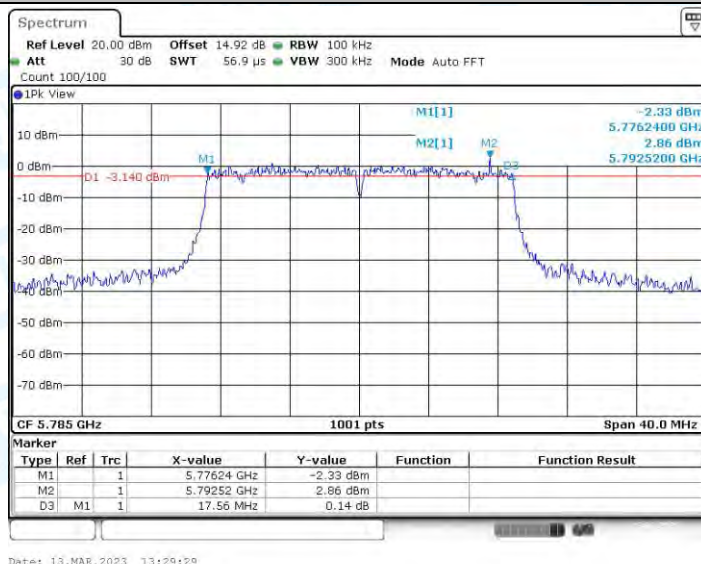


11AC20MIMO_Ant2_5785

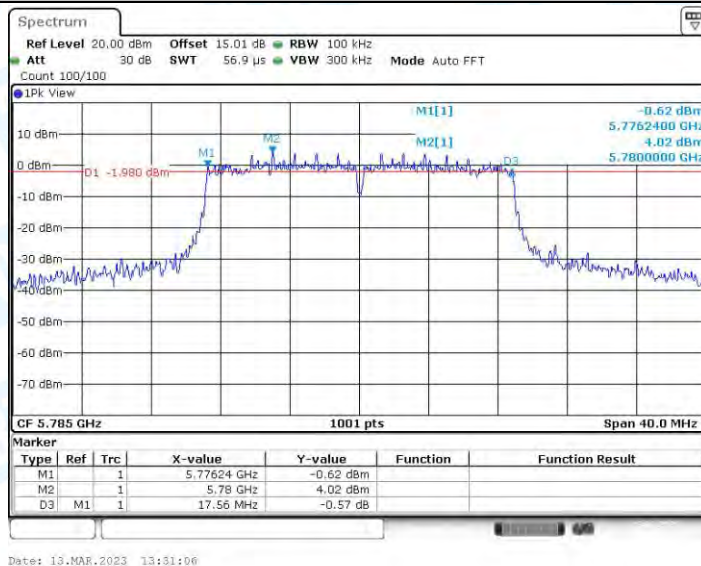


11AC20MIMO_Ant1_5825

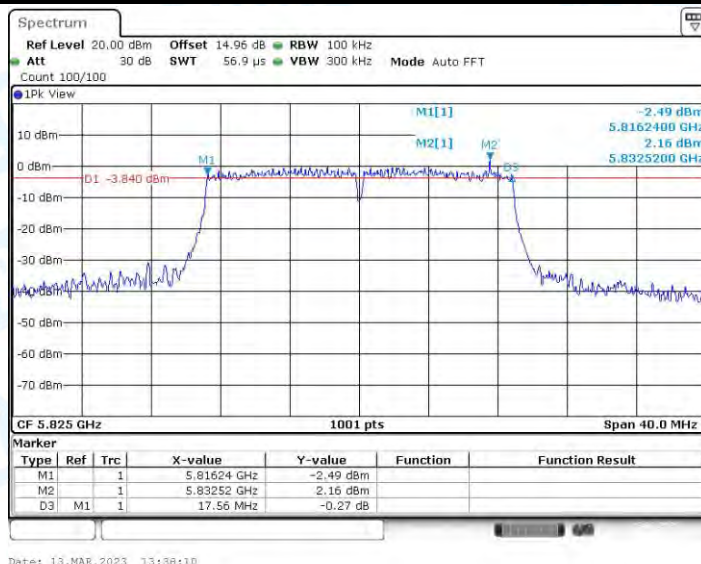


11AC20MIMO_Ant2_5825

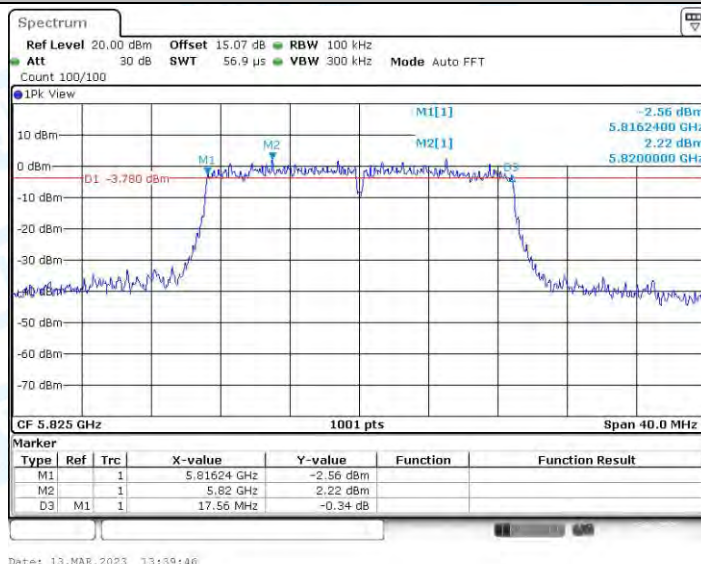


11AC40MIMO_Ant1_5755

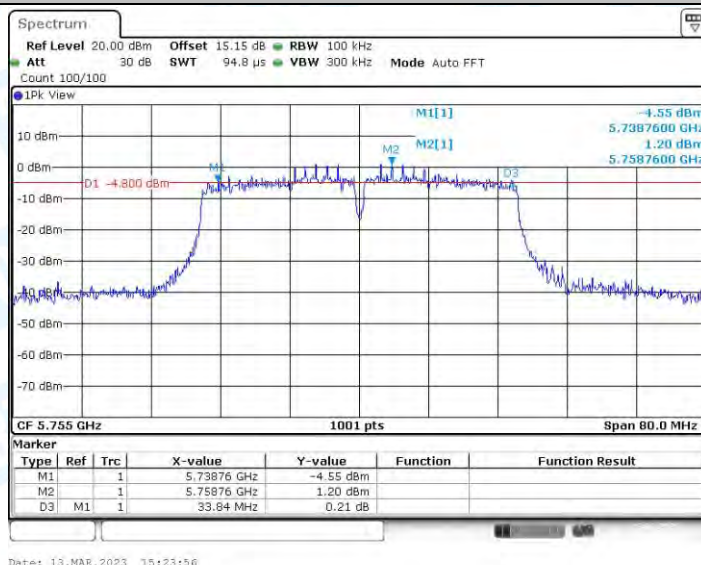


11AC40MIMO_Ant2_5755

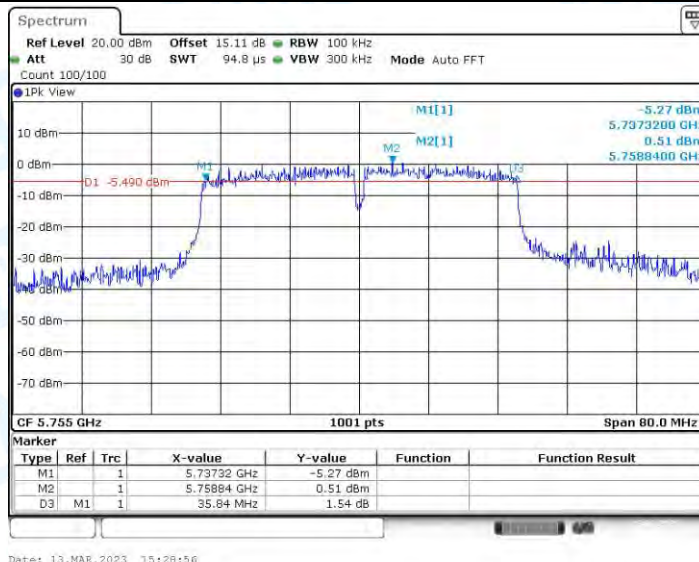


11AC40MIMO_Ant1_5795

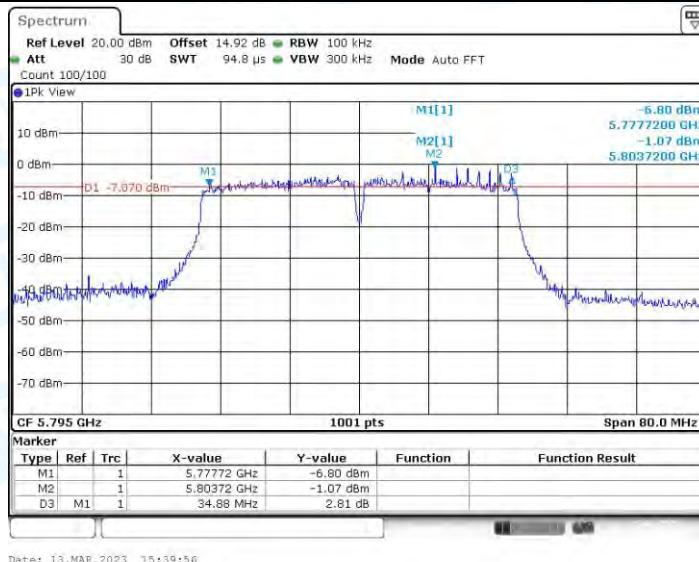


11AC40MIMO_Ant2_5795

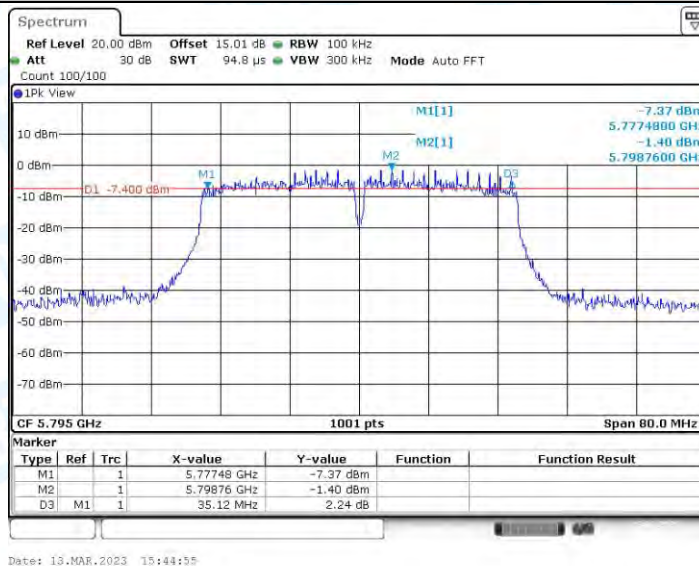

11AC80MIMO_Ant1_5775

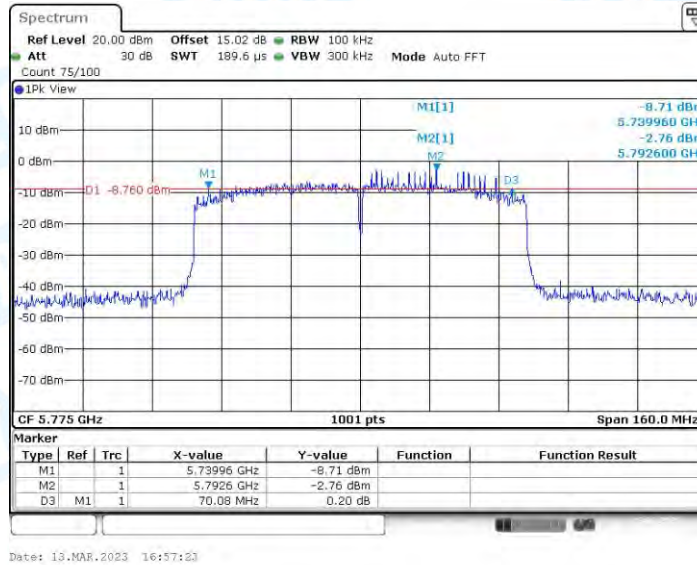

11AC80MIMO_Ant2_5775

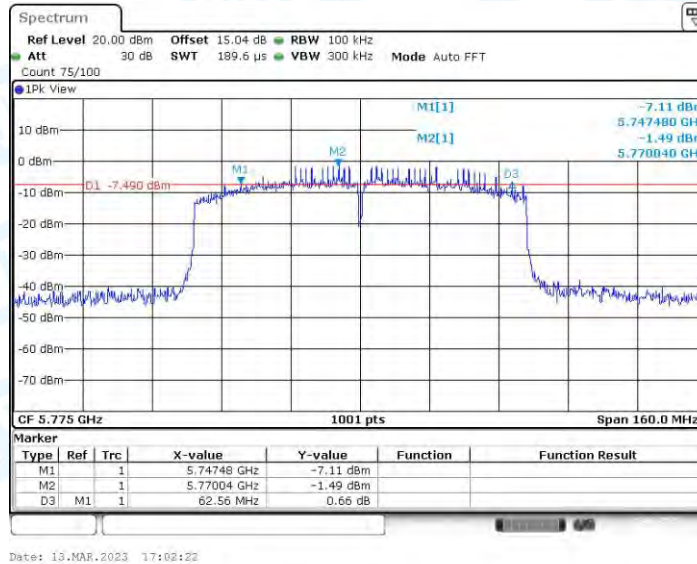

4. Maximum conducted output power

4.1. Test Result

TestMode	Antenna	Channel	Result[dBm]	Limit[dBm]	Verdict
11A	Ant1	5180	15.41	≤23.98	PASS
	Ant2	5180	15.83	≤23.98	PASS
	Ant1	5200	15.22	≤23.98	PASS
	Ant2	5200	16.16	≤23.98	PASS
	Ant1	5240	15.42	≤23.98	PASS
	Ant2	5240	16.24	≤23.98	PASS
	Ant1	5260	15.33	≤23.98	PASS
	Ant2	5260	16.27	≤23.98	PASS
	Ant1	5280	15.45	≤23.98	PASS
	Ant2	5280	16.18	≤23.98	PASS
	Ant1	5320	15.98	≤23.98	PASS
	Ant2	5320	16.09	≤23.98	PASS
	Ant1	5500	16.67	≤23.98	PASS
	Ant2	5500	16.53	≤23.98	PASS
	Ant1	5580	16.01	≤23.98	PASS
	Ant2	5580	15.30	≤23.98	PASS
	Ant1	5700	16.18	≤23.98	PASS
	Ant2	5700	15.10	≤23.98	PASS
	Ant1	5745	16.34	≤30.00	PASS
	Ant2	5745	16.42	≤30.00	PASS
	Ant1	5785	16.56	≤30.00	PASS
	Ant2	5785	16.78	≤30.00	PASS
	Ant1	5825	16.33	≤30.00	PASS
	Ant2	5825	15.82	≤30.00	PASS
11N20MIMO	Ant1	5180	12.57	≤23.98	PASS
	Ant2	5180	13.50	≤23.98	PASS
	total	5180	16.07	≤23.98	PASS
	Ant1	5200	12.56	≤23.98	PASS
	Ant2	5200	13.86	≤23.98	PASS
	total	5200	16.27	≤23.98	PASS
	Ant1	5240	12.76	≤23.98	PASS
	Ant2	5240	14.38	≤23.98	PASS
	total	5240	16.66	≤23.98	PASS
	Ant1	5260	12.70	≤23.98	PASS
	Ant2	5260	13.66	≤23.98	PASS
	total	5260	16.22	≤23.98	PASS
	Ant1	5280	13.10	≤23.98	PASS
	Ant2	5280	13.68	≤23.98	PASS
	total	5280	16.41	≤23.98	PASS
	Ant1	5320	13.67	≤23.98	PASS

	Ant2	5320	13.49	≤23.98	PASS
	total	5320	16.59	≤23.98	PASS
	Ant1	5500	14.31	≤23.98	PASS
	Ant2	5500	14.07	≤23.98	PASS
	total	5500	17.20	≤23.98	PASS
	Ant1	5580	13.26	≤23.98	PASS
	Ant2	5580	13.01	≤23.98	PASS
	total	5580	16.15	≤23.98	PASS
	Ant1	5700	13.19	≤23.98	PASS
	Ant2	5700	12.77	≤23.98	PASS
	total	5700	16.00	≤23.98	PASS
	Ant1	5745	13.91	≤30.00	PASS
	Ant2	5745	14.55	≤30.00	PASS
	total	5745	17.25	≤30.00	PASS
	Ant1	5785	14.05	≤30.00	PASS
	Ant2	5785	15.02	≤30.00	PASS
	total	5785	17.57	≤30.00	PASS
	Ant1	5825	13.73	≤30.00	PASS
	Ant2	5825	14.19	≤30.00	PASS
	total	5825	16.98	≤30.00	PASS
11N40MIMO	Ant1	5190	13.71	≤23.98	PASS
	Ant2	5190	14.14	≤23.98	PASS
	total	5190	16.94	≤23.98	PASS
	Ant1	5230	13.27	≤23.98	PASS
	Ant2	5230	14.68	≤23.98	PASS
	total	5230	17.04	≤23.98	PASS
	Ant1	5270	13.48	≤23.98	PASS
	Ant2	5270	14.16	≤23.98	PASS
	total	5270	16.84	≤23.98	PASS
	Ant1	5310	13.82	≤23.98	PASS
	Ant2	5310	14.14	≤23.98	PASS
	total	5310	16.99	≤23.98	PASS
	Ant1	5510	15.61	≤23.98	PASS
	Ant2	5510	14.67	≤23.98	PASS
	total	5510	18.18	≤23.98	PASS
	Ant1	5550	14.76	≤23.98	PASS
	Ant2	5550	14.27	≤23.98	PASS
	total	5550	17.53	≤23.98	PASS
	Ant1	5670	13.83	≤23.98	PASS
	Ant2	5670	12.66	≤23.98	PASS
	total	5670	16.29	≤23.98	PASS
	Ant1	5755	13.66	≤30.00	PASS
	Ant2	5755	13.81	≤30.00	PASS
	total	5755	16.75	≤30.00	PASS
	Ant1	5795	13.76	≤30.00	PASS

	Ant2	5795	13.65	≤30.00	PASS
	total	5795	16.72	≤30.00	PASS
11AC20MIMO	Ant1	5180	12.73	≤23.98	PASS
	Ant2	5180	13.58	≤23.98	PASS
	total	5180	16.19	≤23.98	PASS
	Ant1	5200	13.28	≤23.98	PASS
	Ant2	5200	13.49	≤23.98	PASS
	total	5200	16.40	≤23.98	PASS
	Ant1	5240	13.30	≤23.98	PASS
	Ant2	5240	14.10	≤23.98	PASS
	total	5240	16.73	≤23.98	PASS
	Ant1	5260	13.38	≤23.98	PASS
	Ant2	5260	14.13	≤23.98	PASS
	total	5260	16.78	≤23.98	PASS
	Ant1	5280	13.62	≤23.98	PASS
	Ant2	5280	14.11	≤23.98	PASS
	total	5280	16.88	≤23.98	PASS
	Ant1	5320	13.79	≤23.98	PASS
	Ant2	5320	13.71	≤23.98	PASS
	total	5320	16.76	≤23.98	PASS
	Ant1	5500	14.73	≤23.98	PASS
	Ant2	5500	14.51	≤23.98	PASS
	total	5500	17.63	≤23.98	PASS
	Ant1	5580	13.76	≤23.98	PASS
	Ant2	5580	12.92	≤23.98	PASS
	total	5580	16.37	≤23.98	PASS
	Ant1	5700	13.47	≤23.98	PASS
	Ant2	5700	12.87	≤23.98	PASS
	total	5700	16.19	≤23.98	PASS
	Ant1	5745	14.13	≤30.00	PASS
	Ant2	5745	14.36	≤30.00	PASS
	total	5745	17.26	≤30.00	PASS
	Ant1	5785	13.79	≤30.00	PASS
	Ant2	5785	14.33	≤30.00	PASS
	total	5785	17.08	≤30.00	PASS
	Ant1	5825	13.52	≤30.00	PASS
	Ant2	5825	13.38	≤30.00	PASS
	total	5825	16.46	≤30.00	PASS
11AC40MIMO	Ant1	5190	13.50	≤23.98	PASS
	Ant2	5190	13.67	≤23.98	PASS
	total	5190	16.60	≤23.98	PASS
	Ant1	5230	13.84	≤23.98	PASS
	Ant2	5230	14.57	≤23.98	PASS
	total	5230	17.23	≤23.98	PASS
	Ant1	5270	13.75	≤23.98	PASS

	Ant2	5270	14.41	≤23.98	PASS
	total	5270	17.10	≤23.98	PASS
	Ant1	5310	14.34	≤23.98	PASS
	Ant2	5310	14.29	≤23.98	PASS
	total	5310	17.33	≤23.98	PASS
	Ant1	5510	13.88	≤23.98	PASS
	Ant2	5510	14.62	≤23.98	PASS
	total	5510	17.28	≤23.98	PASS
	Ant1	5550	13.52	≤23.98	PASS
	Ant2	5550	13.82	≤23.98	PASS
	total	5550	16.68	≤23.98	PASS
	Ant1	5670	13.33	≤23.98	PASS
	Ant2	5670	12.65	≤23.98	PASS
	total	5670	16.01	≤23.98	PASS
	Ant1	5755	13.48	≤30.00	PASS
	Ant2	5755	13.19	≤30.00	PASS
	total	5755	16.35	≤30.00	PASS
	Ant1	5795	13.75	≤30.00	PASS
	Ant2	5795	13.18	≤30.00	PASS
	total	5795	16.48	≤30.00	PASS
11AC80MIMO	Ant1	5210	13.70	≤23.98	PASS
	Ant2	5210	14.71	≤23.98	PASS
	total	5210	17.24	≤23.98	PASS
	Ant1	5290	13.75	≤23.98	PASS
	Ant2	5290	13.93	≤23.98	PASS
	total	5290	16.85	≤23.98	PASS
	Ant1	5530	14.25	≤23.98	PASS
	Ant2	5530	14.15	≤23.98	PASS
	total	5530	17.21	≤23.98	PASS
	Ant1	5610	13.19	≤23.98	PASS
	Ant2	5610	13.17	≤23.98	PASS
	total	5610	16.19	≤23.98	PASS
	Ant1	5775	14.04	≤30.00	PASS
	Ant2	5775	14.85	≤30.00	PASS
	total	5775	17.47	≤30.00	PASS

Note: The Duty Cycle Factor is compensated in the graph.

5. Maximum power spectral density

5.1. Test Result

TestMode	Antenna	Channel	Result [dBm/MHz]	Limit[dBm/MHz]	Verdict
11A	Ant1	5180	5.38	≤11.00	PASS
	Ant2	5180	7.48	≤11.00	PASS
	Ant1	5200	5.8	≤11.00	PASS
	Ant2	5200	7.35	≤11.00	PASS
	Ant1	5240	5.85	≤11.00	PASS
	Ant2	5240	7.28	≤11.00	PASS
	Ant1	5260	5.75	≤11.00	PASS
	Ant2	5260	7.47	≤11.00	PASS
	Ant1	5280	5.38	≤11.00	PASS
	Ant2	5280	7.12	≤11.00	PASS
	Ant1	5320	7.16	≤11.00	PASS
	Ant2	5320	7.45	≤11.00	PASS
	Ant1	5500	8.83	≤11.00	PASS
	Ant2	5500	8.5	≤11.00	PASS
	Ant1	5580	7.39	≤11.00	PASS
	Ant2	5580	6.38	≤11.00	PASS
	Ant1	5700	6.85	≤11.00	PASS
	Ant2	5700	6.26	≤11.00	PASS
	Ant1	5745	4.81	≤30.00	PASS
	Ant2	5745	4.38	≤30.00	PASS
	Ant1	5785	4.7	≤30.00	PASS
	Ant2	5785	5.33	≤30.00	PASS
	Ant1	5825	4.92	≤30.00	PASS
	Ant2	5825	4.37	≤30.00	PASS
11N20MIMO	Ant1	5180	1.52	≤11.00	PASS
	Ant2	5180	3.46	≤11.00	PASS
	total	5180	5.61	≤11.00	PASS
	Ant1	5200	1.8	≤11.00	PASS
	Ant2	5200	3.53	≤11.00	PASS
	total	5200	5.76	≤11.00	PASS
	Ant1	5240	1.81	≤11.00	PASS
	Ant2	5240	4.13	≤11.00	PASS
	total	5240	6.13	≤11.00	PASS
	Ant1	5260	1.29	≤11.00	PASS
	Ant2	5260	2.75	≤11.00	PASS
	total	5260	5.09	≤11.00	PASS
	Ant1	5280	1.81	≤11.00	PASS
	Ant2	5280	3.35	≤11.00	PASS
	total	5280	5.66	≤11.00	PASS

	Ant1	5320	3.23	≤11.00	PASS
	Ant2	5320	3.21	≤11.00	PASS
	total	5320	6.23	≤11.00	PASS
	Ant1	5500	4.59	≤11.00	PASS
	Ant2	5500	4.03	≤11.00	PASS
	total	5500	7.33	≤11.00	PASS
	Ant1	5580	3.05	≤11.00	PASS
	Ant2	5580	2.7	≤11.00	PASS
	total	5580	5.89	≤11.00	PASS
	Ant1	5700	1.89	≤11.00	PASS
	Ant2	5700	2.66	≤11.00	PASS
	total	5700	5.30	≤11.00	PASS
	Ant1	5745	0.26	≤30.00	PASS
	Ant2	5745	1.09	≤30.00	PASS
	total	5745	3.71	≤30.00	PASS
	Ant1	5785	0.45	≤30.00	PASS
	Ant2	5785	2.07	≤30.00	PASS
	total	5785	4.35	≤30.00	PASS
	Ant1	5825	0.52	≤30.00	PASS
	Ant2	5825	1.37	≤30.00	PASS
	total	5825	3.98	≤30.00	PASS
11N40MIMO	Ant1	5190	0.3	≤11.00	PASS
	Ant2	5190	1.5	≤11.00	PASS
	total	5190	3.95	≤11.00	PASS
	Ant1	5230	-0.53	≤11.00	PASS
	Ant2	5230	1.42	≤11.00	PASS
	total	5230	3.56	≤11.00	PASS
	Ant1	5270	-0.26	≤11.00	PASS
	Ant2	5270	0.82	≤11.00	PASS
	total	5270	3.32	≤11.00	PASS
	Ant1	5310	0.82	≤11.00	PASS
	Ant2	5310	1.5	≤11.00	PASS
	total	5310	4.18	≤11.00	PASS
	Ant1	5510	4.32	≤11.00	PASS
	Ant2	5510	2.35	≤11.00	PASS
	total	5510	6.46	≤11.00	PASS
	Ant1	5550	2.64	≤11.00	PASS
	Ant2	5550	1.38	≤11.00	PASS
	total	5550	5.07	≤11.00	PASS
	Ant1	5670	0.3	≤11.00	PASS
	Ant2	5670	-0.46	≤11.00	PASS
	total	5670	2.95	≤11.00	PASS
	Ant1	5755	-2.65	≤30.00	PASS
	Ant2	5755	-2.92	≤30.00	PASS
	total	5755	0.23	≤30.00	PASS


	Ant1	5795	-2.85	≤30.00	PASS
	Ant2	5795	-2.06	≤30.00	PASS
	total	5795	0.57	≤30.00	PASS
11AC20MIMO	Ant1	5180	1.98	≤11.00	PASS
	Ant2	5180	3.94	≤11.00	PASS
	total	5180	6.08	≤11.00	PASS
	Ant1	5200	2.45	≤11.00	PASS
	Ant2	5200	2.9	≤11.00	PASS
	total	5200	5.69	≤11.00	PASS
	Ant1	5240	2.64	≤11.00	PASS
	Ant2	5240	3.45	≤11.00	PASS
	total	5240	6.07	≤11.00	PASS
	Ant1	5260	2.51	≤11.00	PASS
	Ant2	5260	4.07	≤11.00	PASS
	total	5260	6.37	≤11.00	PASS
	Ant1	5280	2.79	≤11.00	PASS
	Ant2	5280	3.95	≤11.00	PASS
	total	5280	6.42	≤11.00	PASS
	Ant1	5320	3.87	≤11.00	PASS
	Ant2	5320	3.37	≤11.00	PASS
	total	5320	6.64	≤11.00	PASS
	Ant1	5500	5.7	≤11.00	PASS
	Ant2	5500	4.97	≤11.00	PASS
	total	5500	8.36	≤11.00	PASS
	Ant1	5580	3.83	≤11.00	PASS
	Ant2	5580	2.73	≤11.00	PASS
	total	5580	6.33	≤11.00	PASS
	Ant1	5700	2.39	≤11.00	PASS
	Ant2	5700	2.51	≤11.00	PASS
	total	5700	5.46	≤11.00	PASS
	Ant1	5745	-0.74	≤30.00	PASS
	Ant2	5745	0.57	≤30.00	PASS
	total	5745	2.97	≤30.00	PASS
	Ant1	5785	0.07	≤30.00	PASS
	Ant2	5785	1.38	≤30.00	PASS
	total	5785	3.78	≤30.00	PASS
	Ant1	5825	-0.12	≤30.00	PASS
	Ant2	5825	0.34	≤30.00	PASS
	total	5825	3.13	≤30.00	PASS
11AC40MIMO	Ant1	5190	0.04	≤11.00	PASS
	Ant2	5190	0.32	≤11.00	PASS
	total	5190	3.19	≤11.00	PASS
	Ant1	5230	0.76	≤11.00	PASS
	Ant2	5230	1.56	≤11.00	PASS
	total	5230	4.19	≤11.00	PASS

	Ant1	5270	0.59	≤11.00	PASS
	Ant2	5270	1.18	≤11.00	PASS
	total	5270	3.91	≤11.00	PASS
	Ant1	5310	1.55	≤11.00	PASS
	Ant2	5310	1.42	≤11.00	PASS
	total	5310	4.50	≤11.00	PASS
	Ant1	5510	0.35	≤11.00	PASS
	Ant2	5510	2.16	≤11.00	PASS
	total	5510	4.36	≤11.00	PASS
	Ant1	5550	0.58	≤11.00	PASS
	Ant2	5550	0.66	≤11.00	PASS
	total	5550	3.63	≤11.00	PASS
	Ant1	5670	-0.69	≤11.00	PASS
	Ant2	5670	-0.41	≤11.00	PASS
	total	5670	2.46	≤11.00	PASS
	Ant1	5755	-2.72	≤30.00	PASS
	Ant2	5755	-3.37	≤30.00	PASS
	total	5755	-0.02	≤30.00	PASS
	Ant1	5795	-2.99	≤30.00	PASS
	Ant2	5795	-3.47	≤30.00	PASS
	total	5795	-0.21	≤30.00	PASS
11AC80MIMO	Ant1	5210	-1.98	≤11.00	PASS
	Ant2	5210	-0.67	≤11.00	PASS
	total	5210	1.73	≤11.00	PASS
	Ant1	5290	-1.45	≤11.00	PASS
	Ant2	5290	-0.9	≤11.00	PASS
	total	5290	1.84	≤11.00	PASS
	Ant1	5530	-0.06	≤11.00	PASS
	Ant2	5530	-1.71	≤11.00	PASS
	total	5530	2.20	≤11.00	PASS
	Ant1	5610	-2.59	≤11.00	PASS
	Ant2	5610	-3.02	≤11.00	PASS
	total	5610	0.21	≤11.00	PASS
	Ant1	5775	-4.56	≤30.00	PASS
	Ant2	5775	-2.81	≤30.00	PASS
	total	5775	-0.59	≤30.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
 2.The Duty Cycle Factor and RBW Factor is compensated in the graph.

5.2.Test Graphs




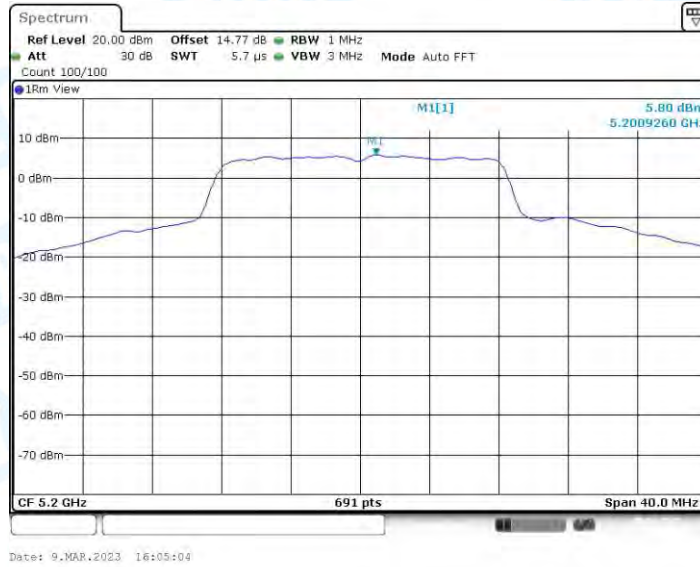

11A_Ant2_5200

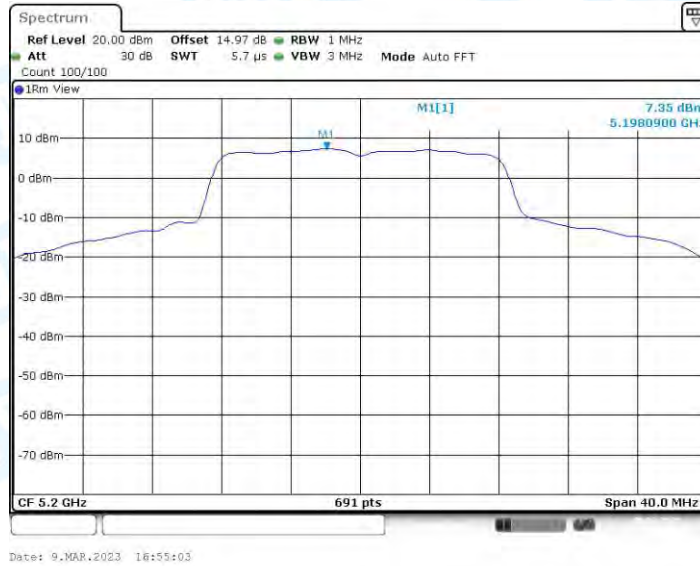

11A_Ant1_5240

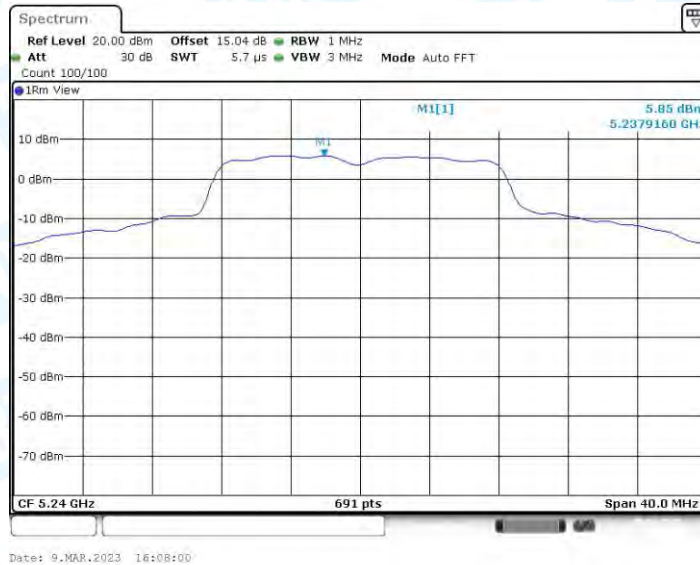

11A_Ant2_5240



11A_Ant1_5260



11A_Ant2_5260




11A_Ant1_5280



11A_Ant2_5280



11A_Ant1_5320

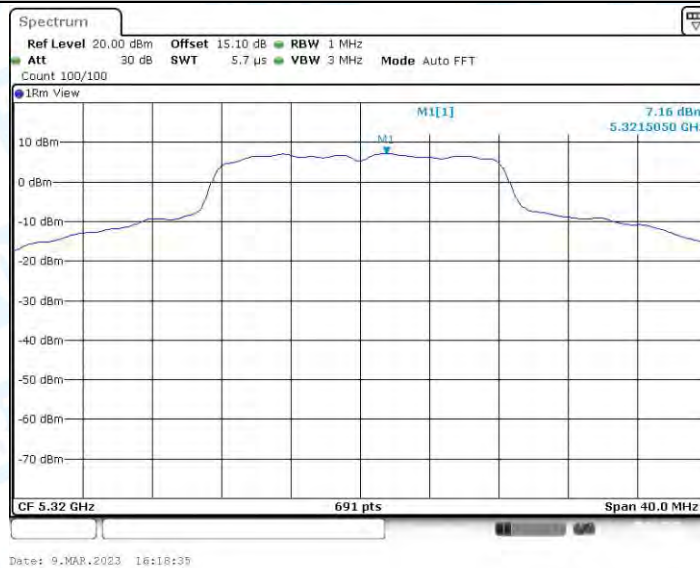

11A_Ant2_5320




11A_Ant1_5500



11A_Ant2_5500



11A_Ant1_5580

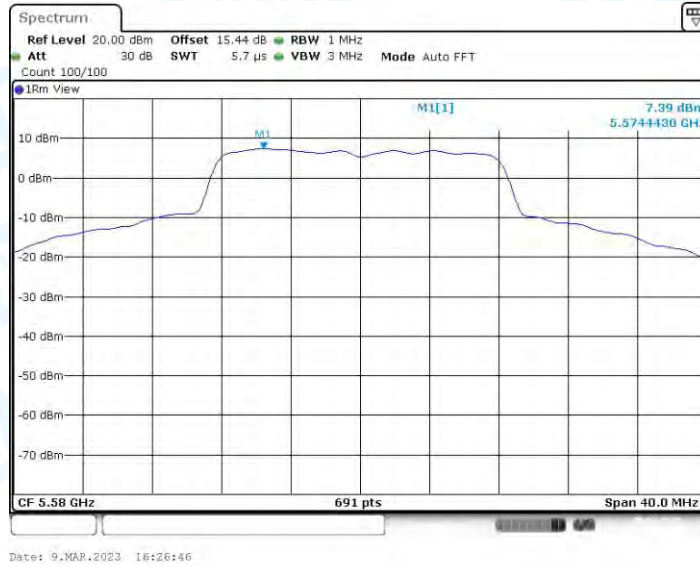

11A_Ant2_5580




11A_Ant1_5700



11A_Ant2_5700



11A_Ant1_5745

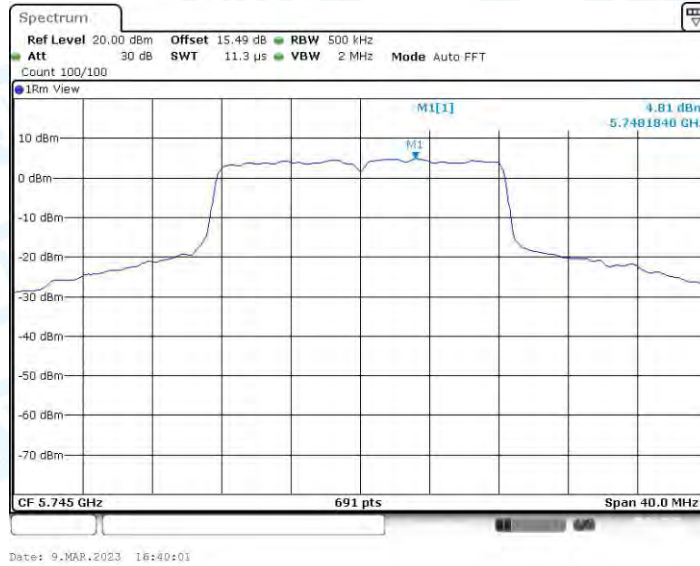

11A_Ant2_5745



11A_Ant1_5785




11A_Ant2_5785



11A_Ant1_5825




11A_Ant2_5825

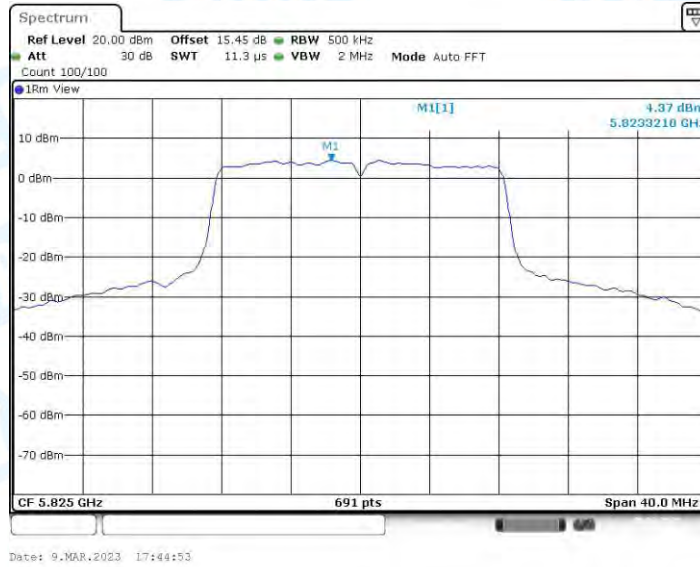


11N20MIMO_Ant1_5180



11N20MIMO_Ant2_5180

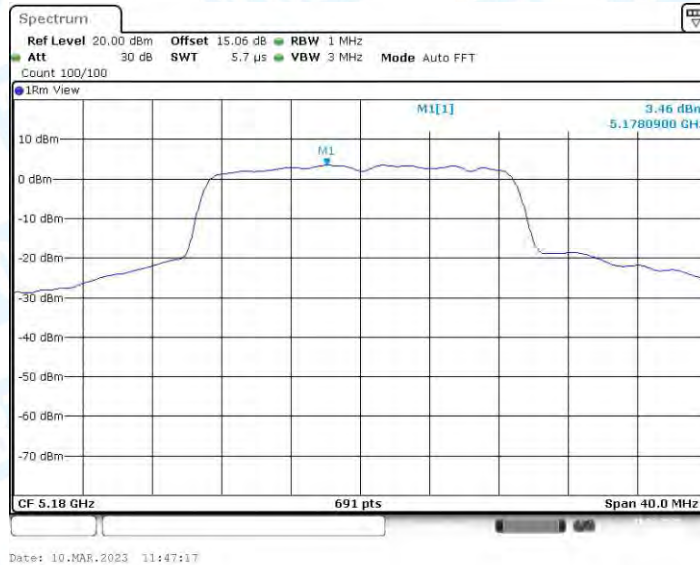


11N20MIMO_Ant1_5200

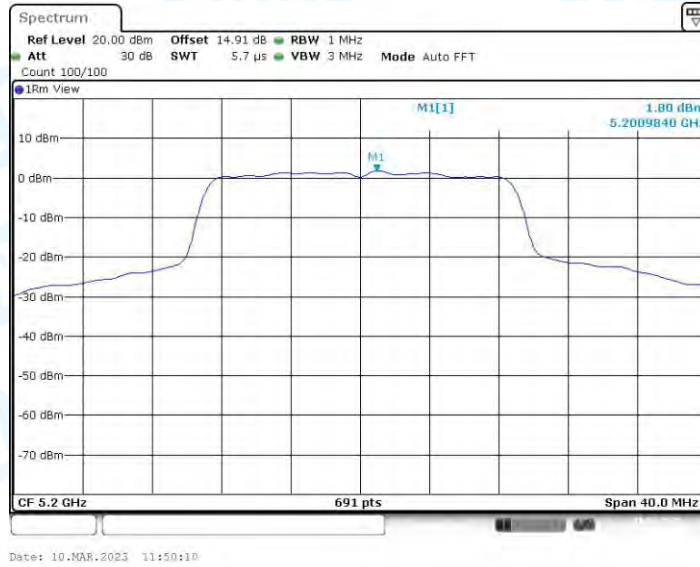

11N20MIMO_Ant2_5200




11N20MIMO_Ant1_5240

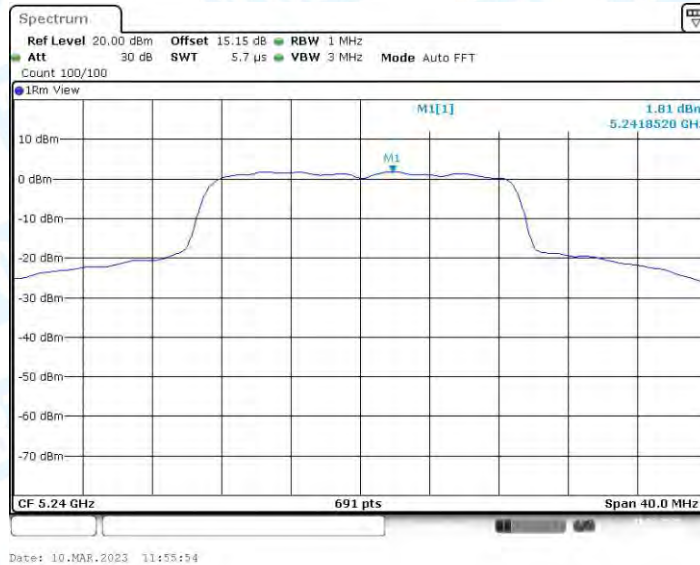

11N20MIMO_Ant2_5240




11N20MIMO_Ant1_5260

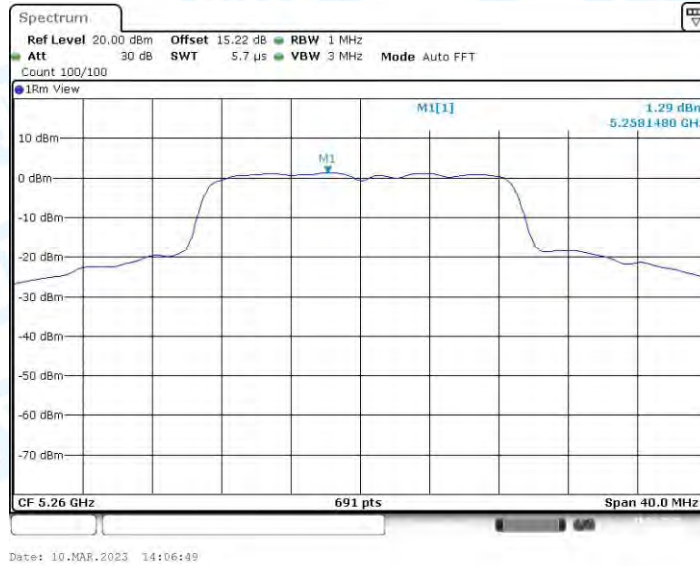

11N20MIMO_Ant2_5260




11N20MIMO_Ant1_5280

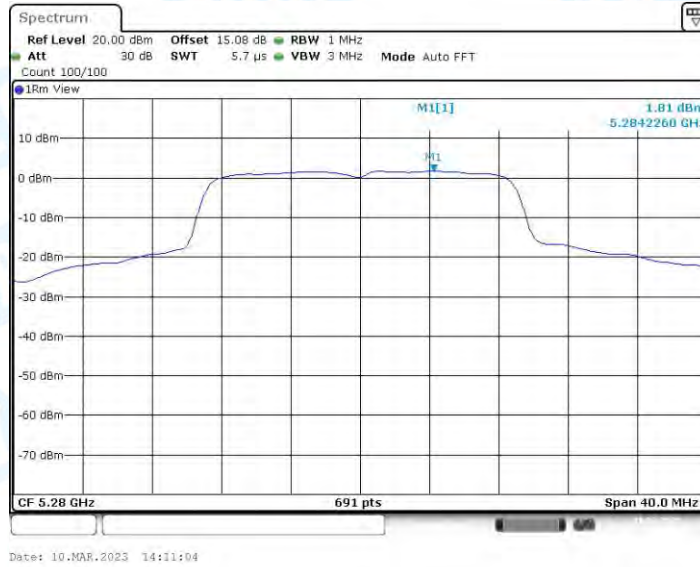

11N20MIMO_Ant2_5280



11N20MIMO_Ant1_5320

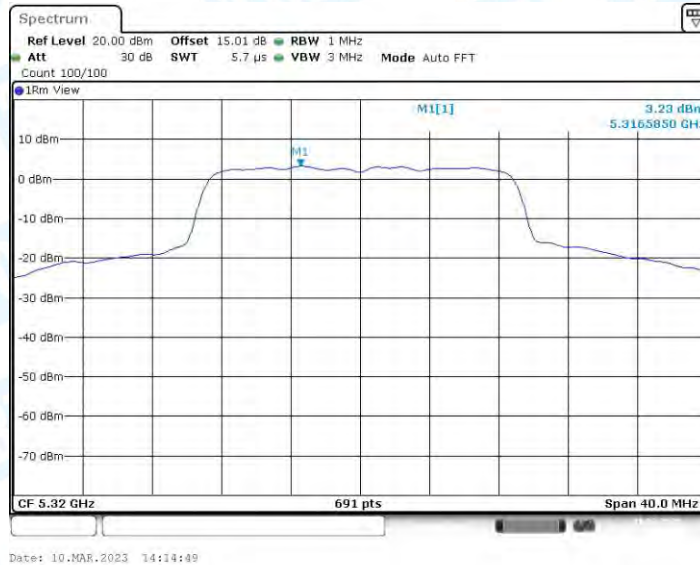

11N20MIMO_Ant2_5320



11N20MIMO_Ant1_5500




11N20MIMO_Ant2_5500




11N20MIMO_Ant1_5580



11N20MIMO_Ant2_5580

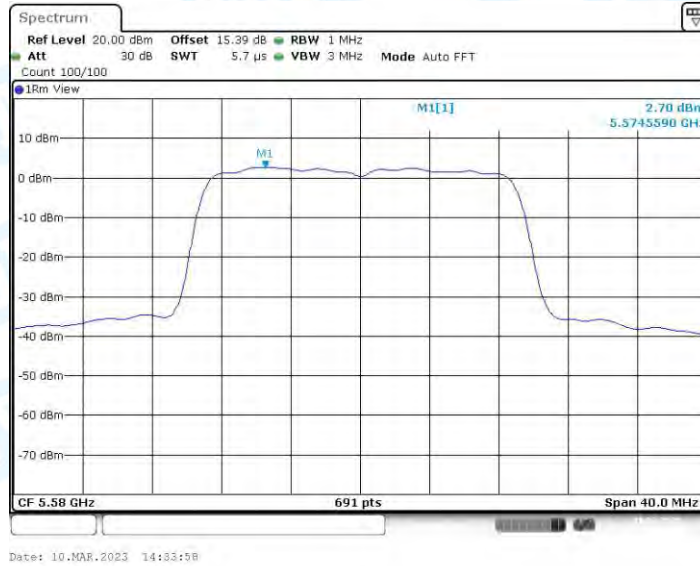


11N20MIMO_Ant1_5700

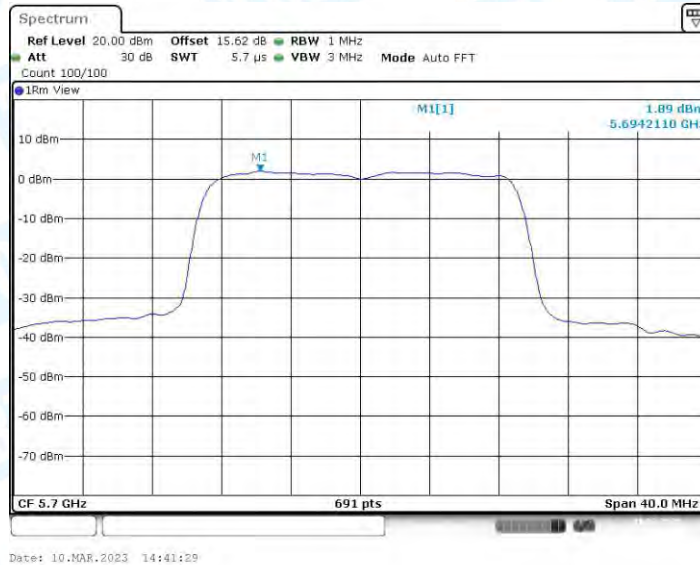


11N20MIMO_Ant2_5700



11N20MIMO_Ant1_5745

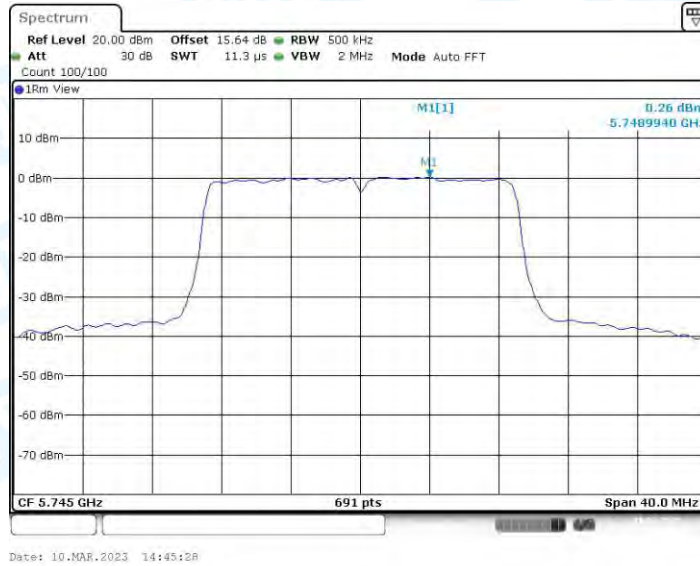

11N20MIMO_Ant2_5745

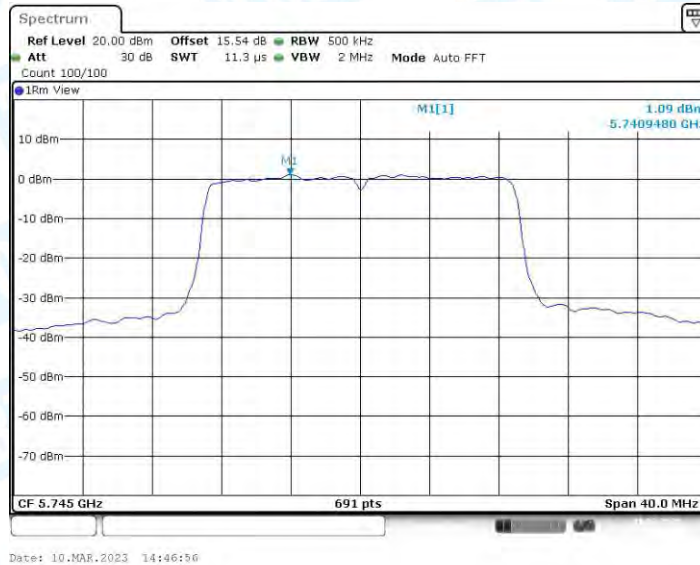


11N20MIMO_Ant1_5785




11N20MIMO_Ant2_5785




11N20MIMO_Ant1_5825

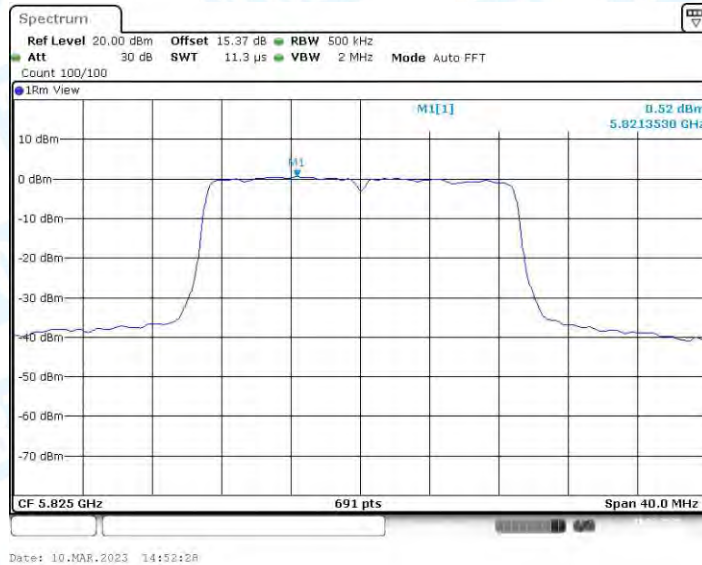

11N20MIMO_Ant2_5825

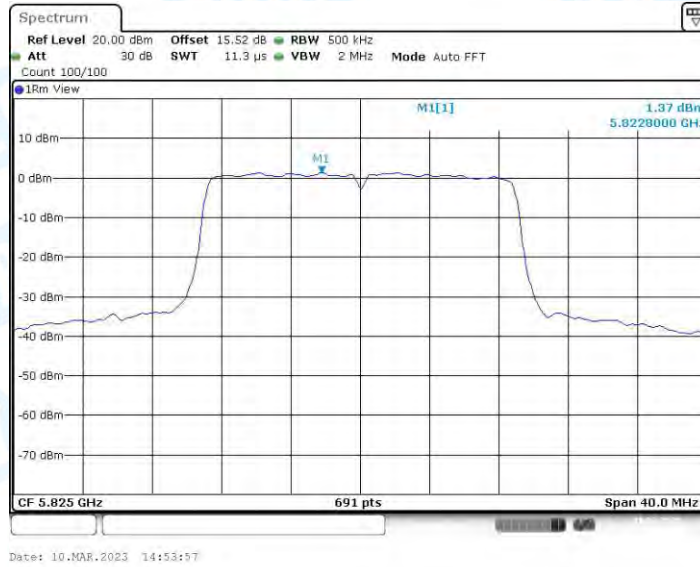


11N40MIMO_Ant1_5190

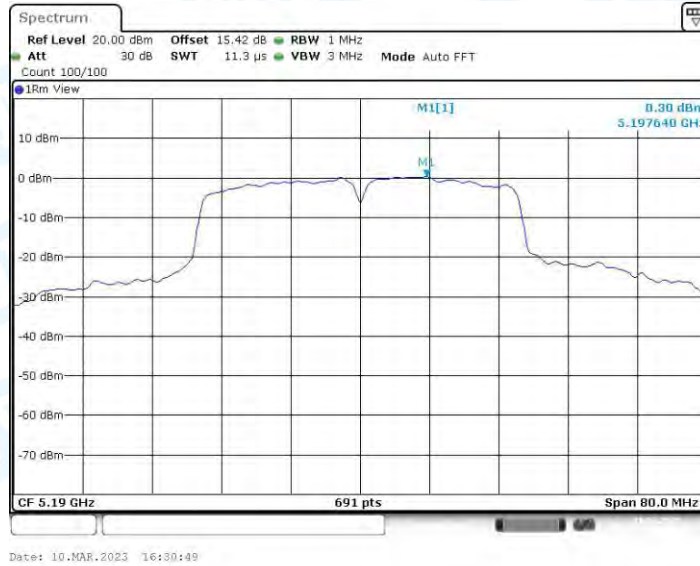

11N40MIMO_Ant2_5190



11N40MIMO_Ant1_5230

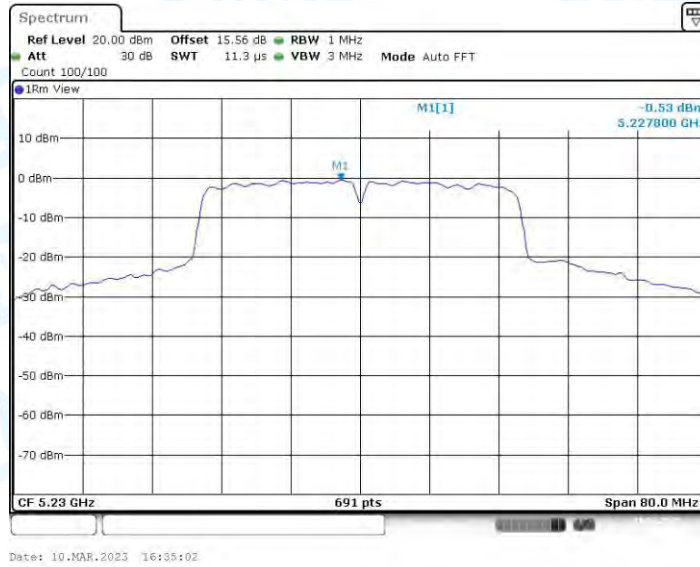


11N40MIMO_Ant2_5230




11N40MIMO_Ant1_5270



11N40MIMO_Ant2_5270

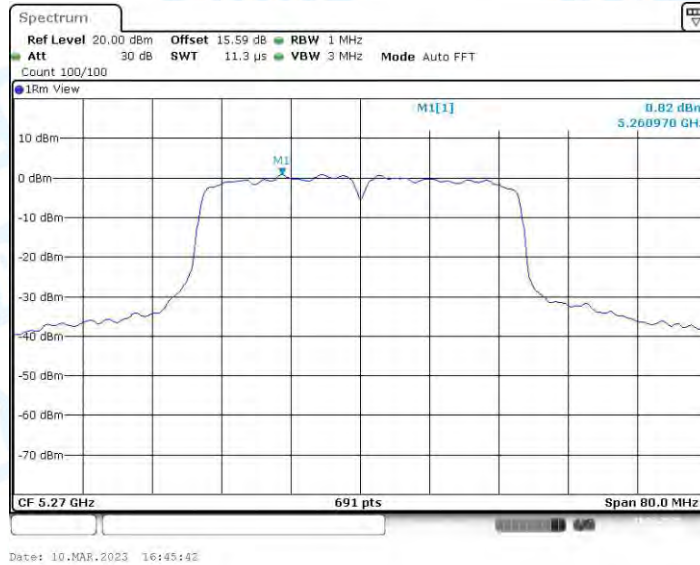

11N40MIMO_Ant1_5310

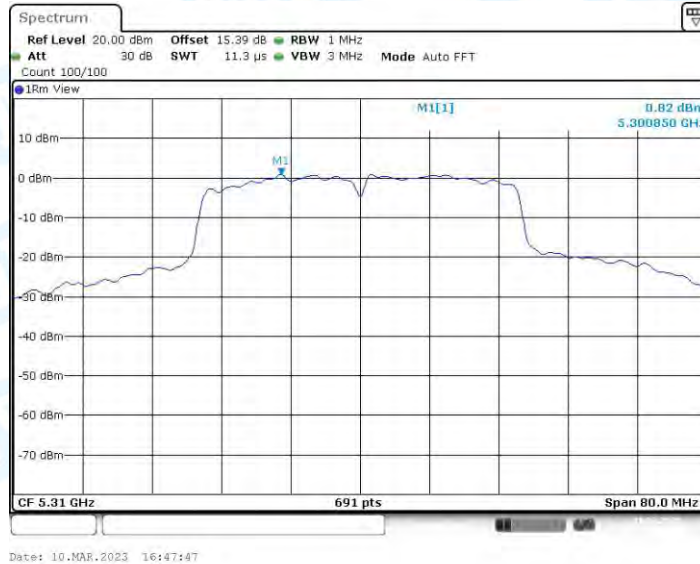

11N40MIMO_Ant2_5310



11N40MIMO_Ant1_5510



11N40MIMO_Ant2_5510




11N40MIMO_Ant1_5550



11N40MIMO_Ant2_5550



11N40MIMO_Ant1_5670

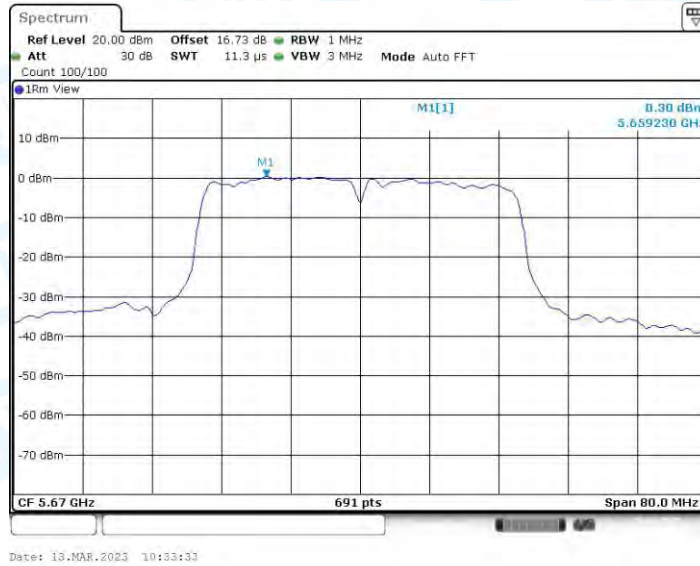


11N40MIMO_Ant2_5670



11N40MIMO_Ant1_5755




11N40MIMO_Ant2_5755

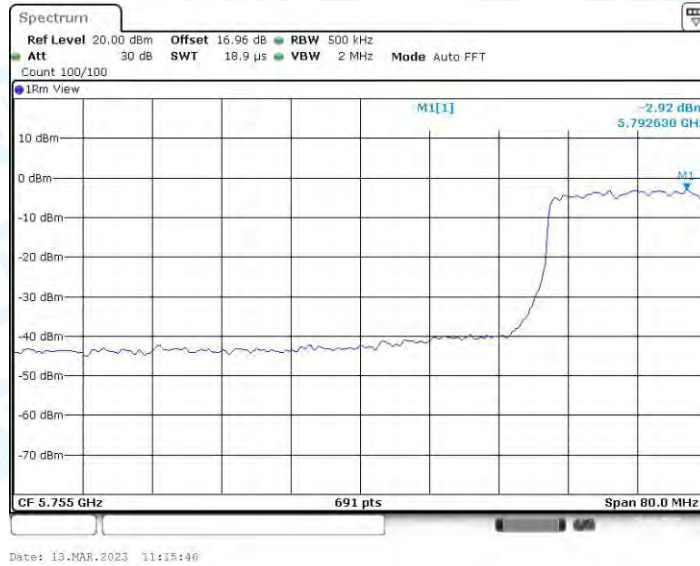

11N40MIMO_Ant1_5795



11N40MIMO_Ant2_5795

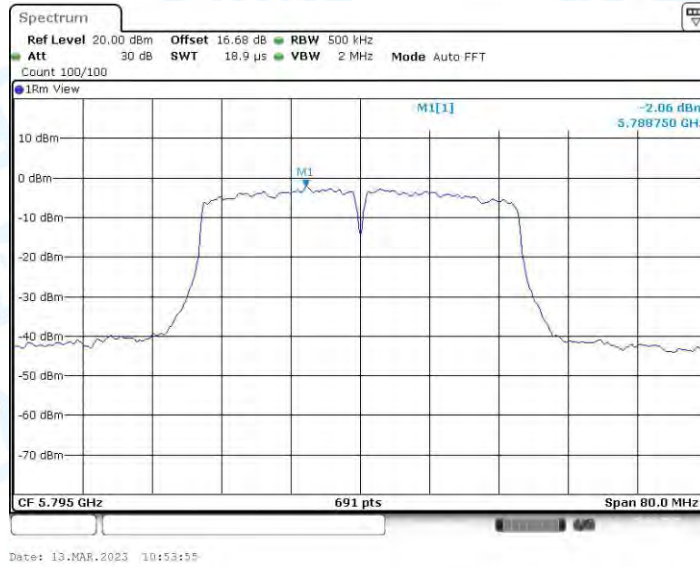

11AC20MIMO_Ant1_5180



11AC20MIMO_Ant2_5180




11AC20MIMO_Ant1_5200



11AC20MIMO_Ant2_5200



11AC20MIMO_Ant1_5240

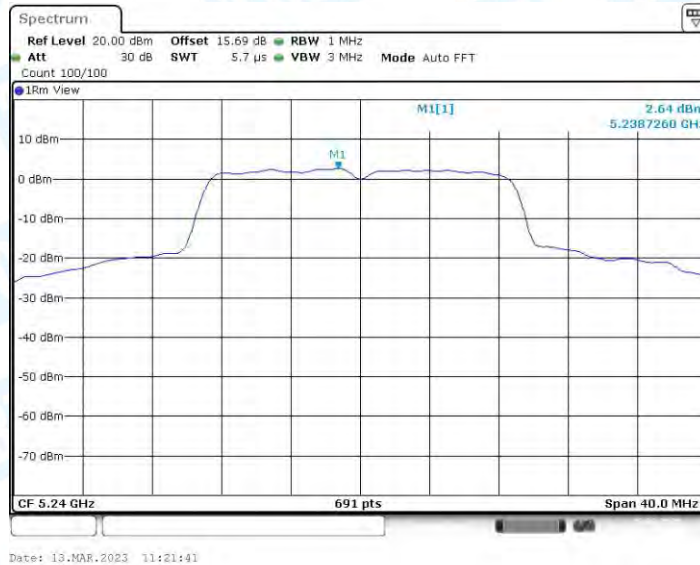

11AC20MIMO_Ant2_5240



11AC20MIMO_Ant1_5260



11AC20MIMO_Ant2_5260




11AC20MIMO_Ant1_5280



11AC20MIMO_Ant2_5280



11AC20MIMO_Ant1_5320

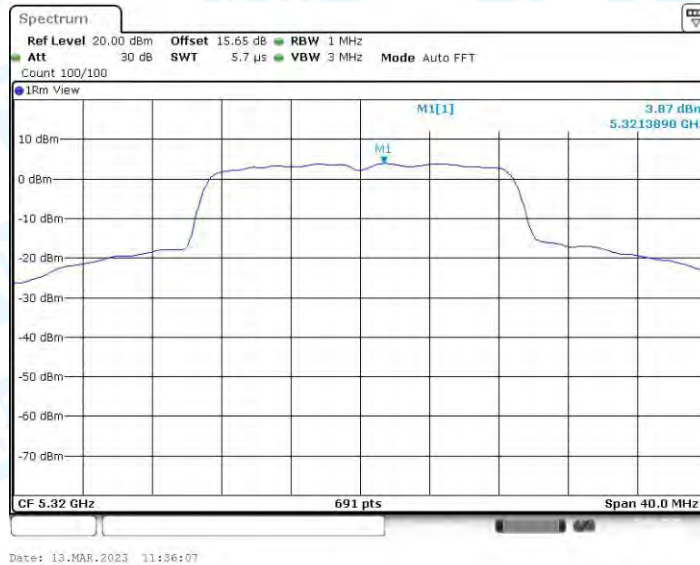

11AC20MIMO_Ant2_5320



11AC20MIMO_Ant1_5500




11AC20MIMO_Ant2_5500



11AC20MIMO_Ant1_5580



11AC20MIMO_Ant2_5580

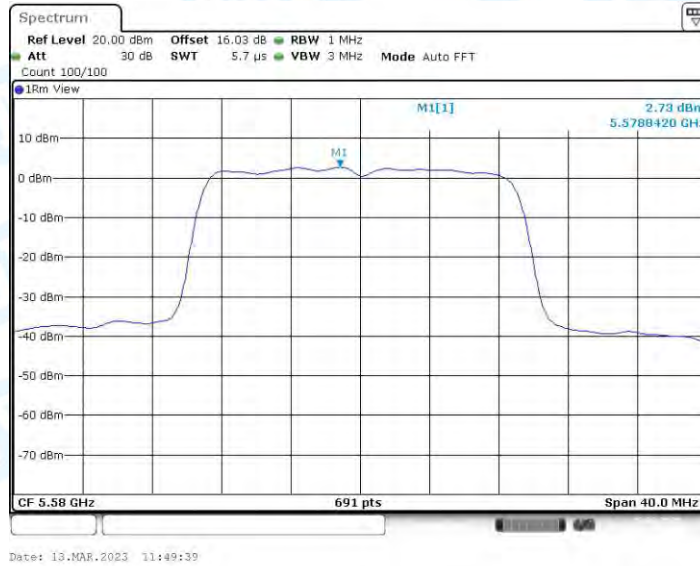


11AC20MIMO_Ant1_5700



11AC20MIMO_Ant2_5700




11AC20MIMO_Ant1_5745

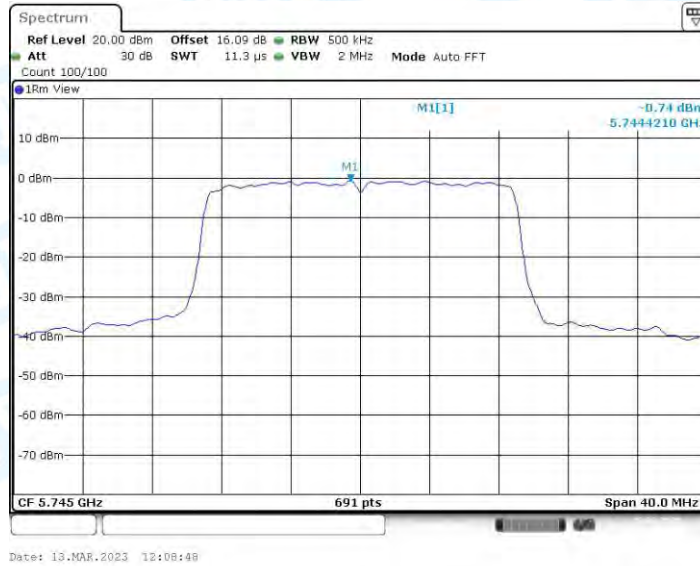

11AC20MIMO_Ant2_5745



11AC20MIMO_Ant1_5785

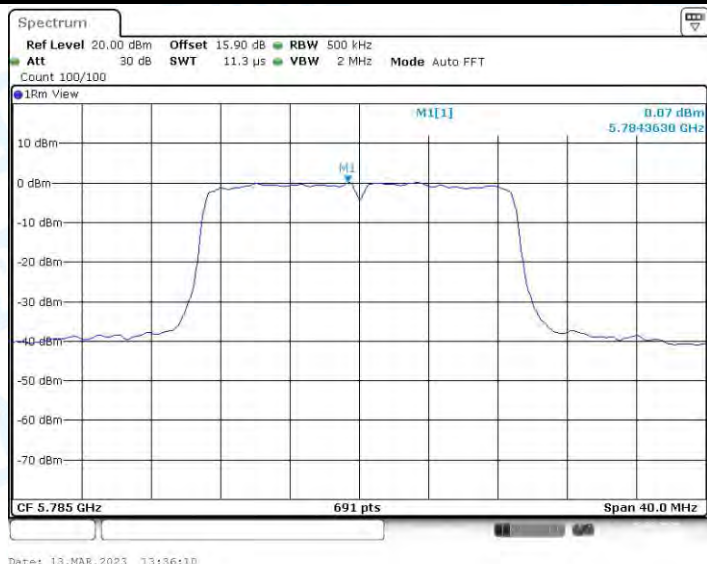


11AC20MIMO_Ant2_5785



11AC20MIMO_Ant1_5825



11AC20MIMO_Ant2_5825

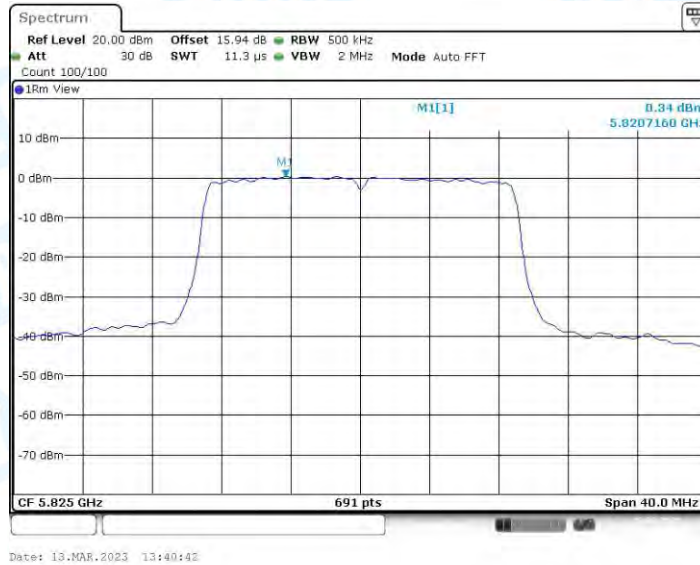

11AC40MIMO_Ant1_5190



11AC40MIMO_Ant2_5190



11AC40MIMO_Ant1_5230



11AC40MIMO_Ant2_5230



11AC40MIMO_Ant1_5270



11AC40MIMO_Ant2_5270



11AC40MIMO_Ant1_5310




11AC40MIMO_Ant2_5310



11AC40MIMO_Ant1_5510



11AC40MIMO_Ant2_5510

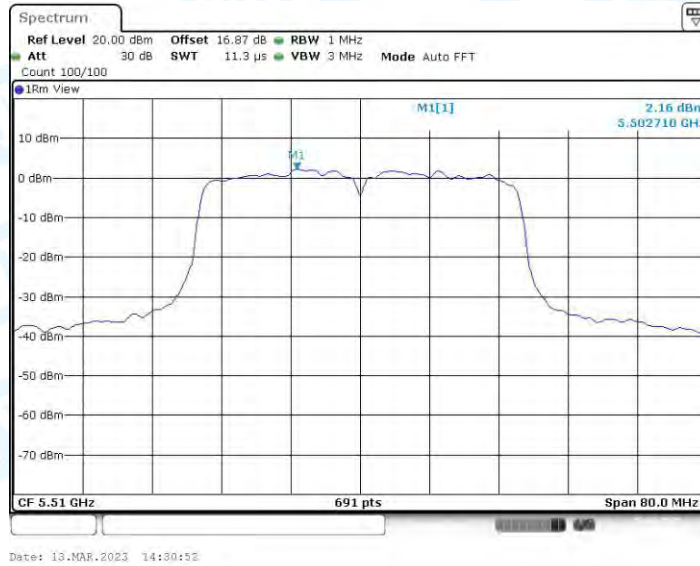

11AC40MIMO_Ant1_5550




11AC40MIMO_Ant2_5550



11AC40MIMO_Ant1_5670



11AC40MIMO_Ant2_5670

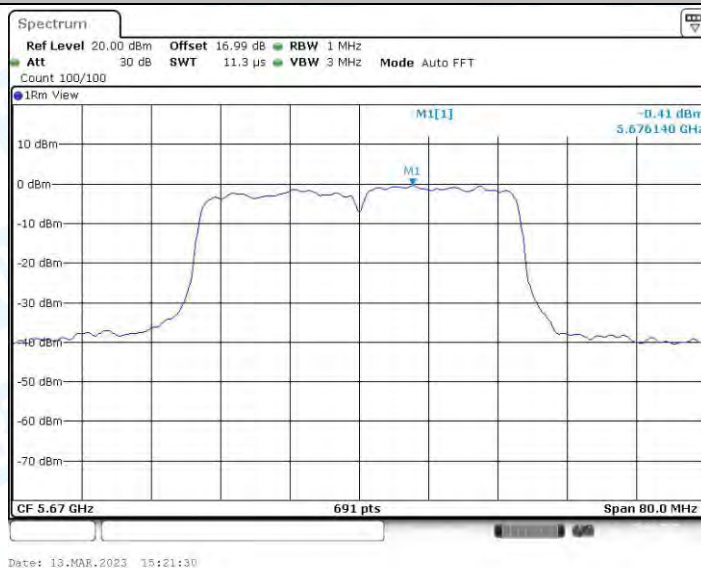


11AC40MIMO_Ant1_5755



11AC40MIMO_Ant2_5755




11AC40MIMO_Ant1_5795

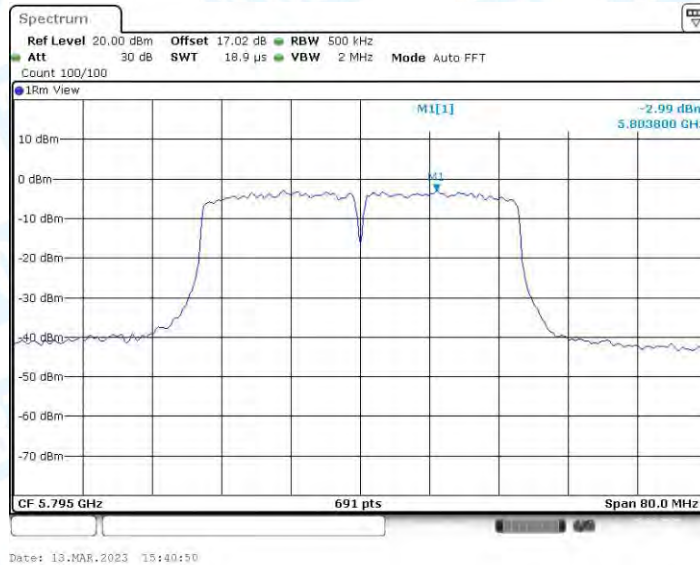

11AC40MIMO_Ant2_5795



11AC80MIMO_Ant1_5210

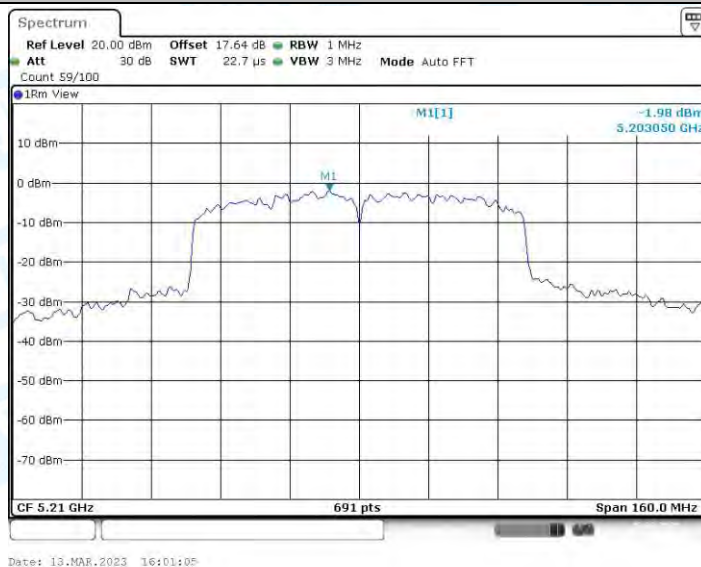

11AC80MIMO_Ant2_5210



11AC80MIMO_Ant1_5290




11AC80MIMO_Ant2_5290



11AC80MIMO_Ant1_5530




11AC80MIMO_Ant2_5530

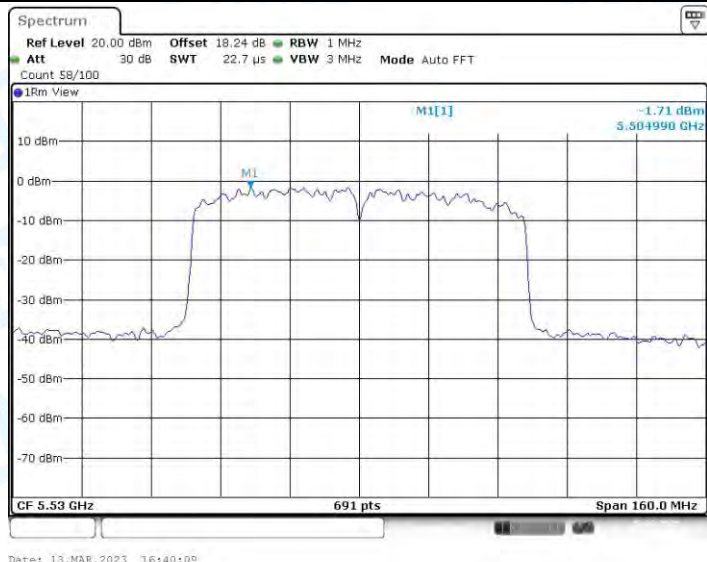


11AC80MIMO_Ant1_5610




11AC80MIMO_Ant2_5610

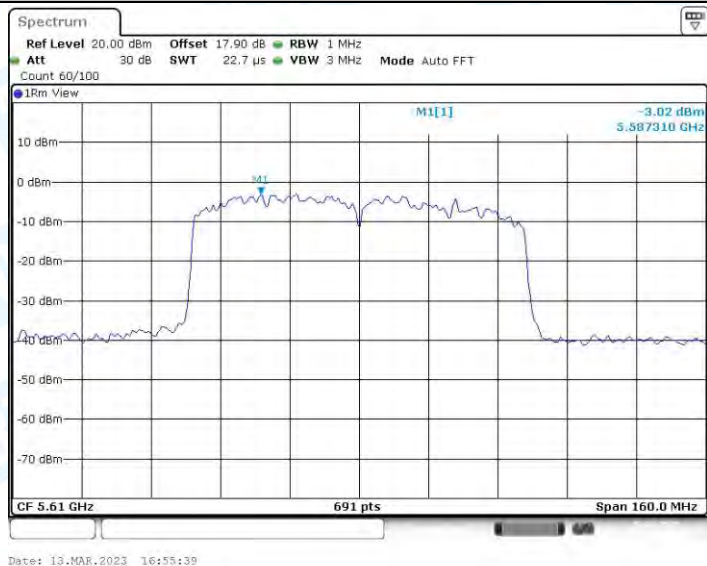

11AC80MIMO_Ant1_5775

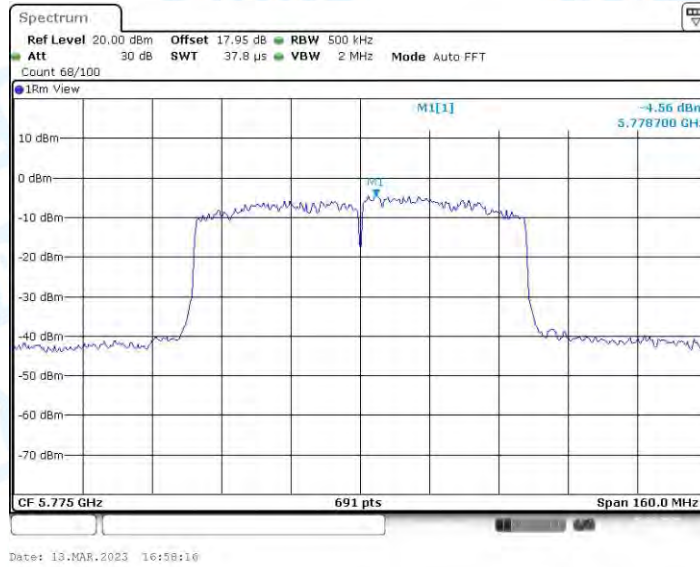

11AC80MIMO_Ant2_5775

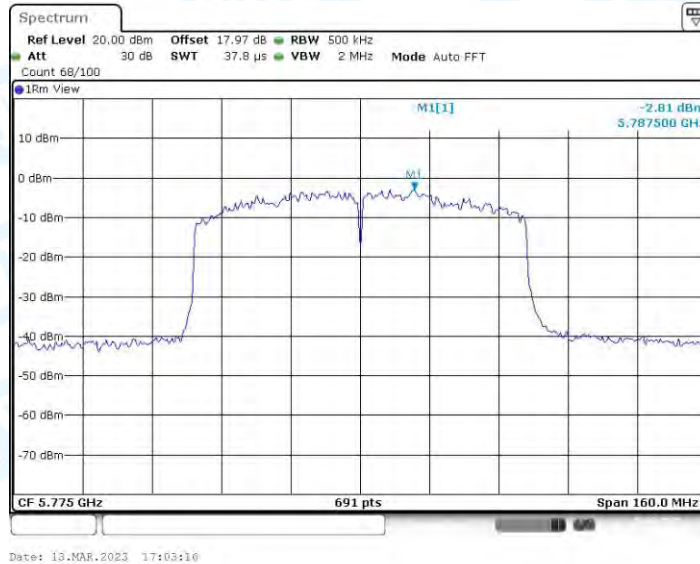

6. Conducted Spurious Emission

6.1. Test Result

TestMode	Antenna	Channel	FreqRange [MHz]	Max. Fre [MHz]	Max. Level [dBm]	Limit [dBm]	Verdict
11A	Ant1	5180	30~1000	972.79	-47.95	≤-27	PASS
			1000~40000	5098.9	-37.33	≤-27	PASS
	Ant2	5180	30~1000	962.19	-44.19	≤-27	PASS
			1000~40000	5262.7	-39.62	≤-27	PASS
	Ant1	5200	30~1000	998.92	-49.69	≤-27	PASS
			1000~40000	5282.2	-37.43	≤-27	PASS
	Ant2	5200	30~1000	998.5	-45.23	≤-27	PASS
			1000~40000	39594.4	-42.47	≤-27	PASS
	Ant1	5240	30~1000	892.84	-52.52	≤-27	PASS
			1000~40000	5323.8	-32.62	≤-27	PASS
	Ant2	5240	30~1000	860.11	-53.27	≤-27	PASS
			1000~40000	2474.2	-39.03	≤-27	PASS
	Ant1	5260	30~1000	866.84	-52.45	≤-27	PASS
			1000~40000	5340.7	-33.61	≤-27	PASS
	Ant2	5260	30~1000	705.47	-50.99	≤-27	PASS
			1000~40000	2472.9	-39.61	≤-27	PASS
	Ant1	5280	30~1000	791.09	-52.35	≤-27	PASS
			1000~40000	5366.7	-31.21	≤-27	PASS
	Ant2	5280	30~1000	961.06	-52.1	≤-27	PASS
			1000~40000	2474.2	-40.48	≤-27	PASS
	Ant1	5320	30~1000	975.54	-51.85	≤-27	PASS
			1000~40000	5400.5	-37.47	≤-27	PASS
	Ant2	5320	30~1000	712.58	-53.04	≤-27	PASS
			1000~40000	39415	-42.01	≤-27	PASS
	Ant1	5500	30~1000	762.5	-51.7	≤-27	PASS
			1000~40000	5416.1	-40.71	≤-27	PASS
	Ant2	5500	30~1000	510.54	-52.8	≤-27	PASS
			1000~40000	39782.9	-42.63	≤-27	PASS
	Ant1	5580	30~1000	705.47	-51.4	≤-27	PASS
			1000~40000	39494.3	-42.38	≤-27	PASS
	Ant2	5580	30~1000	897.1	-51.24	≤-27	PASS
			1000~40000	39503.4	-41.84	≤-27	PASS
	Ant1	5700	30~1000	707.38	-51.8	≤-27	PASS
			1000~40000	2410.5	-40.67	≤-27	PASS
	Ant2	5700	30~1000	959.31	-49.89	≤-27	PASS
			1000~40000	38992.5	-41.11	≤-27	PASS
	Ant1	5745	30~1000	860.02	-51.9	≤-27	PASS
			1000~40000	39438.4	-42.25	≤-27	PASS
	Ant2	5745	30~1000	960.99	-51.08	≤-27	PASS

11N20MIMO	Ant1	5785	1000~40000	2470.3	-40.66	≤ -27	PASS
			30~1000	714.23	-51.2	≤ -27	PASS
	Ant2	5785	1000~40000	38662.3	-42.54	≤ -27	PASS
			30~1000	939.04	-51.76	≤ -27	PASS
	Ant1	5825	1000~40000	39997.4	-42.01	≤ -27	PASS
			30~1000	888.02	-52.25	≤ -27	PASS
	Ant2	5825	1000~40000	39366.9	-42.54	≤ -27	PASS
			30~1000	430.42	-51.98	≤ -27	PASS
	Ant1	5180	1000~40000	38986	-42.62	≤ -27	PASS
			30~1000	706.05	-53.12	≤ -27	PASS
	Ant2	5180	1000~40000	39958.4	-42.79	≤ -27	PASS
			30~1000	967.07	-51.09	≤ -27	PASS
11N20MIMO	Ant1	5200	1000~40000	39087.4	-42.49	≤ -27	PASS
			30~1000	959.21	-52.06	≤ -27	PASS
	Ant2	5200	1000~40000	39984.4	-42.37	≤ -27	PASS
			30~1000	995.13	-49.62	≤ -27	PASS
	Ant1	5240	1000~40000	39481.3	-41.77	≤ -27	PASS
			30~1000	559.88	-52.68	≤ -27	PASS
	Ant2	5240	1000~40000	39686.7	-42.65	≤ -27	PASS
			30~1000	866.1	-52.36	≤ -27	PASS
	Ant1	5260	1000~40000	38273.6	-42.64	≤ -27	PASS
			30~1000	884.3	-52.84	≤ -27	PASS
	Ant2	5260	1000~40000	38937.9	-42.8	≤ -27	PASS
			30~1000	901.05	-52.31	≤ -27	PASS
	Ant1	5280	1000~40000	39958.4	-42.17	≤ -27	PASS
			30~1000	708.74	-50.84	≤ -27	PASS
	Ant2	5280	1000~40000	39404.6	-42.49	≤ -27	PASS
			30~1000	868.17	-51.72	≤ -27	PASS
	Ant1	5320	1000~40000	39044.5	-41.72	≤ -27	PASS
			30~1000	888.96	-52.35	≤ -27	PASS
	Ant2	5320	1000~40000	39996.1	-41.76	≤ -27	PASS
			30~1000	859.89	-52.52	≤ -27	PASS
	Ant1	5500	1000~40000	39559.3	-42.29	≤ -27	PASS
			30~1000	75.15	-52.44	≤ -27	PASS
	Ant2	5500	1000~40000	39054.9	-42.01	≤ -27	PASS
			30~1000	898.36	-50.41	≤ -27	PASS
	Ant1	5580	1000~40000	39907.7	-41.32	≤ -27	PASS
			30~1000	968.56	-52.6	≤ -27	PASS
	Ant2	5580	1000~40000	39017.2	-41.78	≤ -27	PASS
			30~1000	508.83	-50.53	≤ -27	PASS
	Ant1	5700	1000~40000	39548.9	-42.49	≤ -27	PASS
			30~1000	927.4	-51.51	≤ -27	PASS
	Ant2	5700	1000~40000	39612.6	-42.34	≤ -27	PASS
			30~1000	866.9	-51.55	≤ -27	PASS
	Ant1	5785	1000~40000	39001.6	-42.12	≤ -27	PASS
			30~1000	866.9	-51.55	≤ -27	PASS


11N40MIMO	Ant1	5745	30~1000	959.8	-51.64	≤ -27	PASS
			1000~40000	39781.6	-42.11	≤ -27	PASS
	Ant2	5745	30~1000	864.25	-51.48	≤ -27	PASS
			1000~40000	39303.2	-42.79	≤ -27	PASS
	Ant1	5785	30~1000	863.67	-52.53	≤ -27	PASS
			1000~40000	38624.6	-41.89	≤ -27	PASS
	Ant2	5785	30~1000	959.73	-51.54	≤ -27	PASS
			1000~40000	39500.8	-42.54	≤ -27	PASS
	Ant1	5825	30~1000	706.57	-50.66	≤ -27	PASS
			1000~40000	6192.2	-42.66	≤ -27	PASS
	Ant2	5825	30~1000	839.62	-52.16	≤ -27	PASS
			1000~40000	39828.4	-43.3	≤ -27	PASS
	Ant1	5190	30~1000	987.63	-51.49	≤ -27	PASS
			1000~40000	5336.8	-40.27	≤ -27	PASS
	Ant2	5190	30~1000	984.66	-50.53	≤ -27	PASS
			1000~40000	38956.1	-42.99	≤ -27	PASS
	Ant1	5230	30~1000	742.39	-52.21	≤ -27	PASS
			1000~40000	39925.9	-42.22	≤ -27	PASS
	Ant2	5230	30~1000	909.2	-50.5	≤ -27	PASS
			1000~40000	39442.3	-41.89	≤ -27	PASS
	Ant1	5270	30~1000	958.63	-51.84	≤ -27	PASS
			1000~40000	39412.4	-41.92	≤ -27	PASS
	Ant2	5270	30~1000	512.35	-51.34	≤ -27	PASS
			1000~40000	39884.3	-42.06	≤ -27	PASS
	Ant1	5310	30~1000	863.8	-51.96	≤ -27	PASS
			1000~40000	39993.5	-42.45	≤ -27	PASS
	Ant2	5310	30~1000	884.91	-52.58	≤ -27	PASS
			1000~40000	39428	-42.34	≤ -27	PASS
	Ant1	5510	30~1000	860.08	-52.36	≤ -27	PASS
			1000~40000	39028.9	-42.49	≤ -27	PASS
	Ant2	5510	30~1000	902.5	-52.26	≤ -27	PASS
			1000~40000	39338.3	-41.17	≤ -27	PASS
	Ant1	5550	30~1000	780.45	-52.24	≤ -27	PASS
			1000~40000	39468.3	-42.32	≤ -27	PASS
	Ant2	5550	30~1000	566.44	-52.13	≤ -27	PASS
			1000~40000	39556.7	-42.28	≤ -27	PASS
	Ant1	5670	30~1000	207.29	-52.54	≤ -27	PASS
			1000~40000	5516.2	-40.98	≤ -27	PASS
	Ant2	5670	30~1000	862.41	-51.52	≤ -27	PASS
			1000~40000	39251.2	-41.89	≤ -27	PASS
	Ant1	5755	30~1000	509.47	-51.89	≤ -27	PASS
			1000~40000	38636.3	-42.47	≤ -27	PASS
	Ant2	5755	30~1000	610.41	-51.44	≤ -27	PASS
			1000~40000	38936.6	-43.03	≤ -27	PASS
	Ant1	5795	30~1000	962.12	-52.15	≤ -27	PASS


	Ant2	5795	1000~40000	39949.3	-42.69	≤-27	PASS
			30~1000	701.43	-52.29	≤-27	PASS
			1000~40000	39734.8	-41.59	≤-27	PASS
11AC20MIMO	Ant1	5180	30~1000	962.03	-50.05	≤-27	PASS
			1000~40000	10354.8	-41.72	≤-27	PASS
	Ant2	5180	30~1000	968.65	-51.8	≤-27	PASS
			1000~40000	39246	-42.18	≤-27	PASS
	Ant1	5200	30~1000	998.66	-51.71	≤-27	PASS
			1000~40000	39001.6	-41.56	≤-27	PASS
	Ant2	5200	30~1000	750.96	-52.47	≤-27	PASS
			1000~40000	39438.4	-41.73	≤-27	PASS
	Ant1	5240	30~1000	987.21	-51.17	≤-27	PASS
			1000~40000	5331.6	-41.63	≤-27	PASS
	Ant2	5240	30~1000	508.76	-51.94	≤-27	PASS
			1000~40000	38667.5	-42.4	≤-27	PASS
	Ant1	5260	30~1000	926.75	-52.42	≤-27	PASS
			1000~40000	38965.2	-42.11	≤-27	PASS
	Ant2	5260	30~1000	514.42	-52.11	≤-27	PASS
			1000~40000	39476.1	-42.23	≤-27	PASS
	Ant1	5280	30~1000	832.12	-51.44	≤-27	PASS
			1000~40000	10560.2	-42.61	≤-27	PASS
	Ant2	5280	30~1000	542.81	-52.35	≤-27	PASS
			1000~40000	39338.3	-41.71	≤-27	PASS
	Ant1	5320	30~1000	865.13	-51.28	≤-27	PASS
			1000~40000	39985.7	-42.76	≤-27	PASS
	Ant2	5320	30~1000	806.64	-51.87	≤-27	PASS
			1000~40000	38988.6	-41.96	≤-27	PASS
	Ant1	5500	30~1000	903.28	-51.09	≤-27	PASS
			1000~40000	39226.5	-41.02	≤-27	PASS
	Ant2	5500	30~1000	508.95	-51.95	≤-27	PASS
			1000~40000	38601.2	-41.6	≤-27	PASS
	Ant1	5580	30~1000	864.87	-52.46	≤-27	PASS
			1000~40000	39676.3	-41.35	≤-27	PASS
	Ant2	5580	30~1000	508.53	-51.89	≤-27	PASS
			1000~40000	39520.3	-42.19	≤-27	PASS
	Ant1	5700	30~1000	817.79	-52.76	≤-27	PASS
			1000~40000	39428	-42.04	≤-27	PASS
	Ant2	5700	30~1000	863.51	-52.31	≤-27	PASS
			1000~40000	38668.8	-41.48	≤-27	PASS
	Ant1	5745	30~1000	713.46	-51.35	≤-27	PASS
			1000~40000	39065.3	-42.01	≤-27	PASS
	Ant2	5745	30~1000	959.73	-50.92	≤-27	PASS
			1000~40000	39481.3	-41.63	≤-27	PASS
	Ant1	5785	30~1000	706.34	-51.19	≤-27	PASS
			1000~40000	39088.7	-43.01	≤-27	PASS

	Ant2	5785	30~1000	680.12	-52.27	≤ -27	PASS
			1000~40000	39928.5	-43.21	≤ -27	PASS
	Ant1	5825	30~1000	963.58	-50.64	≤ -27	PASS
			1000~40000	39652.9	-42.72	≤ -27	PASS
	Ant2	5825	30~1000	709.67	-51.79	≤ -27	PASS
			1000~40000	38976.9	-42.23	≤ -27	PASS
11AC40MIMO	Ant1	5190	30~1000	736.67	-52.59	≤ -27	PASS
			1000~40000	38999	-42.52	≤ -27	PASS
	Ant2	5190	30~1000	983.04	-50.61	≤ -27	PASS
			1000~40000	38949.6	-42.52	≤ -27	PASS
	Ant1	5230	30~1000	888.7	-51.67	≤ -27	PASS
			1000~40000	39370.8	-41.93	≤ -27	PASS
	Ant2	5230	30~1000	520.5	-52.2	≤ -27	PASS
			1000~40000	39342.2	-42.52	≤ -27	PASS
	Ant1	5270	30~1000	888.15	-51.82	≤ -27	PASS
			1000~40000	38623.3	-42	≤ -27	PASS
	Ant2	5270	30~1000	542.9	-52.83	≤ -27	PASS
			1000~40000	39992.2	-41.91	≤ -27	PASS
	Ant1	5310	30~1000	453.21	-52.43	≤ -27	PASS
			1000~40000	39420.2	-41.86	≤ -27	PASS
	Ant2	5310	30~1000	891.28	-51.61	≤ -27	PASS
			1000~40000	39955.8	-42.32	≤ -27	PASS
	Ant1	5510	30~1000	861.25	-50.6	≤ -27	PASS
			1000~40000	39888.2	-41.55	≤ -27	PASS
	Ant2	5510	30~1000	893.38	-51.77	≤ -27	PASS
			1000~40000	38952.2	-42.04	≤ -27	PASS
	Ant1	5550	30~1000	750.93	-52.09	≤ -27	PASS
			1000~40000	39957.1	-42.02	≤ -27	PASS
	Ant2	5550	30~1000	710.03	-51.73	≤ -27	PASS
			1000~40000	39006.8	-42.08	≤ -27	PASS
	Ant1	5670	30~1000	919.35	-52.39	≤ -27	PASS
			1000~40000	39113.4	-41.63	≤ -27	PASS
	Ant2	5670	30~1000	714.62	-51.83	≤ -27	PASS
			1000~40000	39130.3	-41.79	≤ -27	PASS
	Ant1	5755	30~1000	707.22	-51.9	≤ -27	PASS
			1000~40000	38653.2	-42.26	≤ -27	PASS
	Ant2	5755	30~1000	892.87	-52.09	≤ -27	PASS
			1000~40000	39418.9	-42.33	≤ -27	PASS
	Ant1	5795	30~1000	890.12	-51.03	≤ -27	PASS
			1000~40000	1937.3	-36.98	≤ -27	PASS
	Ant2	5795	30~1000	891.96	-52.25	≤ -27	PASS
			1000~40000	39443.6	-43.15	≤ -27	PASS
11AC80MIMO	Ant1	5210	30~1000	973.86	-51.92	≤ -27	PASS
			1000~40000	39598.3	-43	≤ -27	PASS
	Ant2	5210	30~1000	766.38	-52.29	≤ -27	PASS


TOBY			1000~40000	39844	-42.78	≤-27	PASS
	Ant1	5290	30~1000	893.71	-52.14	≤-27	PASS
			1000~40000	39959.7	-41.77	≤-27	PASS
	Ant2	5290	30~1000	359.16	-52.23	≤-27	PASS
			1000~40000	39598.3	-42.27	≤-27	PASS
	Ant1	5530	30~1000	906.58	-51	≤-27	PASS
			1000~40000	39795.9	-41.56	≤-27	PASS
	Ant2	5530	30~1000	964.16	-51.29	≤-27	PASS
			1000~40000	39633.4	-42.2	≤-27	PASS
	Ant1	5610	30~1000	707.8	-52.45	≤-27	PASS
			1000~40000	2566.5	-41.95	≤-27	PASS
	Ant2	5610	30~1000	868.62	-51.89	≤-27	PASS
			1000~40000	39513.8	-41.44	≤-27	PASS
	Ant1	5775	30~1000	864.45	-52.64	≤-27	PASS
			1000~40000	39907.7	-42.77	≤-27	PASS
	Ant2	5775	30~1000	891.48	-51.75	≤-27	PASS
1000~40000			39075.7	-42.14	≤-27	PASS	

6.2.Test Graphs

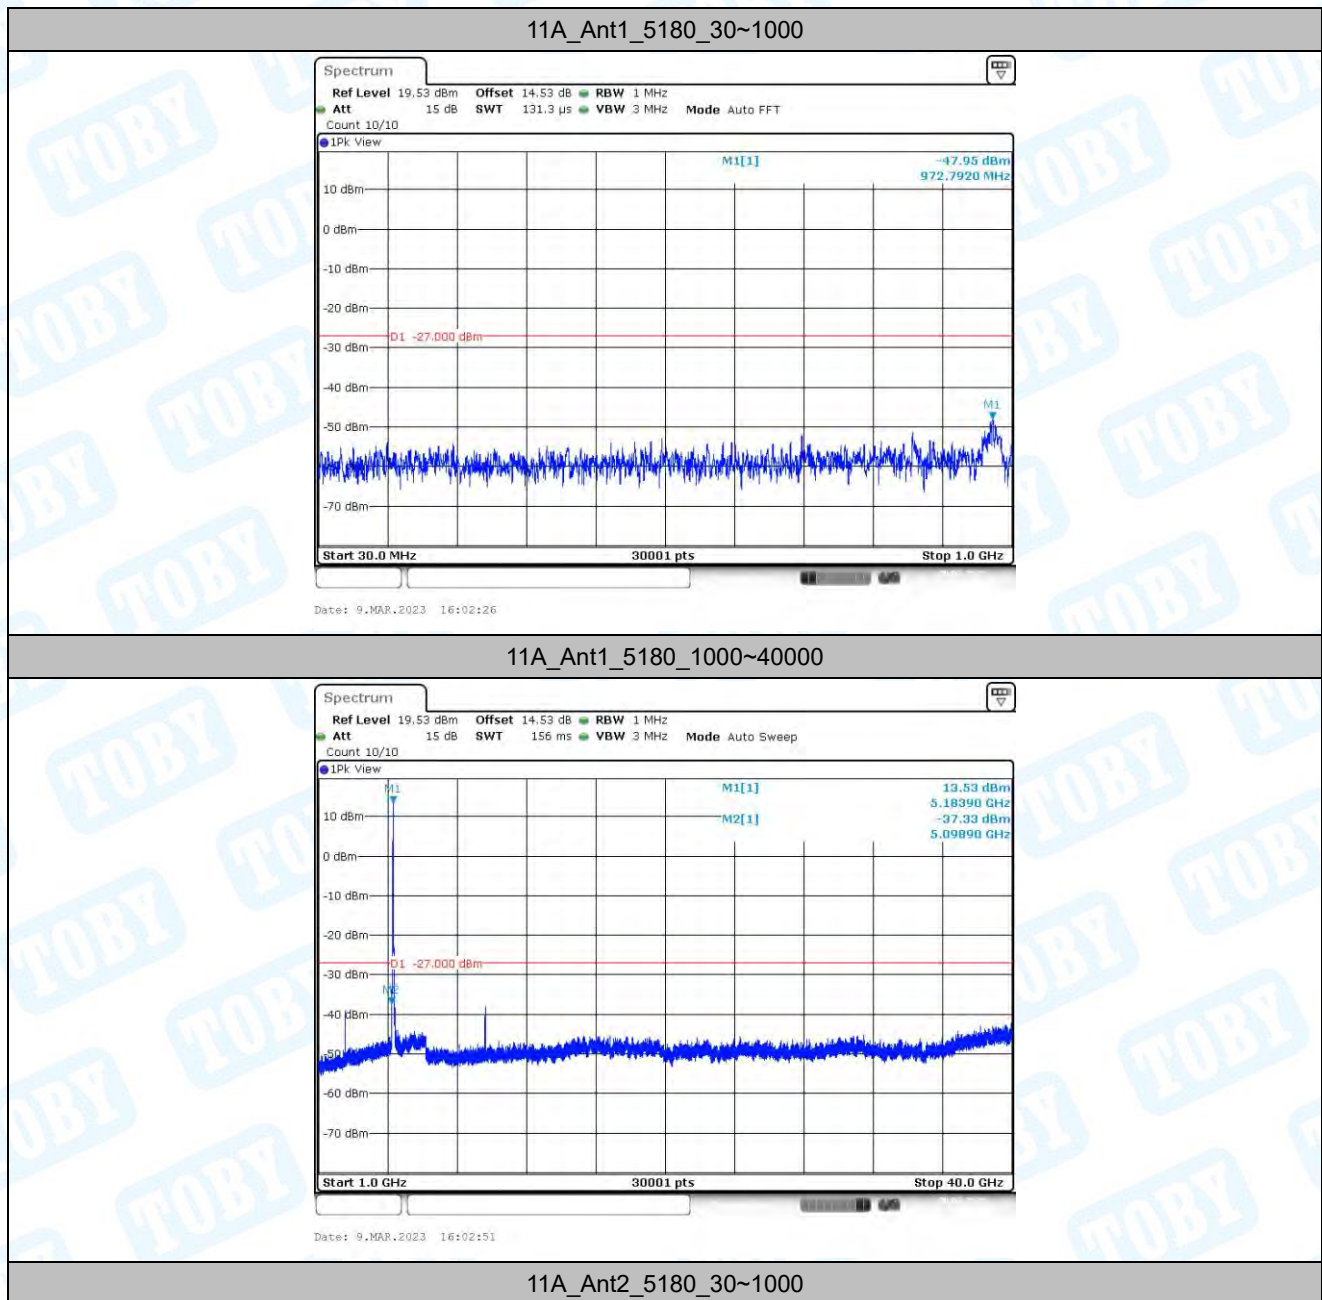


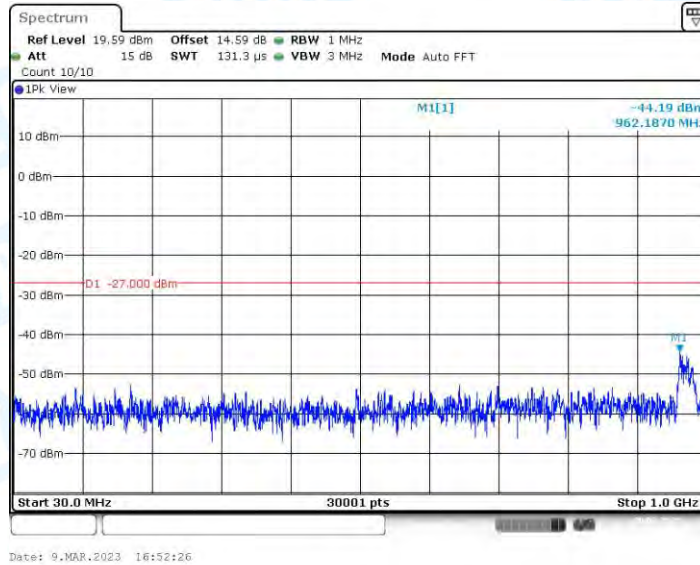


11A_Ant2_5180_1000~40000

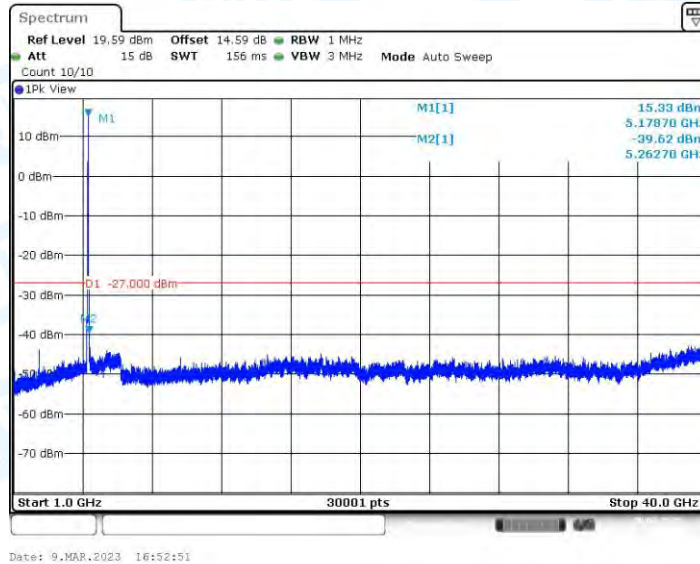


11A_Ant1_5200_30~1000

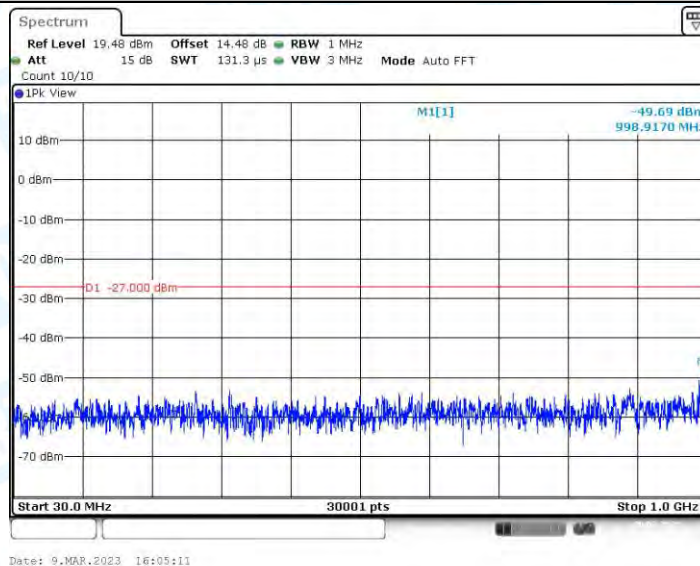


11A_Ant1_5200_1000~40000

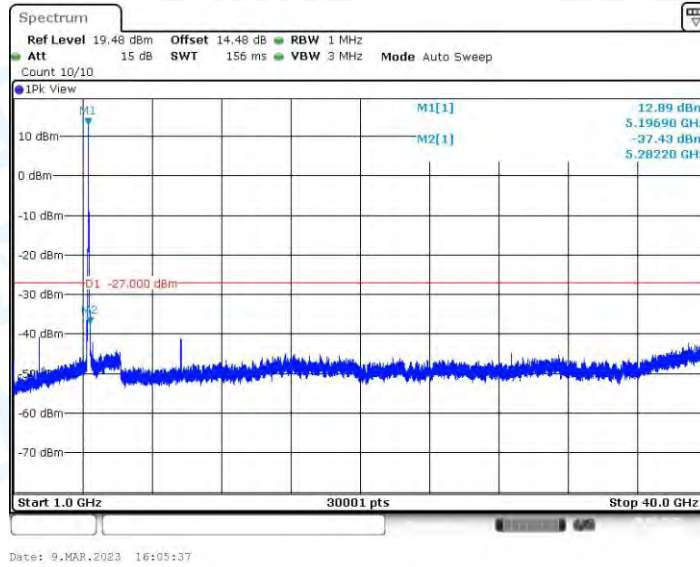


11A_Ant2_5200_30~1000

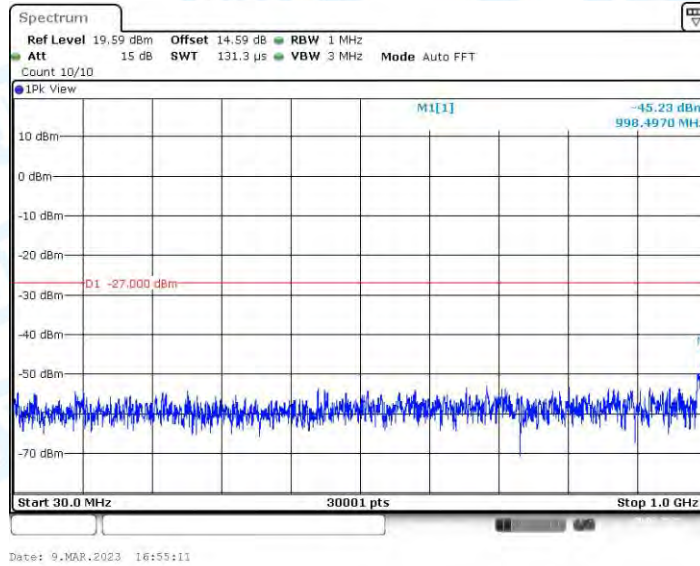


11A_Ant2_5200_1000~40000

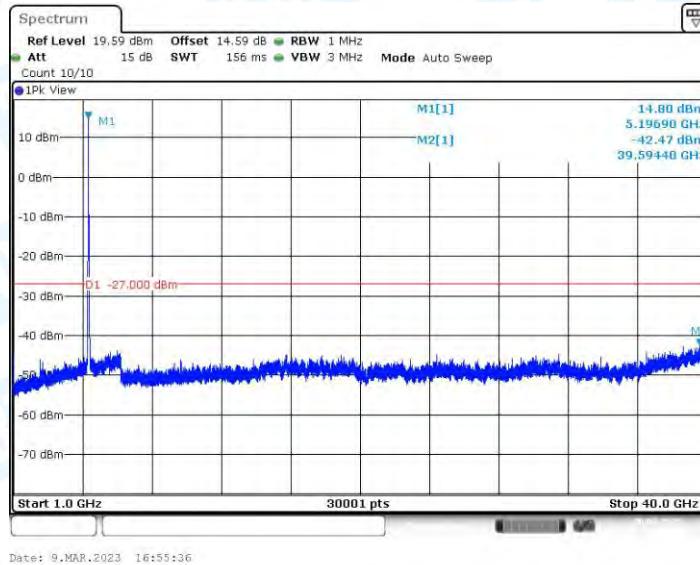


11A_Ant1_5240_30~1000

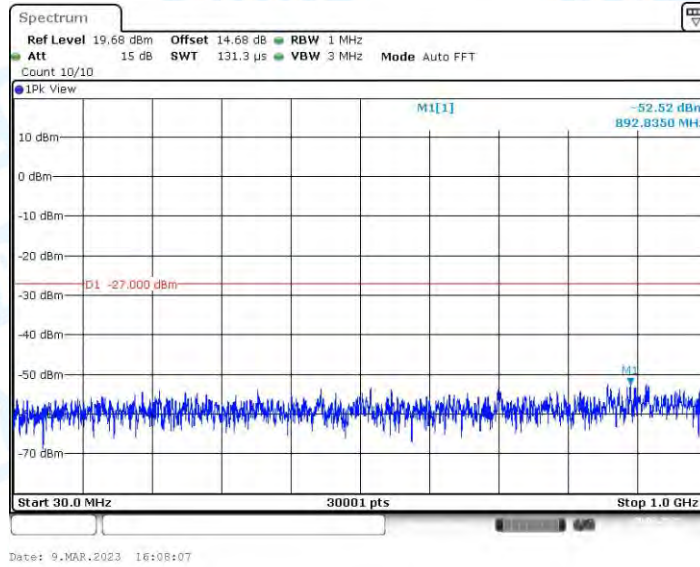


11A_Ant1_5240_1000~40000

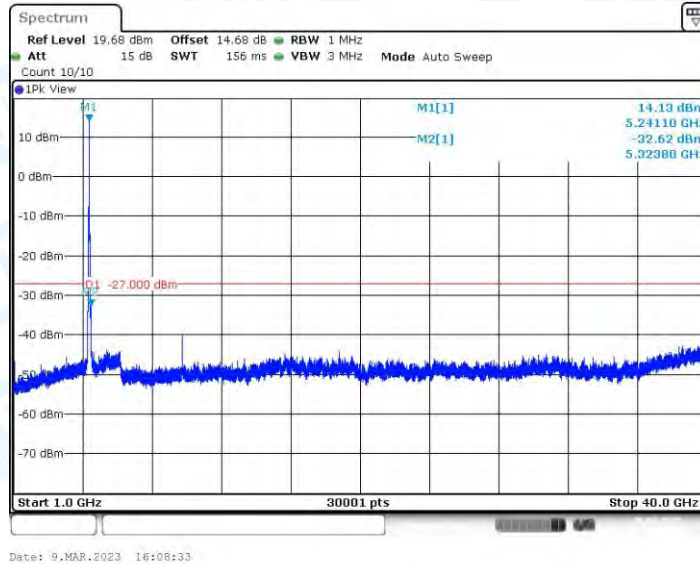


11A_Ant2_5240_30~1000

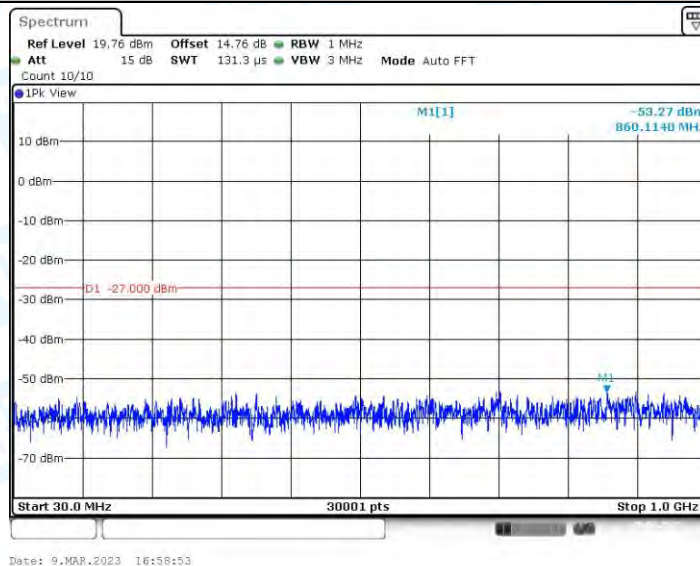


11A_Ant2_5240_1000~40000

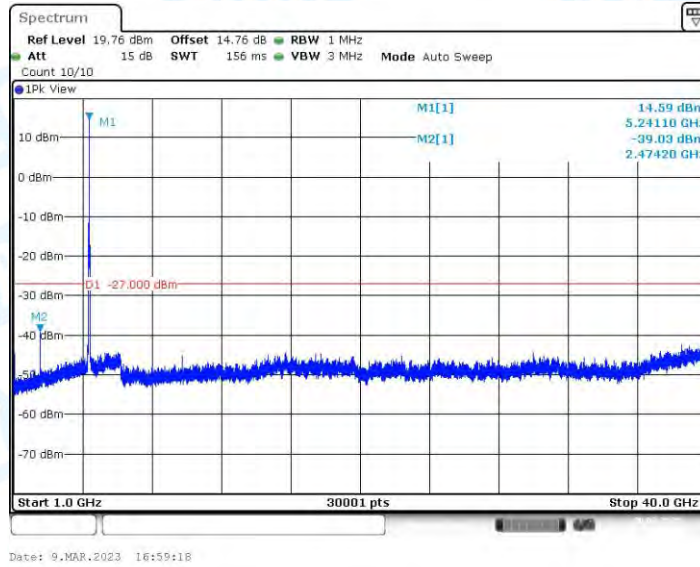


11A_Ant1_5260_30~1000

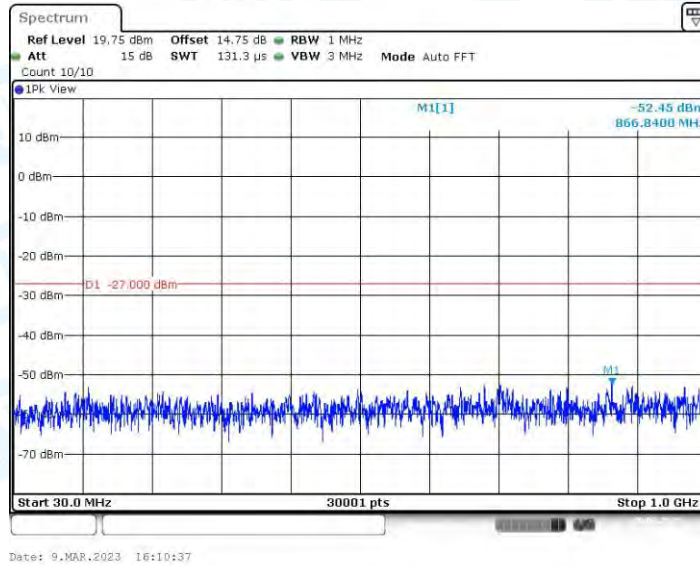


11A_Ant1_5260_1000~40000

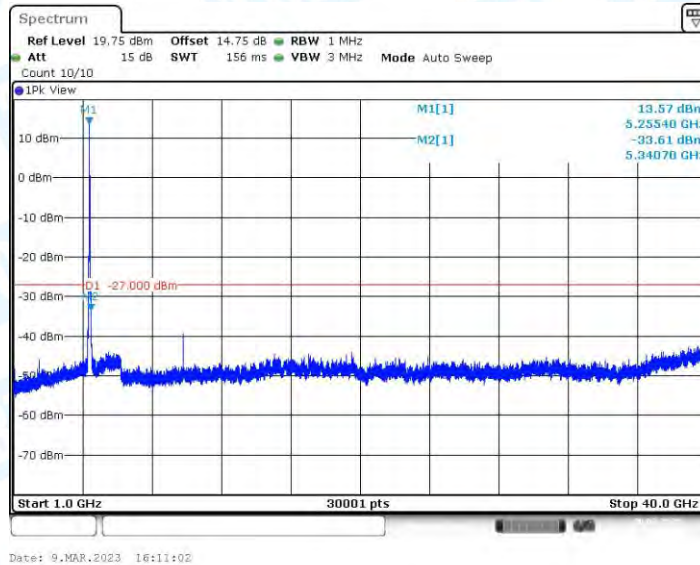


11A_Ant2_5260_30~1000

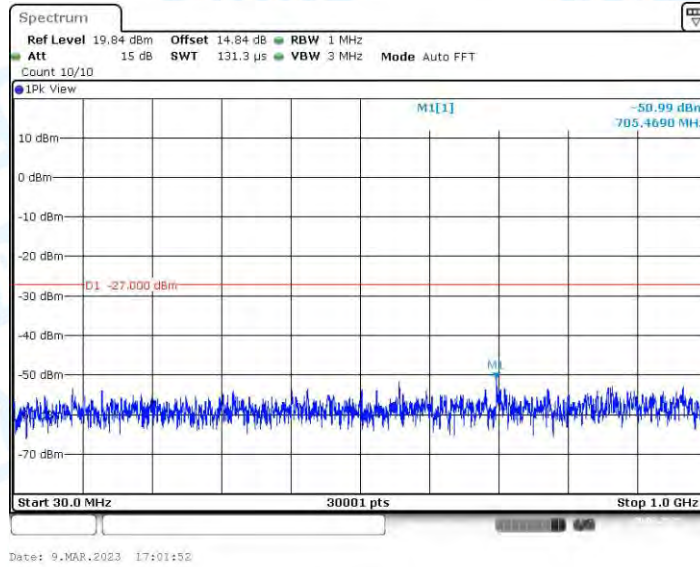


11A_Ant2_5260_1000~40000

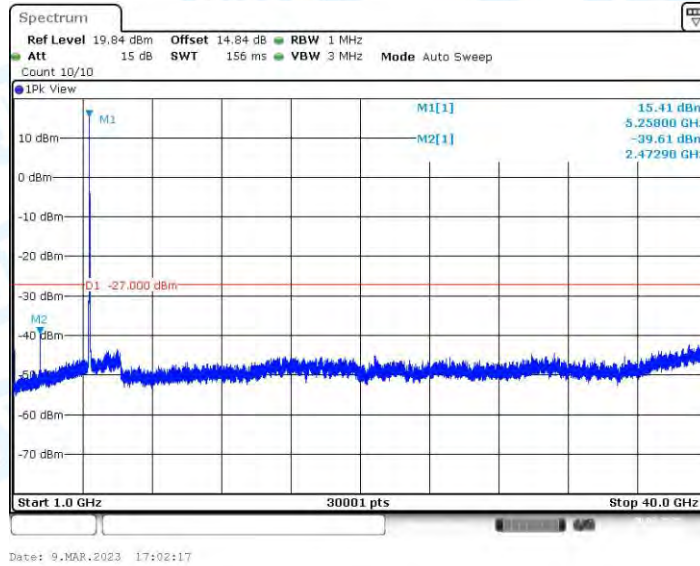


11A_Ant1_5280_30~1000

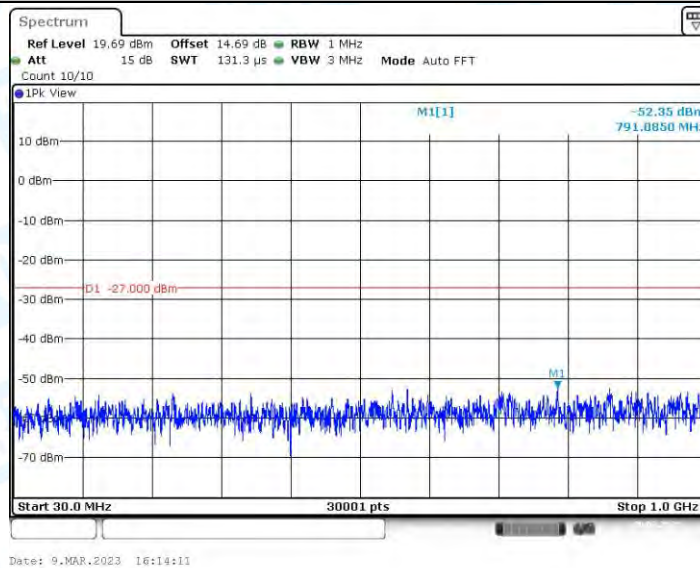


11A_Ant1_5280_1000~40000

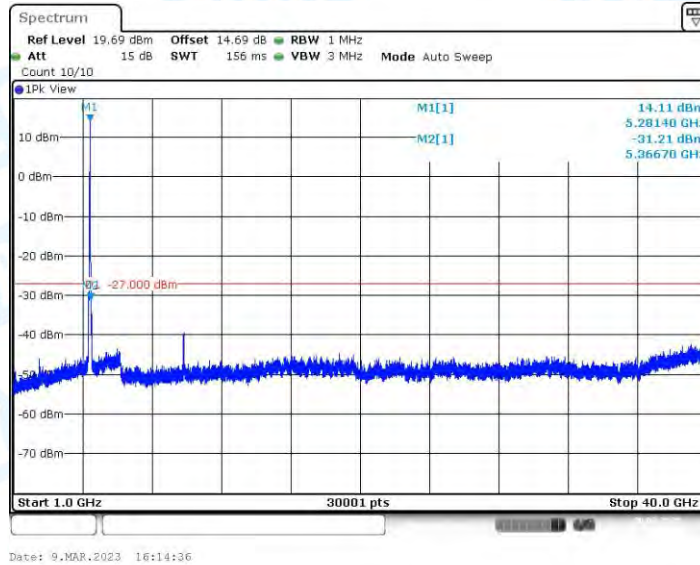


11A_Ant2_5280_30~1000

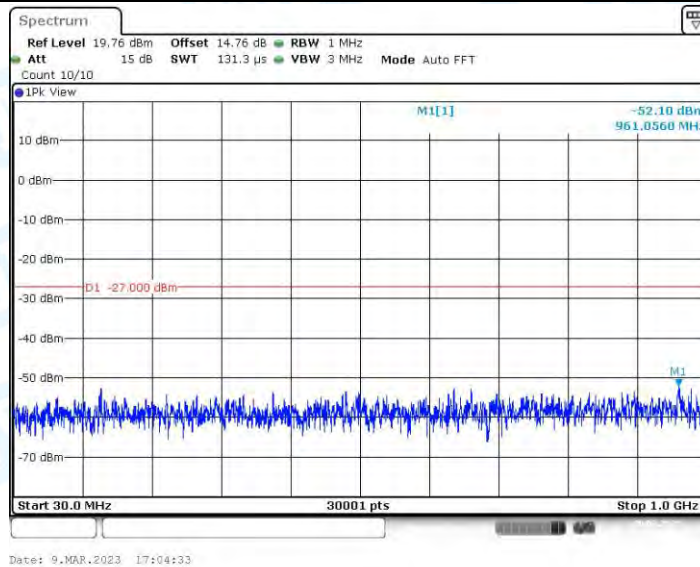


11A_Ant2_5280_1000~40000

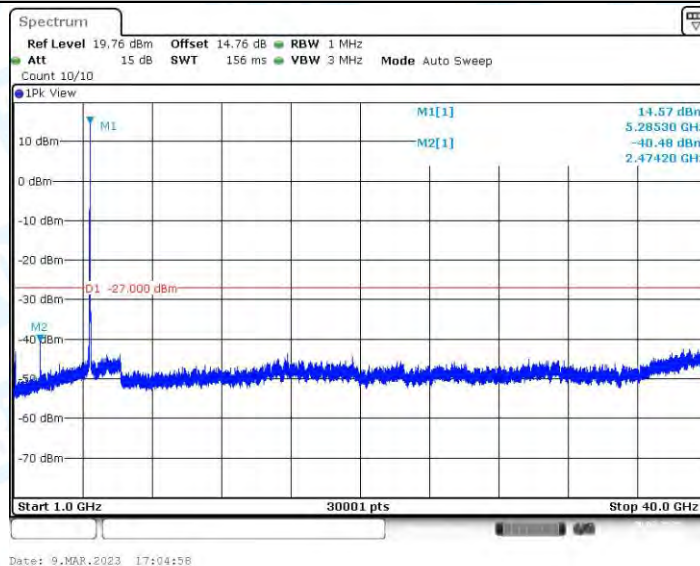


11A_Ant1_5320_30~1000

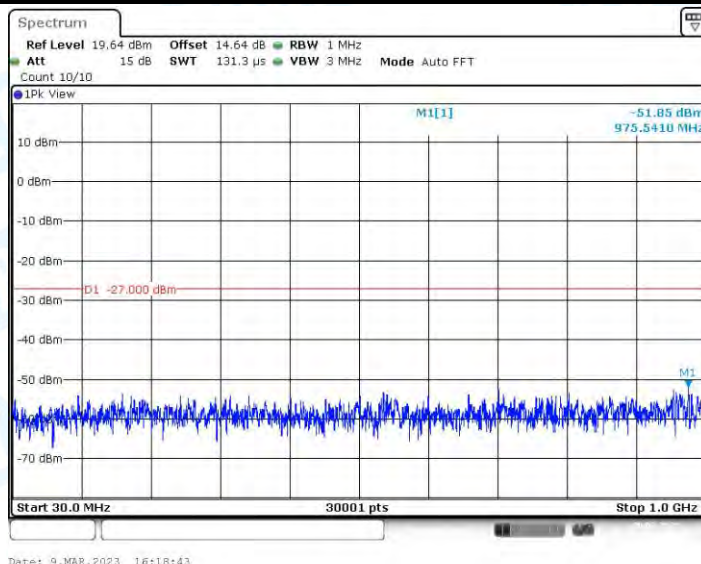


11A_Ant1_5320_1000~40000

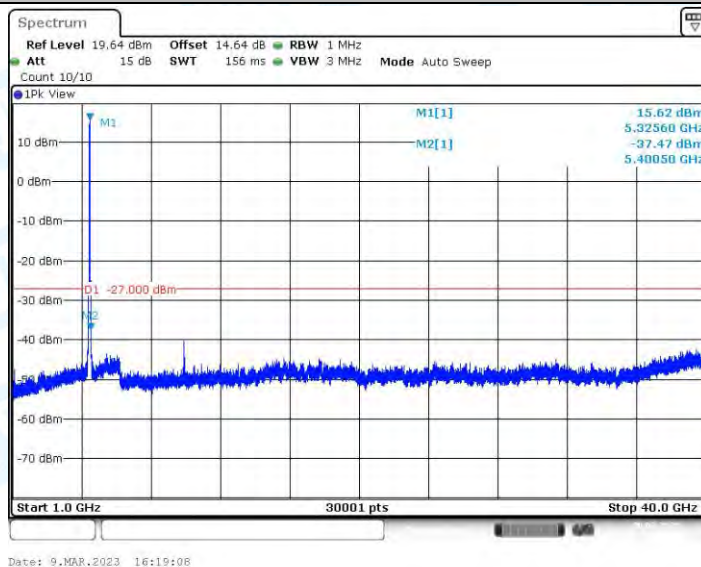


11A_Ant2_5320_30~1000

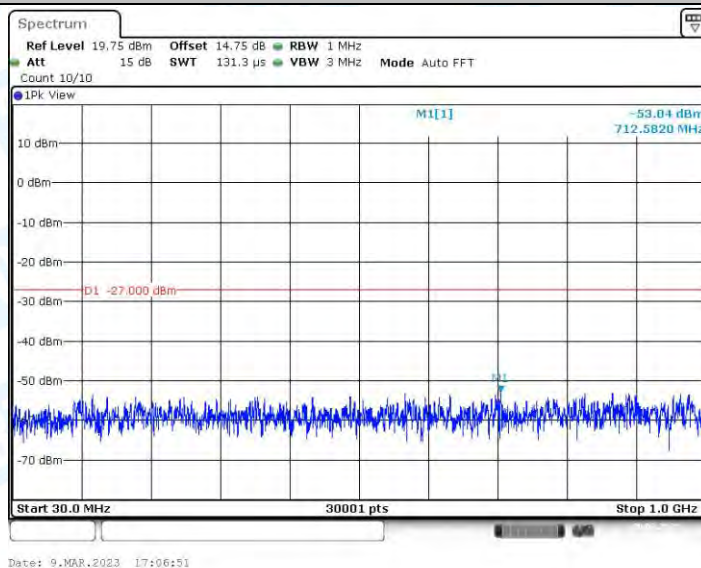


11A_Ant2_5320_1000~40000

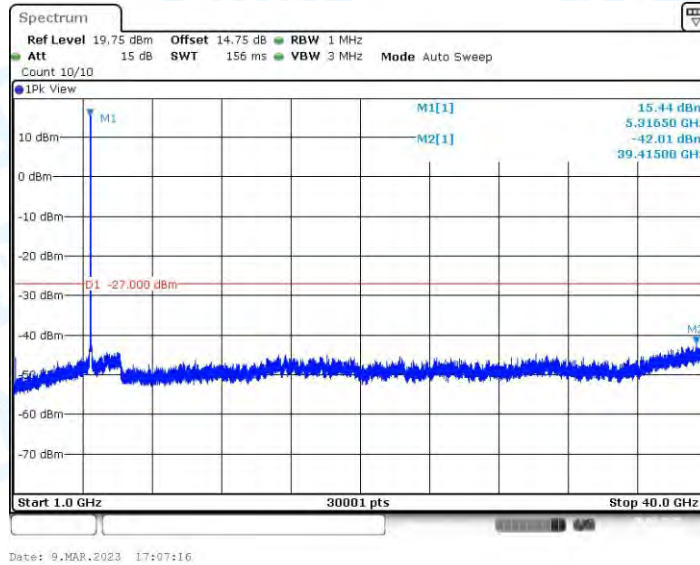


11A_Ant1_5500_30~1000

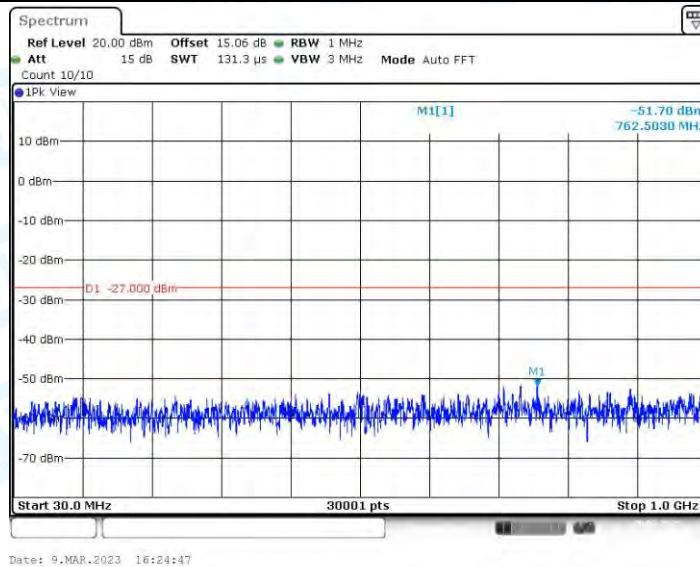


11A_Ant1_5500_1000~40000

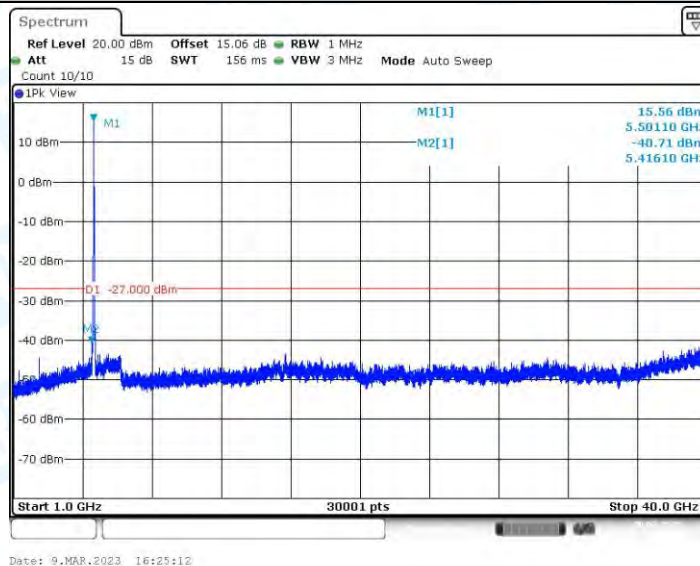


11A_Ant2_5500_30~1000

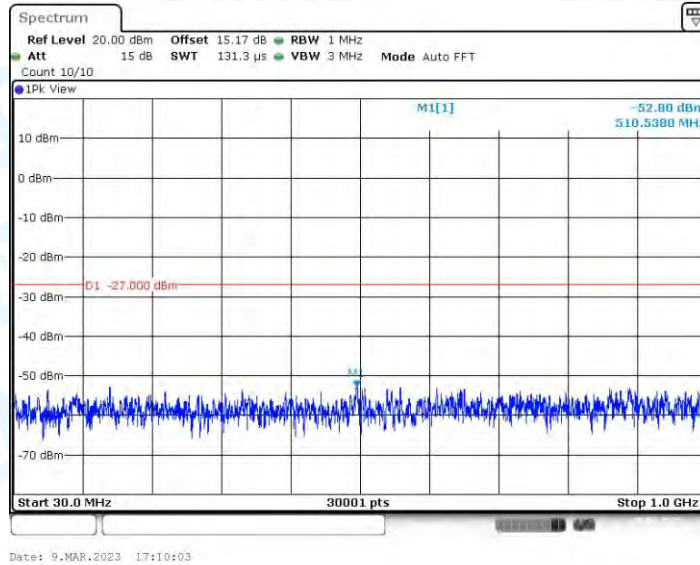


11A_Ant2_5500_1000~40000

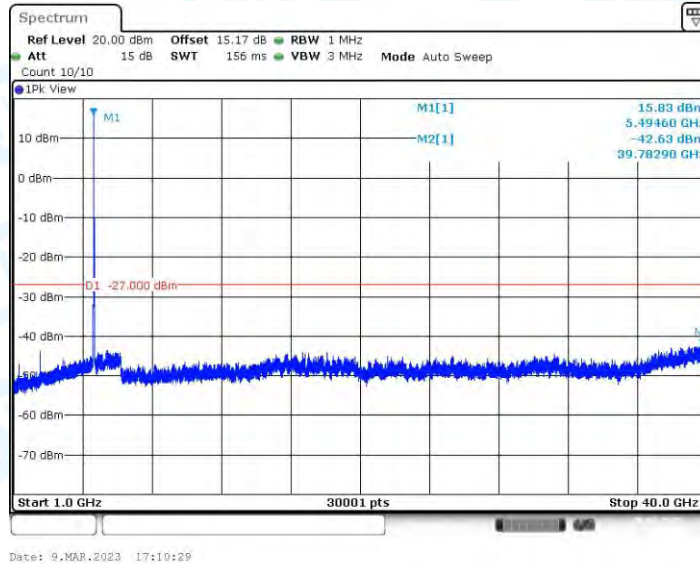


11A_Ant1_5580_30~1000

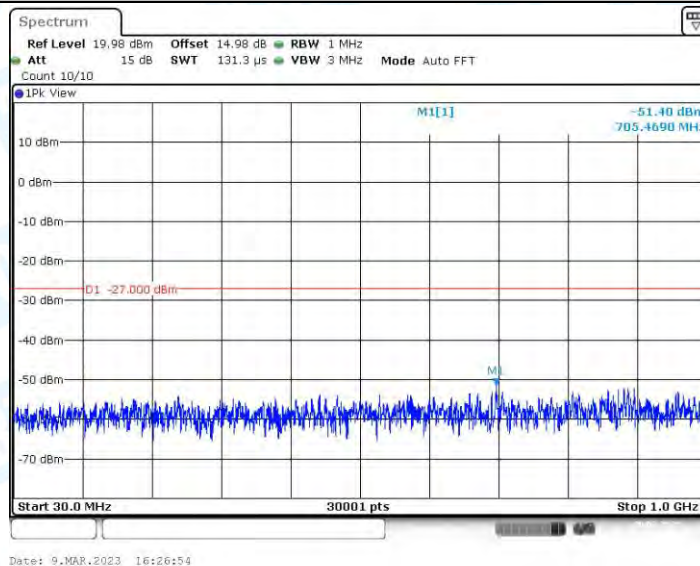


11A_Ant1_5580_1000~40000

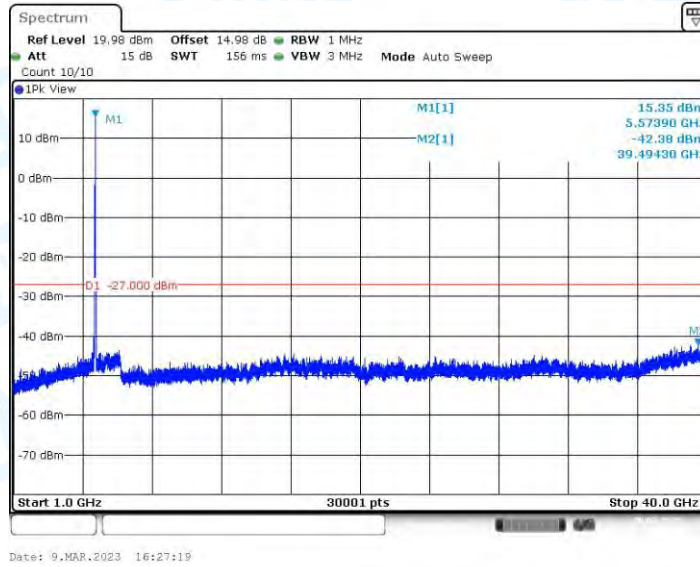


11A_Ant2_5580_30~1000

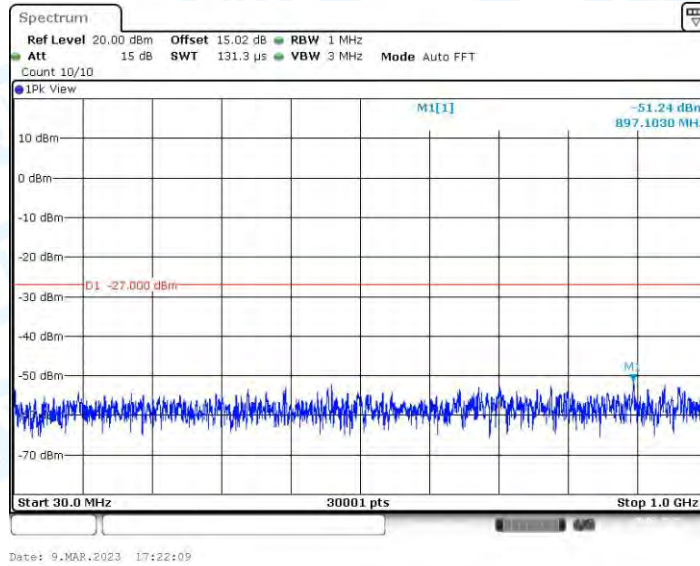


11A_Ant2_5580_1000~40000

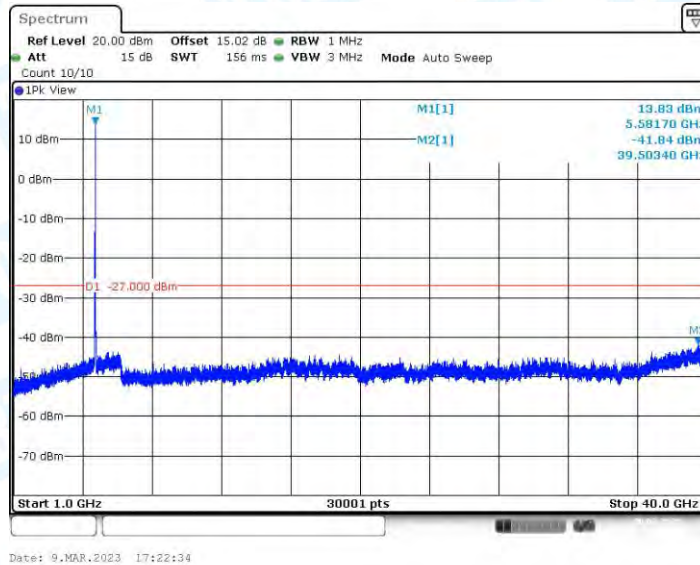


11A_Ant1_5700_30~1000

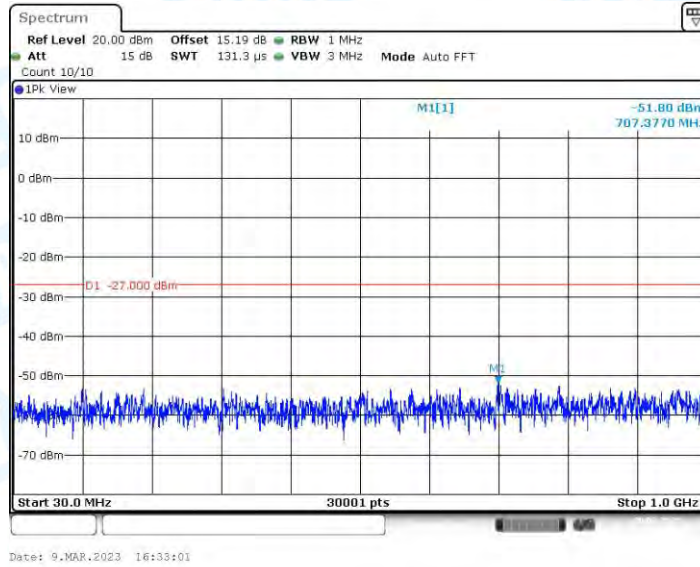


11A_Ant1_5700_1000~40000

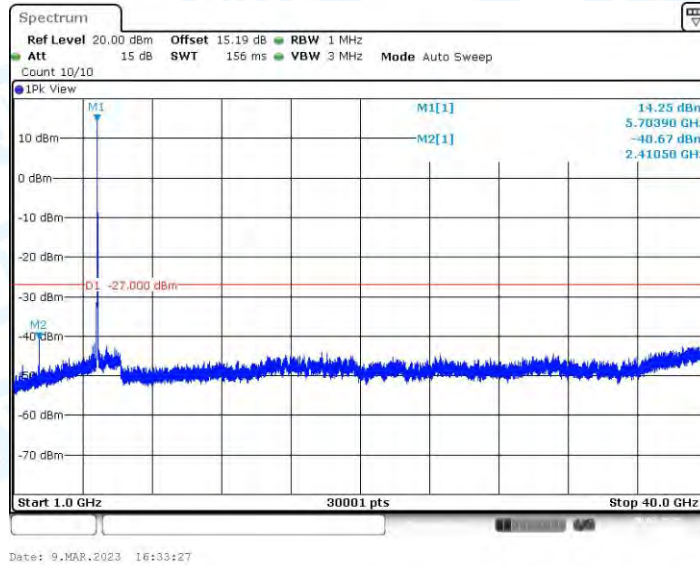


11A_Ant2_5700_30~1000

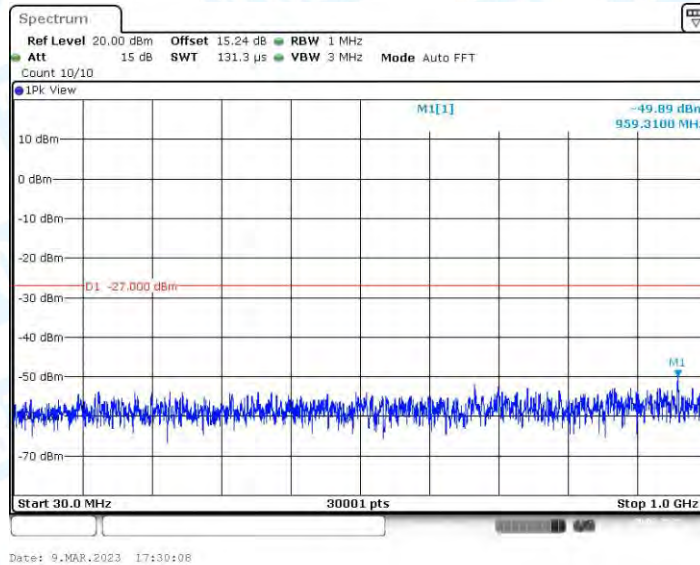


11A_Ant2_5700_1000~40000

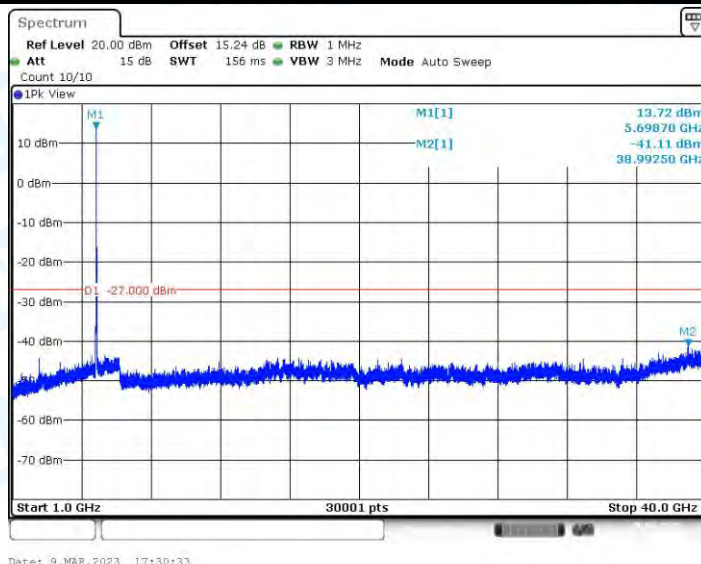


11A_Ant1_5745_30~1000

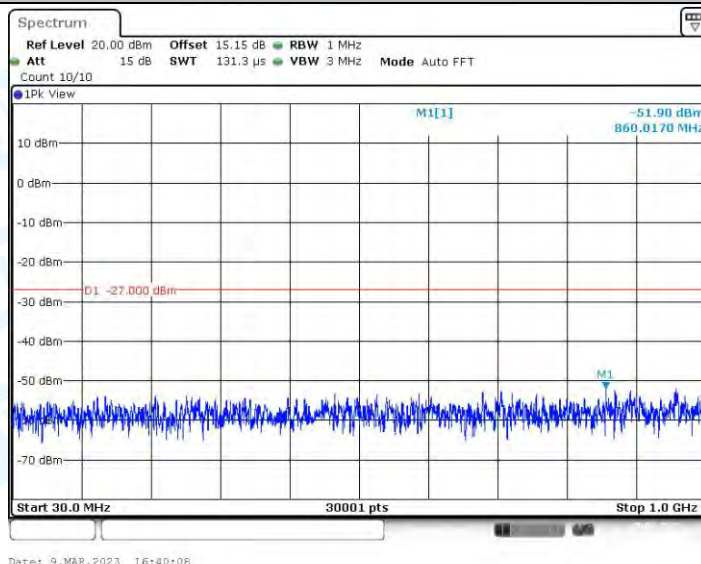


11A_Ant1_5745_1000~40000

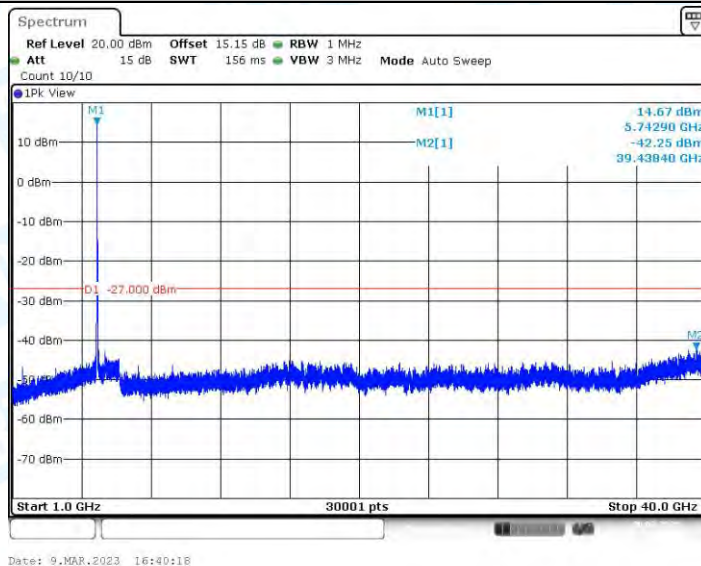


11A_Ant2_5745_30~1000

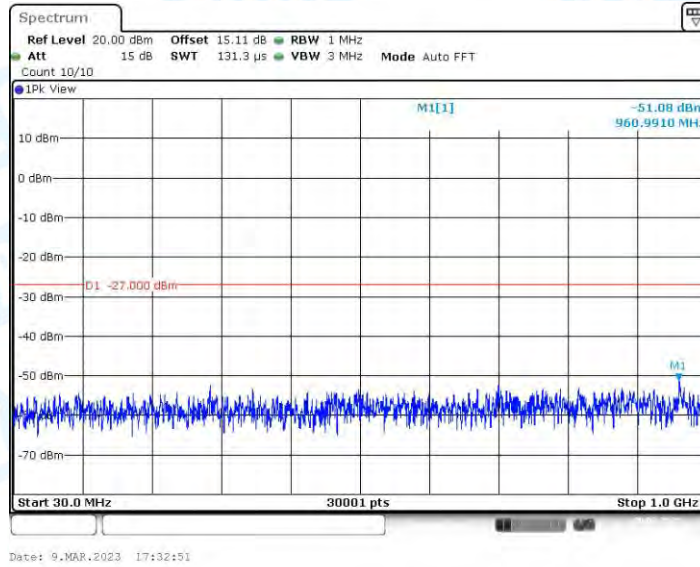


11A_Ant2_5745_1000~40000

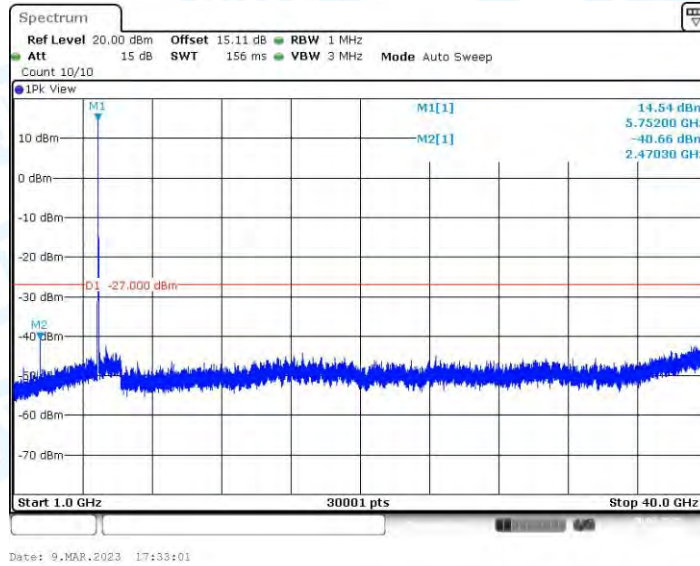


11A_Ant1_5785_30~1000

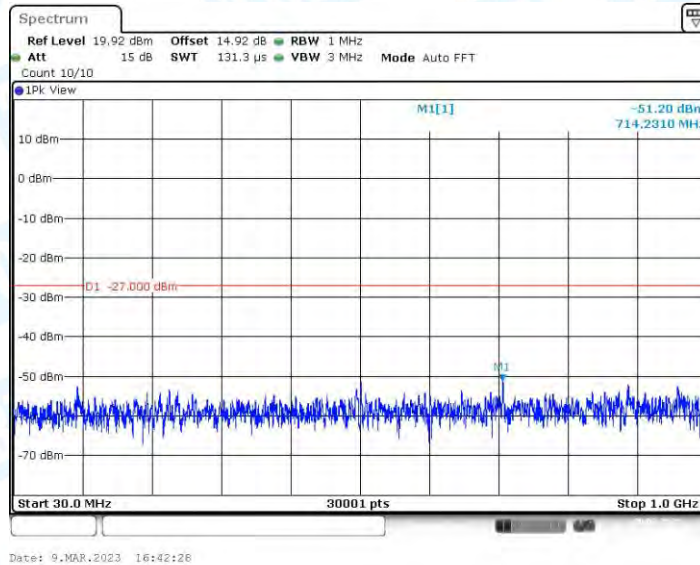


11A_Ant1_5785_1000~40000

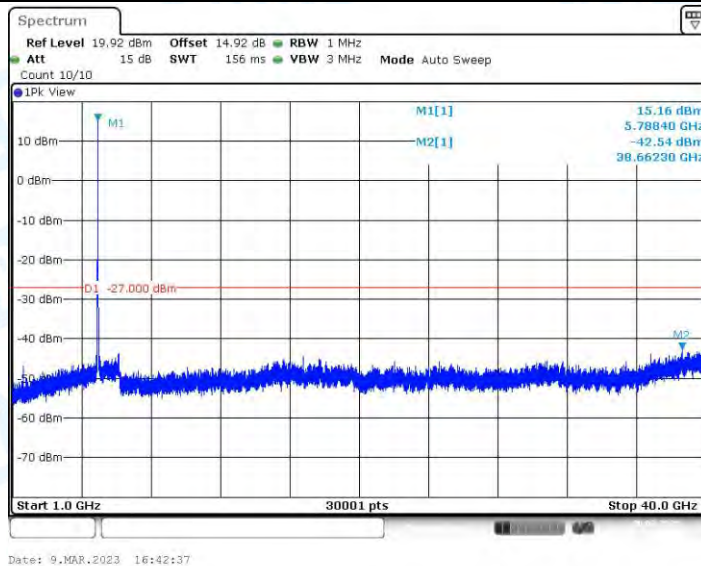

11A_Ant2_5785_30~1000

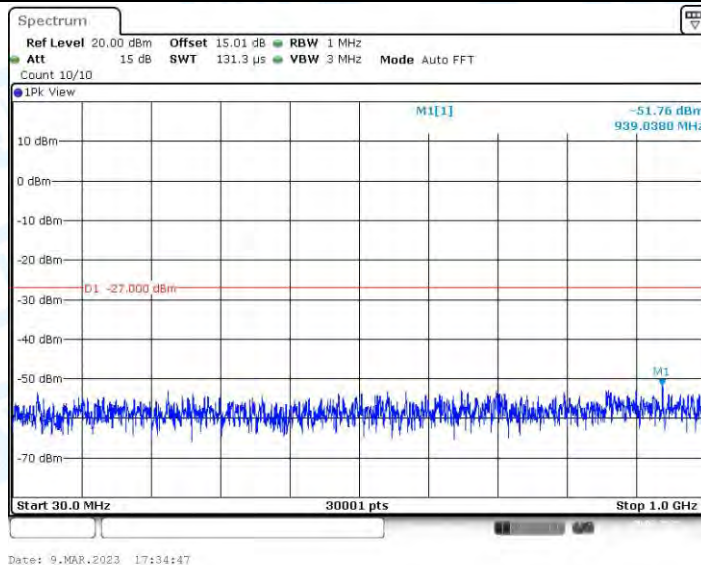

11A_Ant2_5785_1000~40000

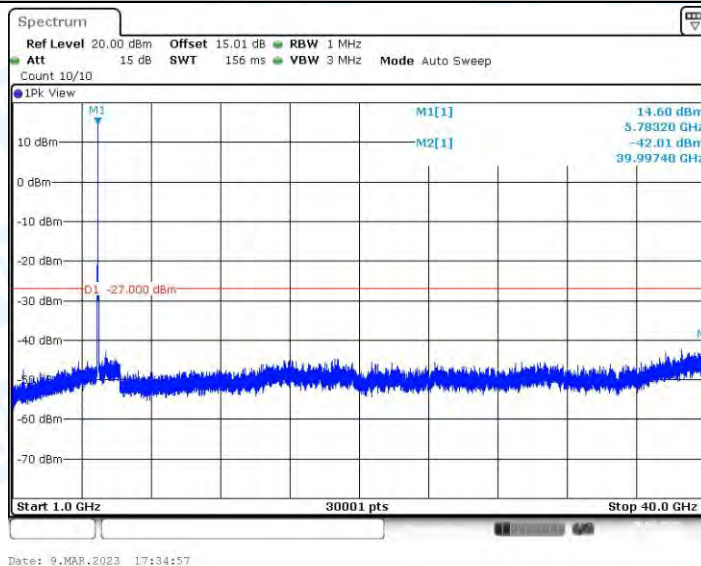

11A_Ant1_5825_30~1000