

01 Conducted output power


Band	Channel	Frequency (MHz)	Power (dBm)	Verdict
EGPRS1900 1 Slot	512	1850.2	25.04	PASS
EGPRS1900 1 Slot	661	1880	25.09	PASS
EGPRS1900 1 Slot	810	1909.8	24.67	PASS
EGPRS1900 2 Slot	512	1850.2	24.58	PASS
EGPRS1900 2 Slot	661	1880	24.54	PASS
EGPRS1900 2 Slot	810	1909.8	24.20	PASS
EGPRS1900 3 Slot	512	1850.2	22.78	PASS
EGPRS1900 3 Slot	661	1880	22.63	PASS
EGPRS1900 3 Slot	810	1909.8	22.51	PASS
EGPRS1900 4 Slot	512	1850.2	20.70	PASS
EGPRS1900 4 Slot	661	1880	20.18	PASS
EGPRS1900 4 Slot	810	1909.8	20.12	PASS
EGPRS850 1 Slot	128	824.2	25.20	PASS
EGPRS850 1 Slot	189	836.4	25.83	PASS
EGPRS850 1 Slot	251	848.8	25.64	PASS
EGPRS850 2 Slot	128	824.2	25.22	PASS
EGPRS850 2 Slot	189	836.4	24.91	PASS
EGPRS850 2 Slot	251	848.8	25.03	PASS
EGPRS850 3 Slot	128	824.2	23.81	PASS
EGPRS850 3 Slot	189	836.4	24.22	PASS
EGPRS850 3 Slot	251	848.8	23.62	PASS
EGPRS850 4 Slot	128	824.2	21.60	PASS
EGPRS850 4 Slot	189	836.4	21.54	PASS
EGPRS850 4 Slot	251	848.8	21.01	PASS
GPRS1900 1 Slot	512	1850.2	29.26	PASS
GPRS1900 1 Slot	661	1880	29.20	PASS
GPRS1900 1 Slot	810	1909.8	29.12	PASS
GPRS1900 2 Slot	512	1850.2	26.91	PASS
GPRS1900 2 Slot	661	1880	26.66	PASS
GPRS1900 2 Slot	810	1909.8	26.17	PASS
GPRS1900 3 Slot	512	1850.2	25.26	PASS
GPRS1900 3 Slot	661	1880	24.95	PASS
GPRS1900 3 Slot	810	1909.8	24.44	PASS
GPRS1900 4 Slot	512	1850.2	23.09	PASS
GPRS1900 4 Slot	661	1880	22.84	PASS
GPRS1900 4 Slot	810	1909.8	22.23	PASS
GPRS850 1 Slot	128	824.2	32.66	PASS
GPRS850 1 Slot	189	836.4	32.67	PASS
GPRS850 1 Slot	251	848.8	32.59	PASS
GPRS850 2 Slot	128	824.2	30.50	PASS
GPRS850 2 Slot	189	836.4	30.44	PASS

GPRS850 2 Slot	251	848.8	30.19	PASS
GPRS850 3 Slot	128	824.2	28.51	PASS
GPRS850 3 Slot	189	836.4	28.41	PASS
GPRS850 3 Slot	251	848.8	28.12	PASS
GPRS850 4 Slot	128	824.2	26.31	PASS
GPRS850 4 Slot	189	836.4	26.25	PASS
GPRS850 4 Slot	251	848.8	25.94	PASS
GSM1900	512	1850.2	29.35	PASS
GSM1900	661	1880	29.31	PASS
GSM1900	810	1909.8	29.18	PASS
GSM850	128	824.2	32.72	PASS
GSM850	189	836.4	32.74	PASS
GSM850	251	848.8	32.63	PASS


15 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
EGPRS1900	512	1850.2	7.19	13	PASS
EGPRS1900	661	1880	7.14	13	PASS
EGPRS1900	810	1909.8	7.10	13	PASS
EGPRS850	128	824.2	9.44	13	PASS
EGPRS850	189	836.4	9.97	13	PASS
EGPRS850	251	848.8	9.26	13	PASS


EGPRS1900 Channel=661

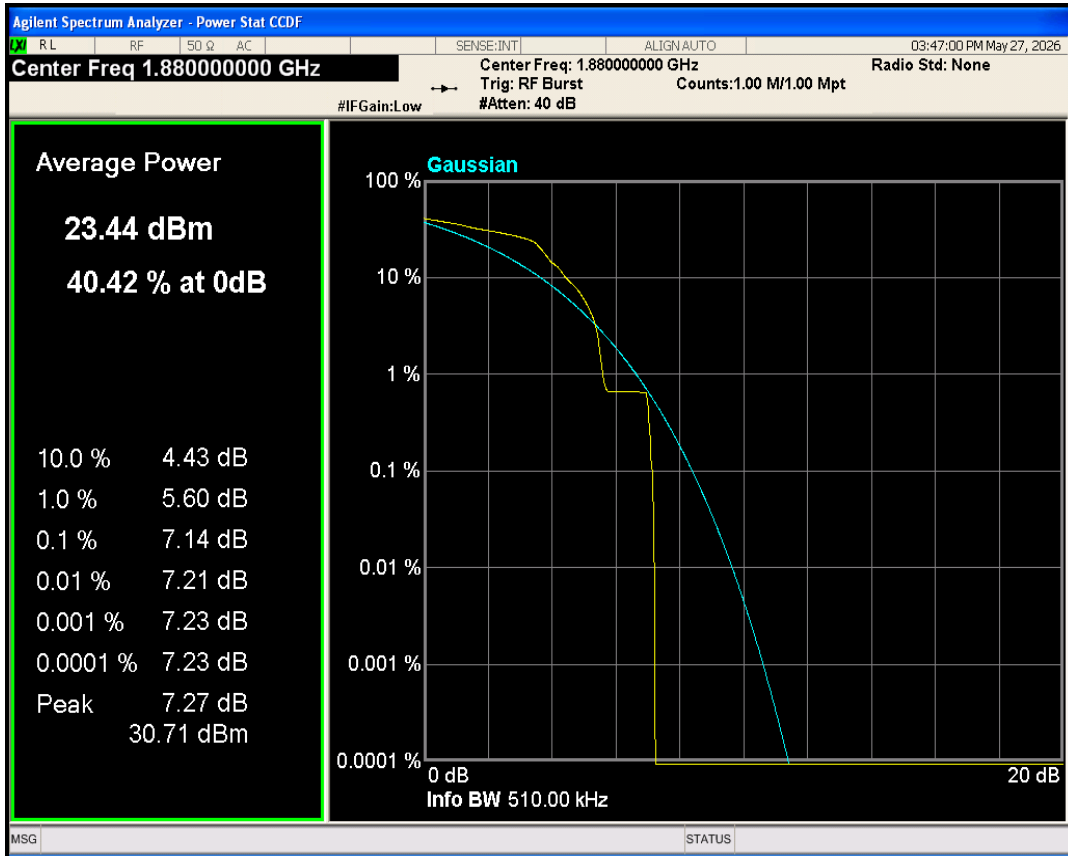


EGPRS1900 Channel=512

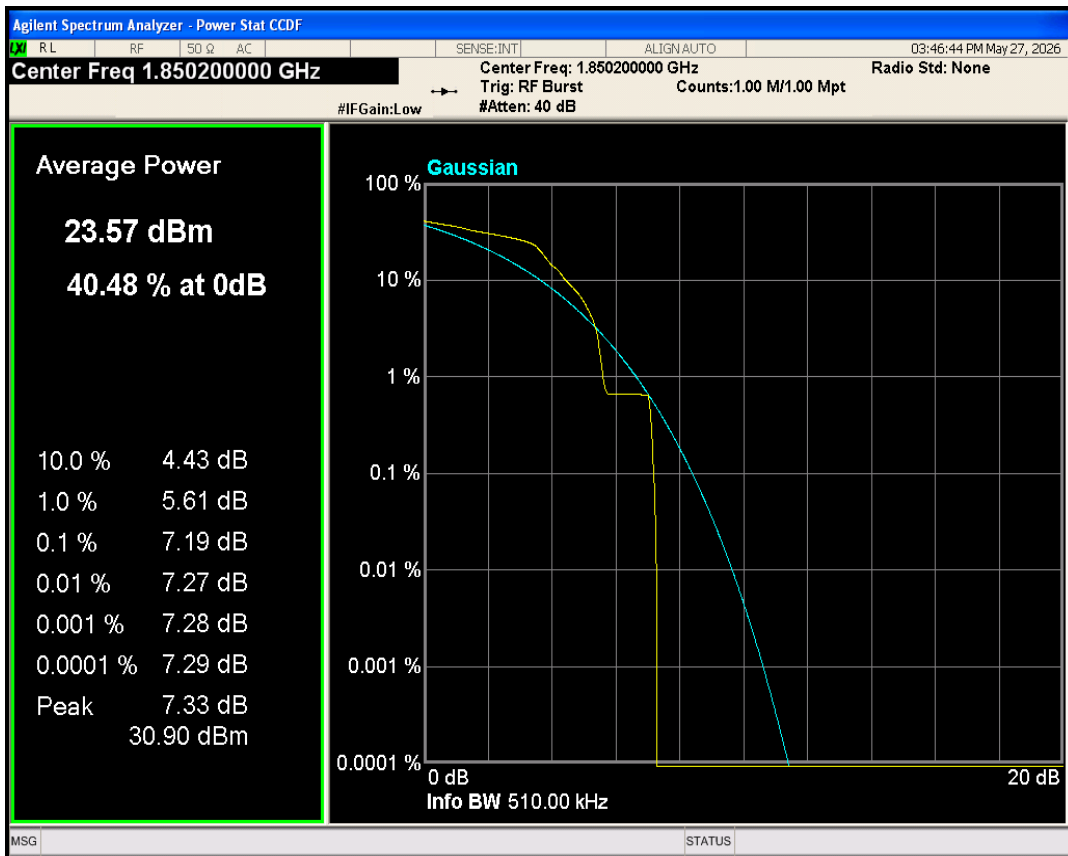


EGPRS1900 Channel=810

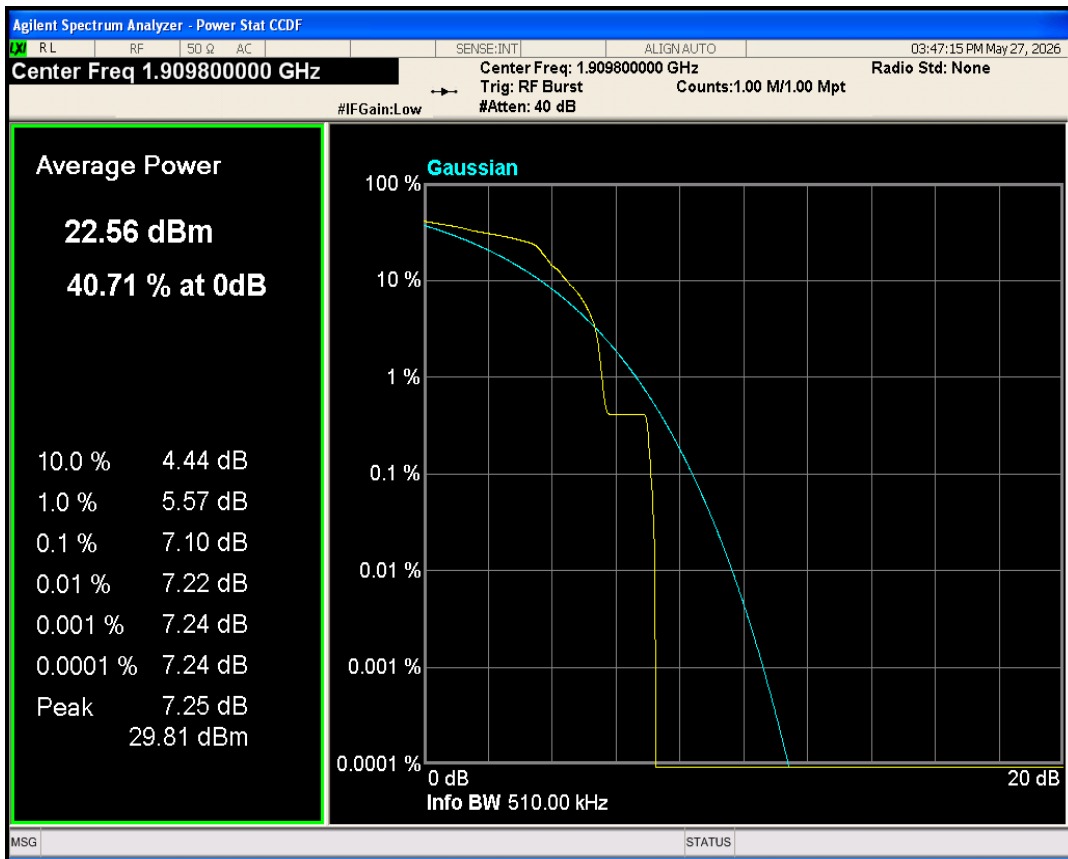


EGPRS850 Channel=128

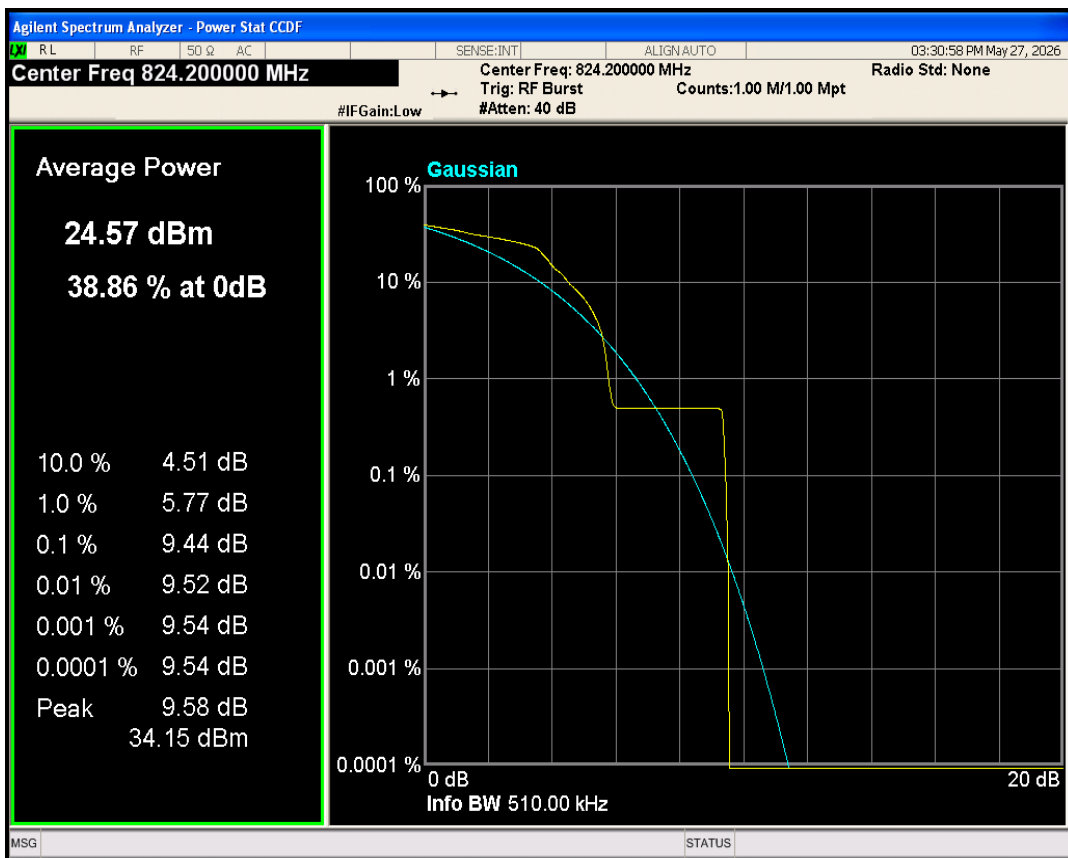

EGPRS850 Channel=251

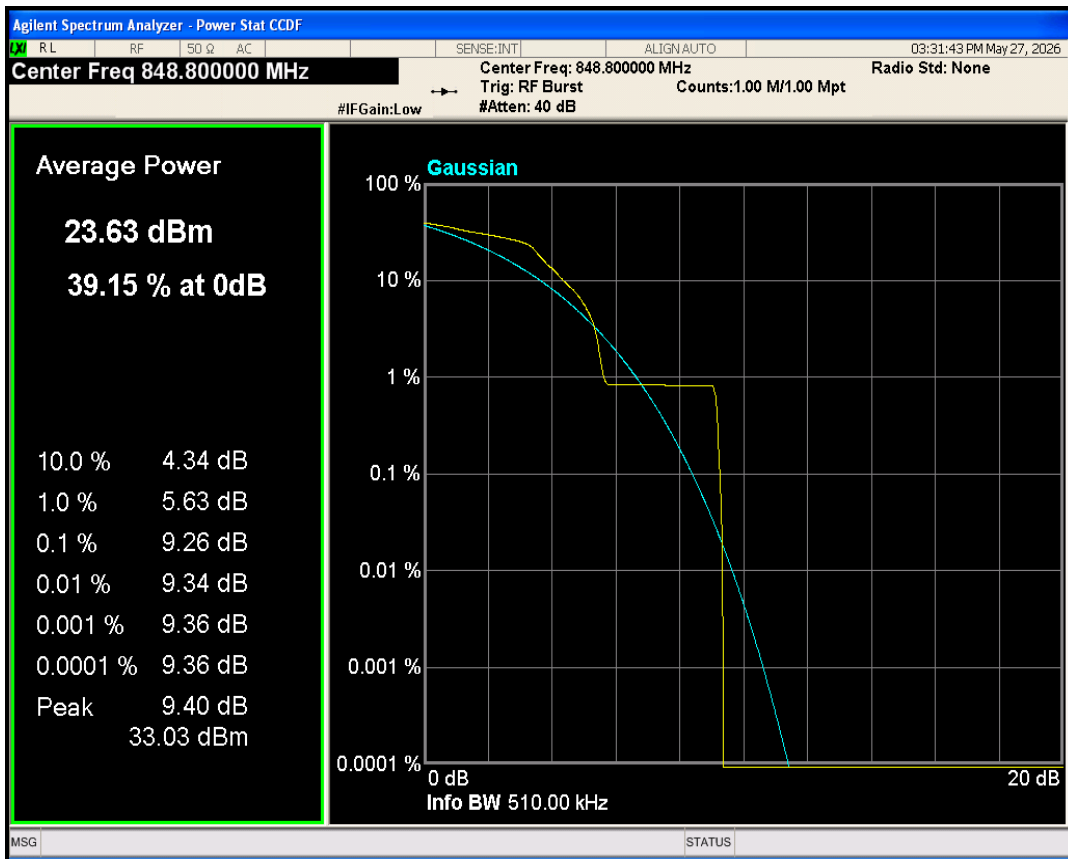


EGPRS850 Channel=189

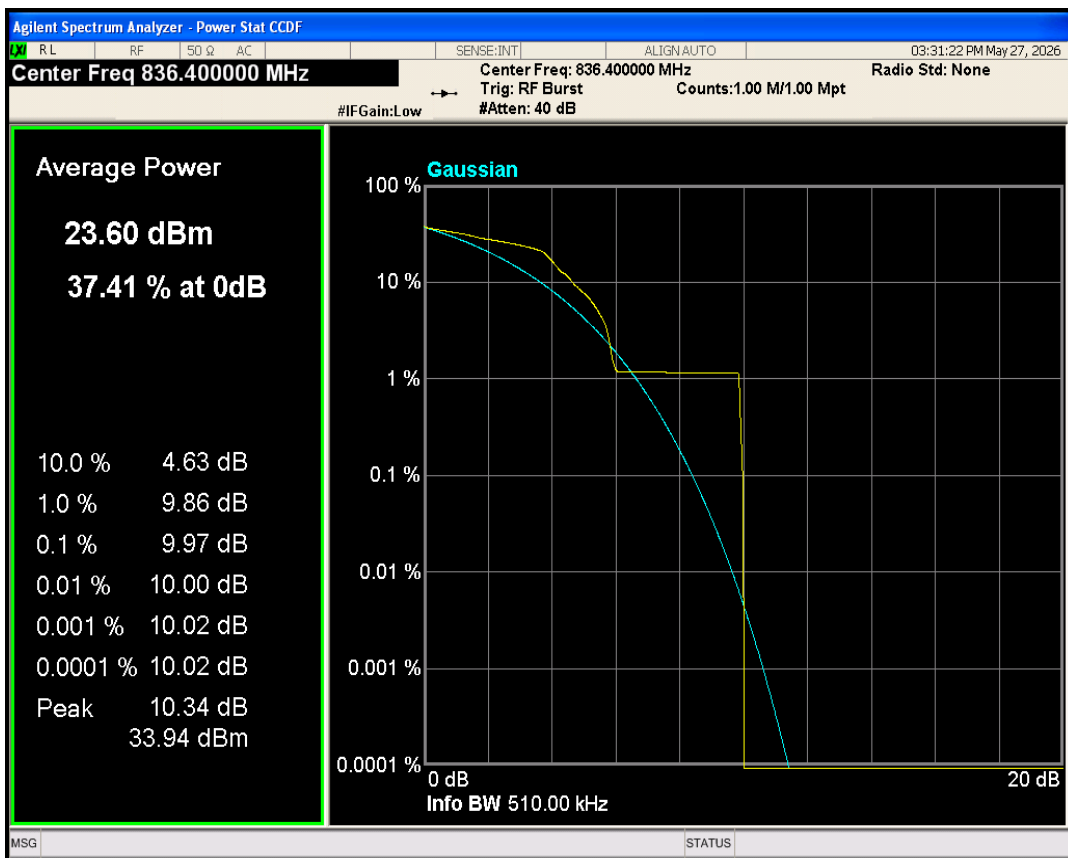


16 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
EGPRS1900	512	1850.2	241.269	297.724	PASS
EGPRS1900	661	1880	239.189	295.147	PASS
EGPRS1900	810	1909.8	240.868	313.409	PASS
EGPRS850	128	824.2	234.848	294.490	PASS
EGPRS850	189	836.4	242.057	293.477	PASS
EGPRS850	251	848.8	246.369	314.280	PASS


EGPRS1900 Channel=512

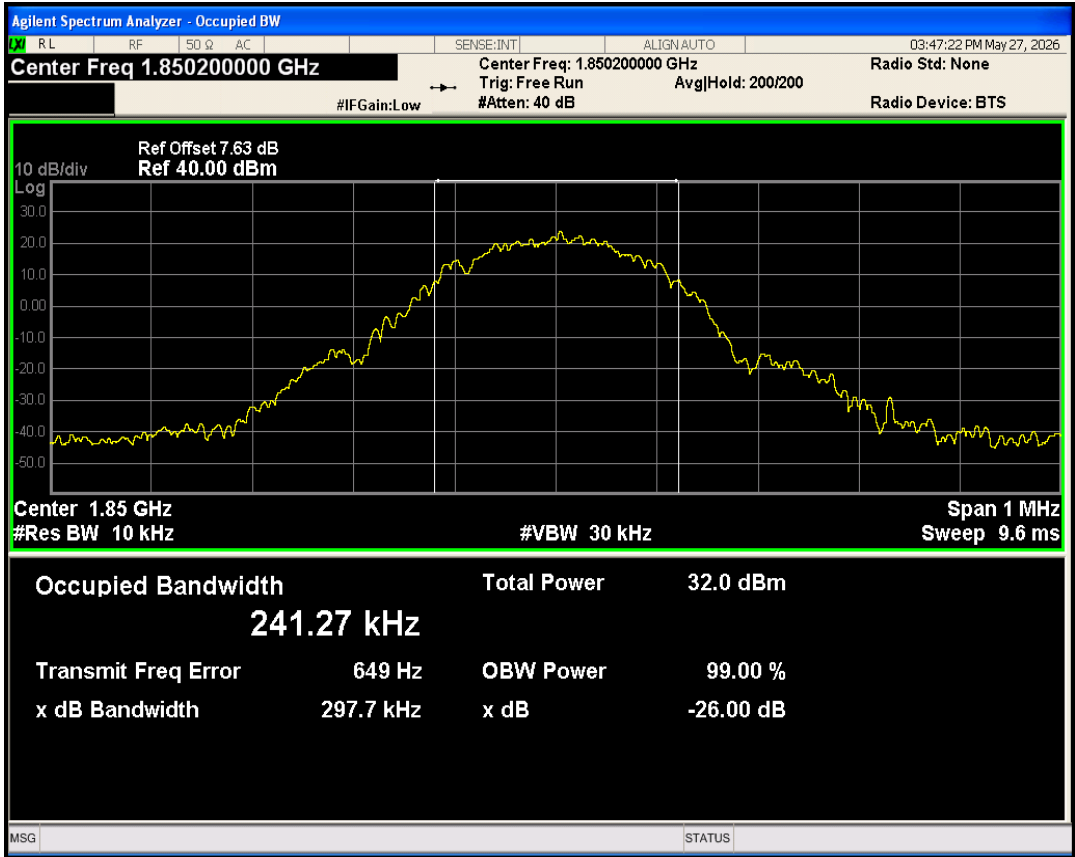


EGPRS1900 Channel=810

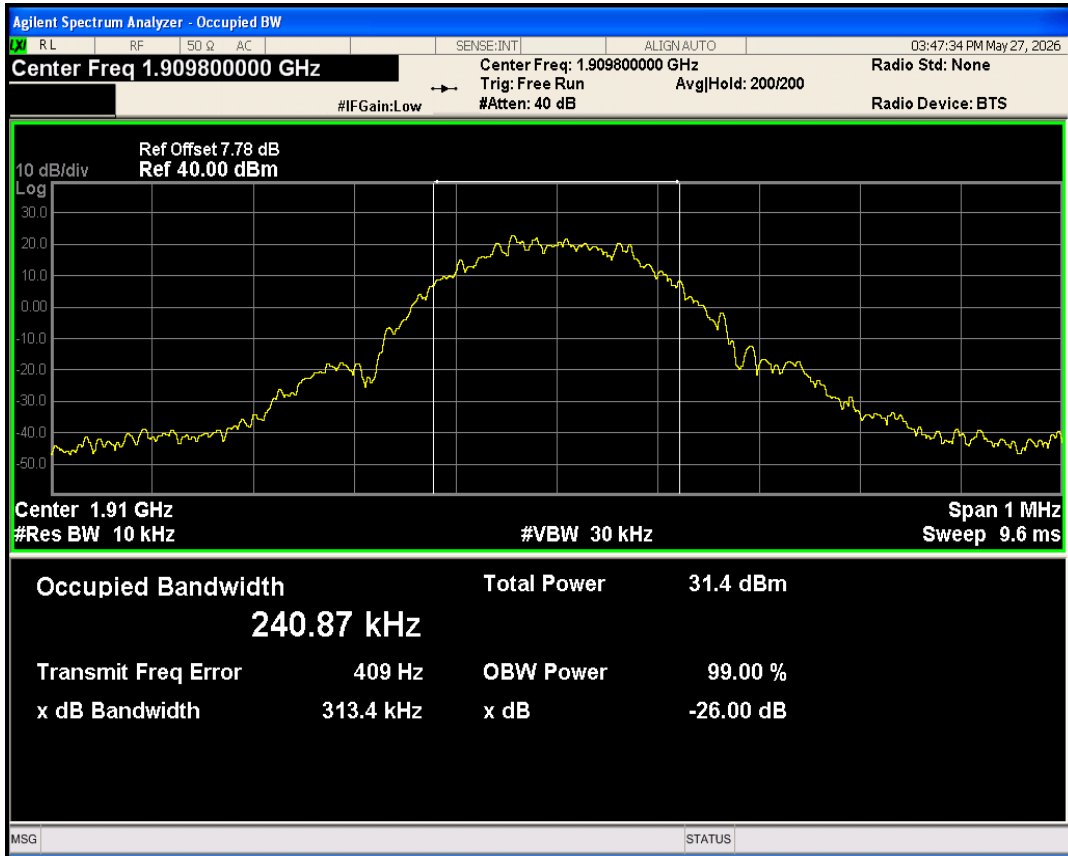


EGPRS1900 Channel=661

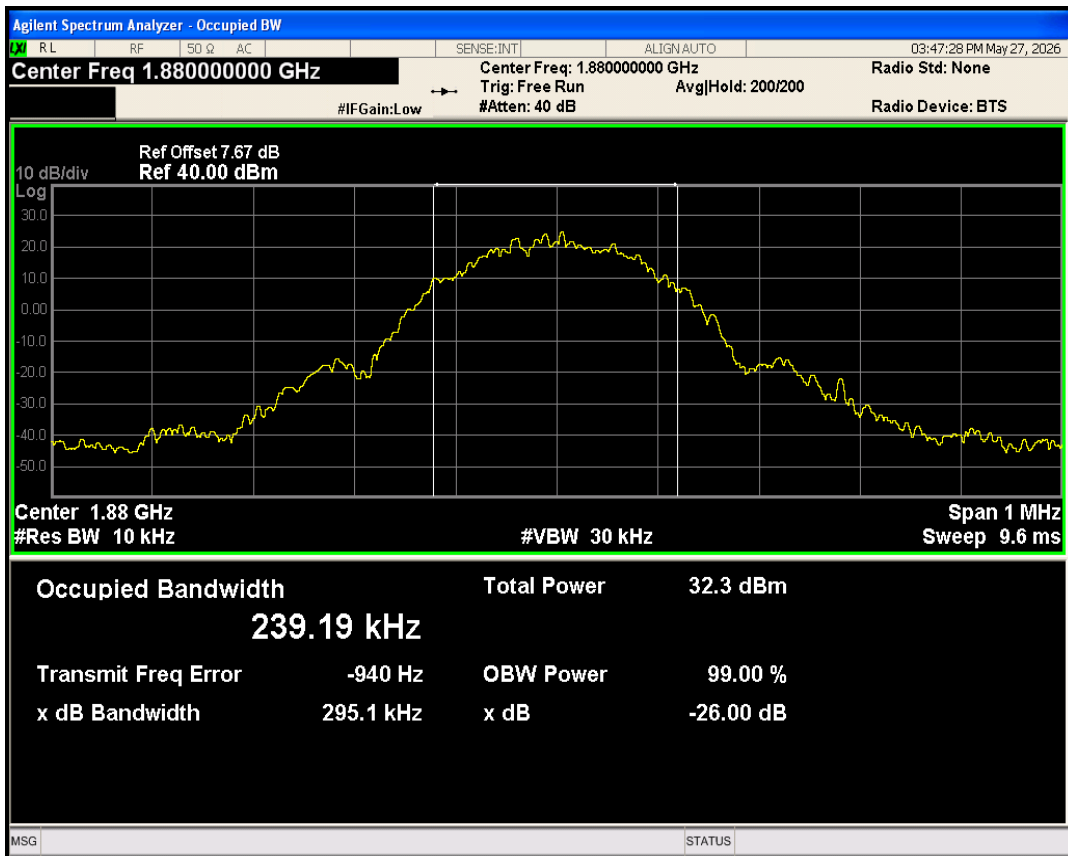


EGPRS850 Channel=128

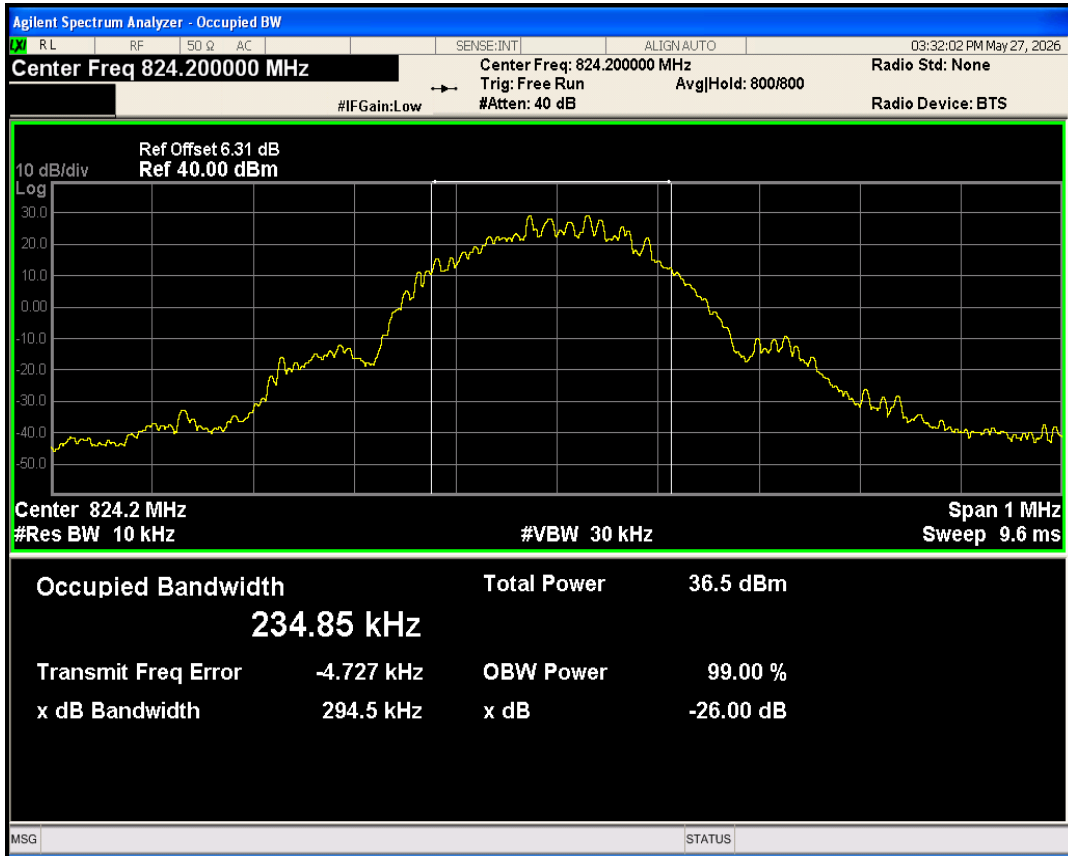

EGPRS850 Channel=251

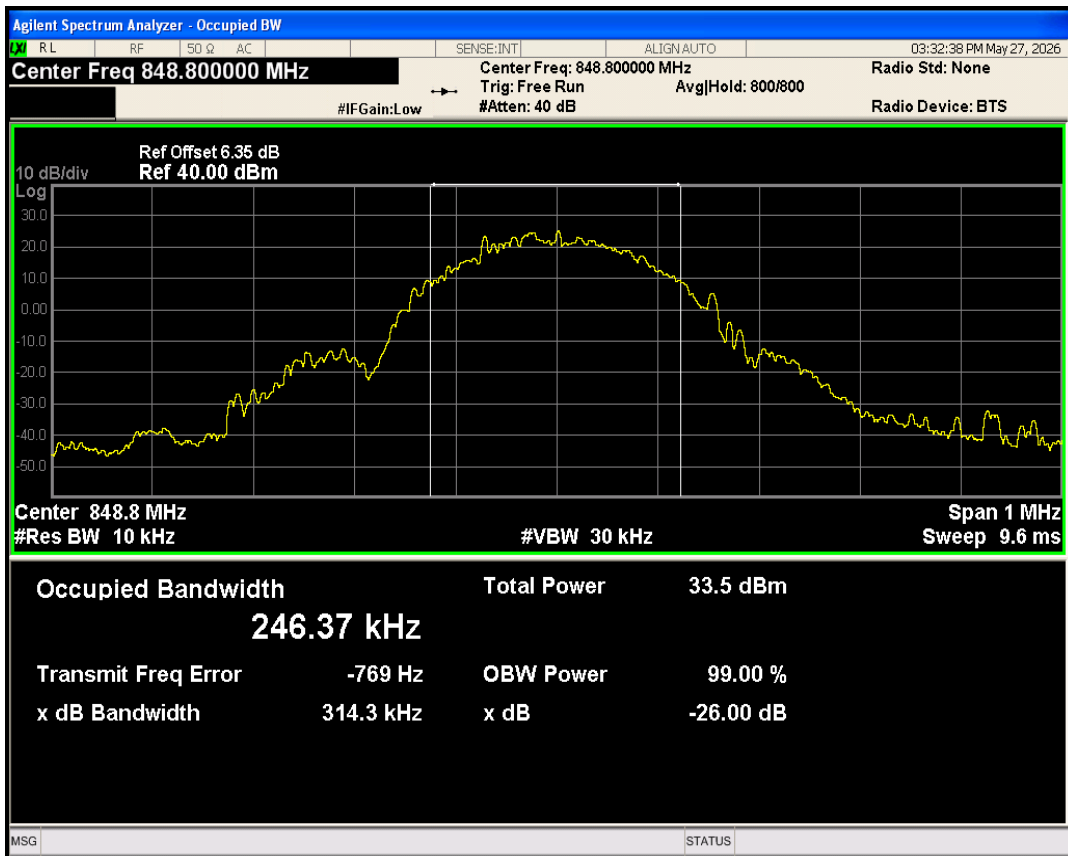


EGPRS850 Channel=189

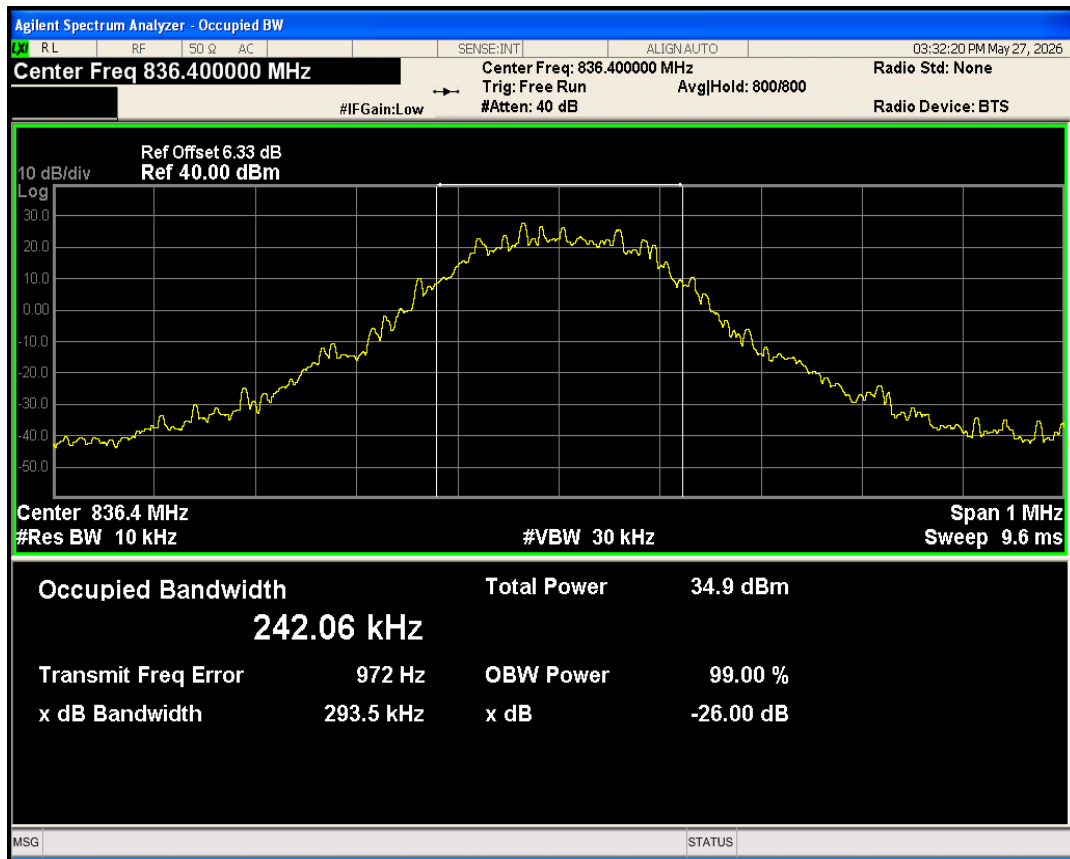


17 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	1849.99	-35.94	-13	PASS
EGPRS1900	810	1909.8	1910.02	-36.99	-13	PASS
EGPRS850	128	824.2	823.97	-34.14	-13	PASS
EGPRS850	251	848.8	849.02	-35.62	-13	PASS


EGPRS1900 Channel=512

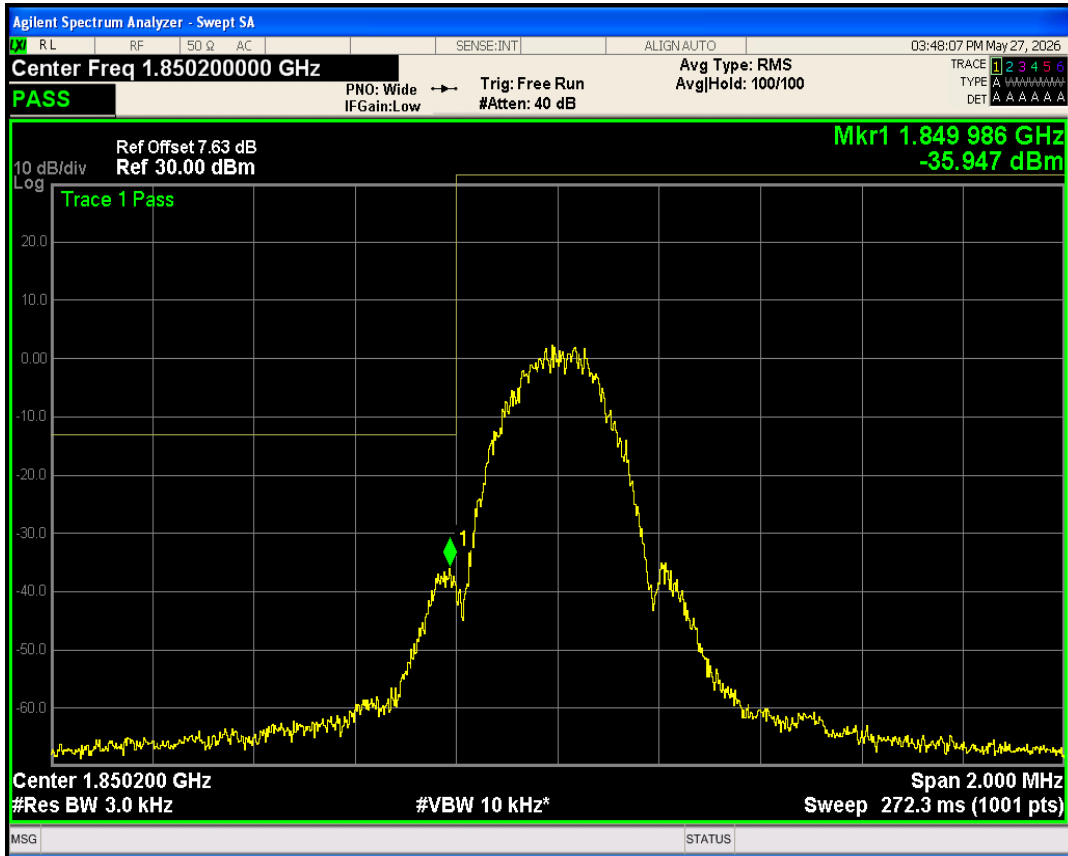


EGPRS1900 Channel=810

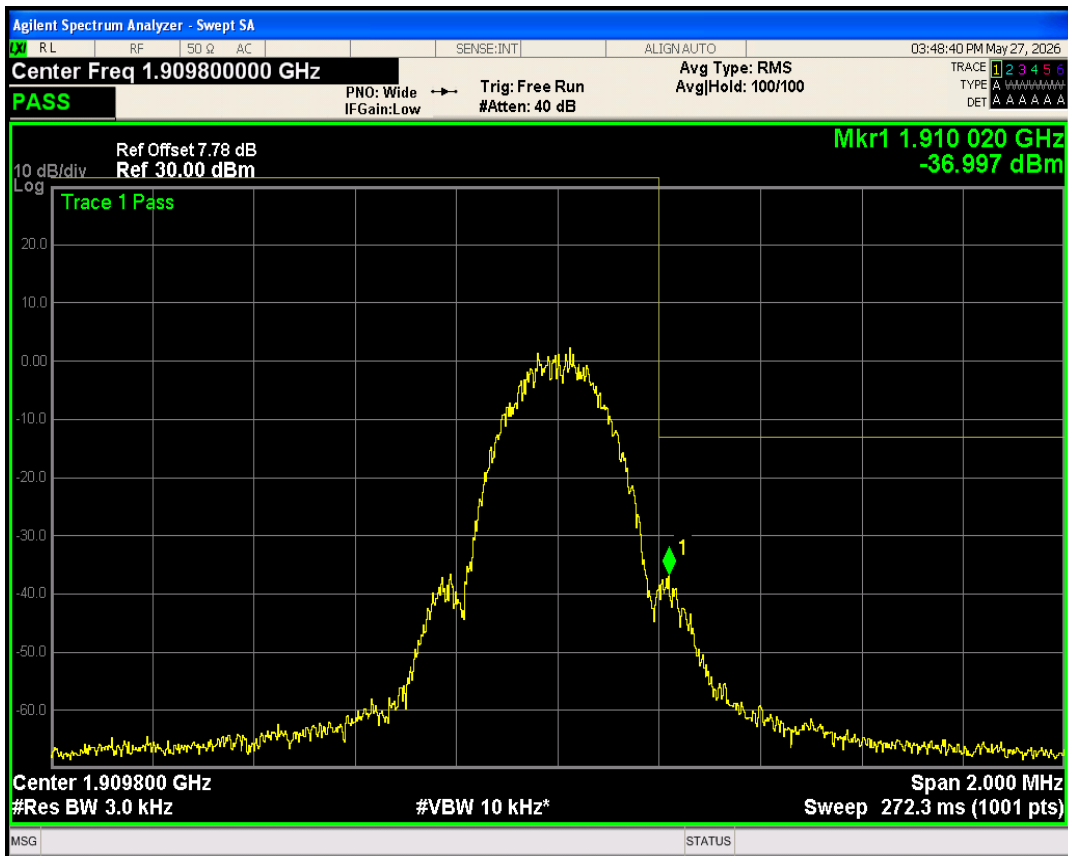

EGPRS850 Channel=128

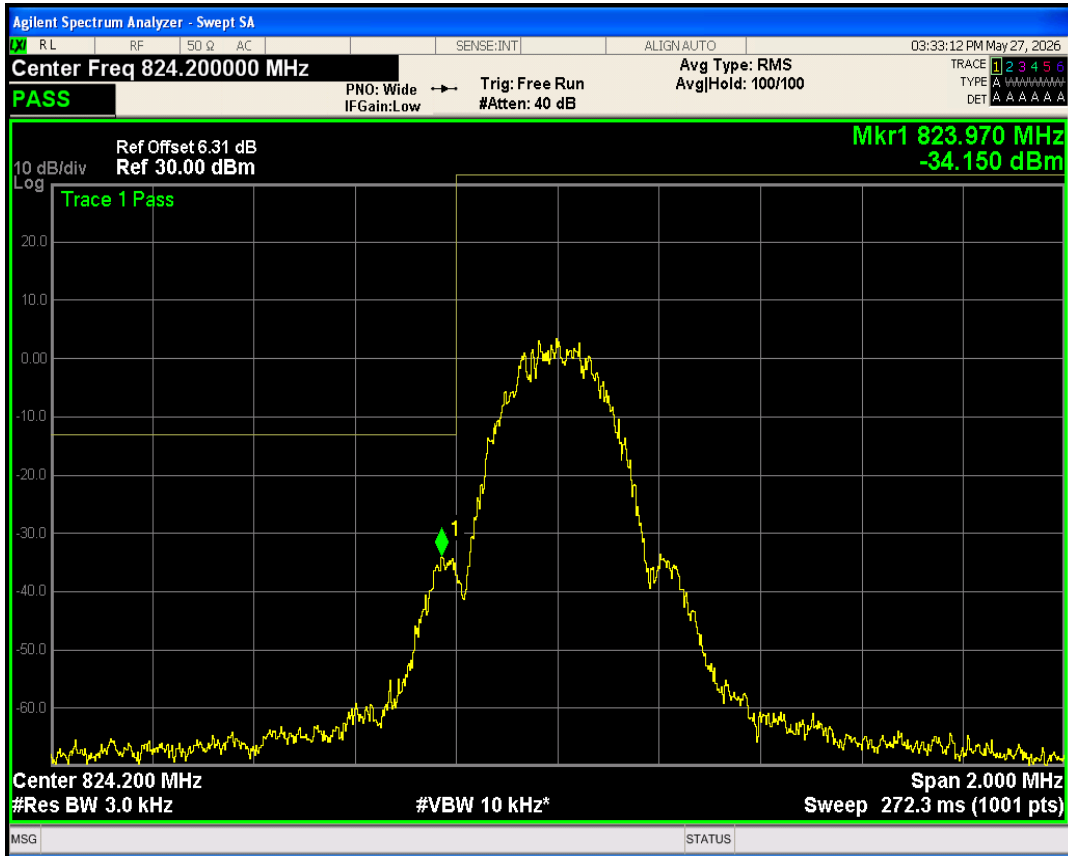


EGPRS850 Channel=251

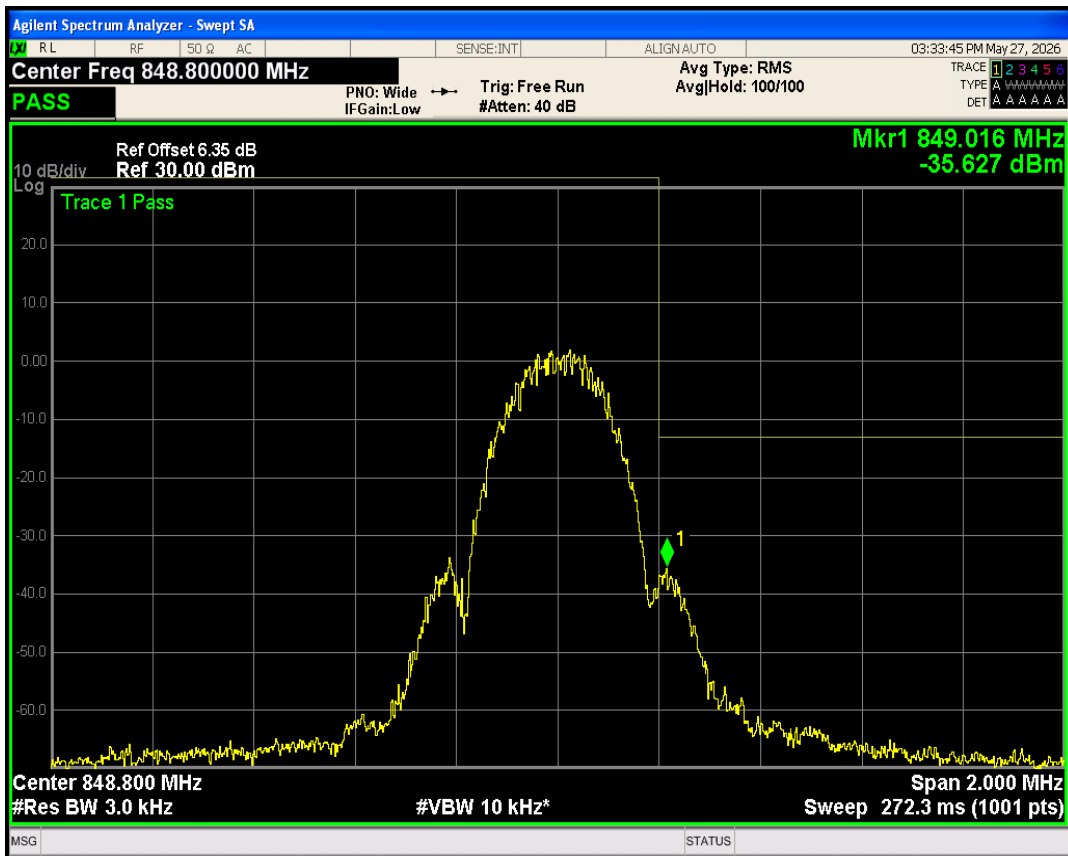


18 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
EGPRS1900	512	1850.2	25231.43	-19.42	-13	PASS
EGPRS1900	661	1880	25953.39	-19.73	-13	PASS
EGPRS1900	810	1909.8	25536.49	-19.77	-13	PASS
EGPRS850	128	824.2	25215.54	-20.74	-13	PASS
EGPRS850	189	836.4	25965.97	-20.65	-13	PASS
EGPRS850	251	848.8	25654.95	-20.82	-13	PASS


EGPRS1900 Channel=661

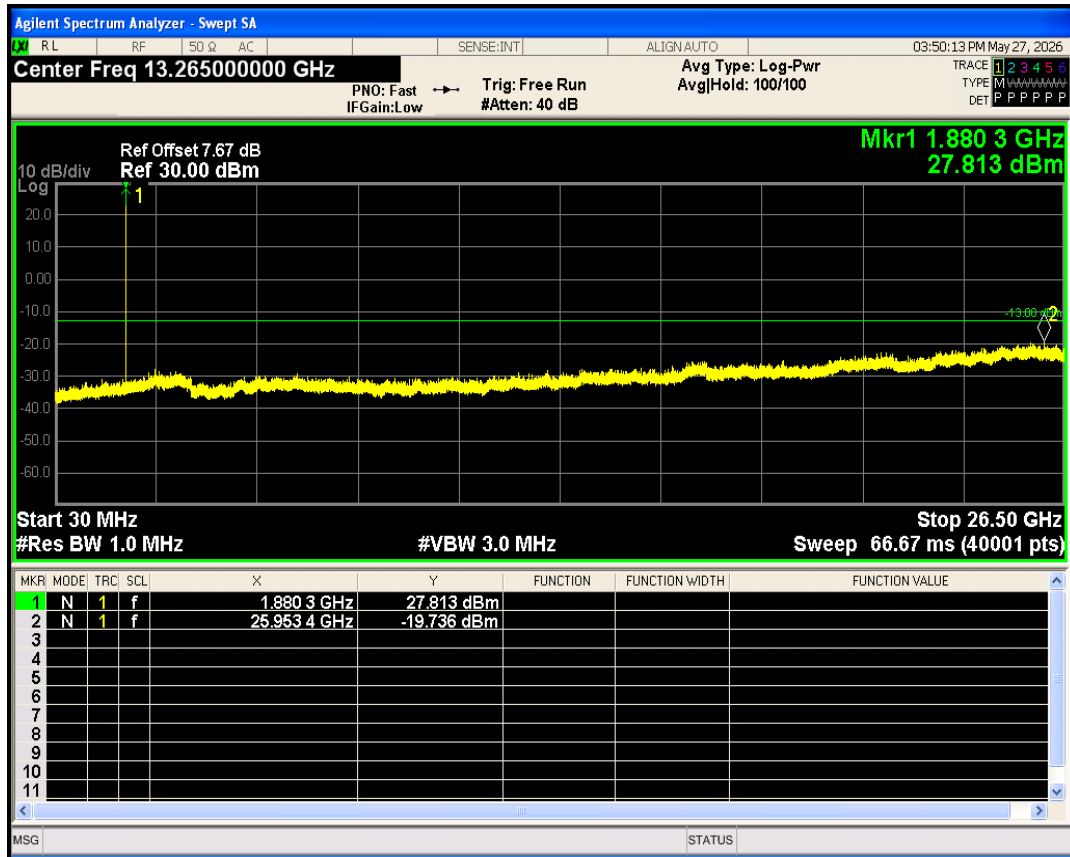


EGPRS1900 Channel=512

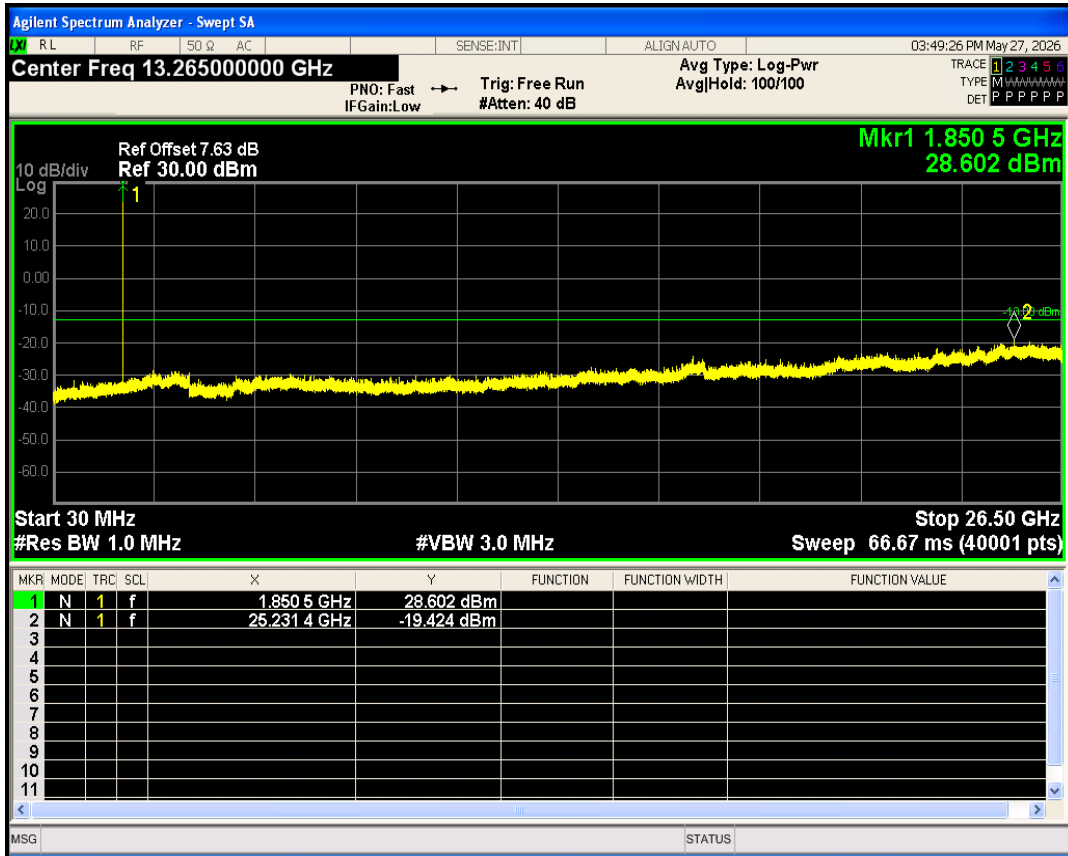


EGPRS1900 Channel=810

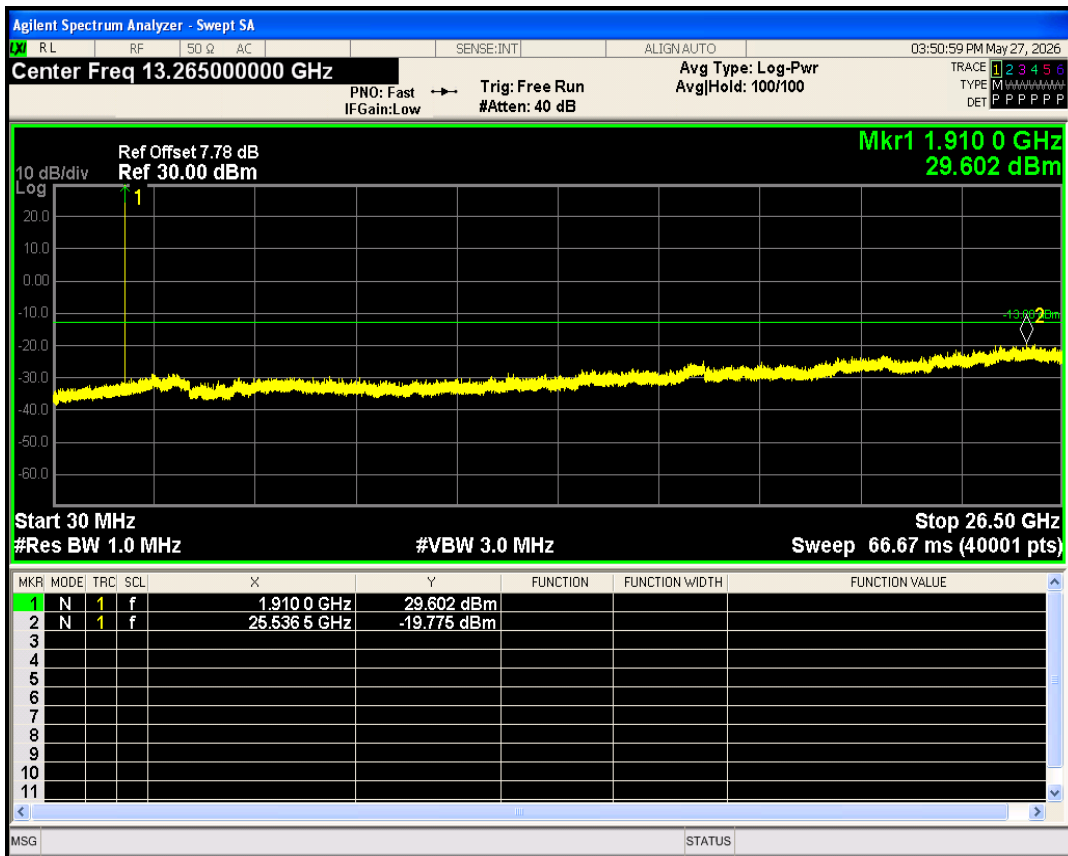


EGPRS850 Channel=128

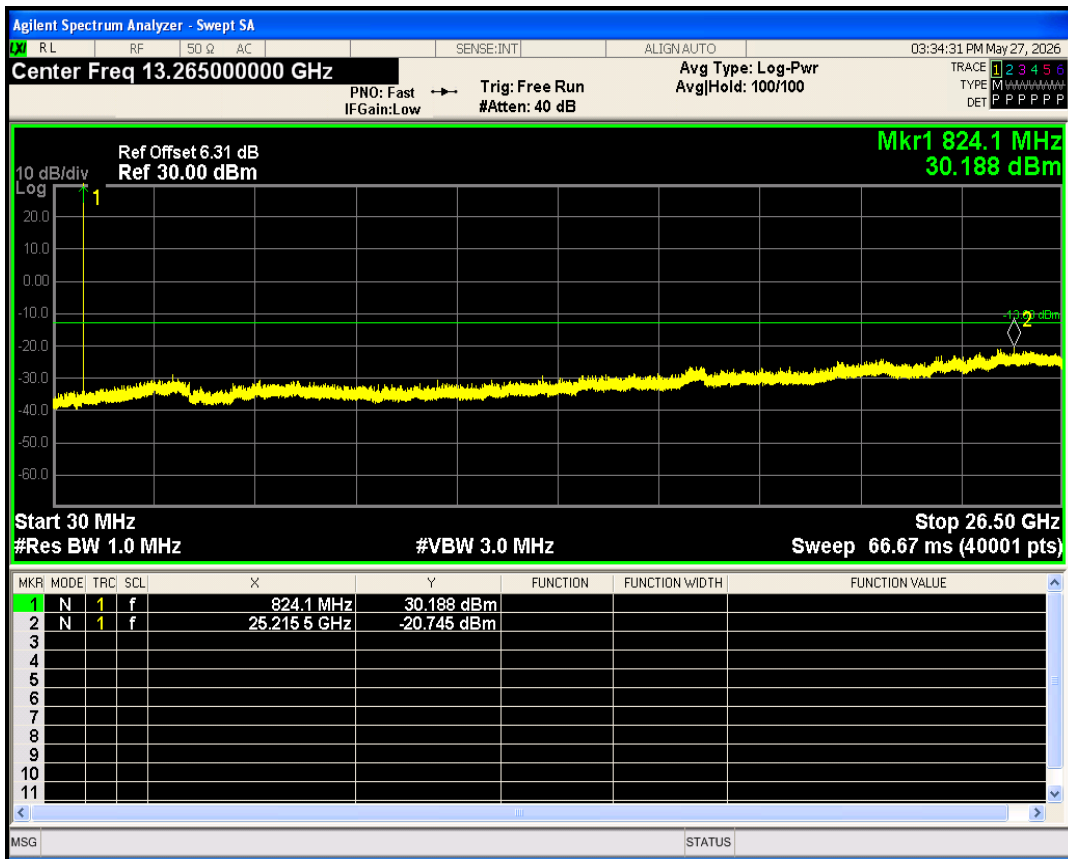

EGPRS850 Channel=251

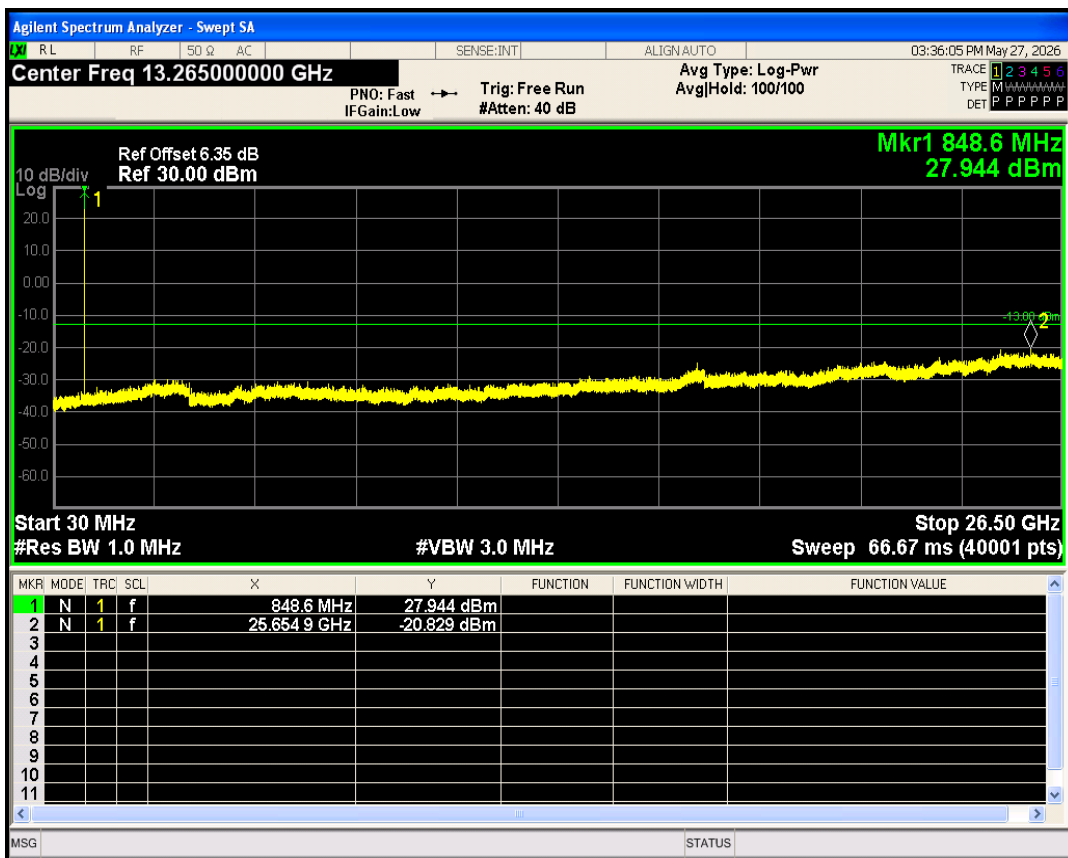


EGPRS850 Channel=189

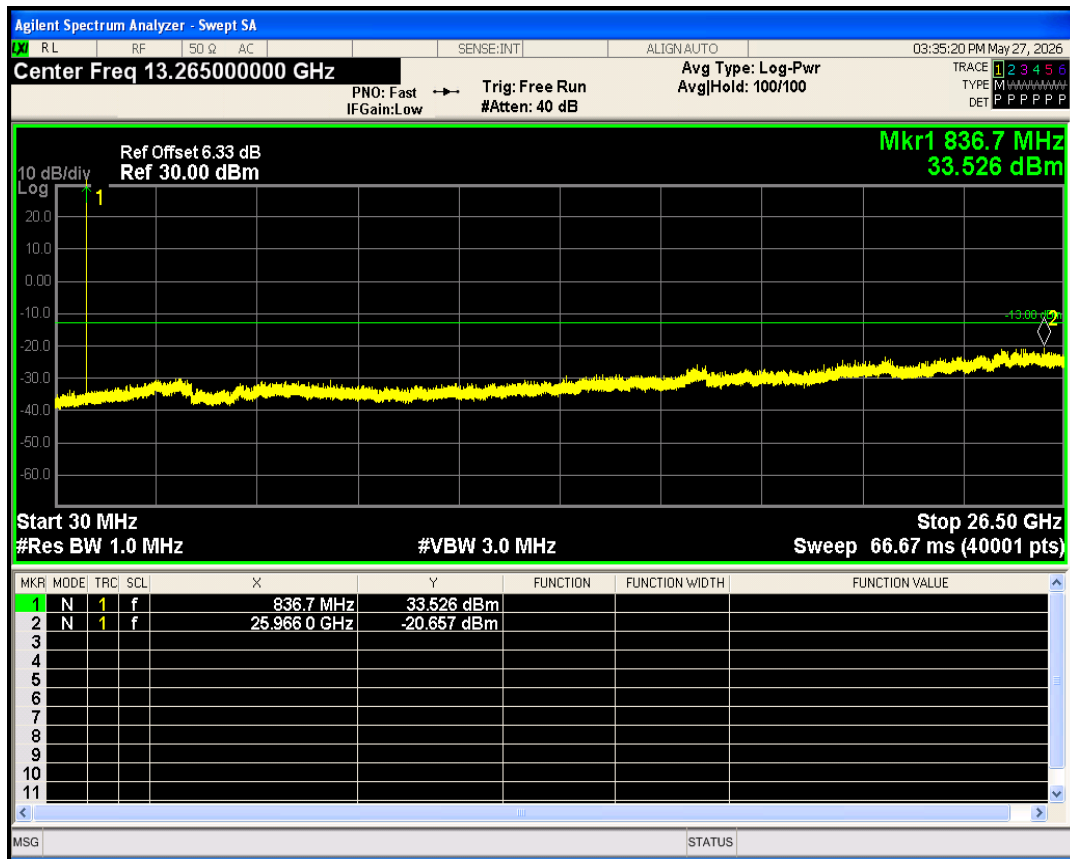


09 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GPRS1900	512	1850.2	2.84	13	PASS
GPRS1900	661	1880	2.88	13	PASS
GPRS1900	810	1909.8	2.90	13	PASS
GPRS850	128	824.2	2.79	13	PASS
GPRS850	189	836.4	2.73	13	PASS
GPRS850	251	848.8	2.83	13	PASS


GPRS1900 Channel=661

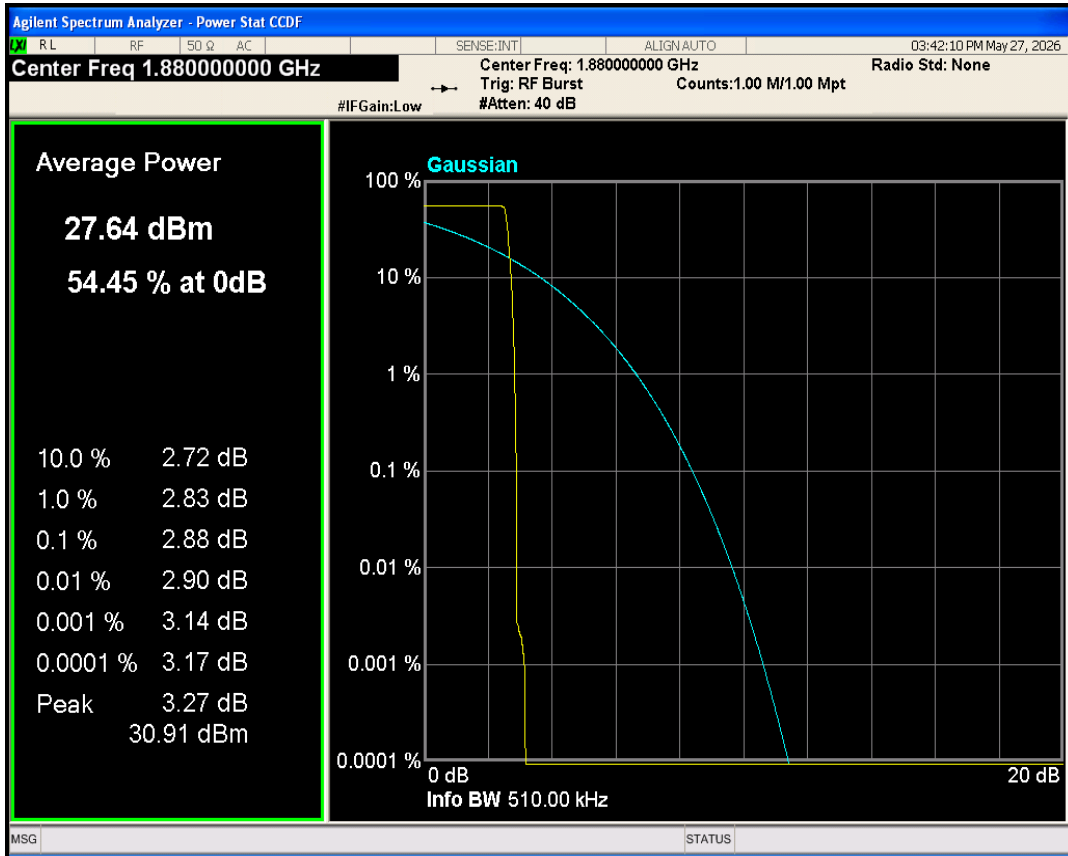


GPRS1900 Channel=512

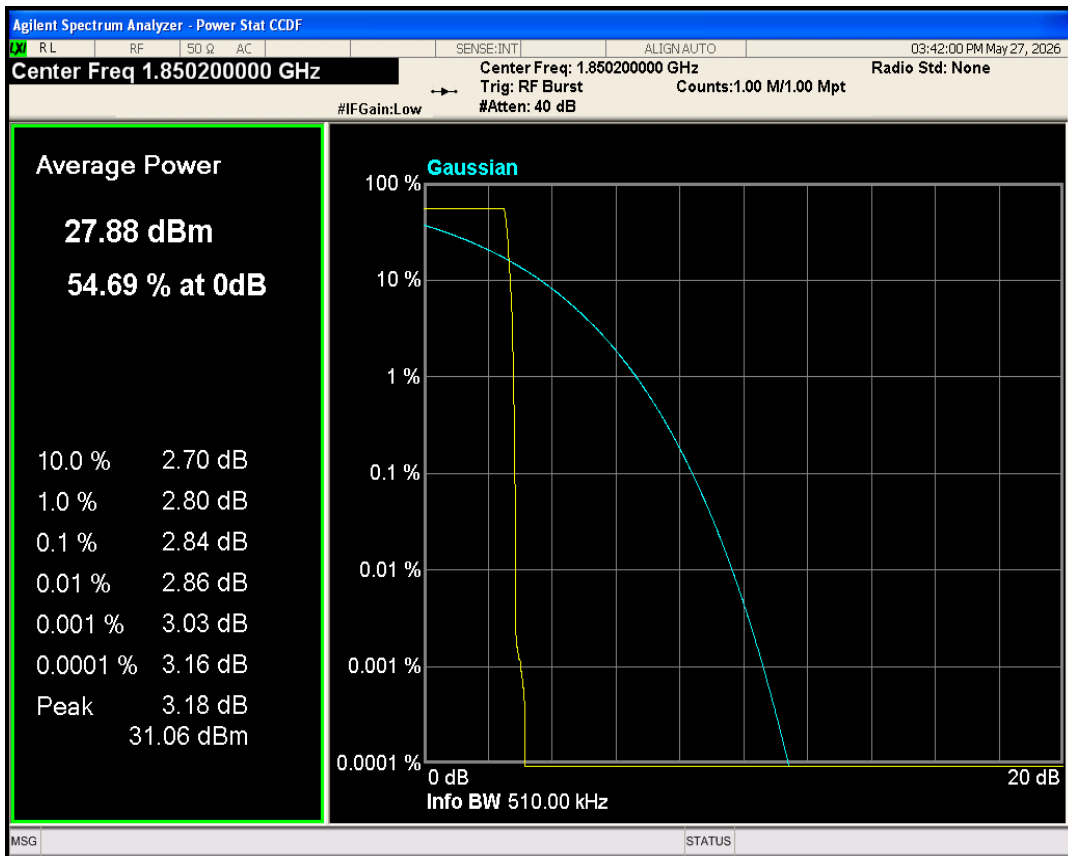


GPRS1900 Channel=810

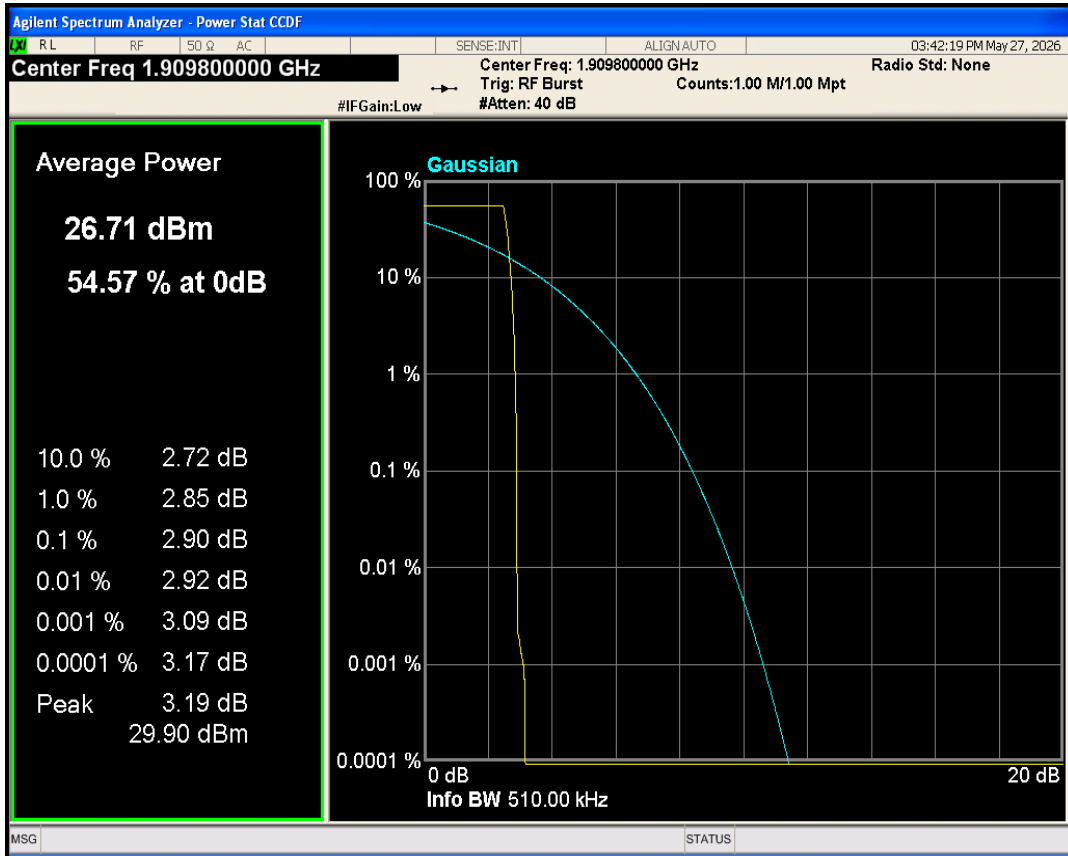


GPRS850 Channel=128

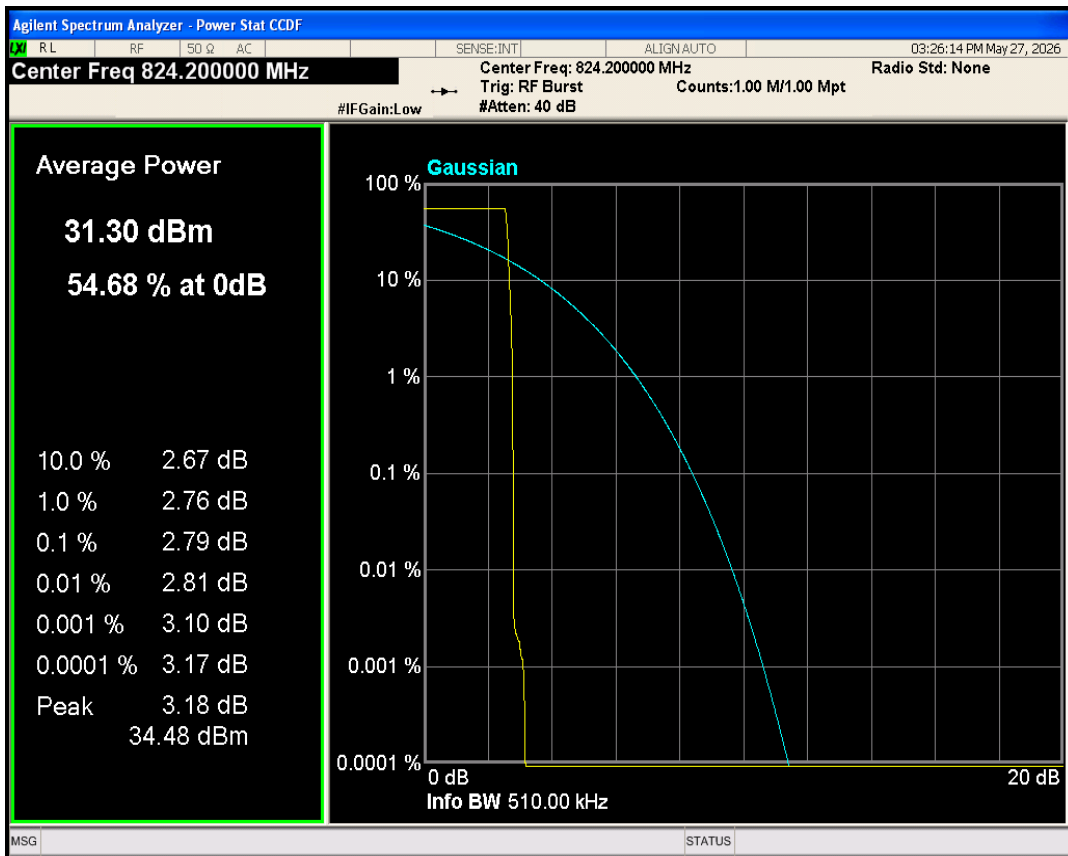

GPRS850 Channel=251

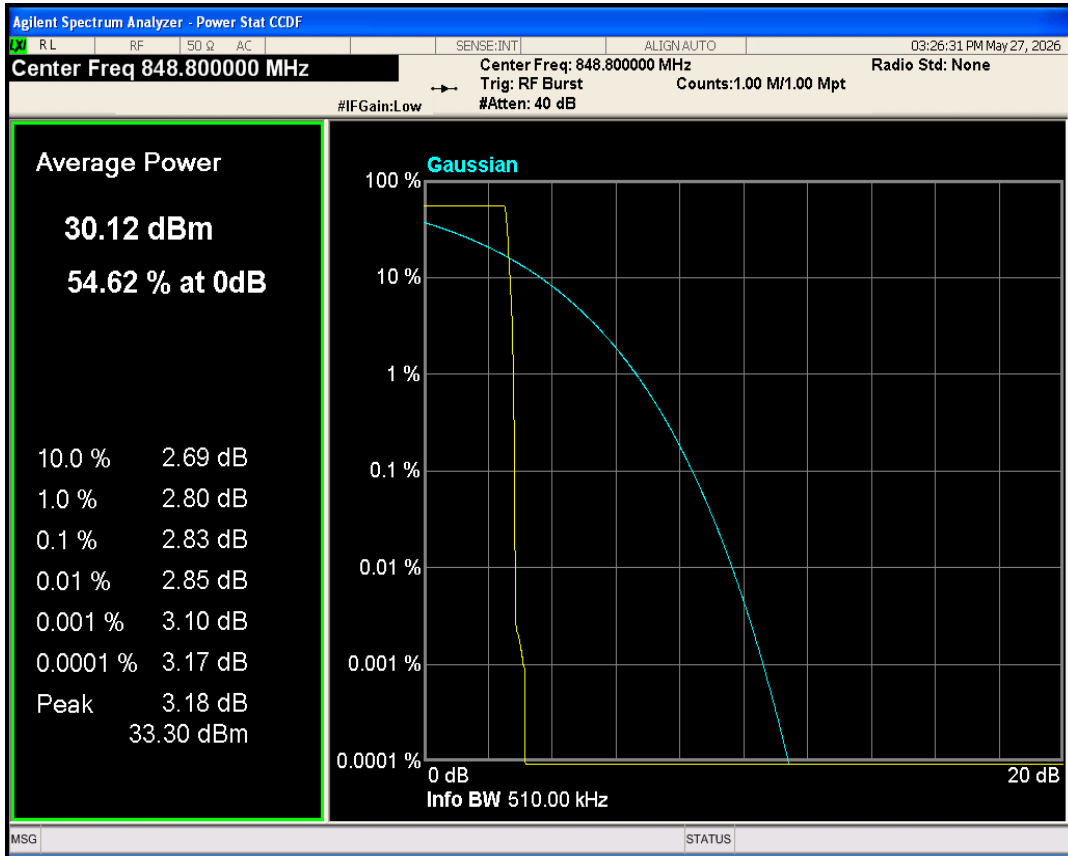


GPRS850 Channel=189

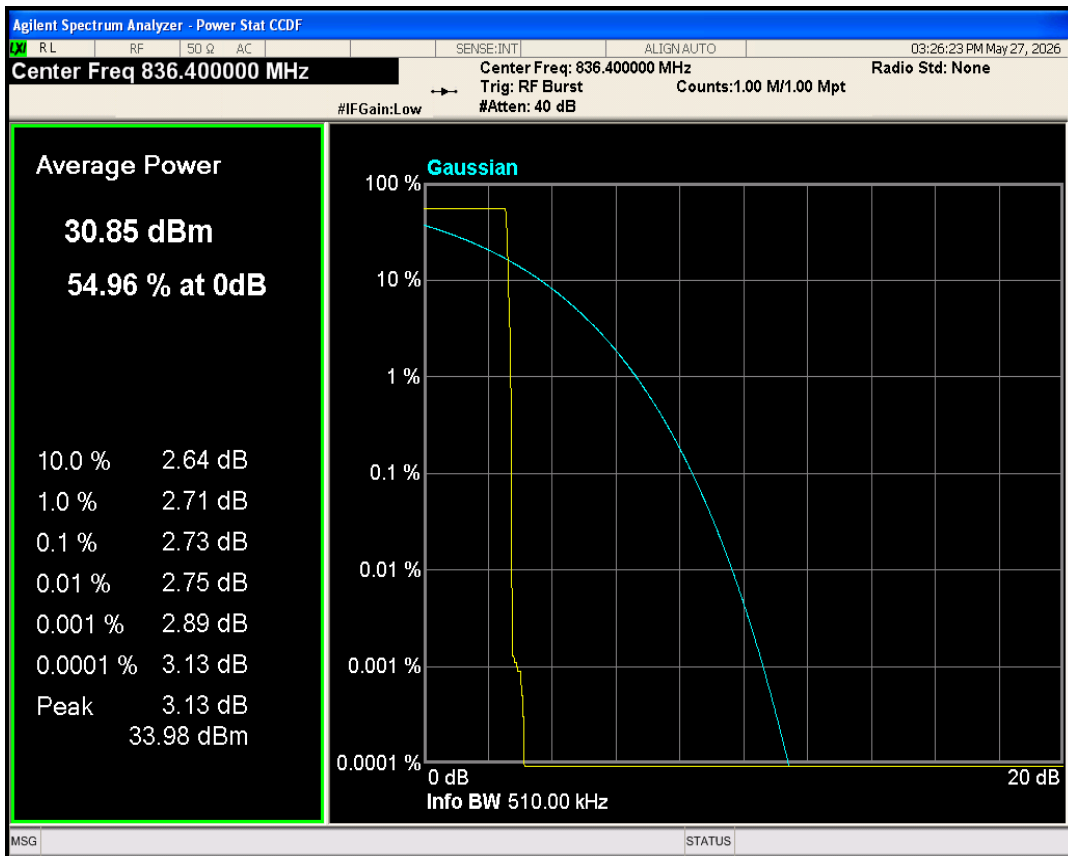


10 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GPRS1900	512	1850.2	247.529	320.304	PASS
GPRS1900	661	1880	240.872	302.826	PASS
GPRS1900	810	1909.8	242.107	312.427	PASS
GPRS850	128	824.2	245.362	325.071	PASS
GPRS850	189	836.4	245.641	317.871	PASS
GPRS850	251	848.8	245.882	309.076	PASS


GPRS1900 Channel=512

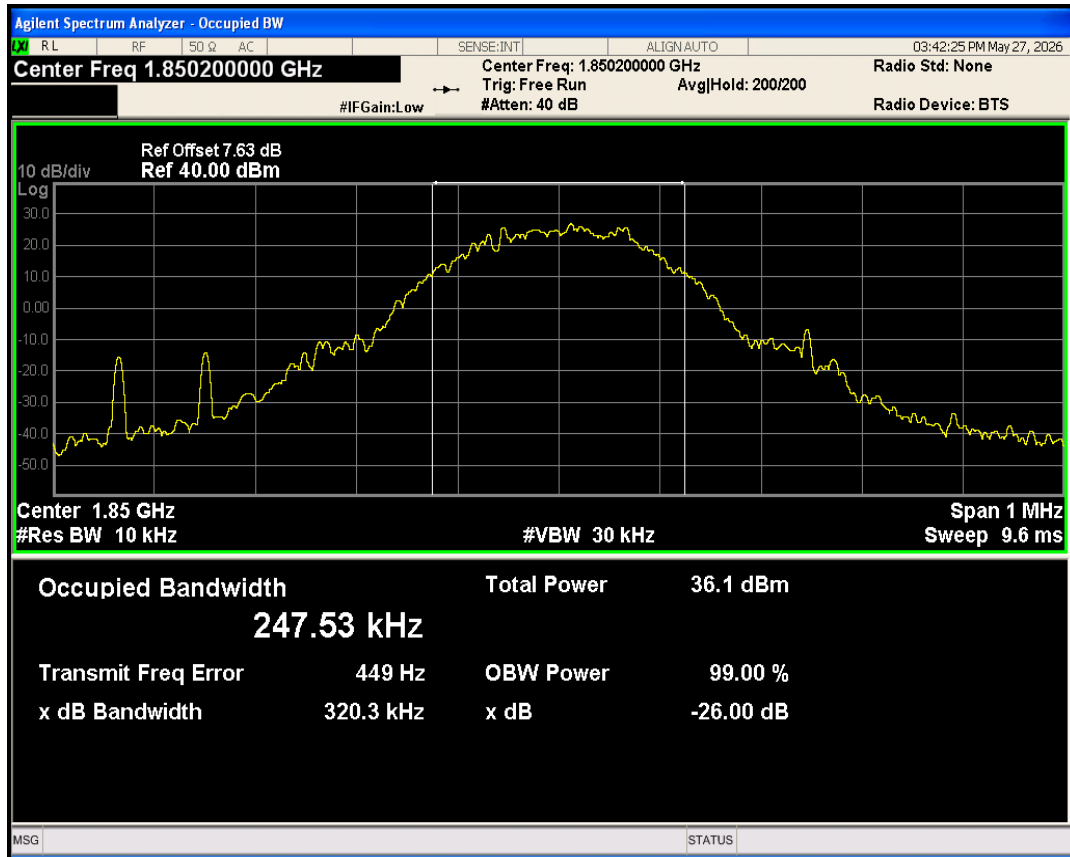


GPRS1900 Channel=661

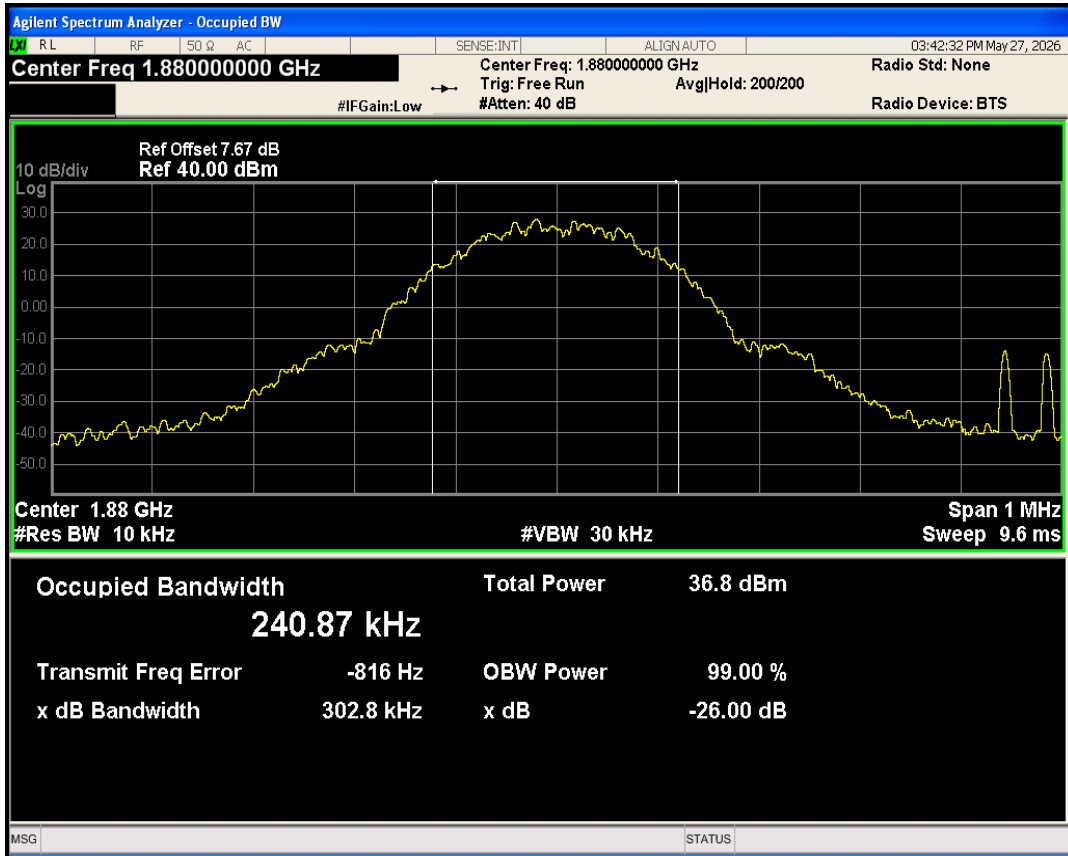


GPRS1900 Channel=810

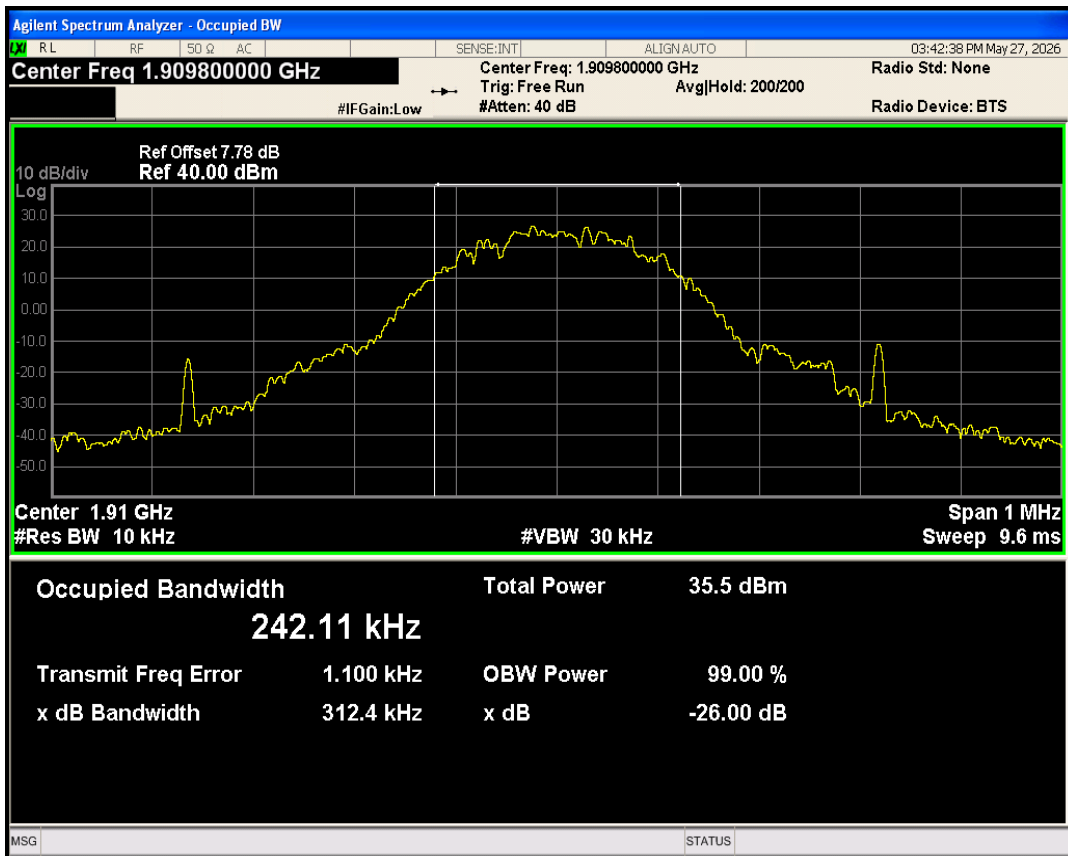


GPRS850 Channel=189

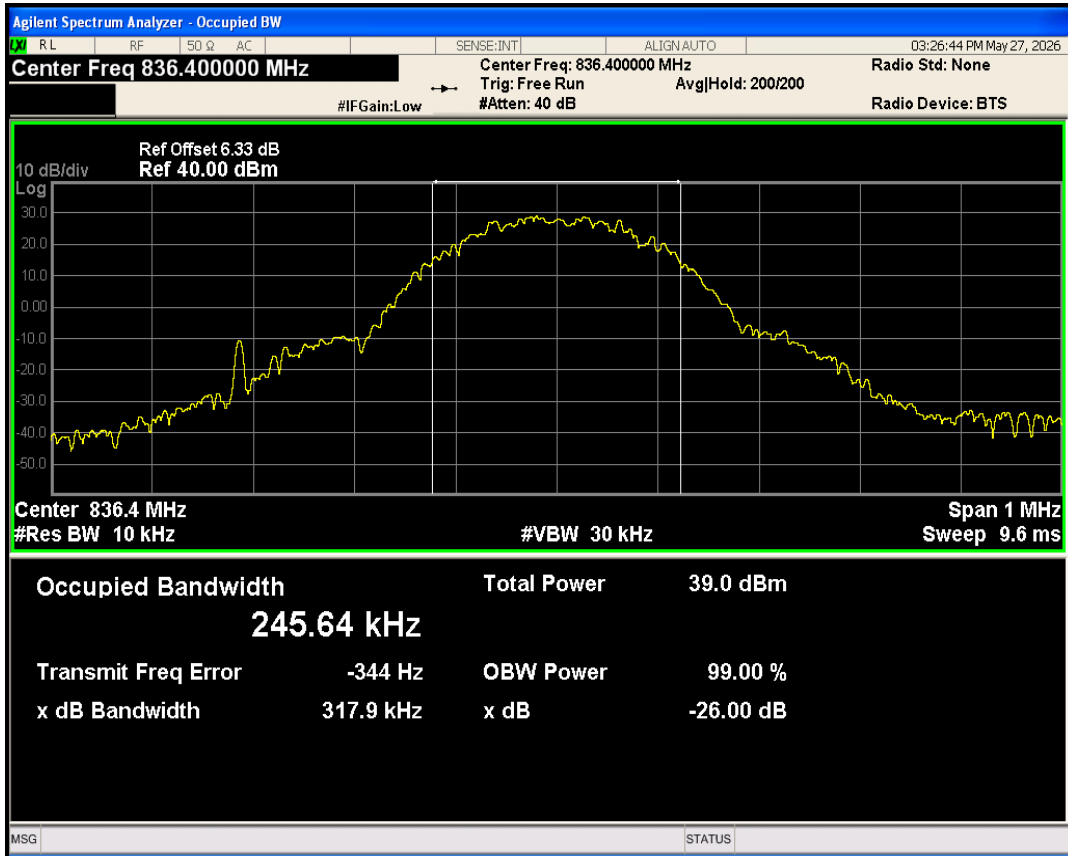

GPRS850 Channel=128

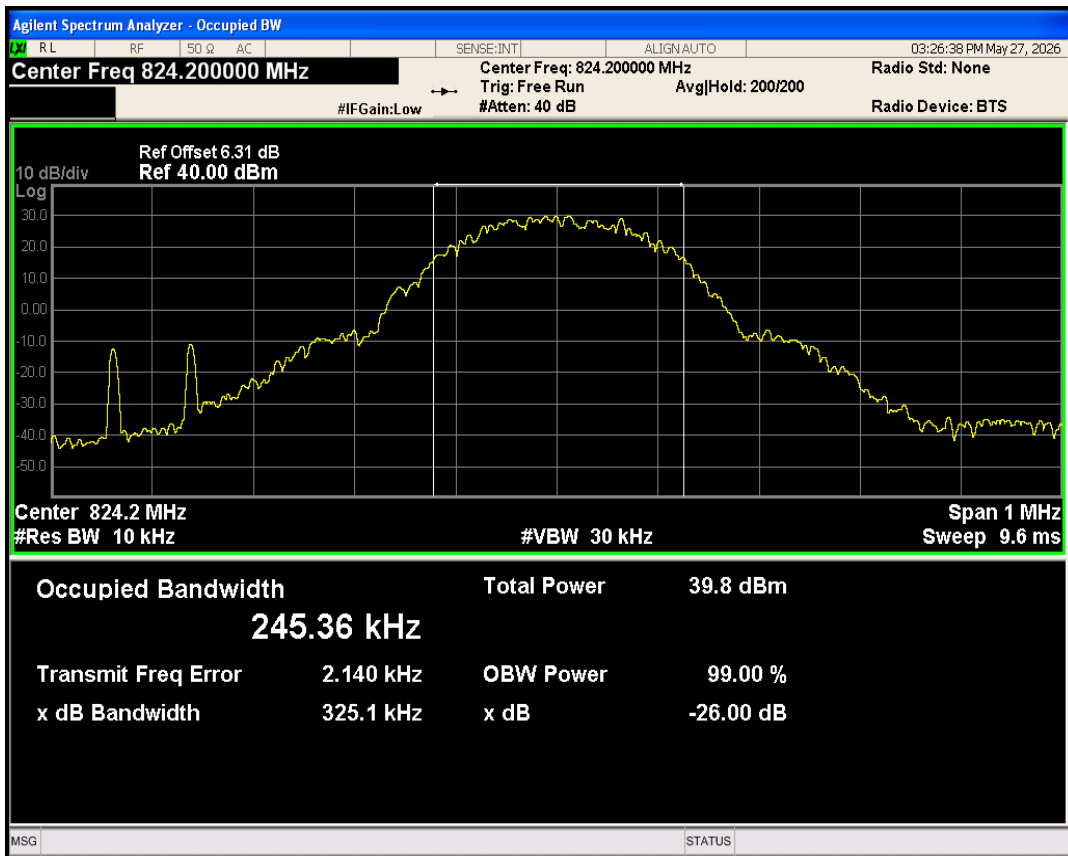


GPRS850 Channel=251

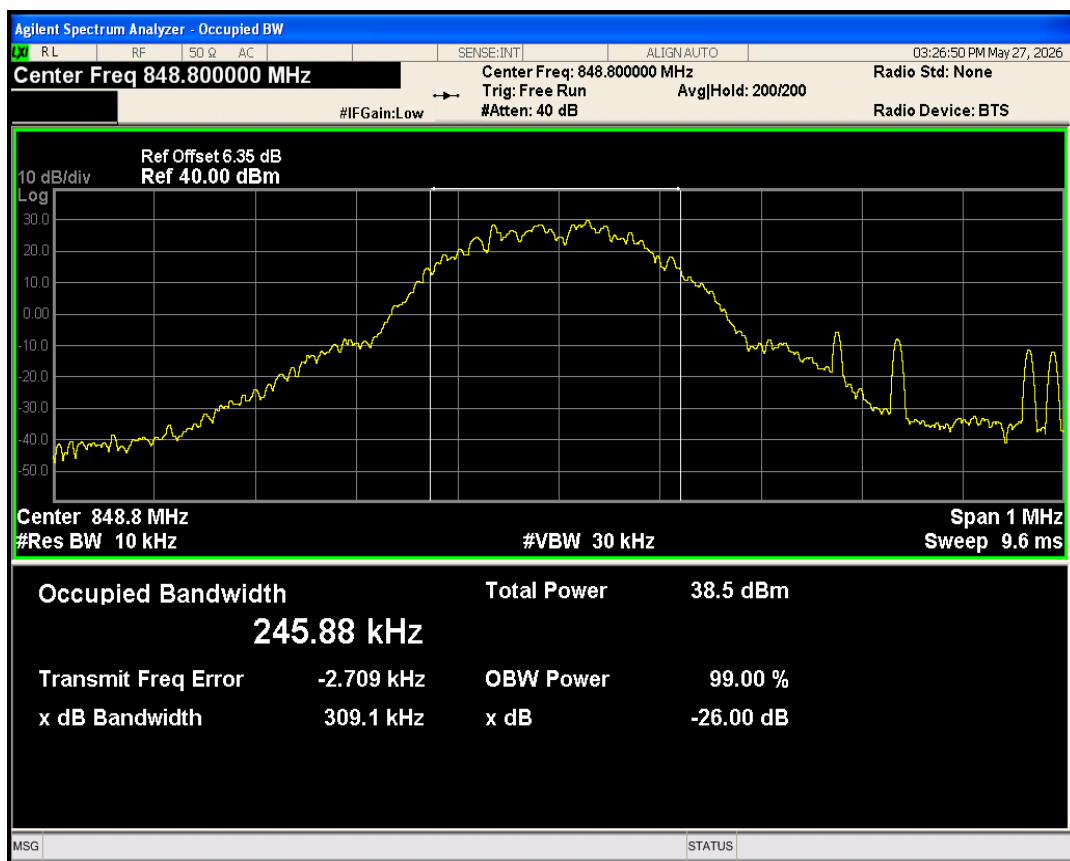


11 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	1849.99	-29.25	-13	PASS
GPRS1900	810	1909.8	1910.01	-30.94	-13	PASS
GPRS850	128	824.2	823.98	-27.73	-13	PASS
GPRS850	251	848.8	849.02	-27.27	-13	PASS


GPRS1900 Channel=512

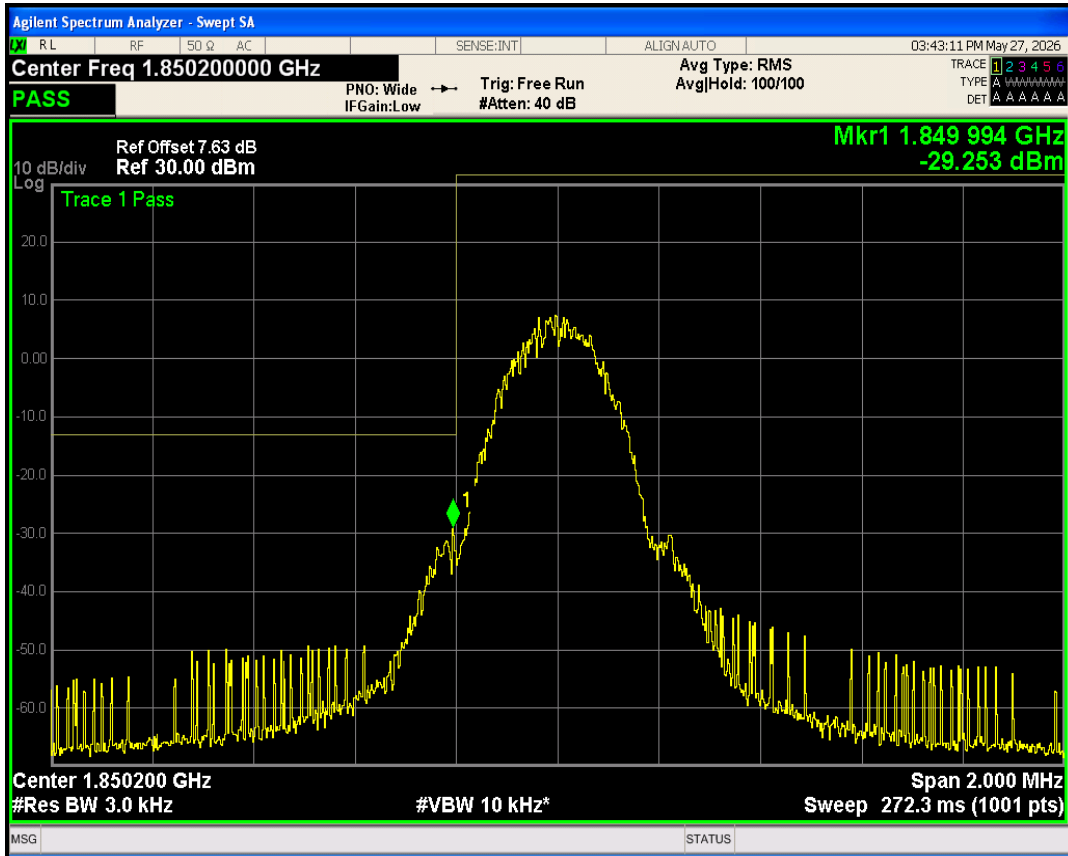


GPRS1900 Channel=810

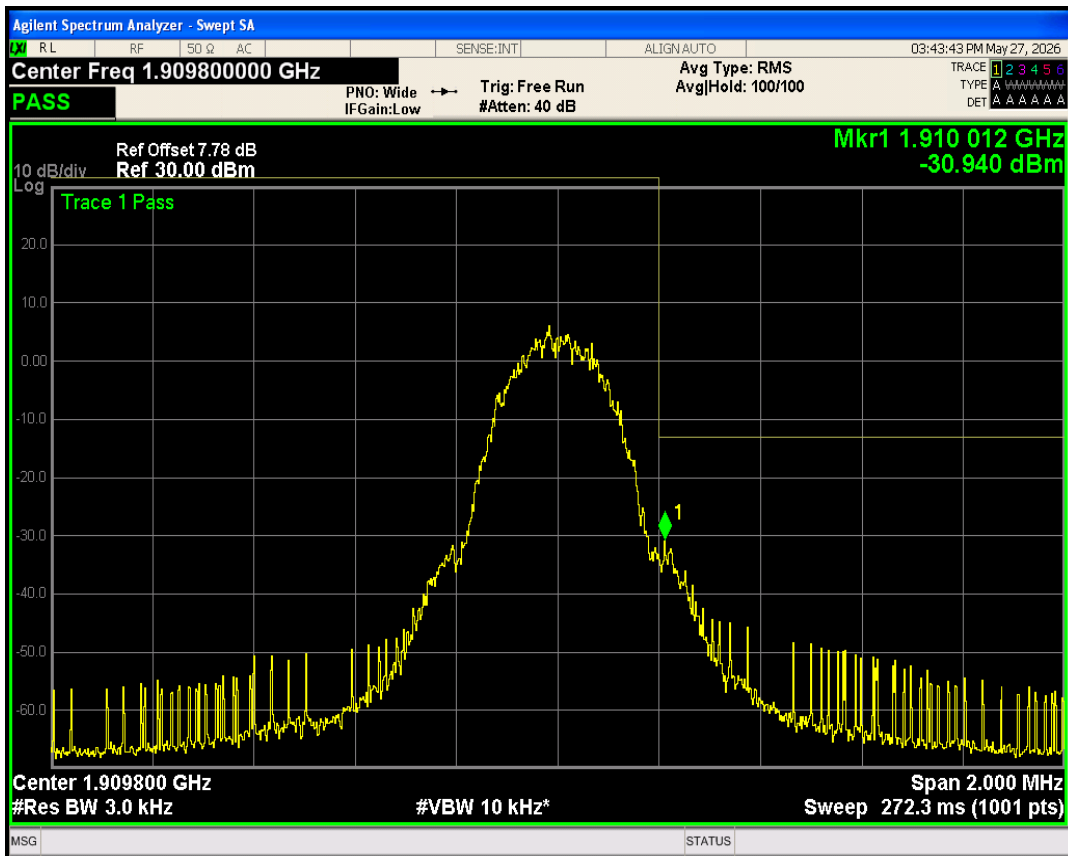

GPRS850 Channel=128

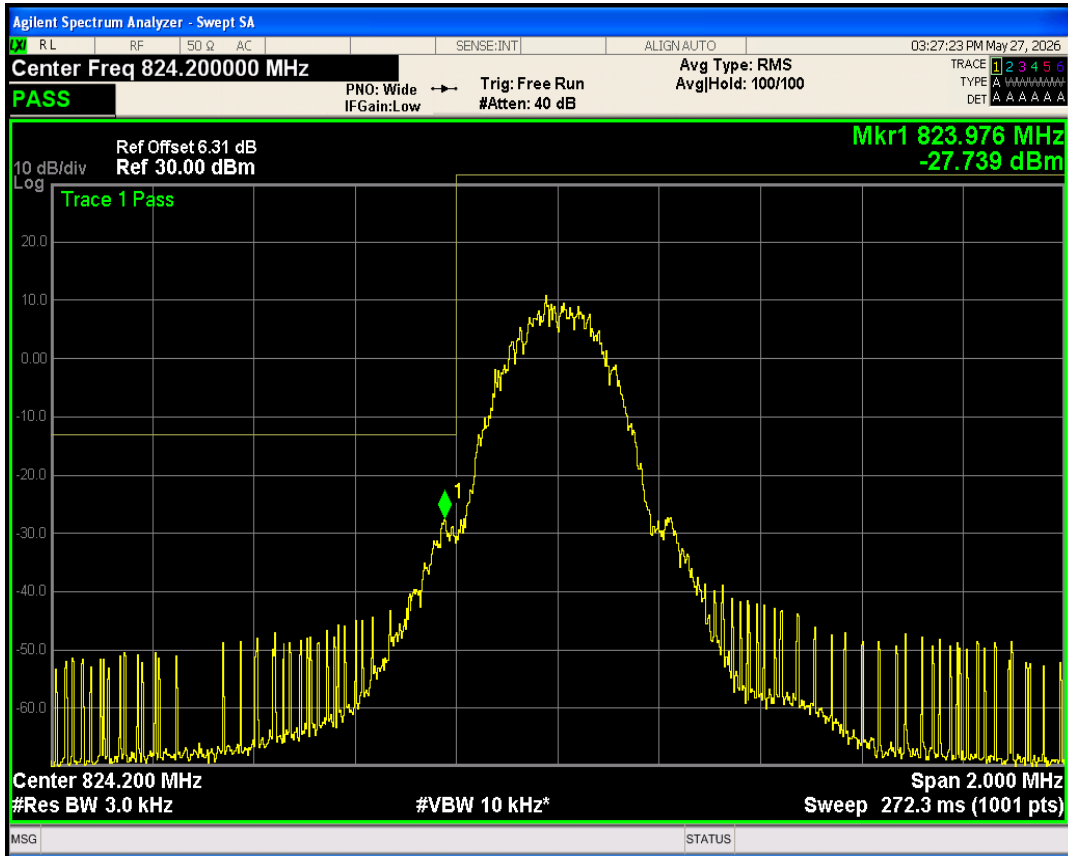


GPRS850 Channel=251

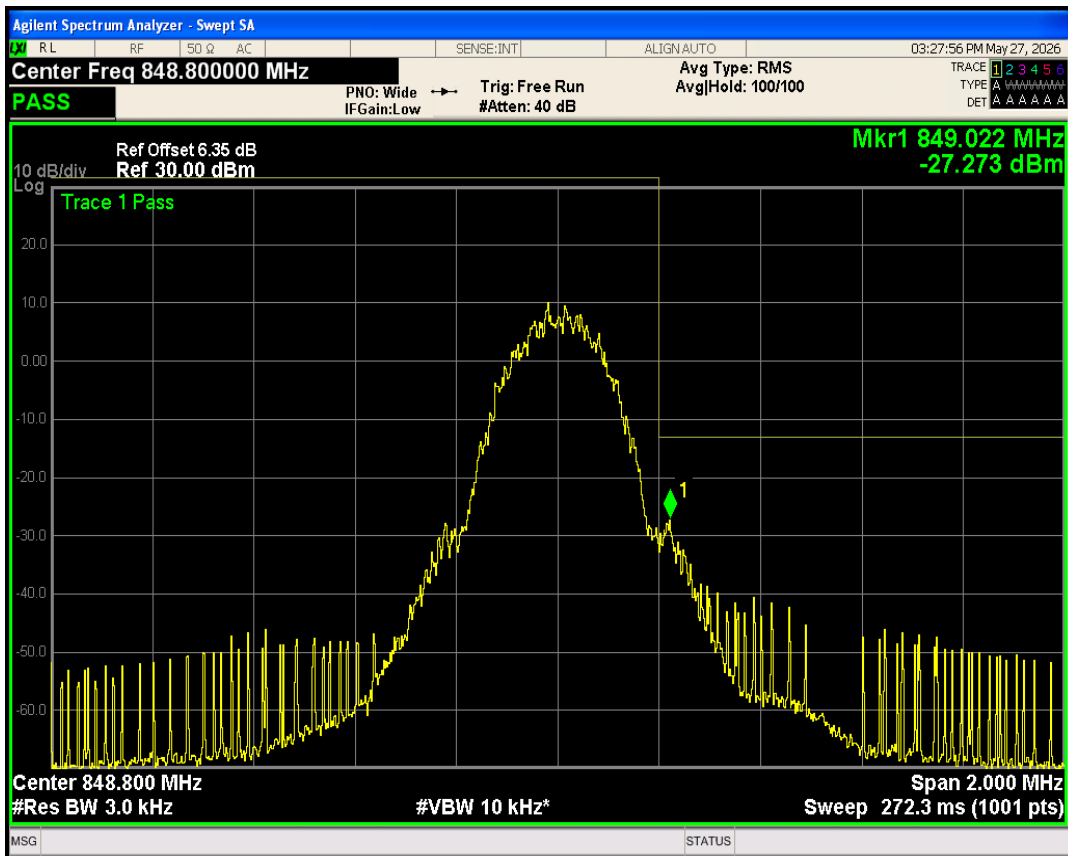


12 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GPRS1900	512	1850.2	25676.78	-19.55	-13	PASS
GPRS1900	661	1880	25766.78	-19.62	-13	PASS
GPRS1900	810	1909.8	25685.39	-19.40	-13	PASS
GPRS850	128	824.2	25238.70	-20.66	-13	PASS
GPRS850	189	836.4	24889.30	-20.95	-13	PASS
GPRS850	251	848.8	25217.53	-20.81	-13	PASS


GPRS1900 Channel=512

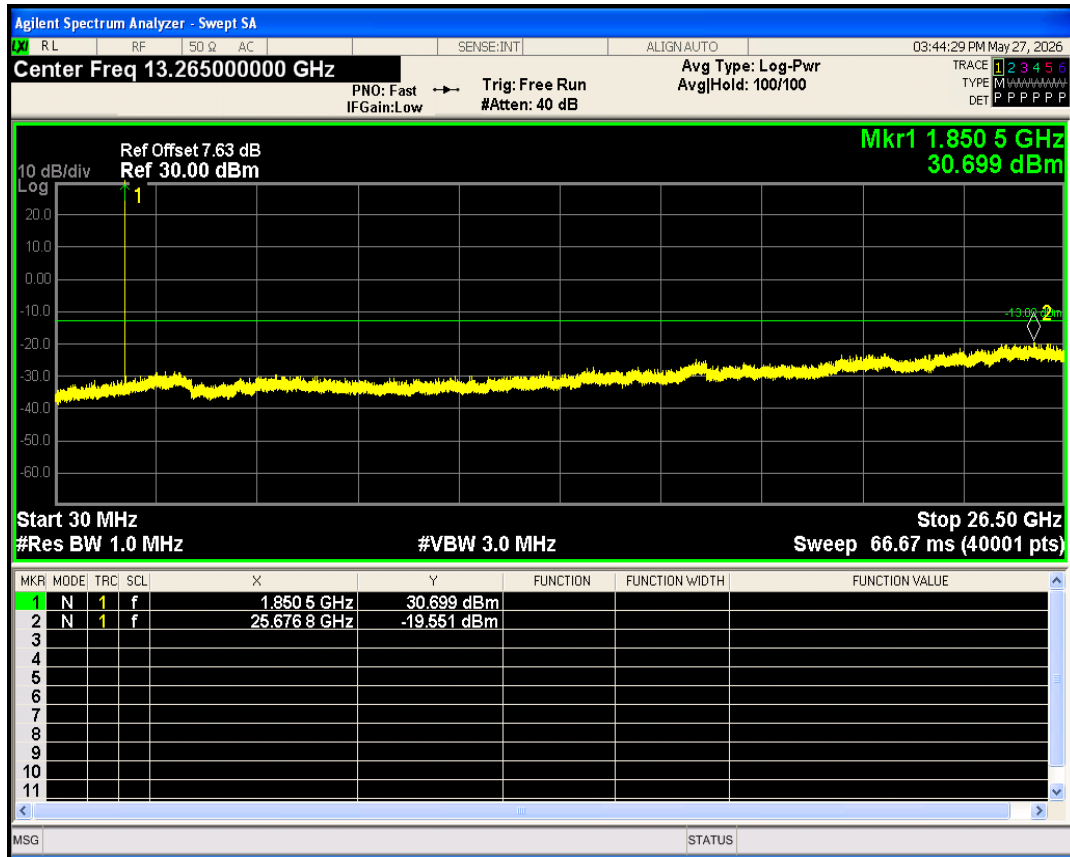


GPRS1900 Channel=810

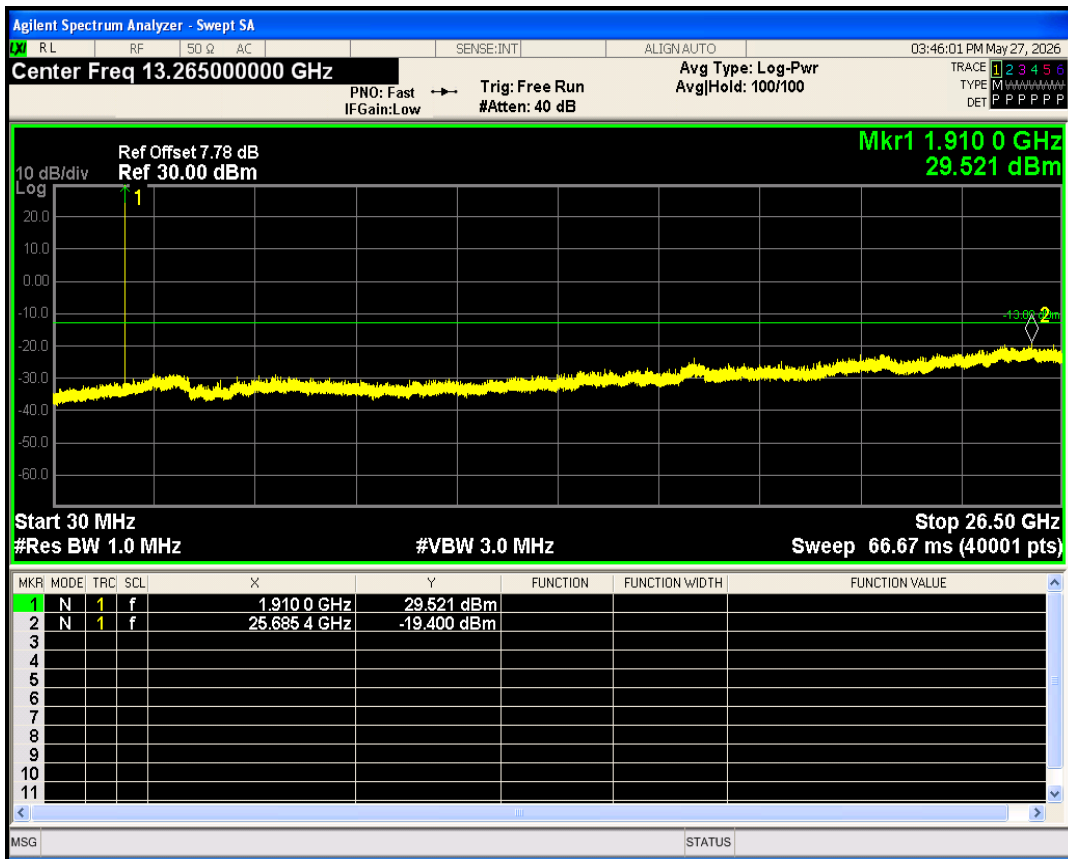


GPRS1900 Channel=661

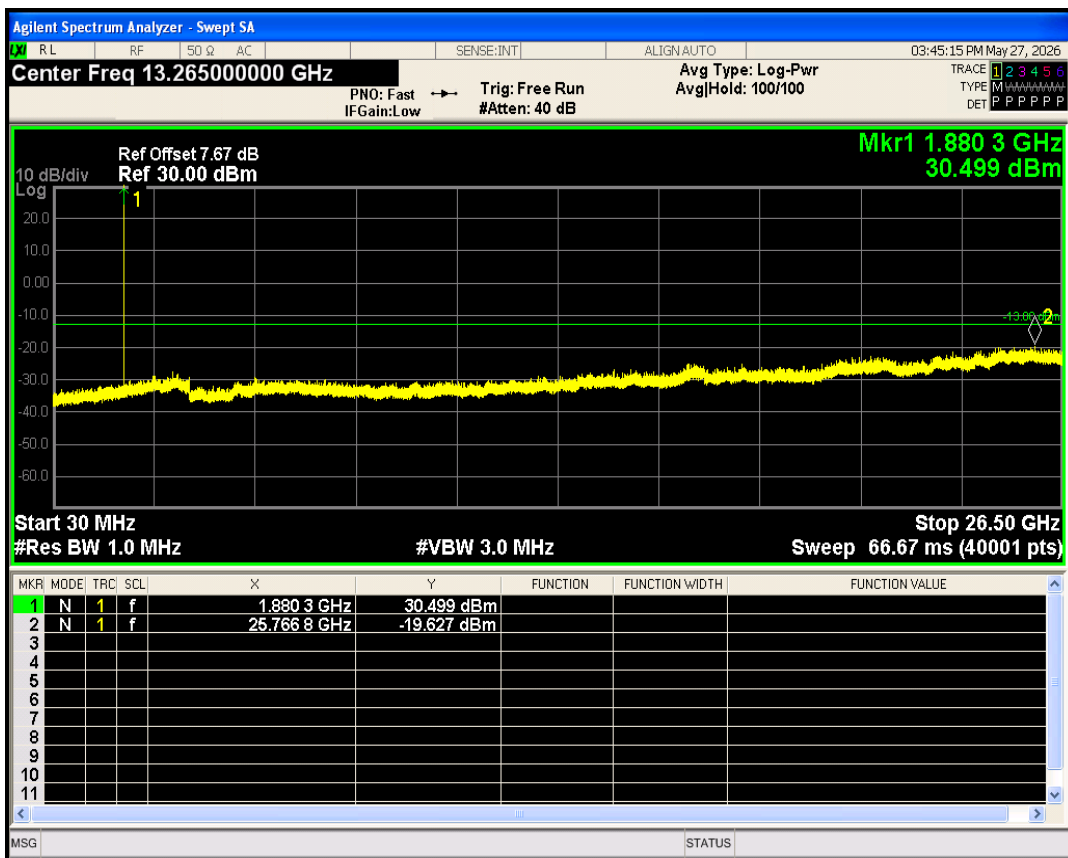


GPRS850 Channel=128

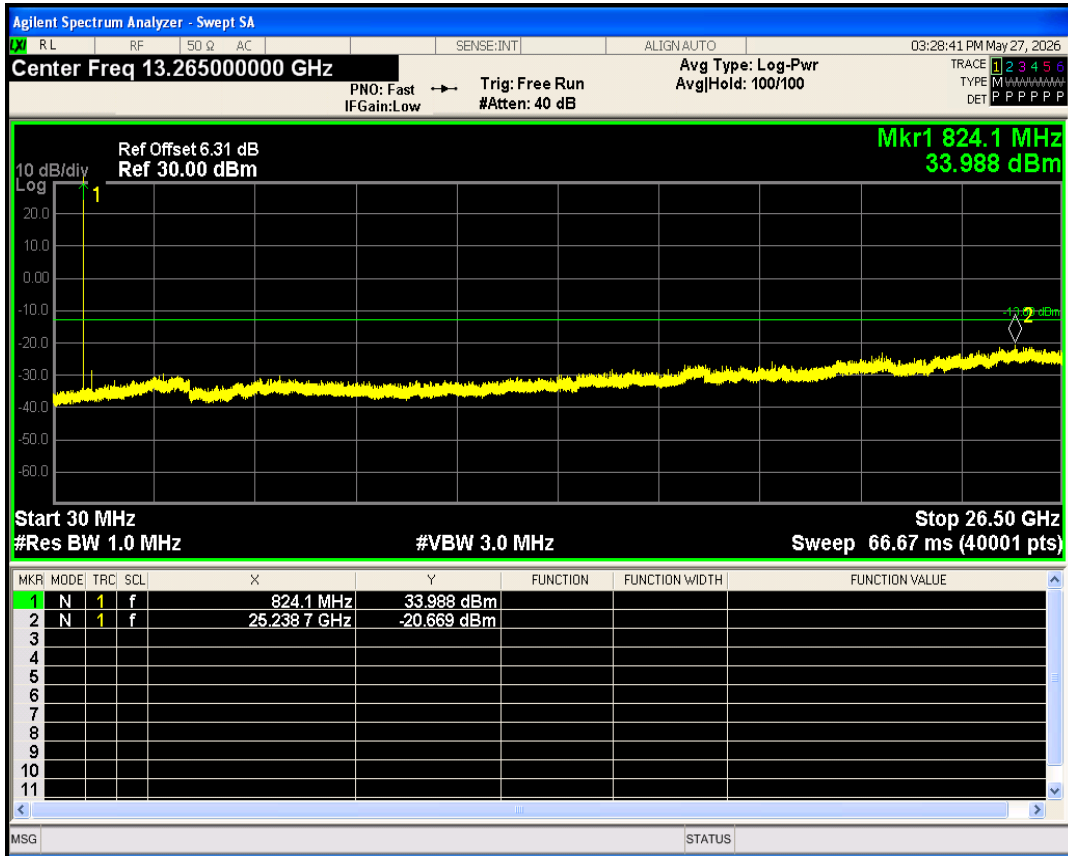

GPRS850 Channel=251

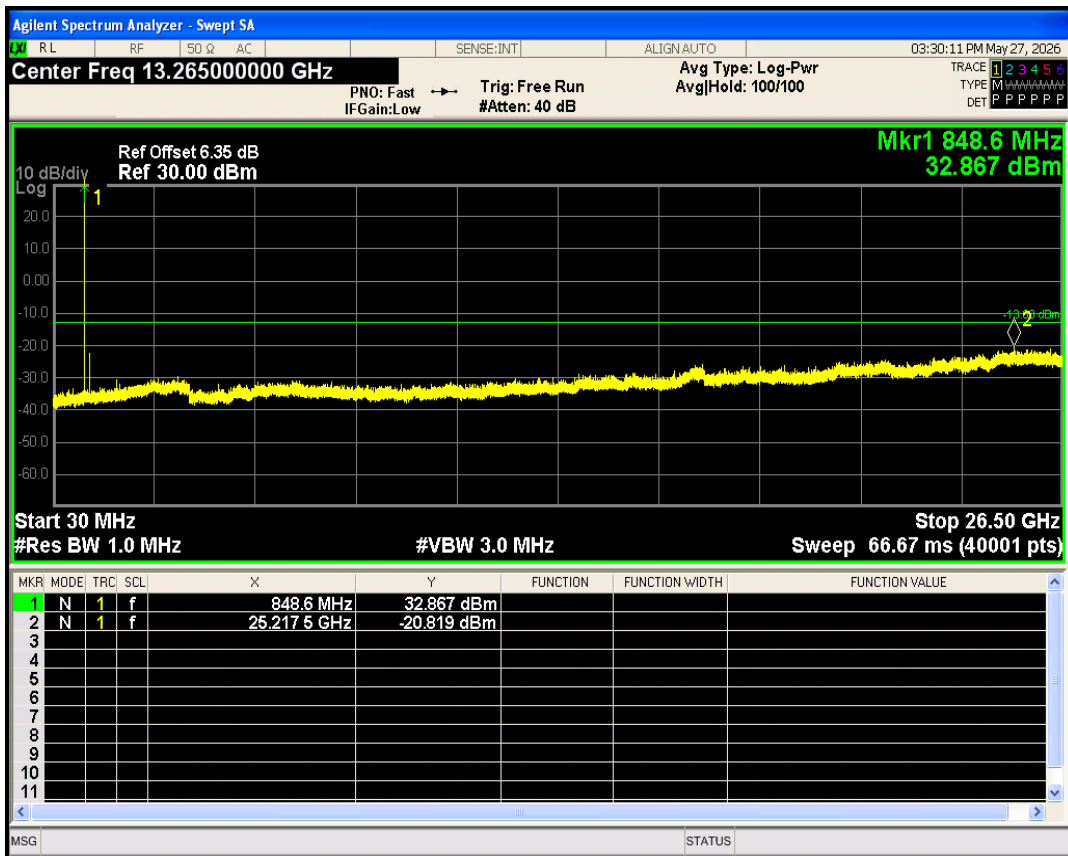


GPRS850 Channel=189

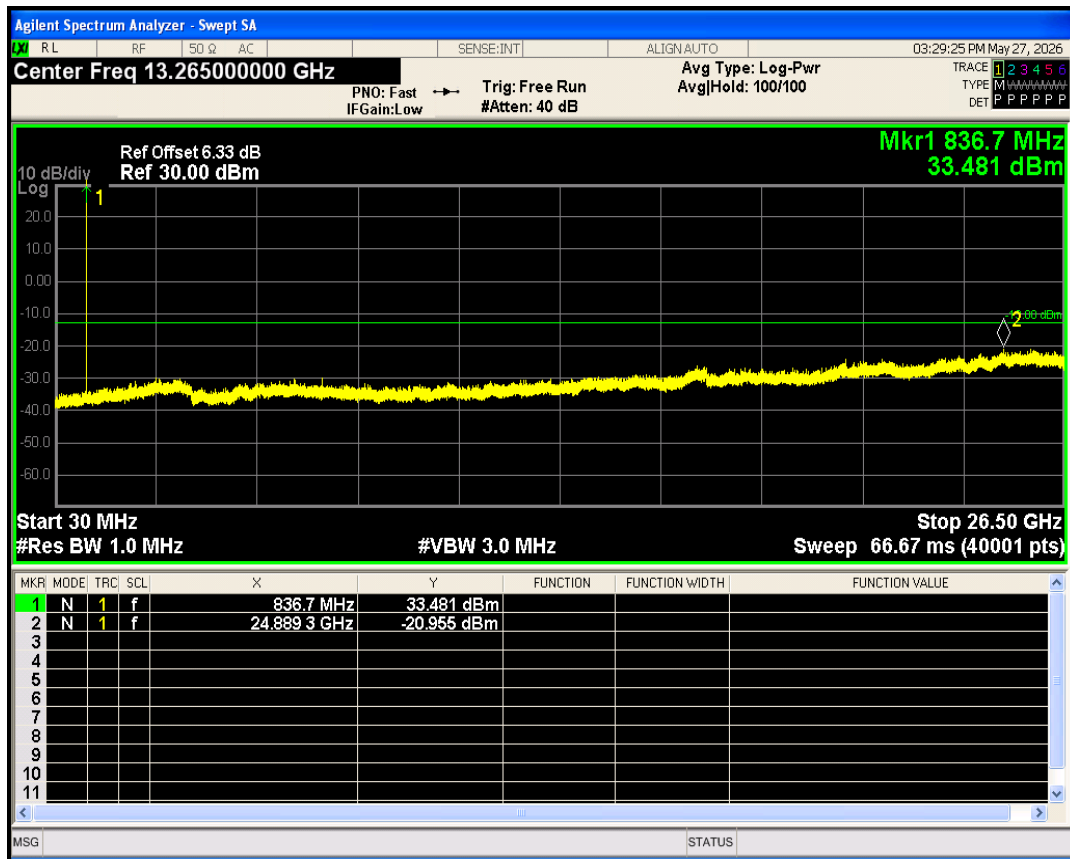


03 Peak-to-Average Ratio

Band	Channel	Frequency (MHz)	Result (dB)	high Limit (dB)	Verdict
GSM1900	512	1850.2	2.79	13	PASS
GSM1900	661	1880	2.83	13	PASS
GSM1900	810	1909.8	2.88	13	PASS
GSM850	128	824.2	2.75	13	PASS
GSM850	189	836.4	2.72	13	PASS
GSM850	251	848.8	2.79	13	PASS


GSM1900 Channel=512

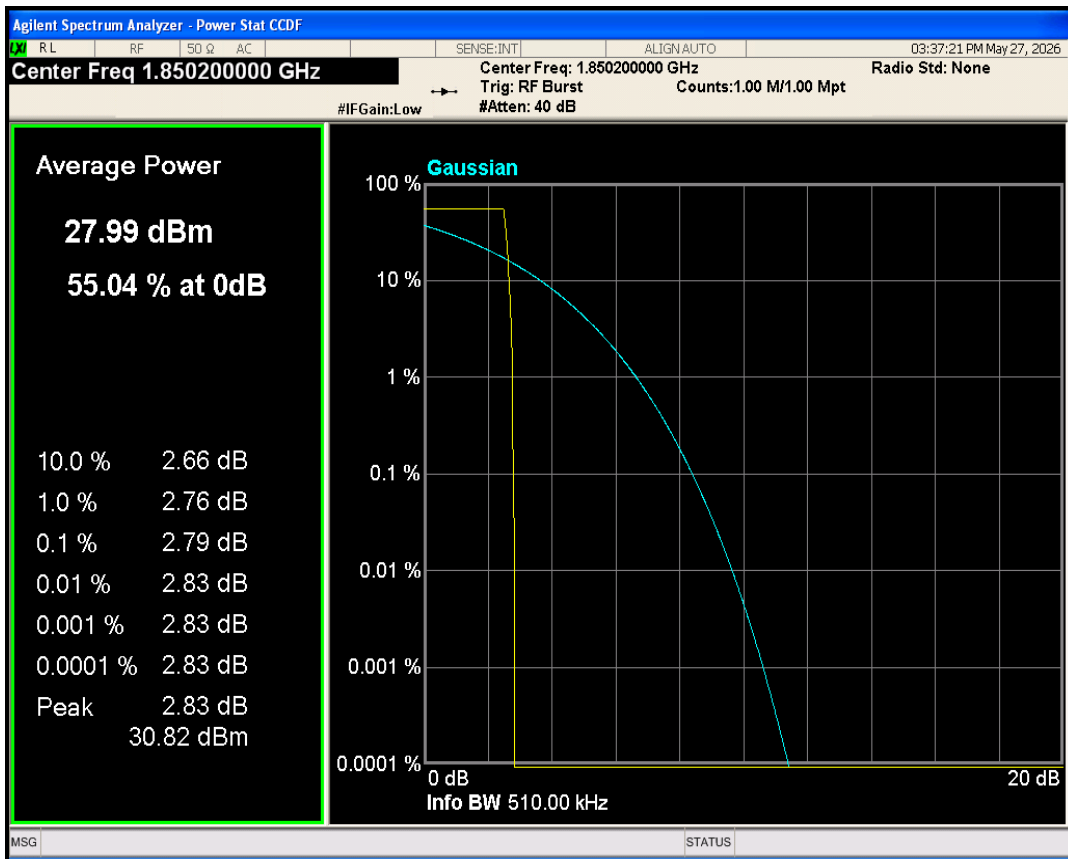


GSM1900 Channel=810

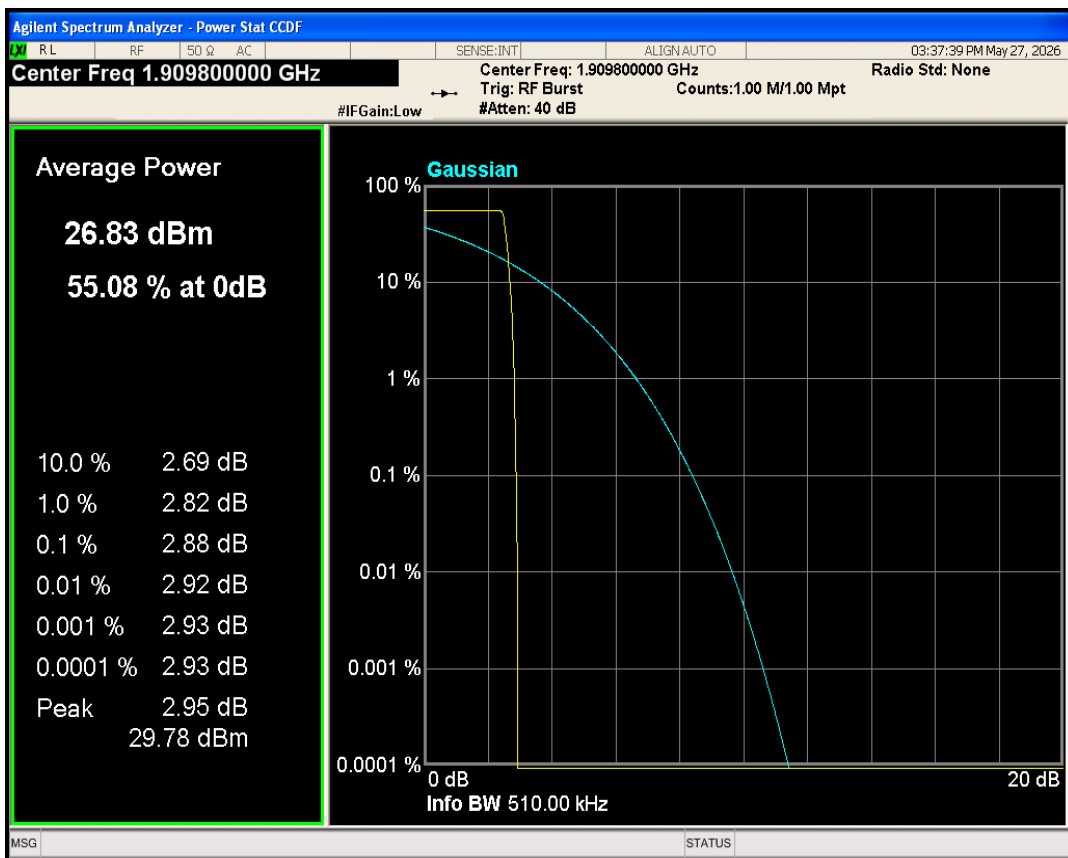


GSM1900 Channel=661

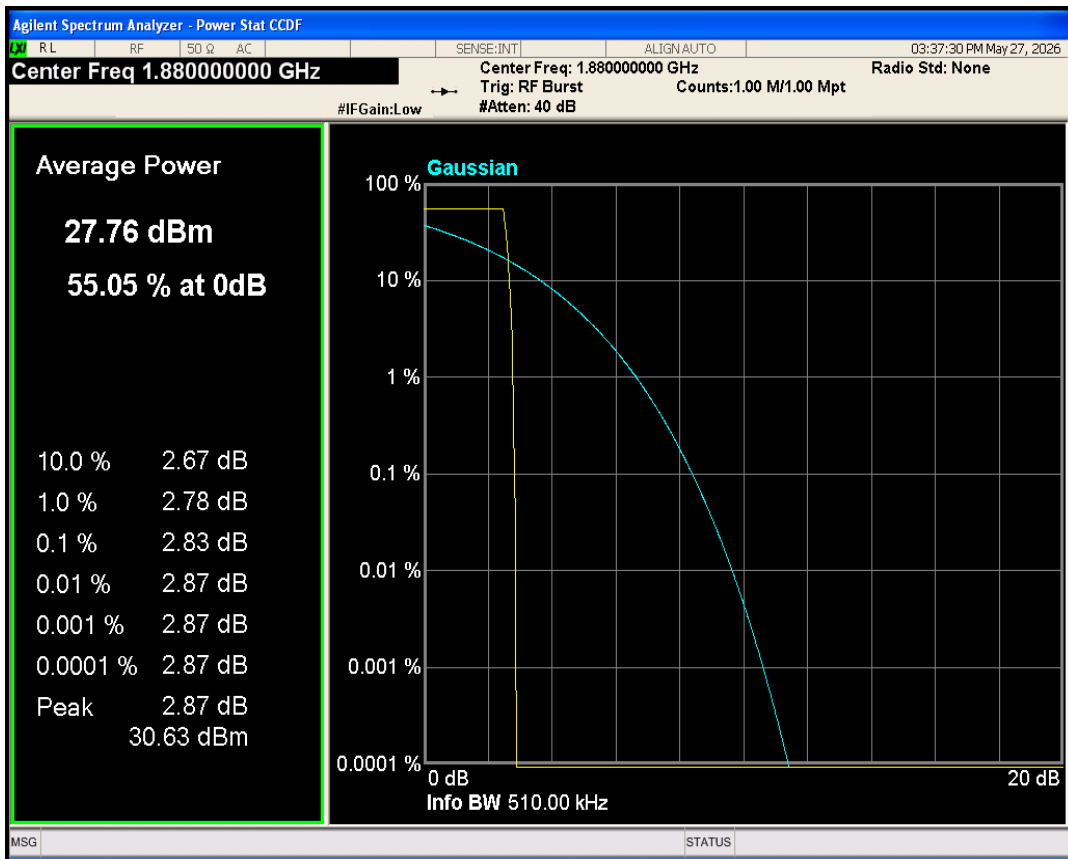


GSM850 Channel=128

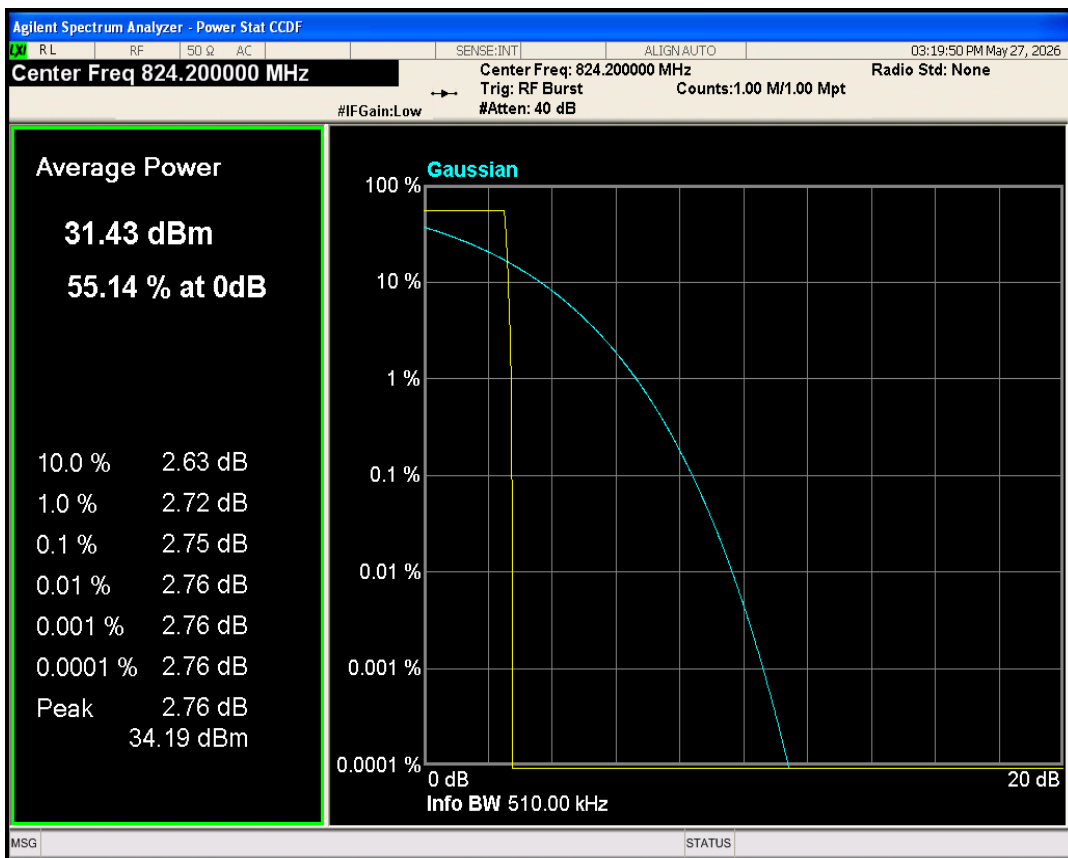

GSM850 Channel=189

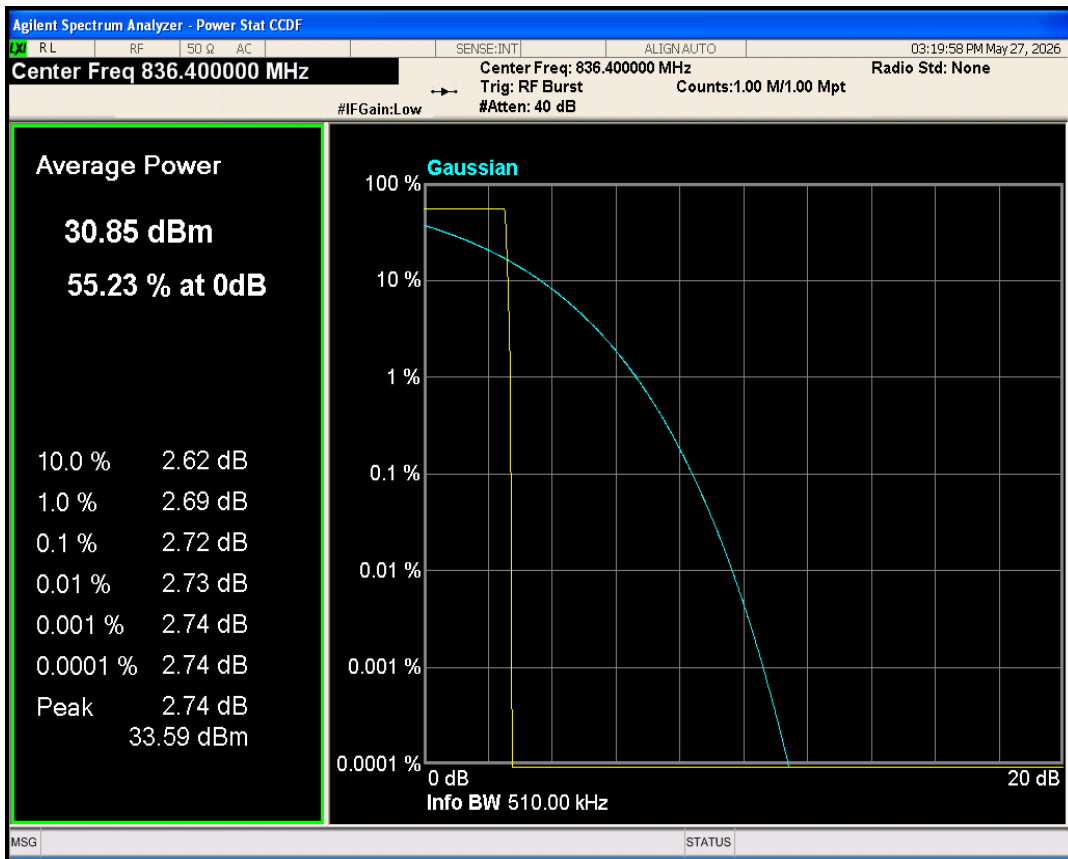


GSM850 Channel=251

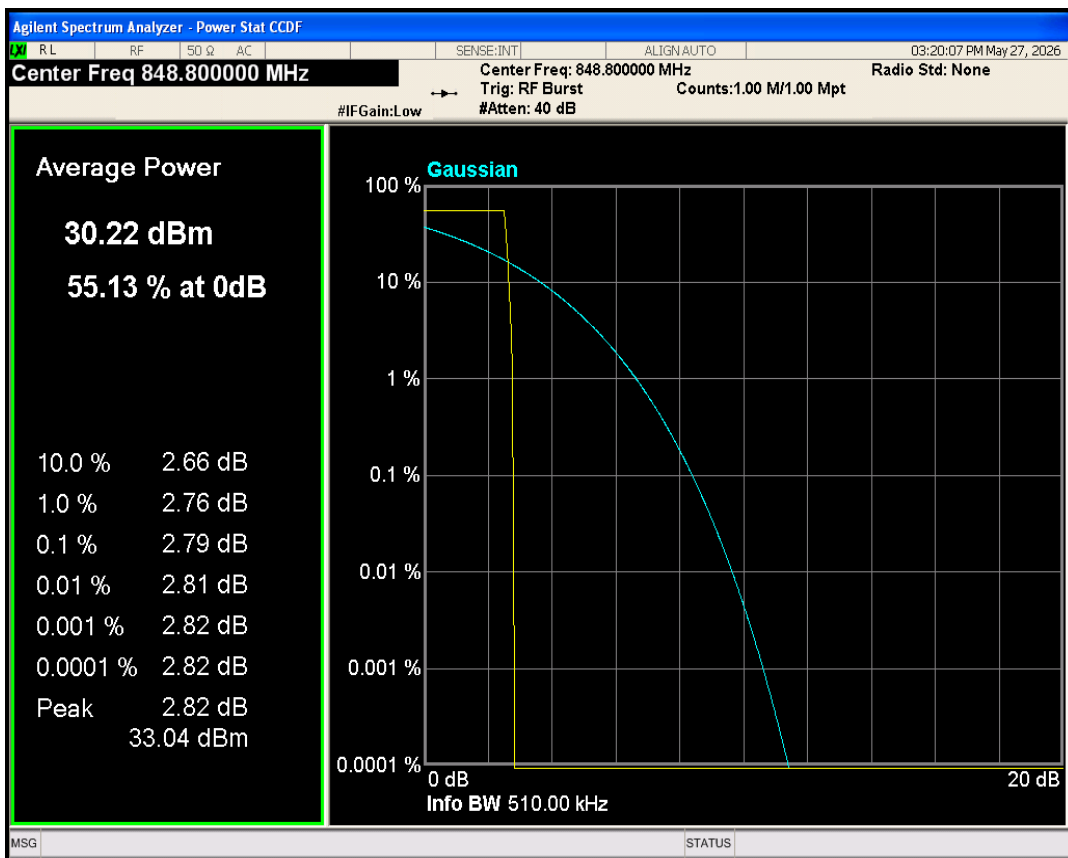


04 Occupied bandwidth

Band	Channel	Frequency (MHz)	99% OBW (kHz)	-26dB EBW (kHz)	Verdict
GSM1900	512	1850.2	238.674	297.227	PASS
GSM1900	661	1880	242.567	323.457	PASS
GSM1900	810	1909.8	240.596	309.639	PASS
GSM850	128	824.2	238.456	302.968	PASS
GSM850	189	836.4	246.483	302.318	PASS
GSM850	251	848.8	245.232	310.647	PASS


GSM1900 Channel=661

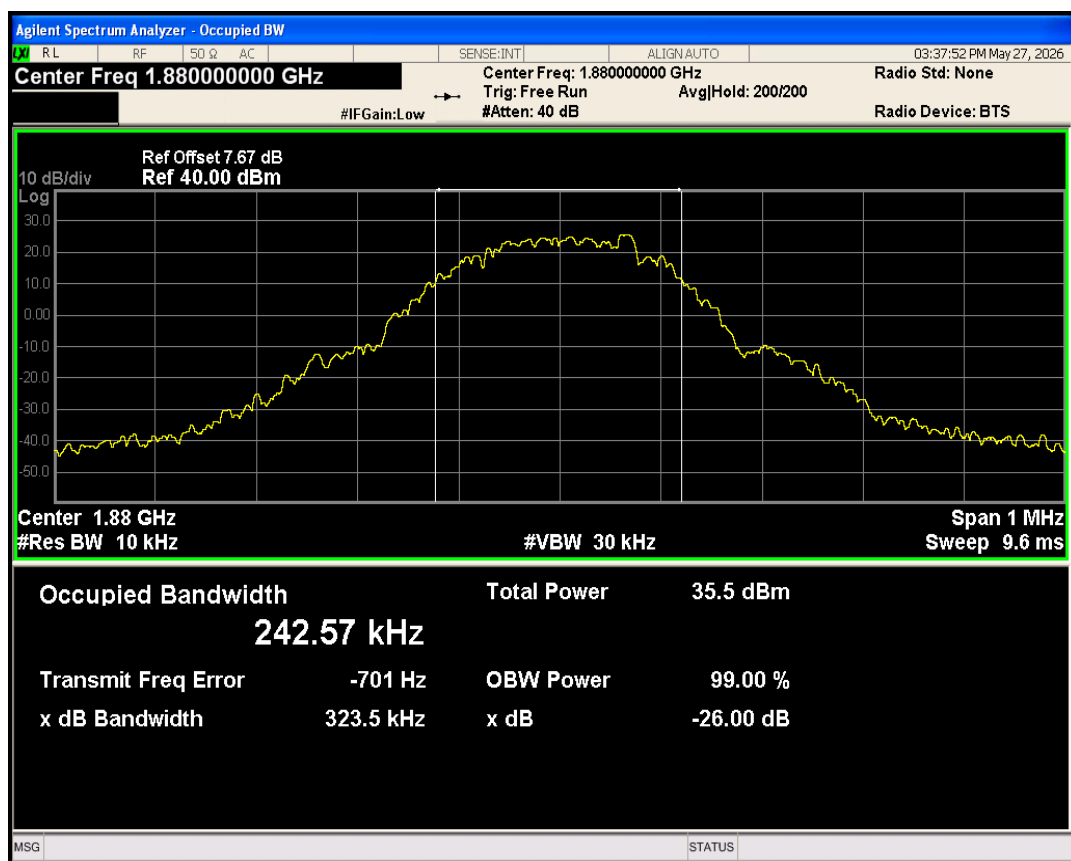


GSM1900 Channel=512

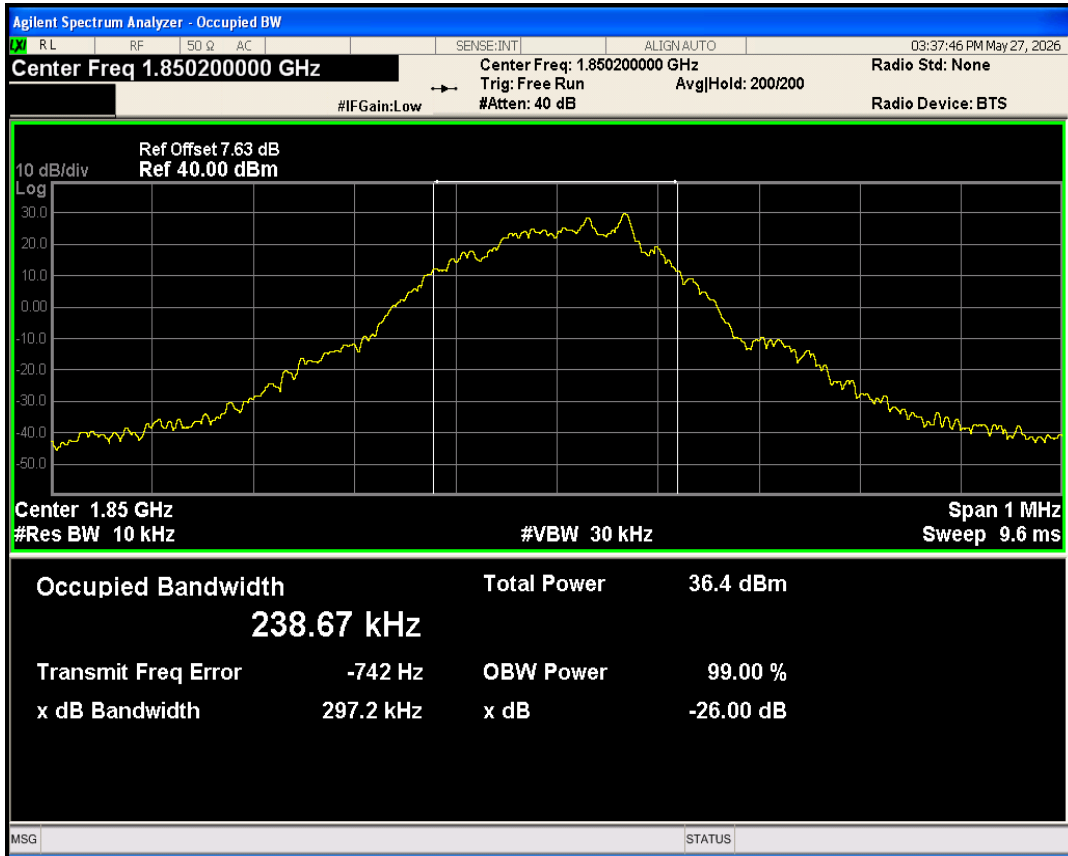


GSM1900 Channel=810

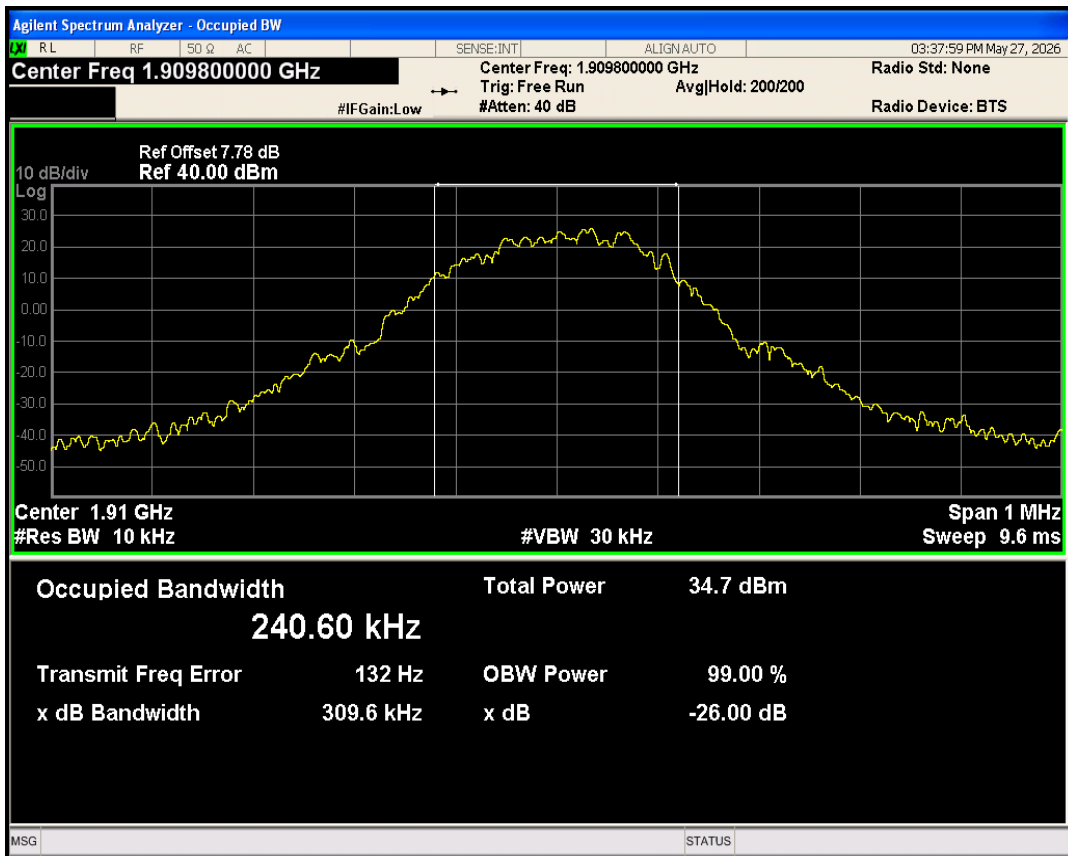


GSM850 Channel=128

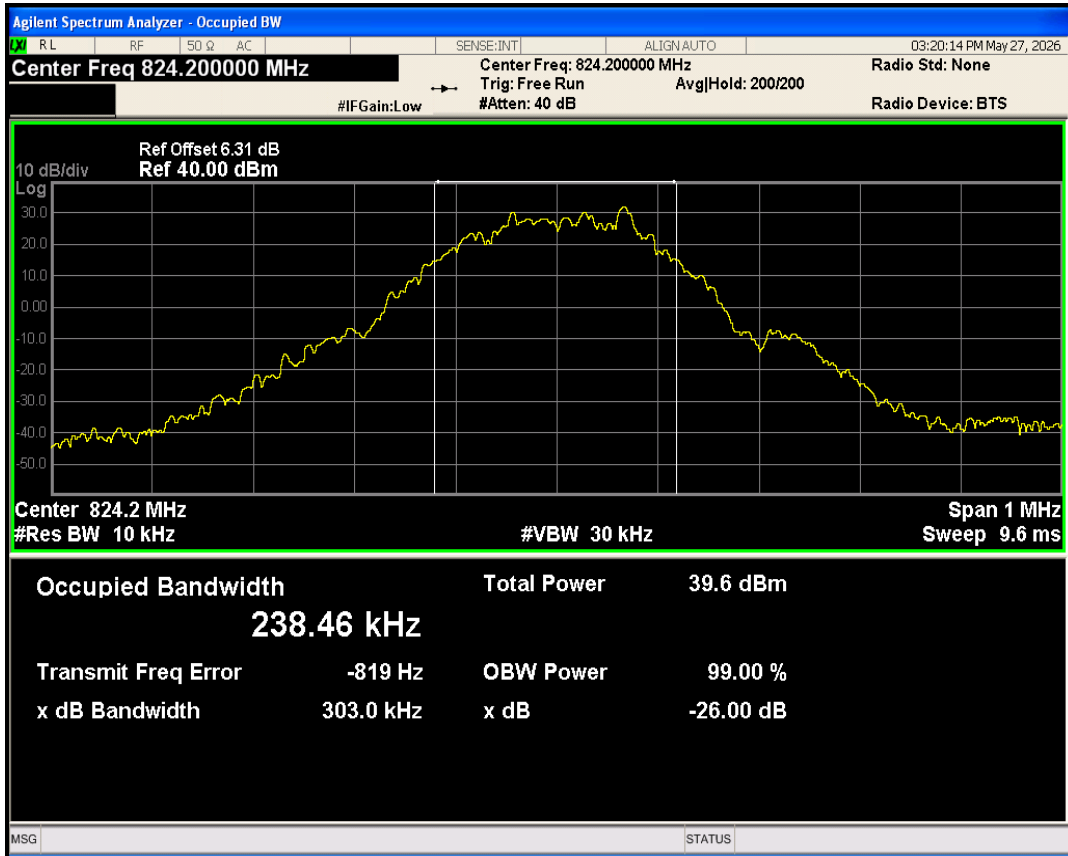

GSM850 Channel=251

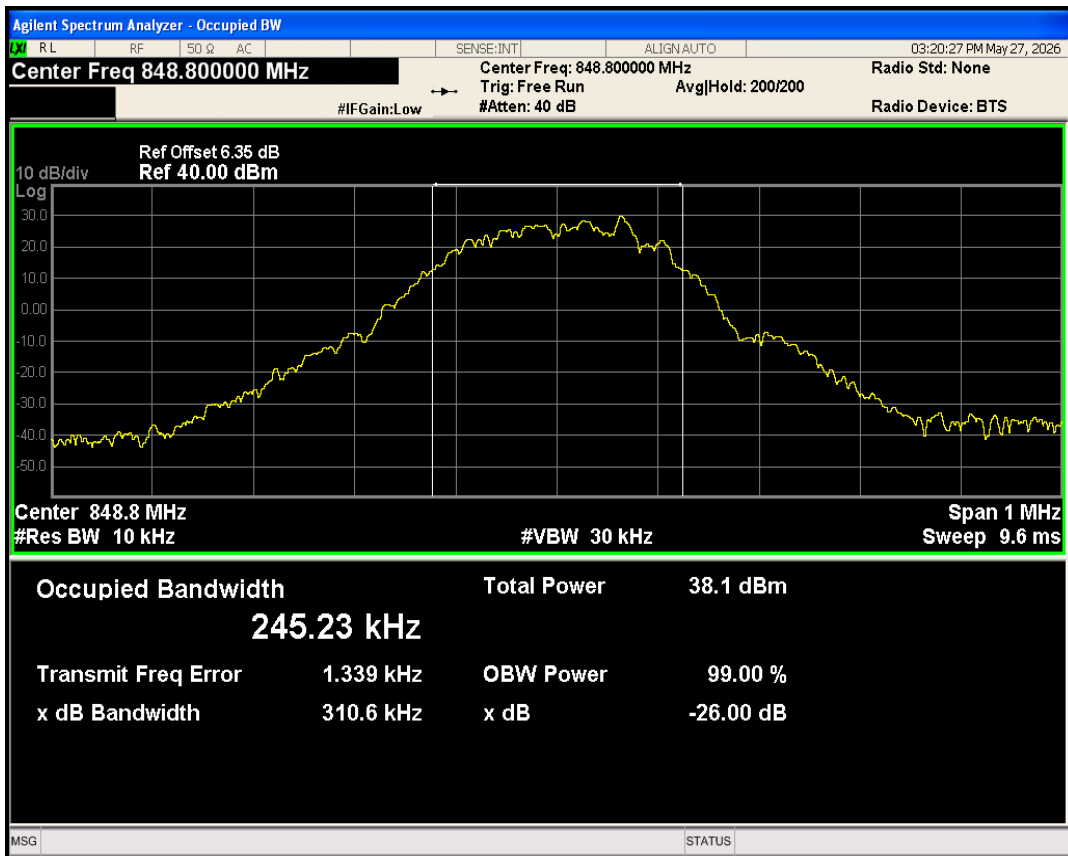


GSM850 Channel=189

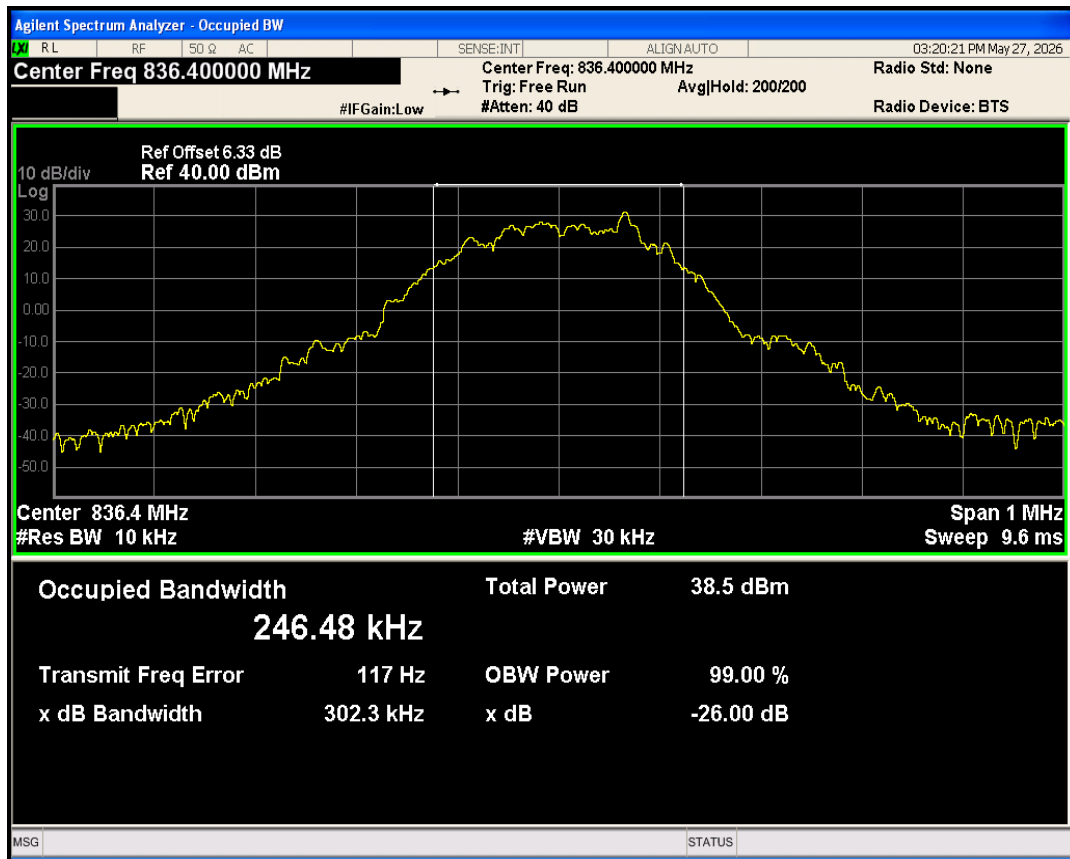


05 Band edge

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	1850.00	-27.53	-13	PASS
GSM1900	810	1909.8	1910.02	-30.18	-13	PASS
GSM850	128	824.2	824.00	-24.16	-13	PASS
GSM850	251	848.8	849.02	-26.32	-13	PASS


GSM1900 Channel=512

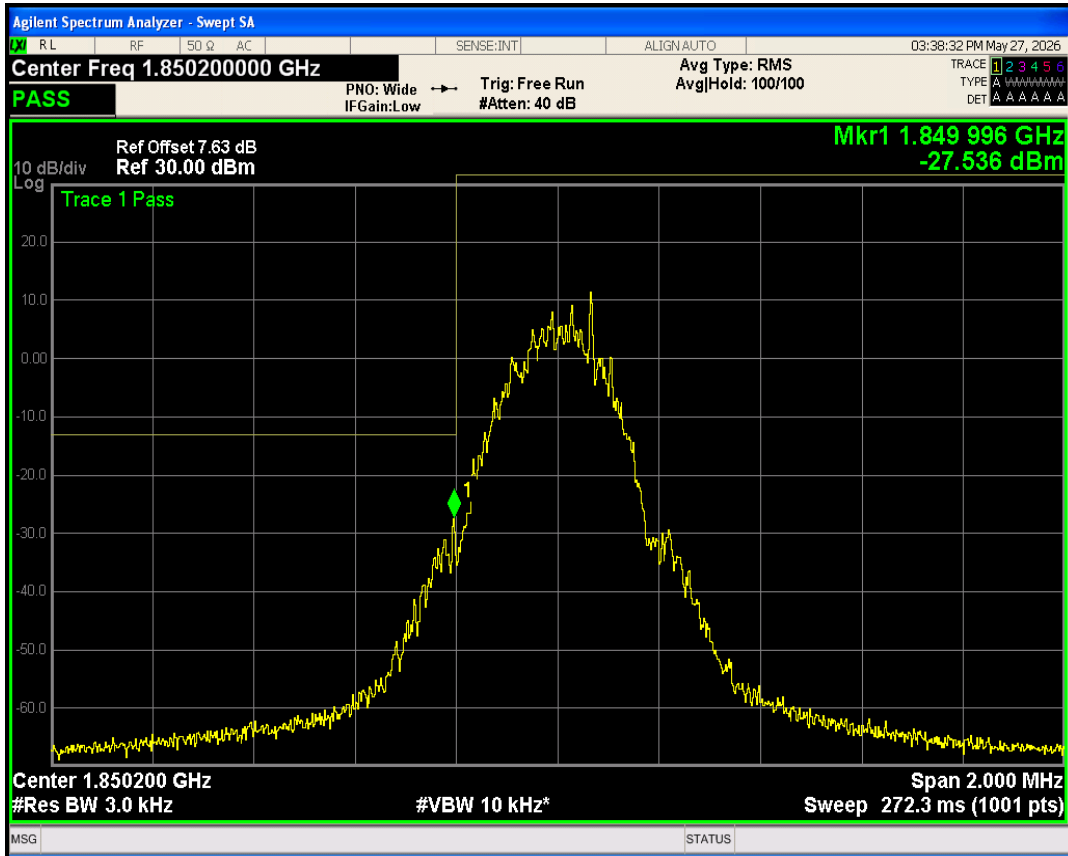


GSM1900 Channel=810

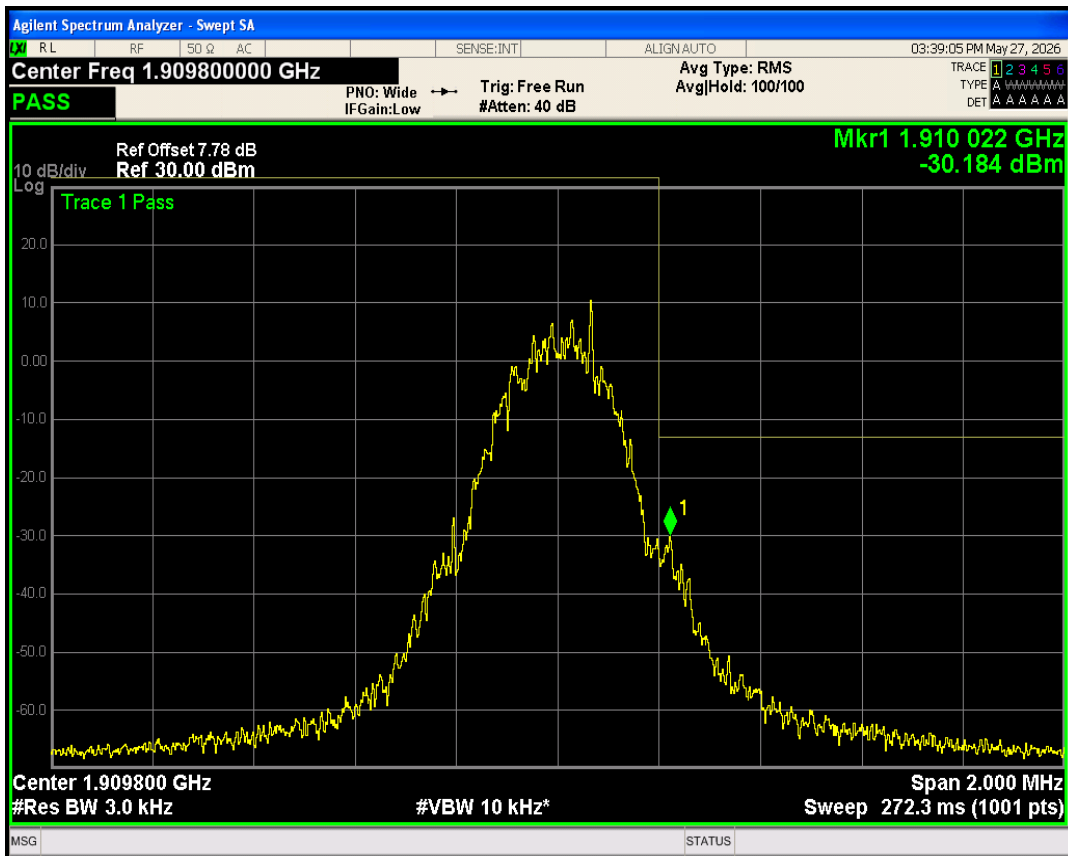

GSM850 Channel=251

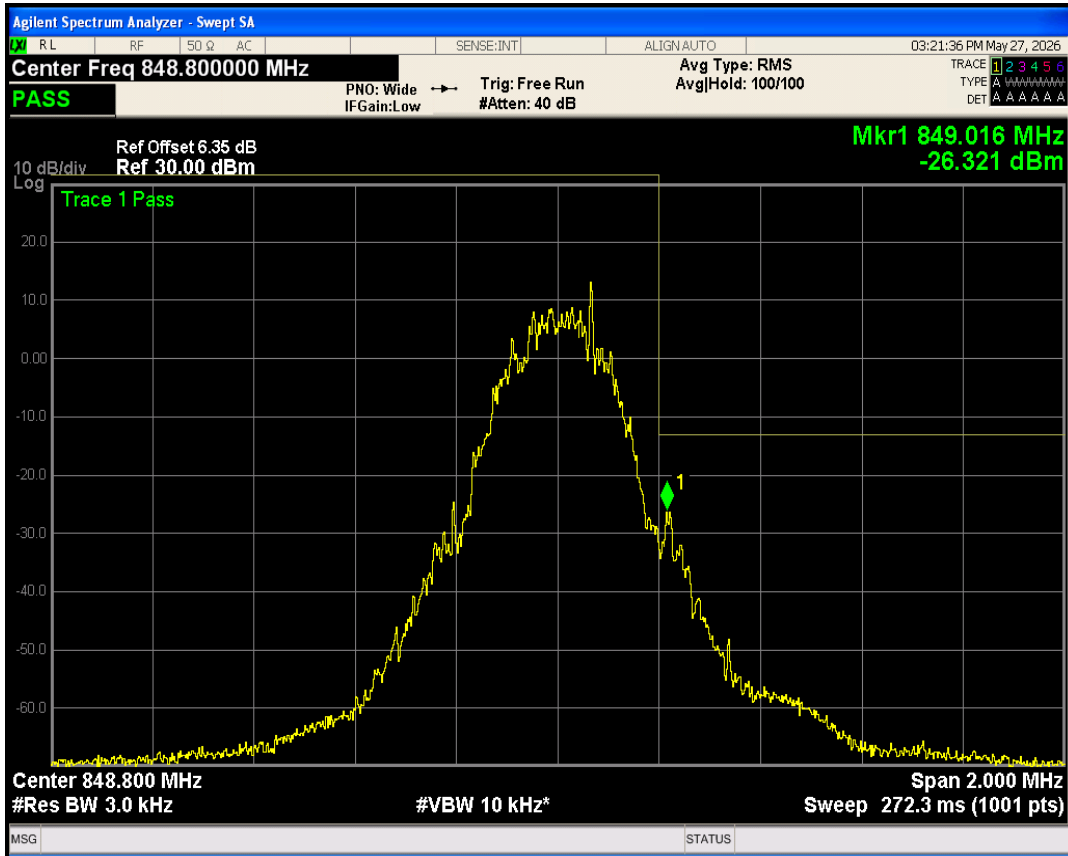


GSM850 Channel=128

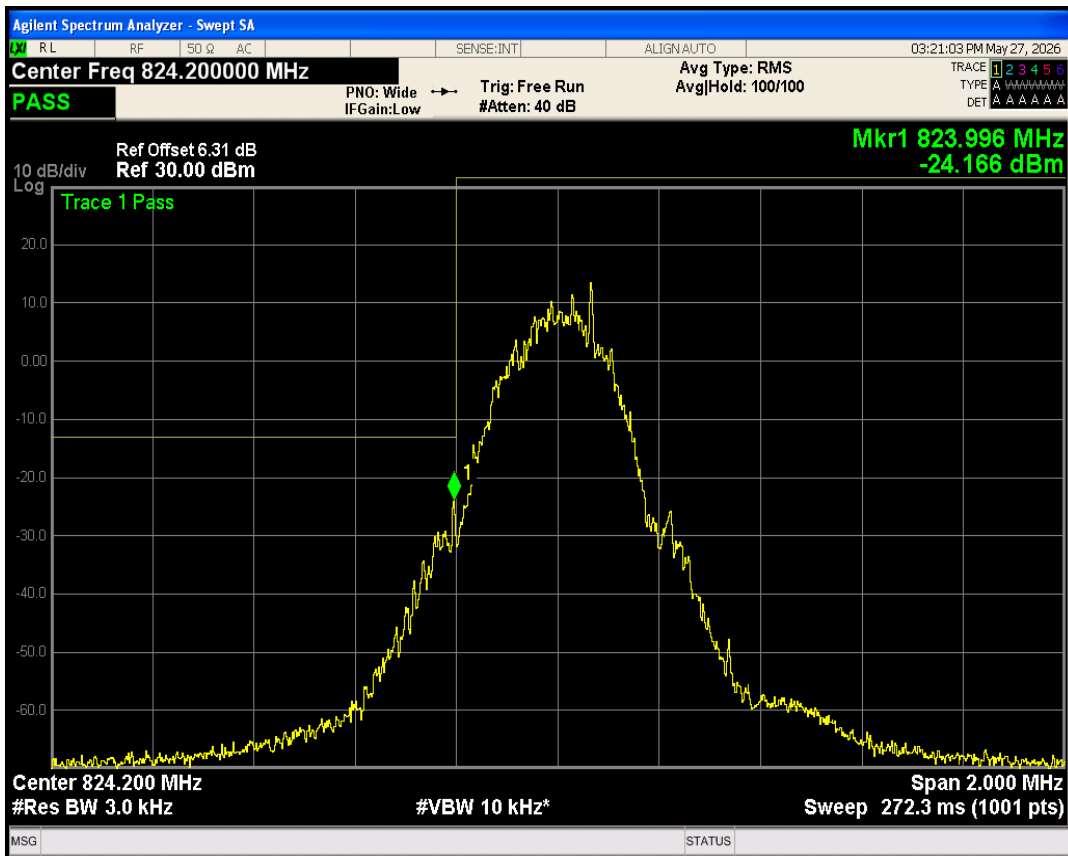


06 Out-of-band emissions

Band	Channel	Frequency (MHz)	Spur Freq (MHz)	Spur Level (dBm)	Limit (dBm)	Verdict
GSM1900	512	1850.2	24865.48	-19.66	-13	PASS
GSM1900	661	1880	26034.79	-19.96	-13	PASS
GSM1900	810	1909.8	25327.38	-19.31	-13	PASS
GSM850	128	824.2	25725.09	-21.28	-13	PASS
GSM850	189	836.4	25682.08	-21.20	-13	PASS
GSM850	251	848.8	25501.42	-21.40	-13	PASS


GSM1900 Channel=512

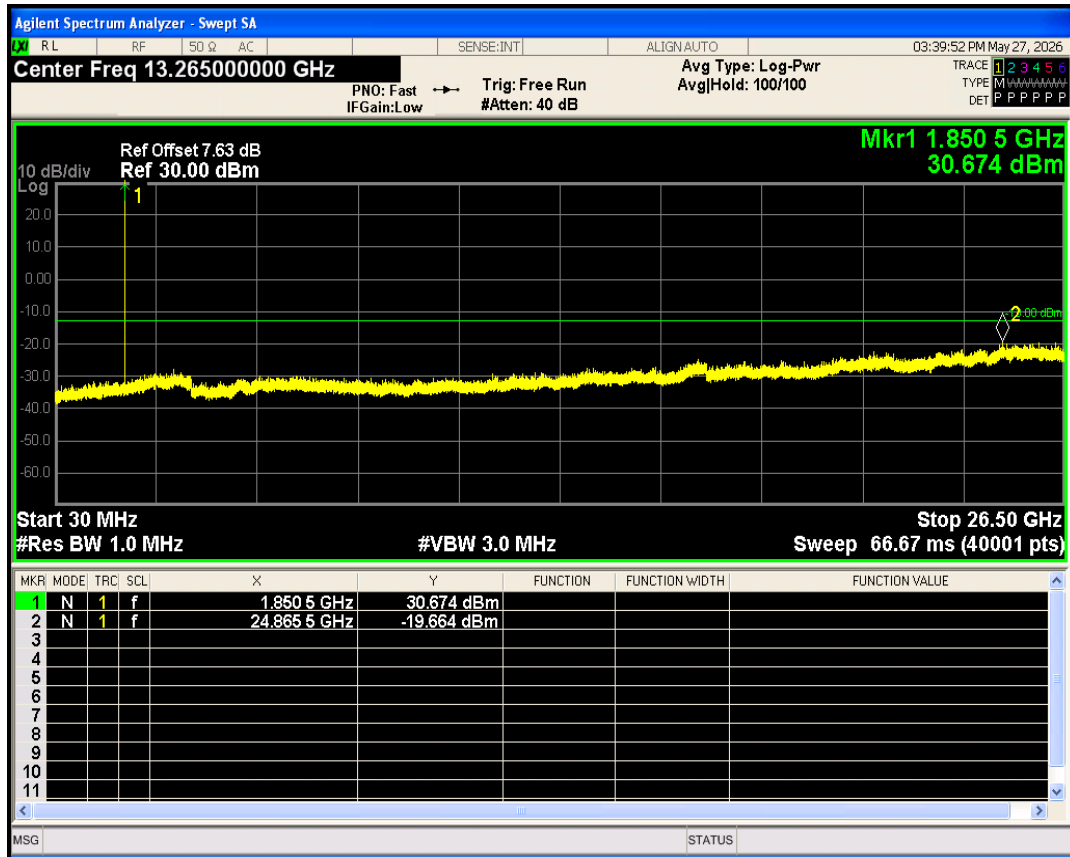


GSM1900 Channel=661

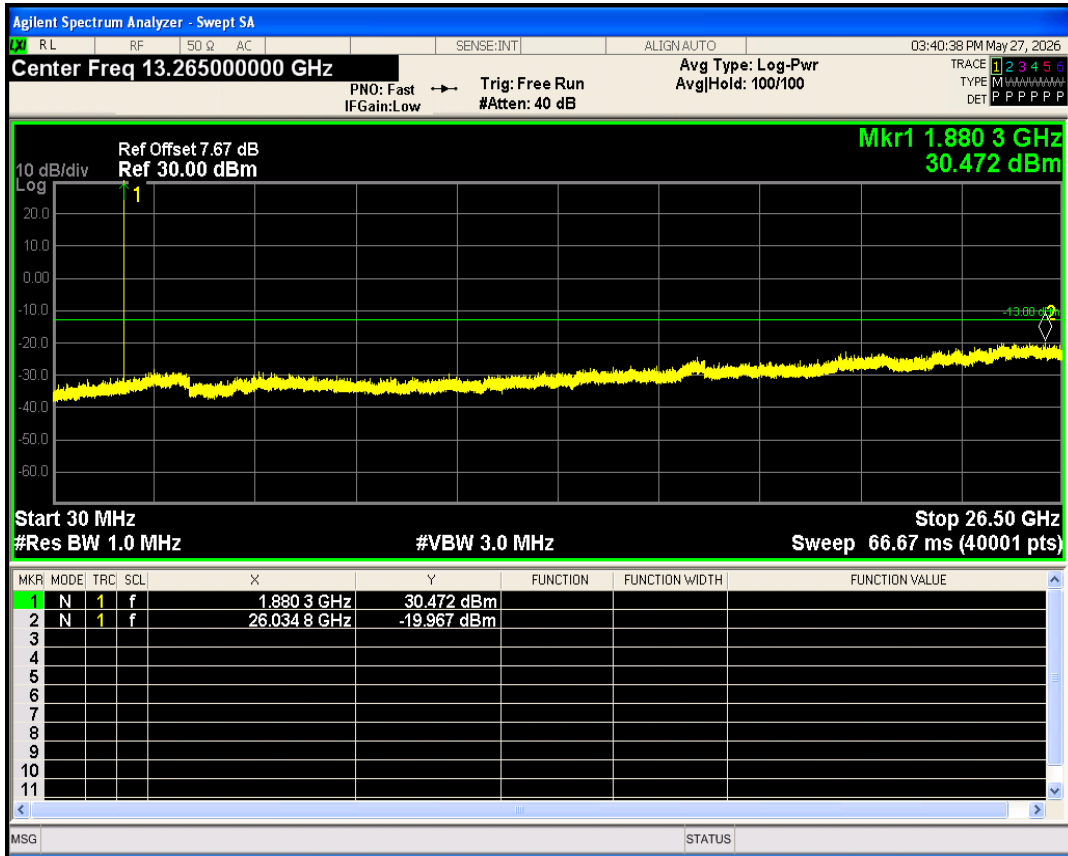


GSM1900 Channel=810

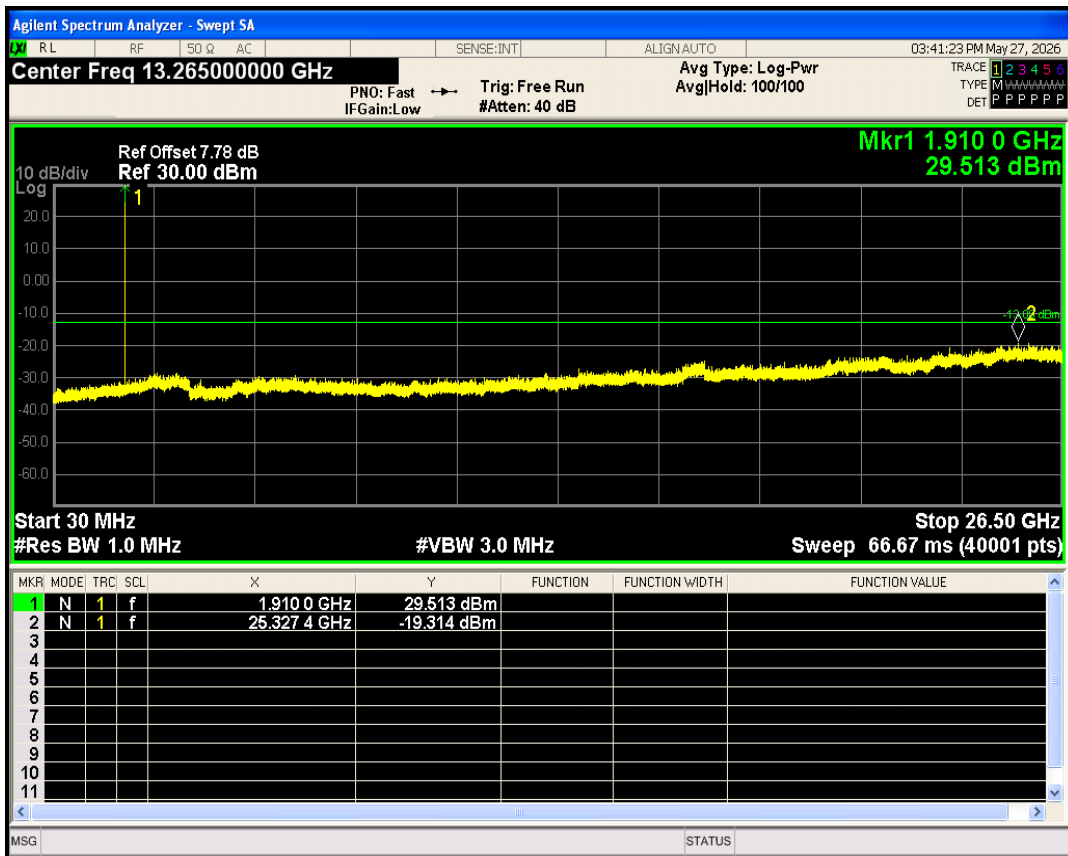

GSM850 Channel=128

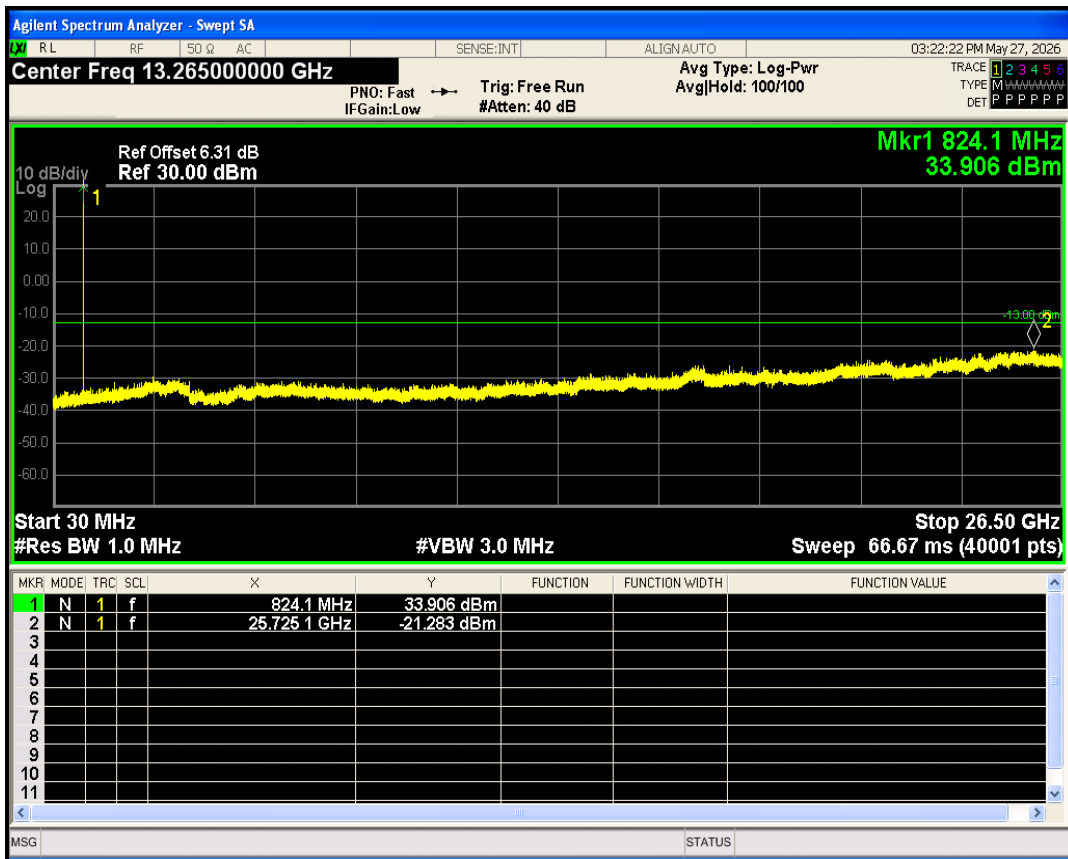

GSM850 Channel=251

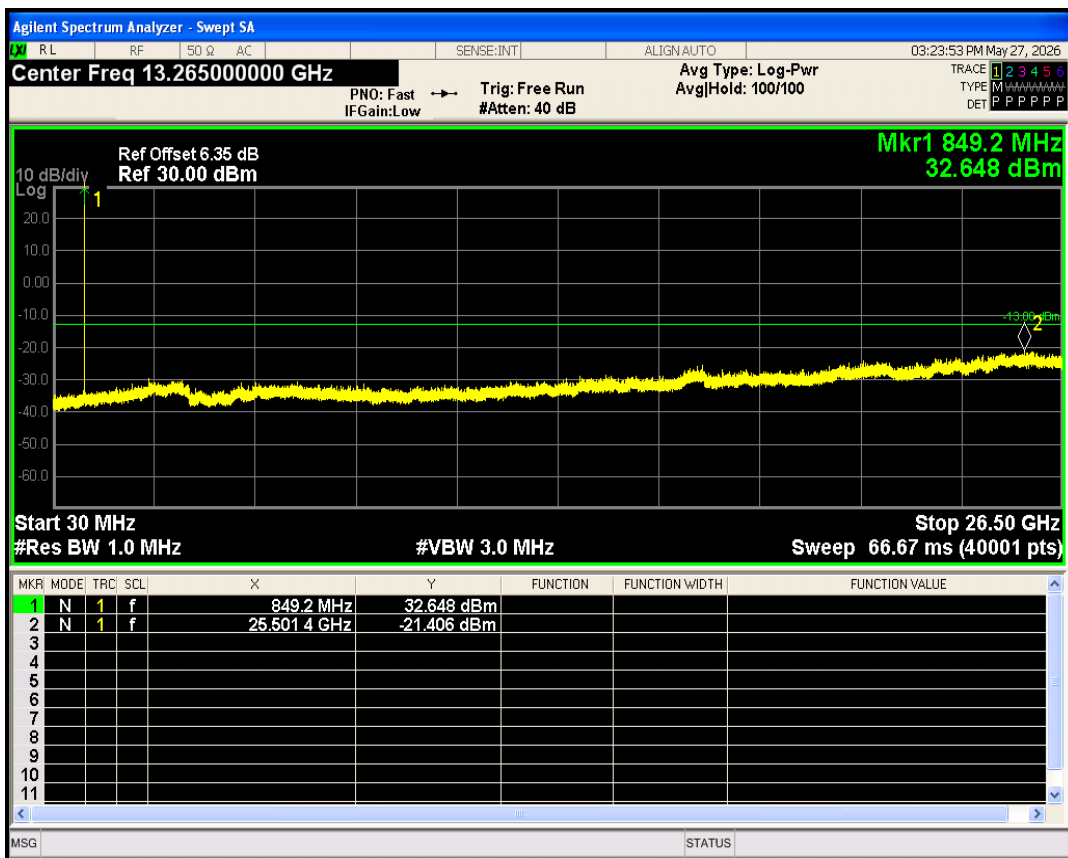

GSM850 Channel=189

