

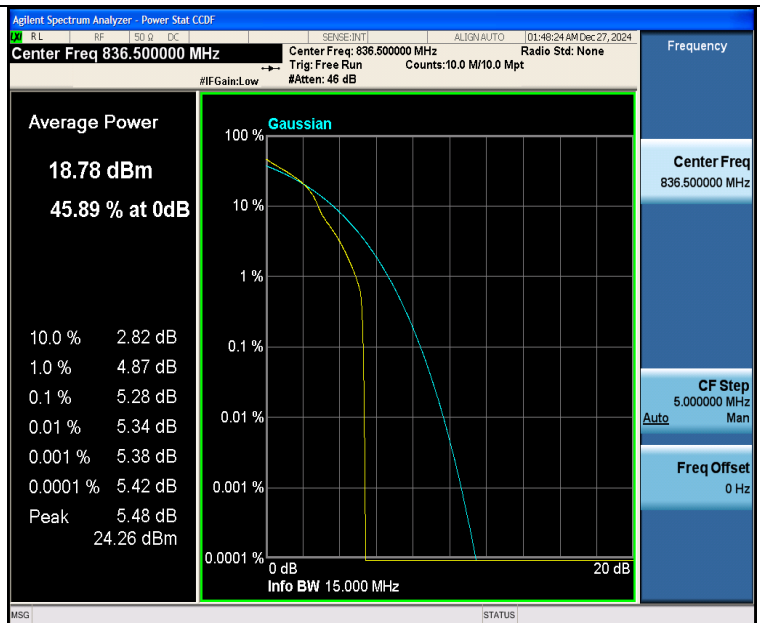


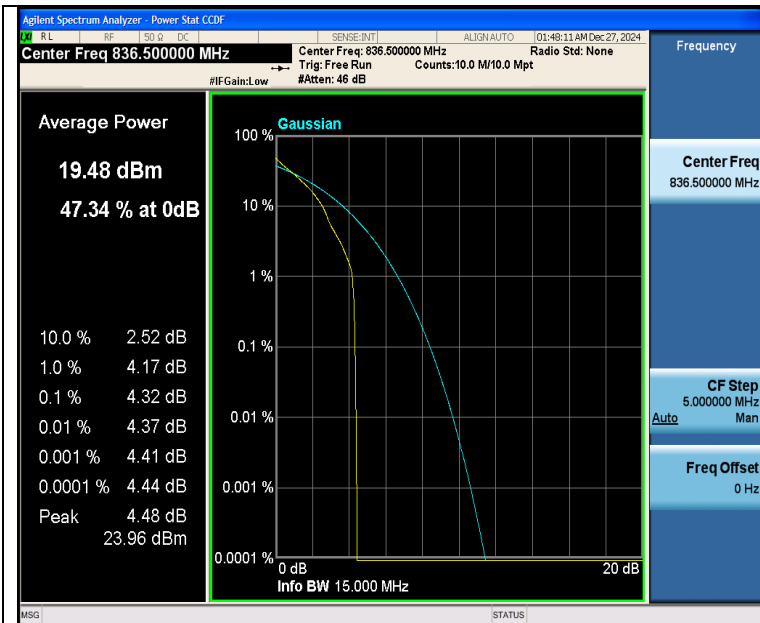



Band26(824-849)-15MHz-QPSK-26915-1RB#0-PASS

Band26(824-849)-15MHz-16QAM-26915-1RB#0-PASS

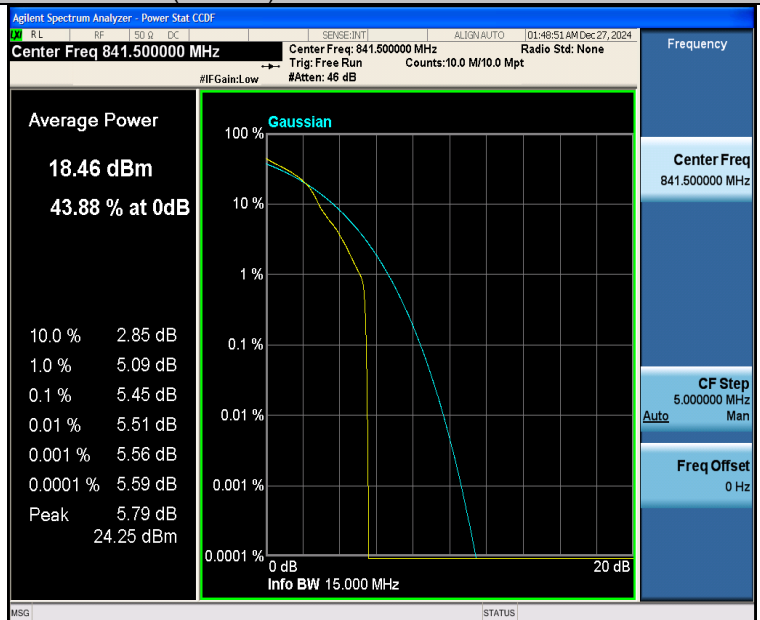


Band26(824-849)-15MHz-QPSK-26965-1RB#0-PASS

Band26(824-849)-15MHz-16QAM-26965-1RB#0-PASS

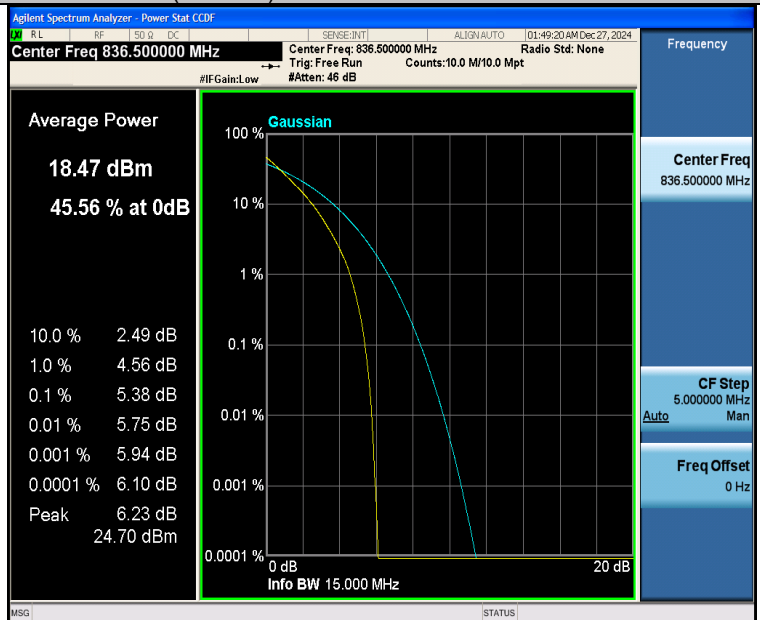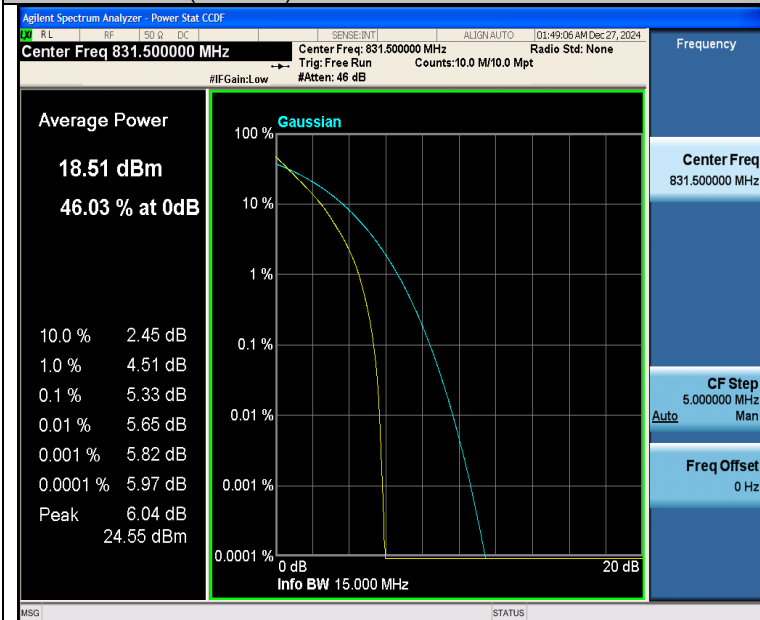

Band26(824-849)-15MHz-QPSK-26865-75RB#0-PASS

Band26(824-849)-15MHz-QPSK-26915-75RB#0-PASS

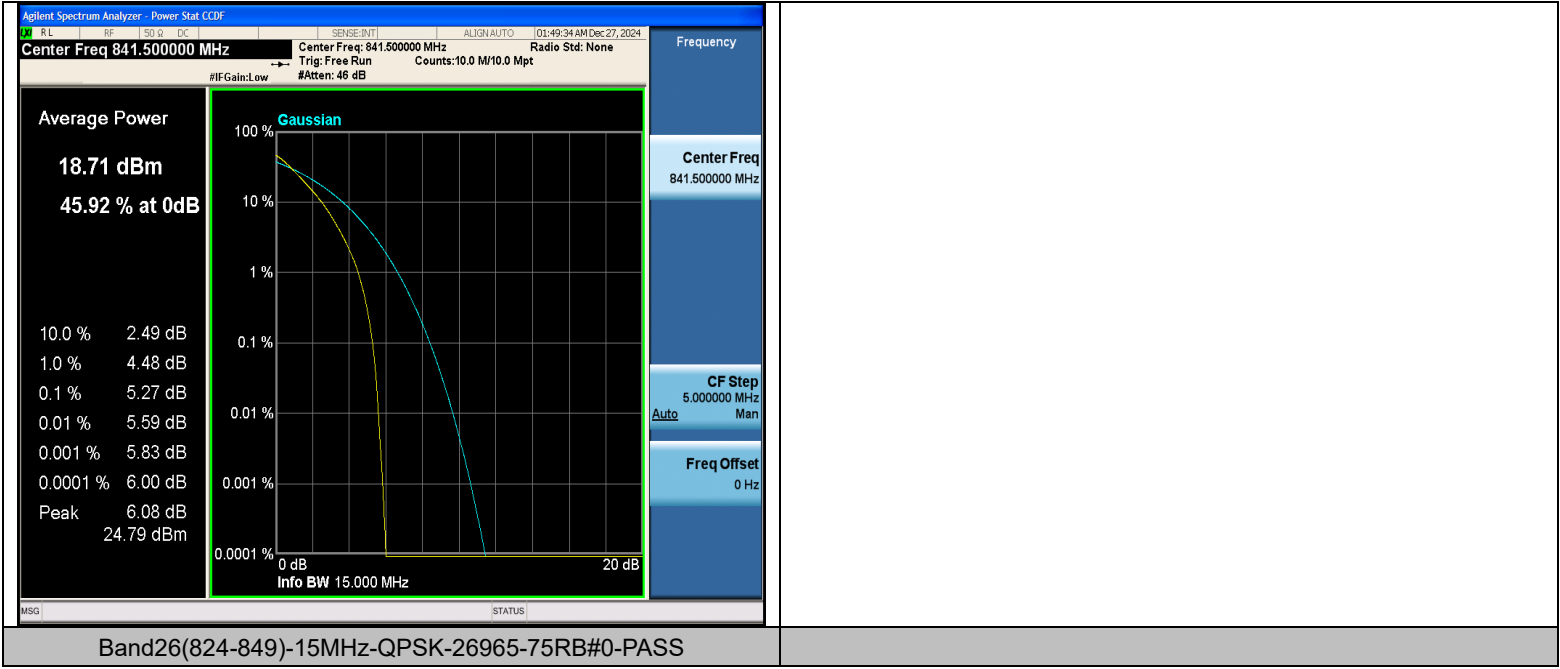


Appendix C: 26dB Bandwidth and Occupied Bandwidth

Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)	Verdict
Band26(814-824)	1.4MHz	QPSK	26697	6RB#0	1.0935	1.278	PASS
Band26(814-824)	1.4MHz	16QAM	26697	6RB#0	1.0964	1.305	PASS
Band26(814-824)	1.4MHz	QPSK	26740	6RB#0	1.0970	1.291	PASS
Band26(814-824)	1.4MHz	16QAM	26740	6RB#0	1.0957	1.293	PASS
Band26(814-824)	1.4MHz	QPSK	26783	6RB#0	1.1003	1.298	PASS
Band26(814-824)	1.4MHz	16QAM	26783	6RB#0	1.0918	1.277	PASS
Band26(814-824)	3MHz	QPSK	26705	15RB#0	2.7033	2.971	PASS
Band26(814-824)	3MHz	16QAM	26705	15RB#0	2.6932	2.969	PASS
Band26(814-824)	3MHz	QPSK	26740	15RB#0	2.6972	2.962	PASS
Band26(814-824)	3MHz	16QAM	26740	15RB#0	2.6927	2.969	PASS
Band26(814-824)	3MHz	QPSK	26775	15RB#0	2.7017	2.979	PASS
Band26(814-824)	3MHz	16QAM	26775	15RB#0	2.6954	2.972	PASS
Band26(814-824)	5MHz	QPSK	26715	25RB#0	4.5101	5.021	PASS
Band26(814-824)	5MHz	16QAM	26715	25RB#0	4.5008	4.944	PASS
Band26(814-824)	5MHz	QPSK	26740	25RB#0	4.4992	5.015	PASS
Band26(814-824)	5MHz	16QAM	26740	25RB#0	4.5157	5.049	PASS
Band26(814-824)	5MHz	QPSK	26765	25RB#0	4.5036	4.979	PASS
Band26(814-824)	5MHz	16QAM	26765	25RB#0	4.5122	5.014	PASS
Band26(814-824)	10MHz	QPSK	26740	50RB#0	8.9987	9.930	PASS
Band26(814-824)	10MHz	16QAM	26740	27RB#0	4.9869	5.793	PASS
Band26(824-849)	1.4MHz	QPSK	26797	6RB#0	1.0926	1.288	PASS
Band26(824-849)	1.4MHz	16QAM	26797	6RB#0	1.0908	1.287	PASS
Band26(824-849)	1.4MHz	QPSK	26915	6RB#0	1.0962	1.291	PASS
Band26(824-849)	1.4MHz	16QAM	26915	6RB#0	1.0931	1.281	PASS
Band26(824-849)	1.4MHz	QPSK	27033	6RB#0	1.0945	1.296	PASS
Band26(824-849)	1.4MHz	16QAM	27033	6RB#0	1.1027	1.281	PASS
Band26(824-849)	3MHz	QPSK	26805	15RB#0	2.7050	2.949	PASS
Band26(824-849)	3MHz	16QAM	26805	15RB#0	2.6911	2.971	PASS
Band26(824-849)	3MHz	QPSK	26915	15RB#0	2.6994	2.973	PASS
Band26(824-849)	3MHz	16QAM	26915	15RB#0	2.6942	2.973	PASS

849)							
Band26(824-849)	3MHz	QPSK	27025	15RB#0	2.7039	2.959	PASS
Band26(824-849)	3MHz	16QAM	27025	15RB#0	2.6974	2.965	PASS
Band26(824-849)	5MHz	QPSK	26815	25RB#0	4.4997	4.987	PASS
Band26(824-849)	5MHz	16QAM	26815	25RB#0	4.4956	4.978	PASS
Band26(824-849)	5MHz	QPSK	26915	25RB#0	4.4961	4.975	PASS
Band26(824-849)	5MHz	16QAM	26915	25RB#0	4.5102	5.023	PASS
Band26(824-849)	5MHz	QPSK	27015	25RB#0	4.5104	4.986	PASS
Band26(824-849)	5MHz	16QAM	27015	25RB#0	4.5232	5.042	PASS
Band26(824-849)	10MHz	QPSK	26840	50RB#0	8.9647	9.923	PASS
Band26(824-849)	10MHz	QPSK	26915	50RB#0	8.9780	9.886	PASS
Band26(824-849)	10MHz	QPSK	26990	50RB#0	8.9660	9.858	PASS
Band26(824-849)	10MHz	16QAM	26840	27RB#0	4.9444	5.794	PASS
Band26(824-849)	10MHz	16QAM	26915	27RB#0	4.9908	5.875	PASS
Band26(824-849)	10MHz	16QAM	26990	27RB#0	4.9600	5.851	PASS
Band26(824-849)	15MHz	QPSK	26865	75RB#0	13.458	14.73	PASS
Band26(824-849)	15MHz	QPSK	26915	75RB#0	13.442	14.80	PASS
Band26(824-849)	15MHz	QPSK	26965	75RB#0	13.396	14.69	PASS
Band26(824-849)	15MHz	16QAM	26865	27RB#0	5.0603	6.085	PASS
Band26(824-849)	15MHz	16QAM	26915	27RB#0	5.1144	6.061	PASS
Band26(824-849)	15MHz	16QAM	26965	27RB#0	5.1086	6.068	PASS

Test Graphs

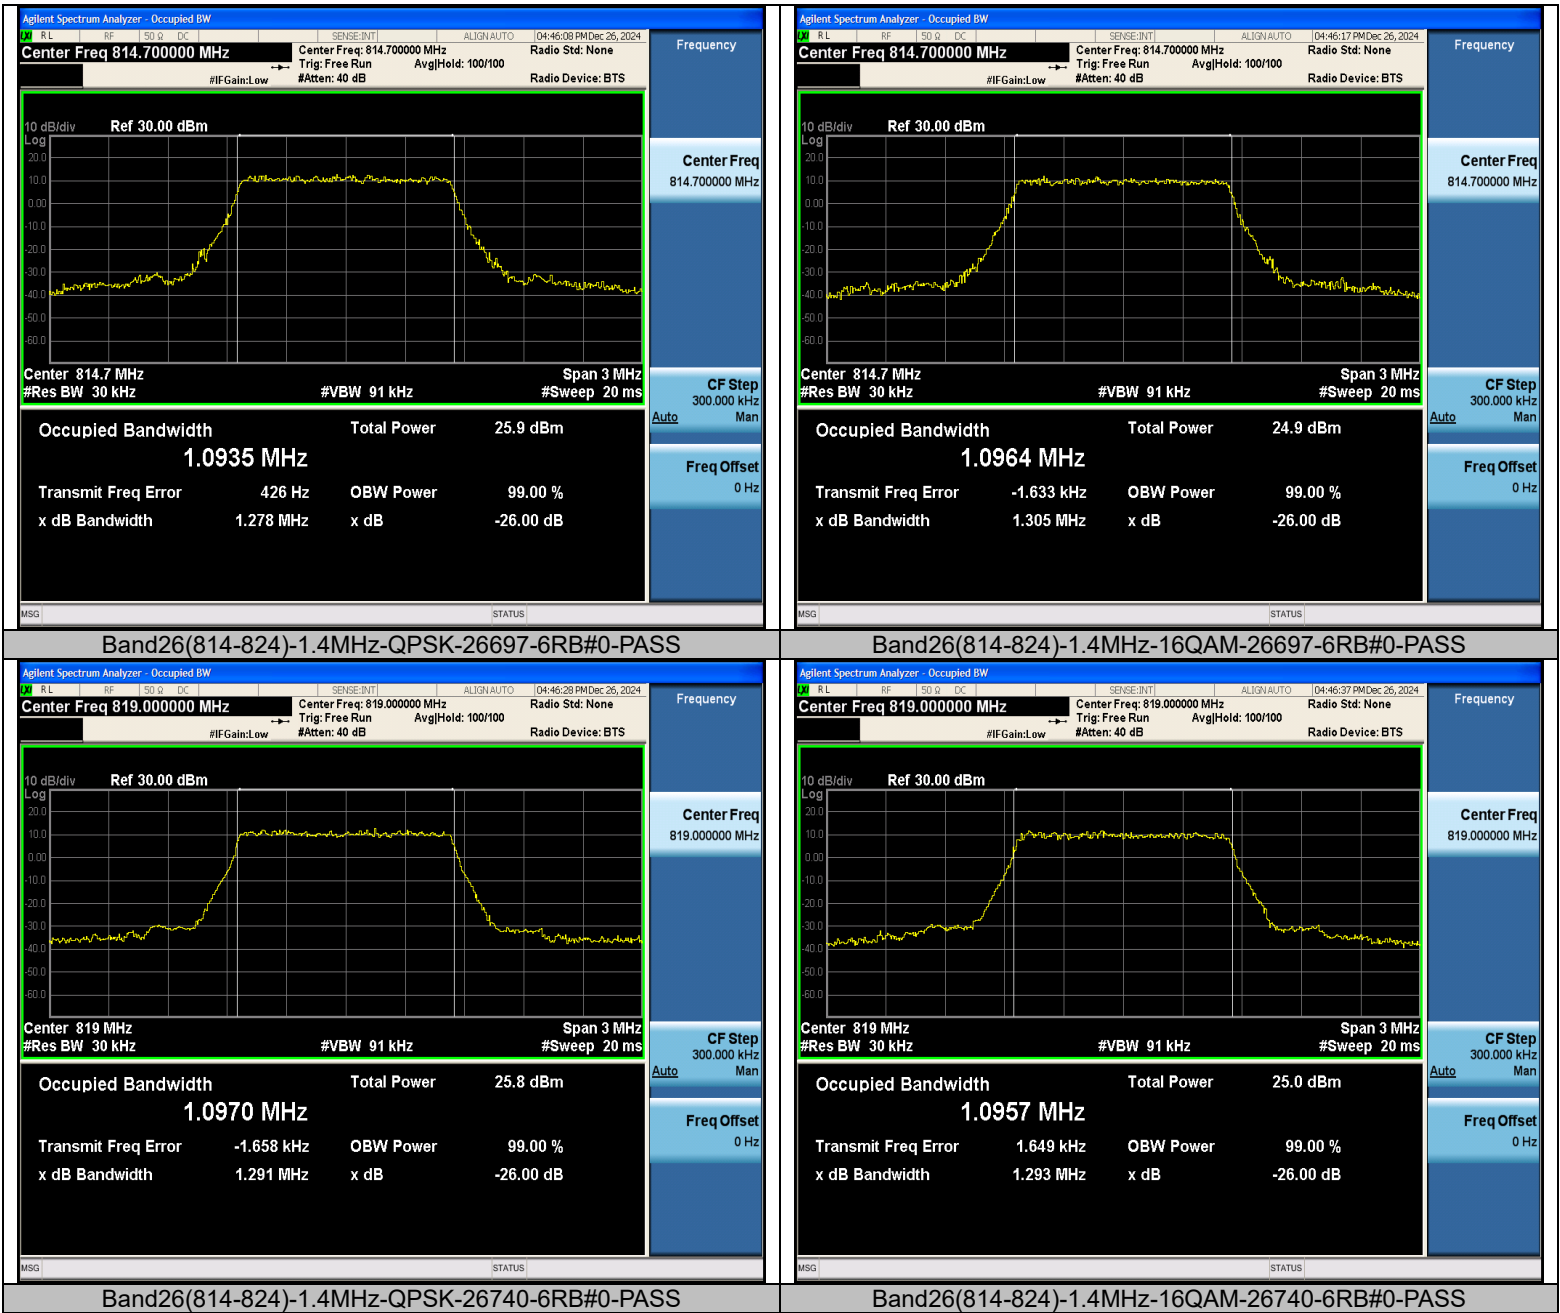

Agilent Spectrum Analyzer - Occupied BW

RL

RF

50 Ω

DC

SENSE:INT

ALIGN:AUTO

04:46:28 PM Dec 26, 2024

Center Freq 819.000000 MHz

Center Freq: 819.000000 MHz
Trig: Free Run
Avg/Hold: 100/100

Radio Std: None


#IFGain:Low

#Atten: 40 dB

Radio Device: BTS

10 dB/div

Ref 30.00 dBm

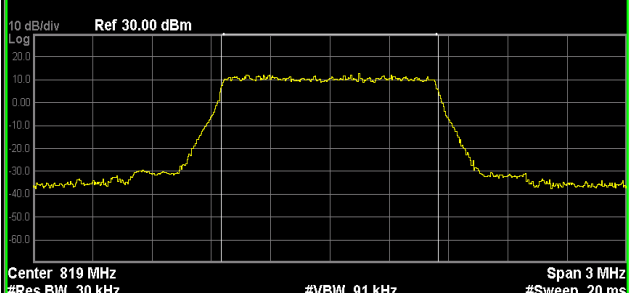

Center 819 MHz

#Res BW 30 kHz

#VBW 91 kHz

Span 3 MHz

#Sweep 20 ms

Occupied Bandwidth

Total Power

25.8 dBm

1.0970 MHz

Transmit Freq Error

-1.658 kHz

OBW Power

99.00 %

x dB Bandwidth

1.291 MHz

x dB

-26.00 dB

MSG

STATUS

Frequency

Center Freq
819.000000 MHz

CF Step
300.000 kHz
Auto Man

Freq Offset
0 Hz

Band26(814-824)-1.4MHz-QPSK-26740-6RB#0-PASS

Agilent Spectrum Analyzer - Occupied BW

RL

RF

50 Ω

DC

SENSE:INT

ALIGN:AUTO

04:46:37 PM Dec 26, 2024

Center Freq 819.000000 MHz

Center Freq: 819.000000 MHz
Trig: Free Run
Avg/Hold: 100/100

Radio Std: None


#IFGain:Low

#Atten: 40 dB

Radio Device: BTS

10 dB/div

Ref 30.00 dBm

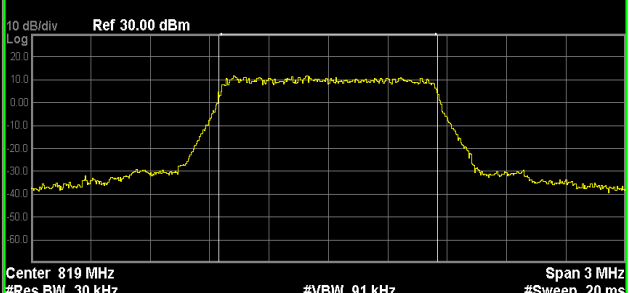

Center 819 MHz

#Res BW 30 kHz

#VBW 91 kHz

Span 3 MHz

#Sweep 20 ms

Occupied Bandwidth

Total Power

25.0 dBm

1.0957 MHz

Transmit Freq Error

1.649 kHz

OBW Power

99.00 %

x dB Bandwidth

1.293 MHz

x dB

-26.00 dB

MSG

STATUS



Frequency

Center Freq
819.000000 MHz

CF Step
300.000 kHz
Auto Man



Freq Offset
0 Hz

Band26(814-824)-1.4MHz-16QAM-26740-6RB#0-PASS

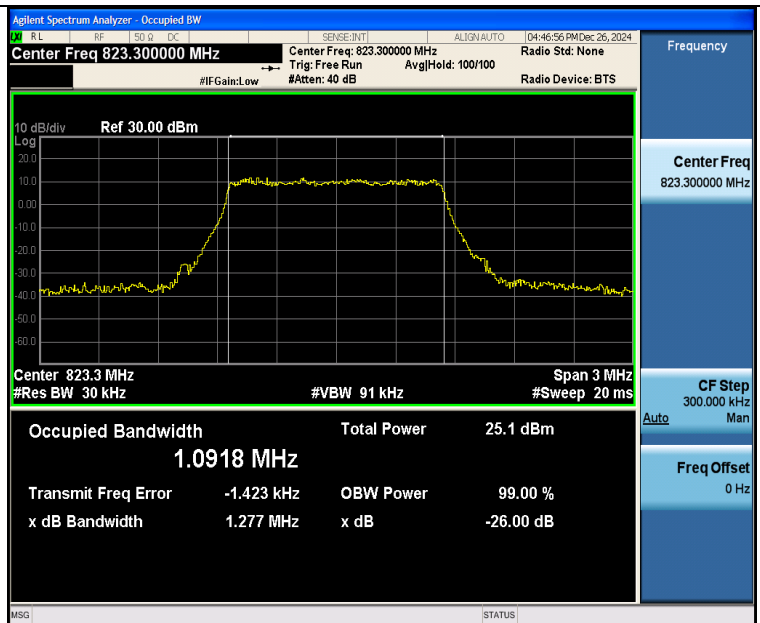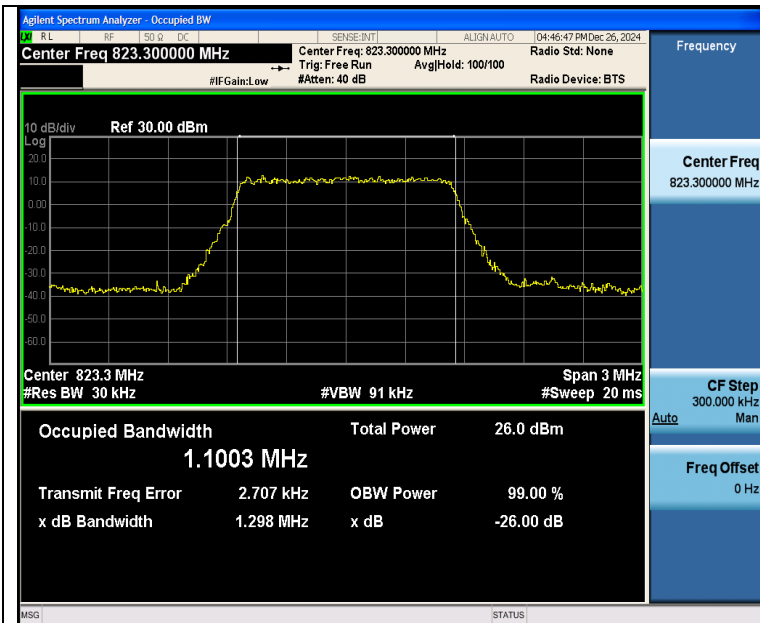



Band26(814-824)-1.4MHz-QPSK-26783-6RB#0-PASS

Band26(814-824)-1.4MHz-16QAM-26783-6RB#0-PASS

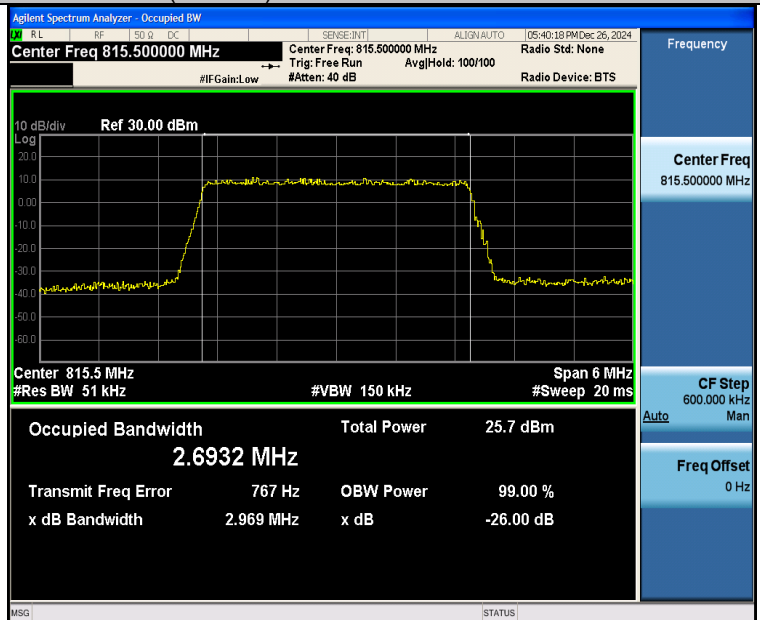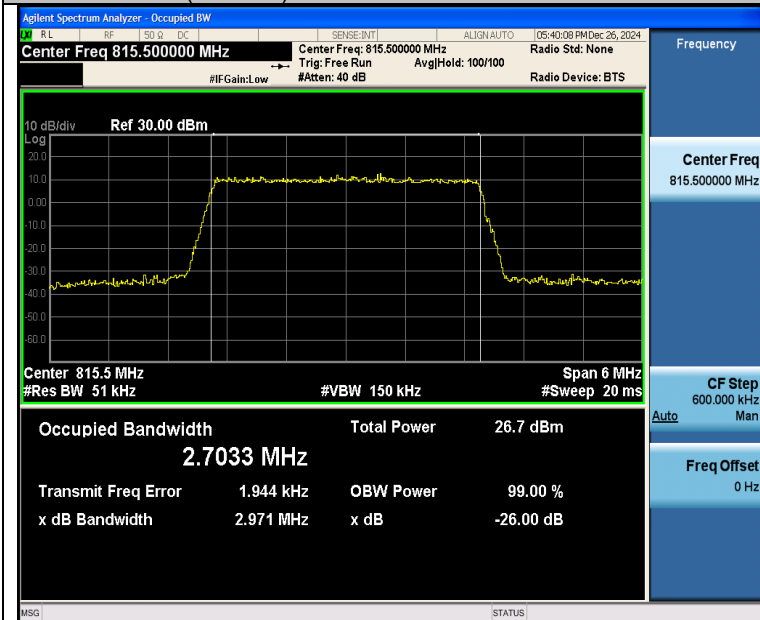



Band26(814-824)-3MHz-QPSK-26705-15RB#0-PASS

Band26(814-824)-3MHz-16QAM-26705-15RB#0-PASS

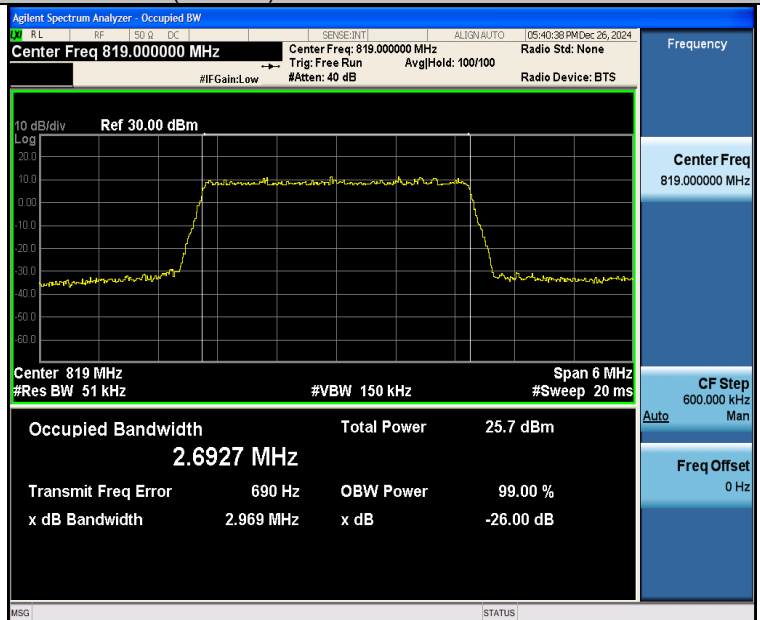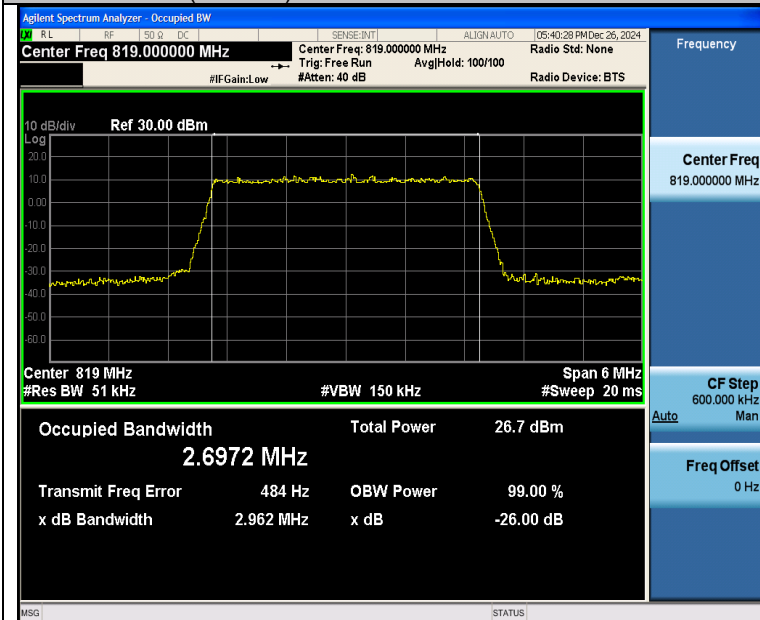


Band26(814-824)-3MHz-QPSK-26740-15RB#0-PASS

Band26(814-824)-3MHz-16QAM-26740-15RB#0-PASS

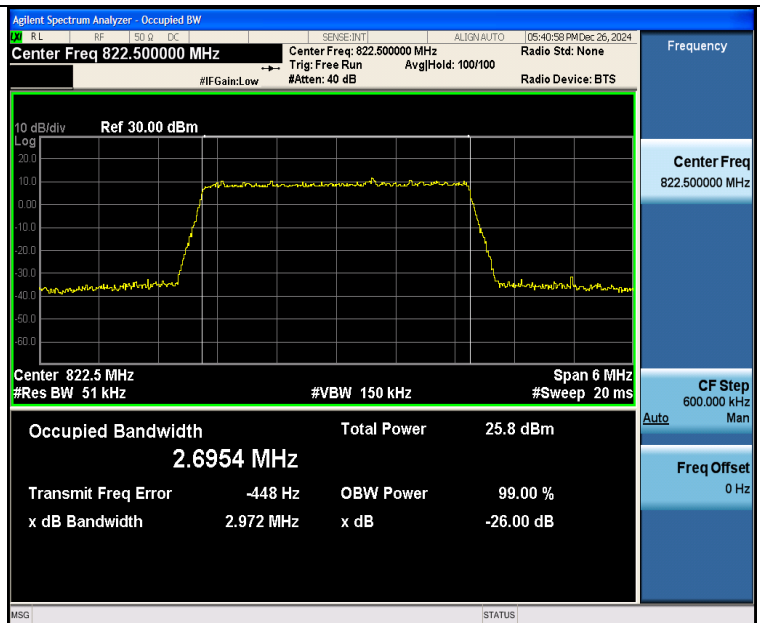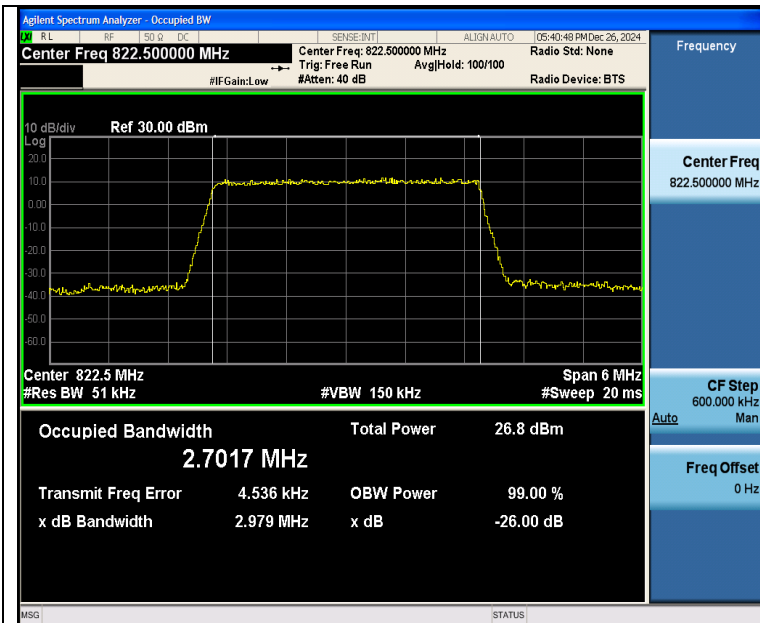



Band26(814-824)-3MHz-QPSK-26775-15RB#0-PASS

Band26(814-824)-3MHz-16QAM-26775-15RB#0-PASS

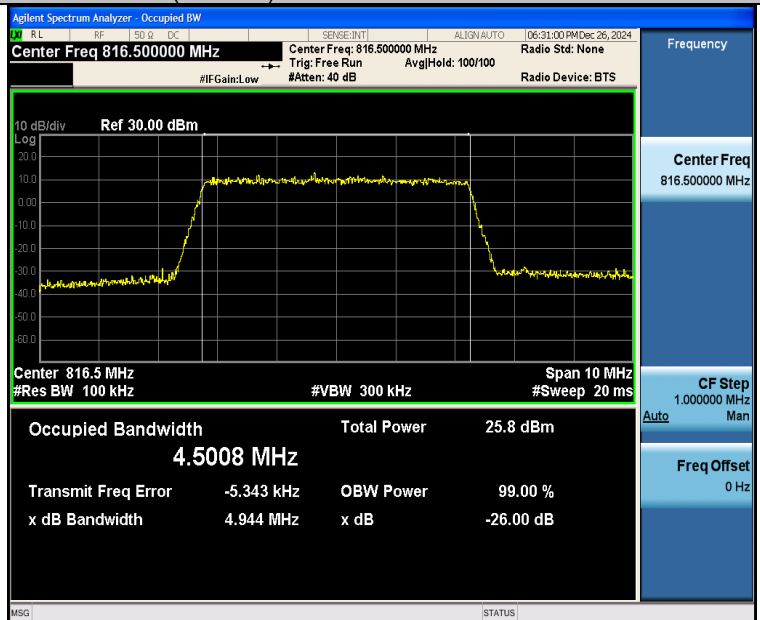



Band26(814-824)-5MHz-QPSK-26715-25RB#0-PASS

Band26(814-824)-5MHz-16QAM-26715-25RB#0-PASS

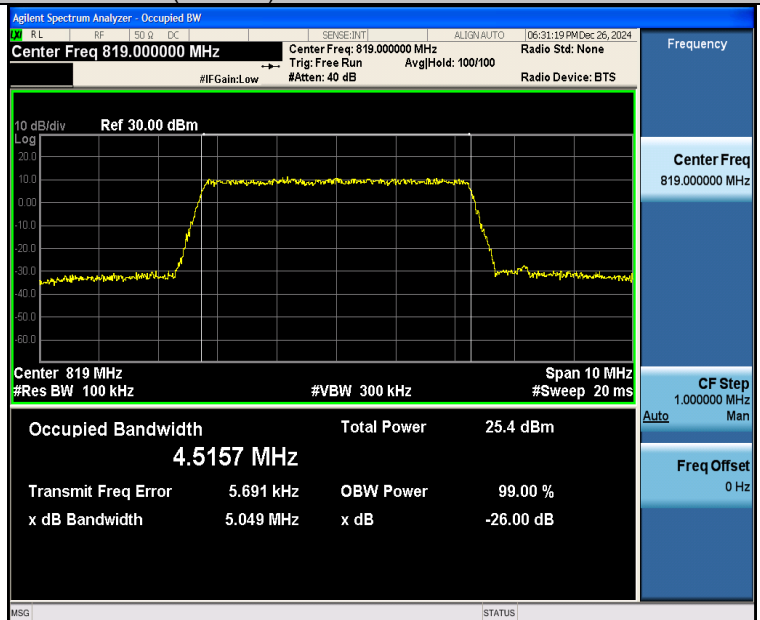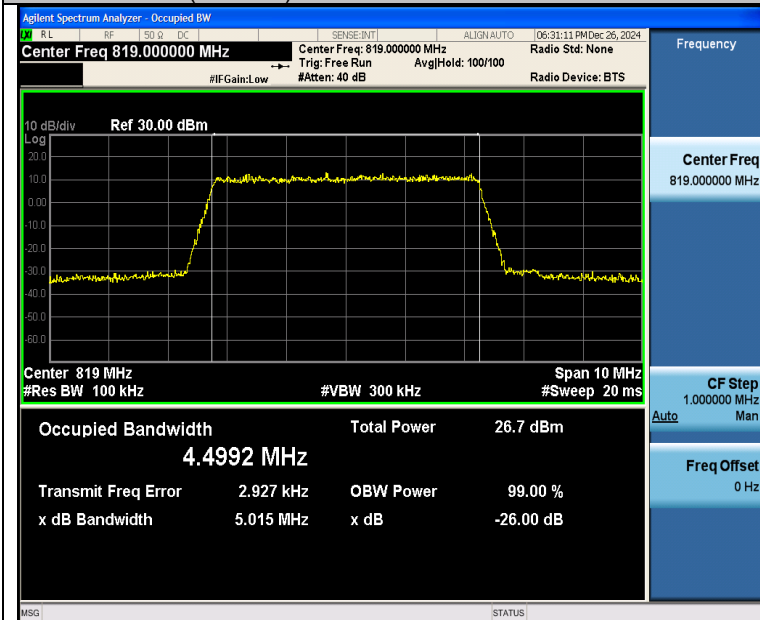



Band26(814-824)-5MHz-QPSK-26740-25RB#0-PASS

Band26(814-824)-5MHz-16QAM-26740-25RB#0-PASS

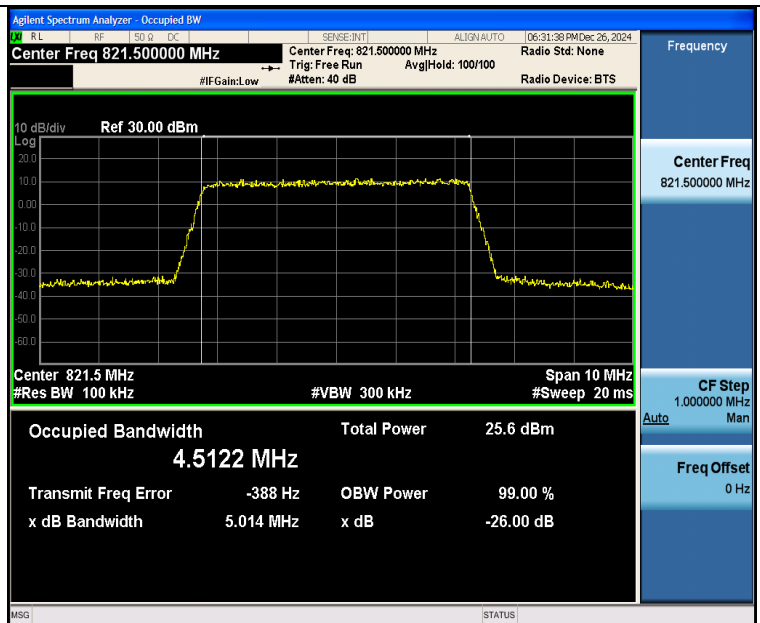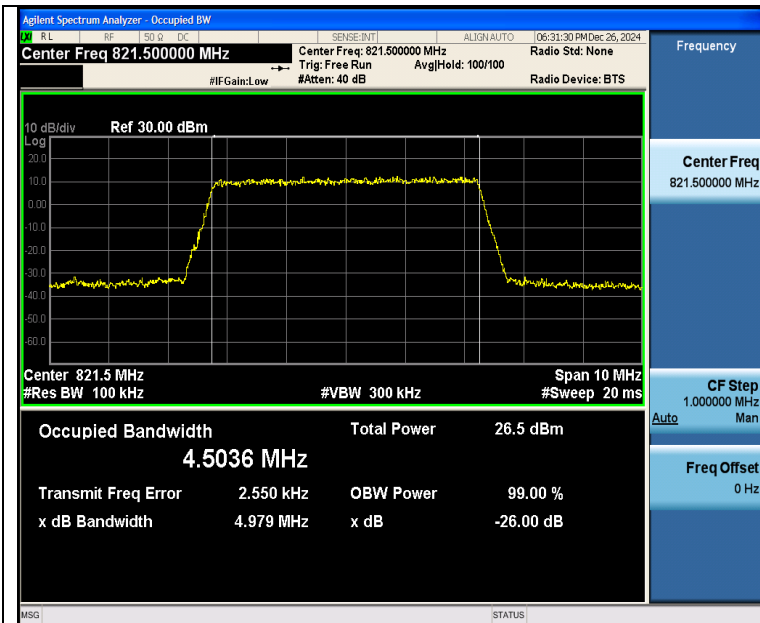



Band26(814-824)-5MHz-QPSK-26765-25RB#0-PASS

Band26(814-824)-5MHz-16QAM-26765-25RB#0-PASS

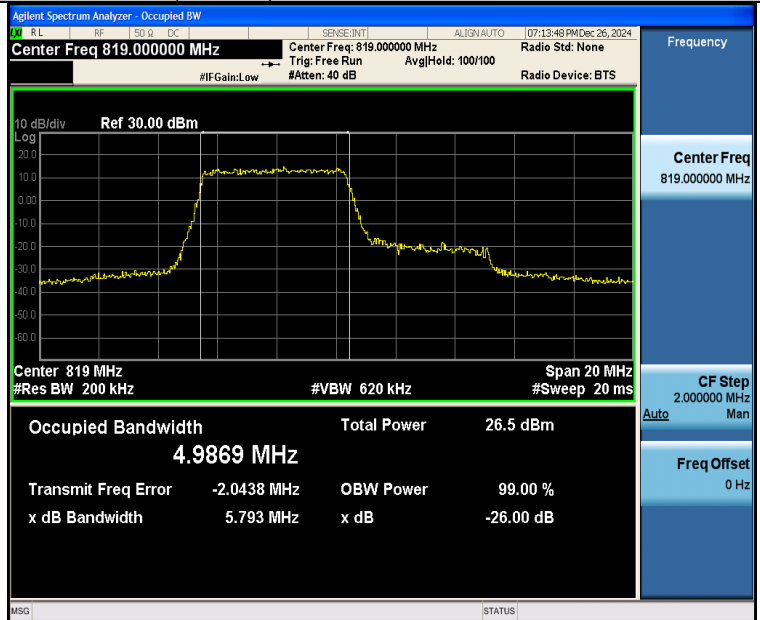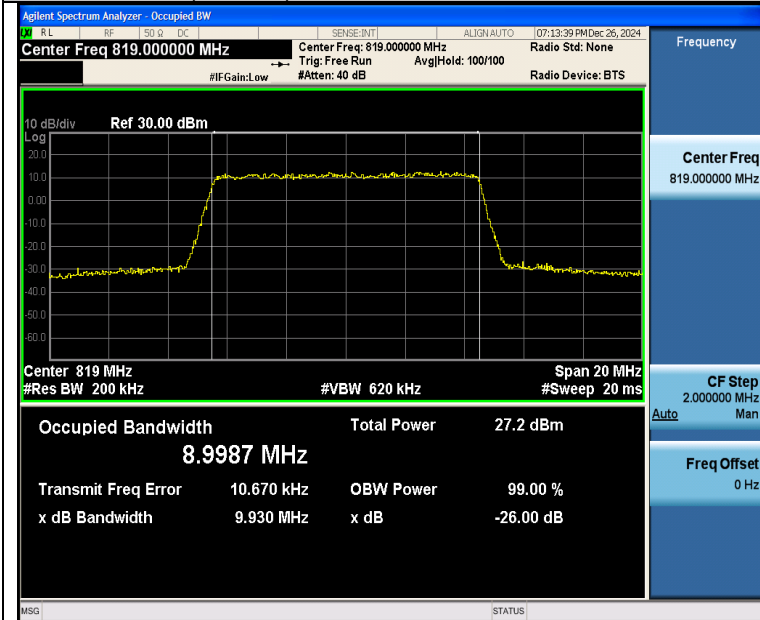


Band26(814-824)-10MHz-QPSK-26740-50RB#0-PASS

Band26(814-824)-10MHz-16QAM-26740-27RB#0-PASS

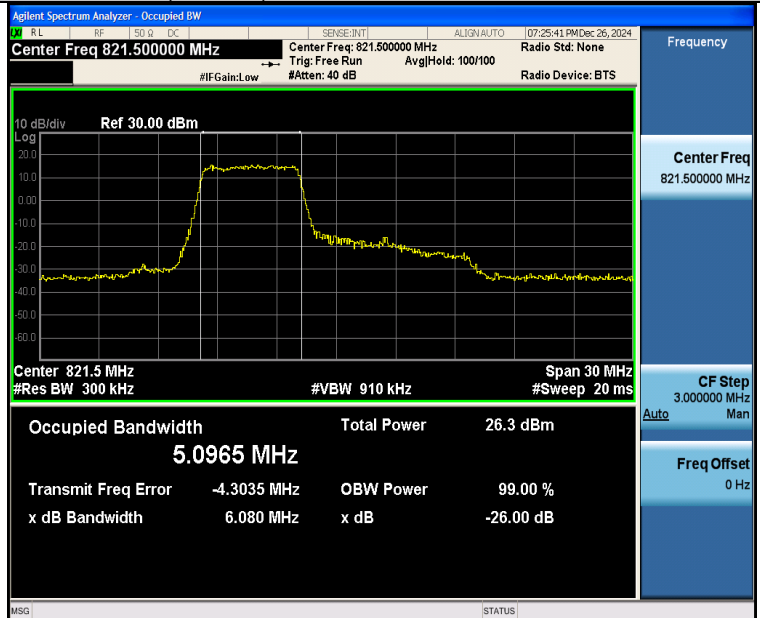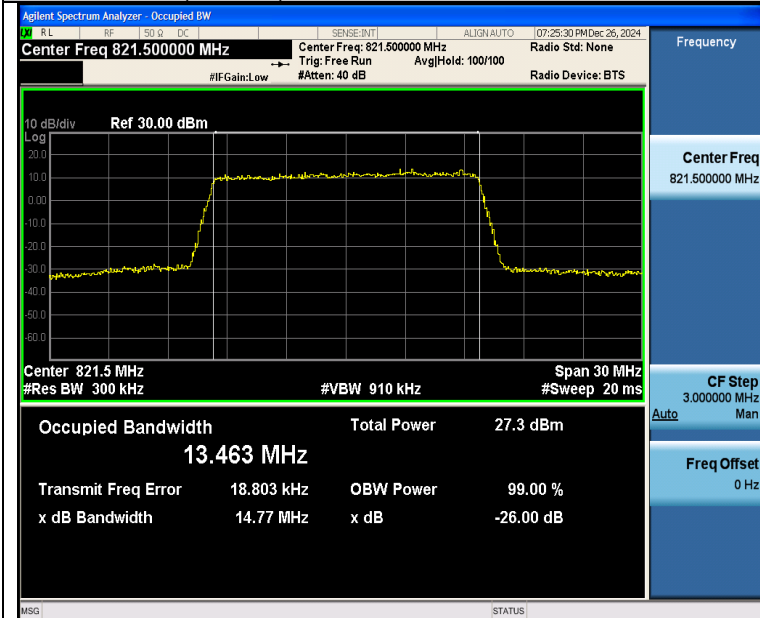



Band26(814-824)-15MHz-QPSK-26765-75RB#0-PASS

Band26(814-824)-15MHz-16QAM-26765-27RB#0-PASS

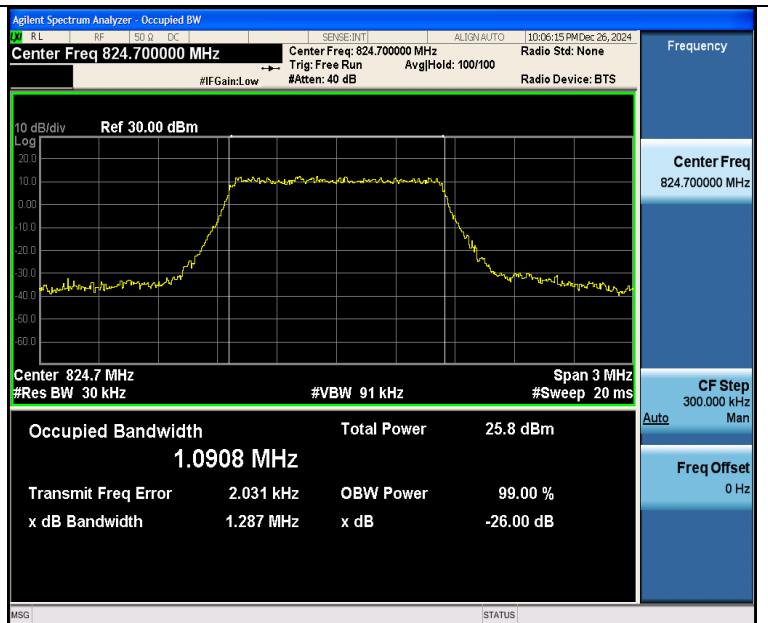



Band26(824-849)-1.4MHz-QPSK-26797-6RB#0-PASS

Band26(824-849)-1.4MHz-16QAM-26797-6RB#0-PASS

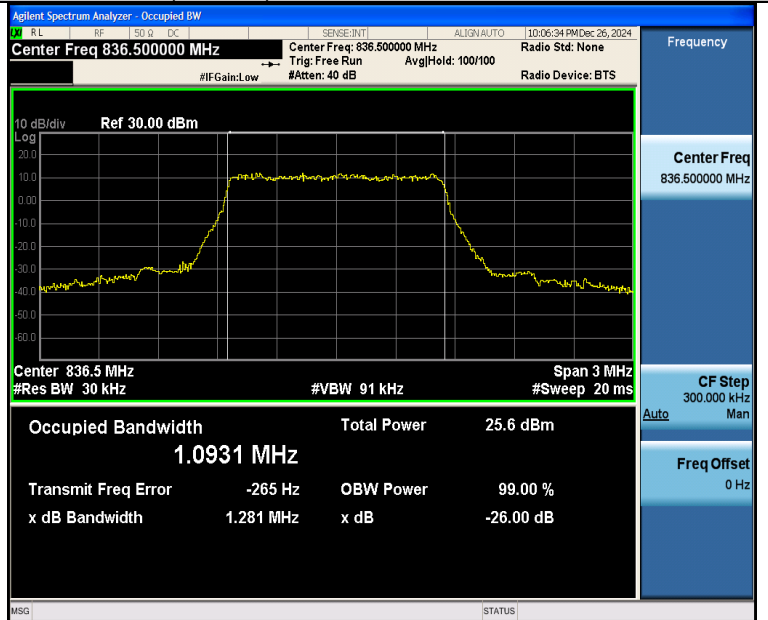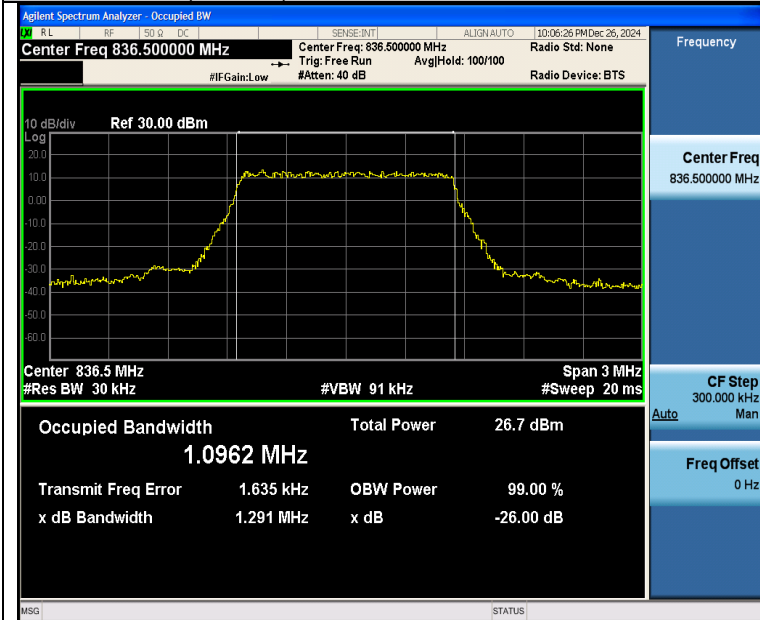



Band26(824-849)-1.4MHz-QPSK-26915-6RB#0-PASS

Band26(824-849)-1.4MHz-16QAM-26915-6RB#0-PASS

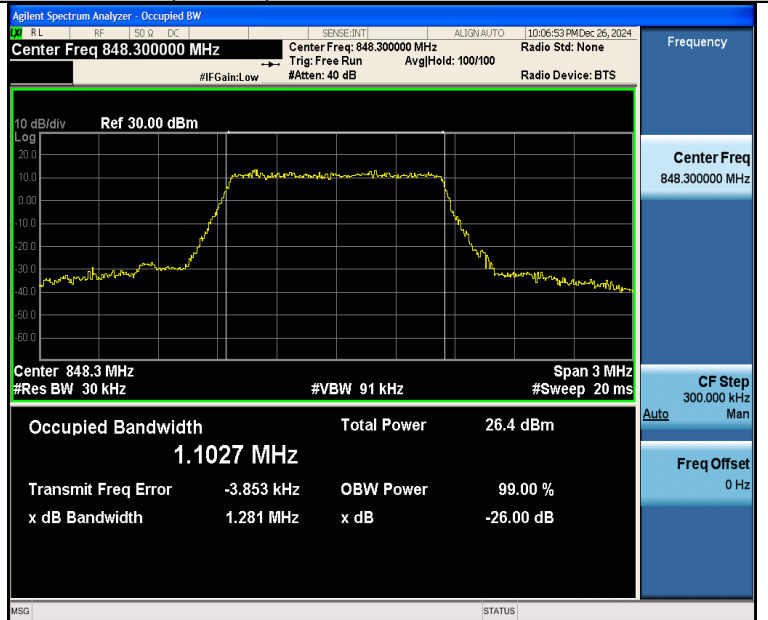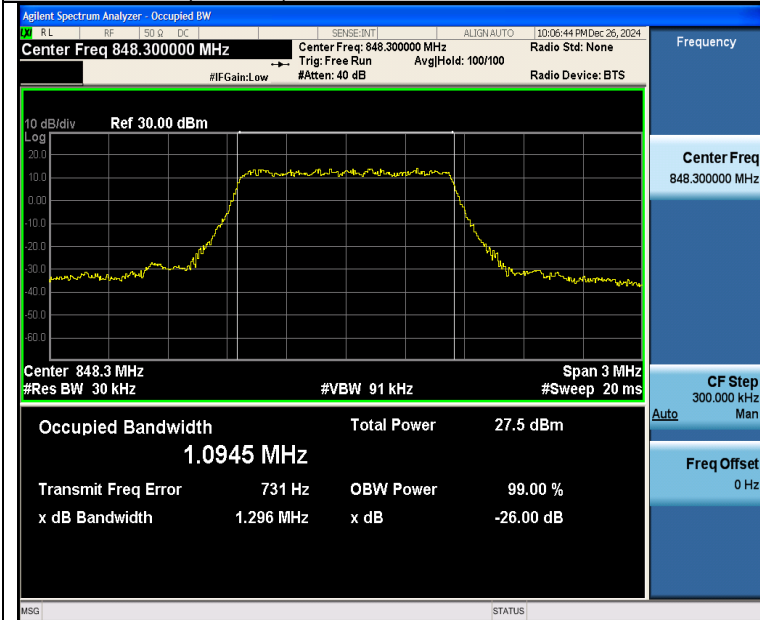



Band26(824-849)-1.4MHz-QPSK-27033-6RB#0-PASS

Band26(824-849)-1.4MHz-16QAM-27033-6RB#0-PASS

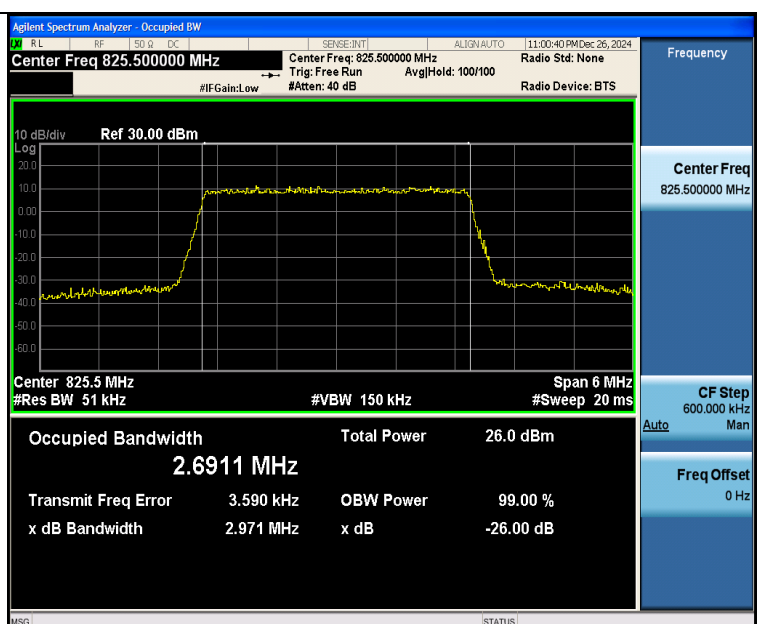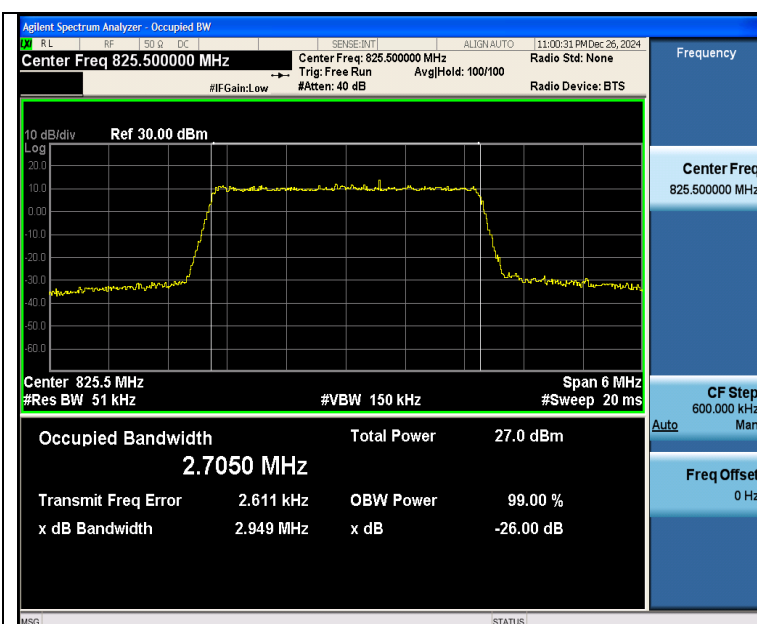



Band26(824-849)-3MHz-QPSK-26805-15RB#0-PASS

Band26(824-849)-3MHz-16QAM-26805-15RB#0-PASS

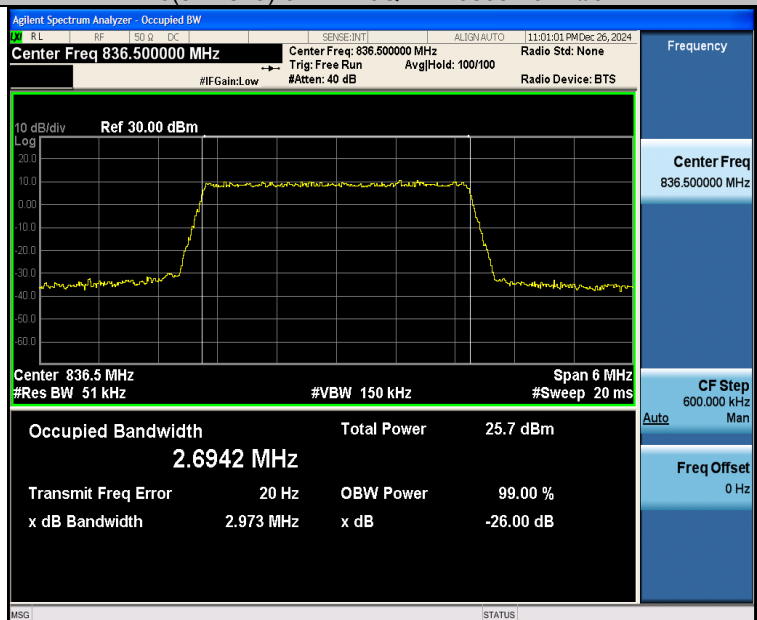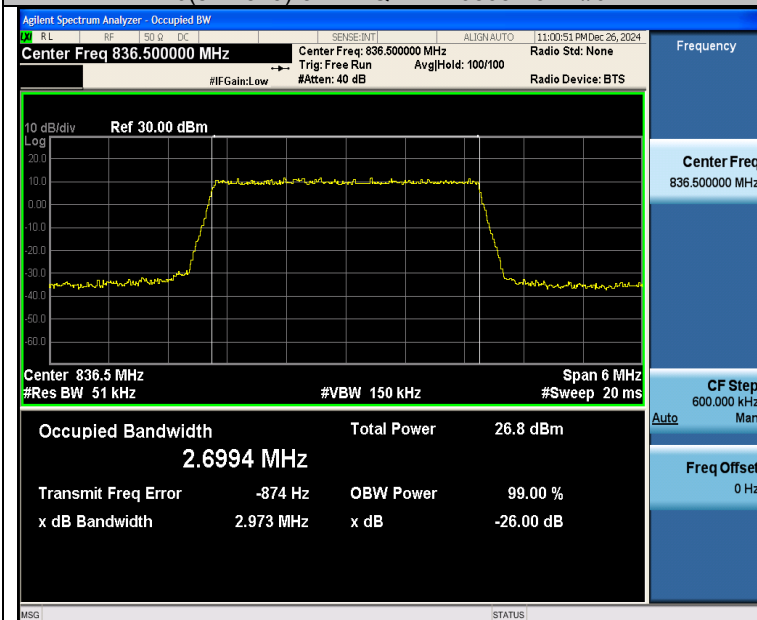



Band26(824-849)-3MHz-QPSK-26915-15RB#0-PASS

Band26(824-849)-3MHz-16QAM-26915-15RB#0-PASS

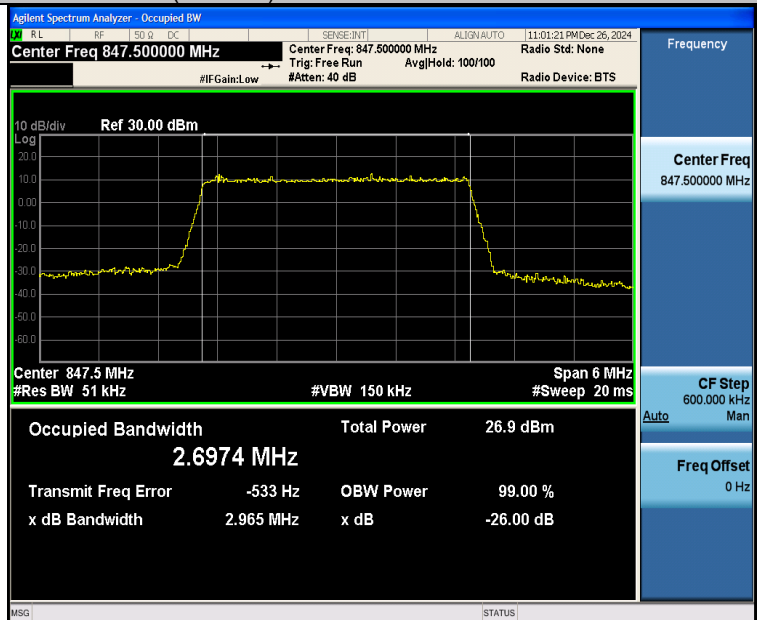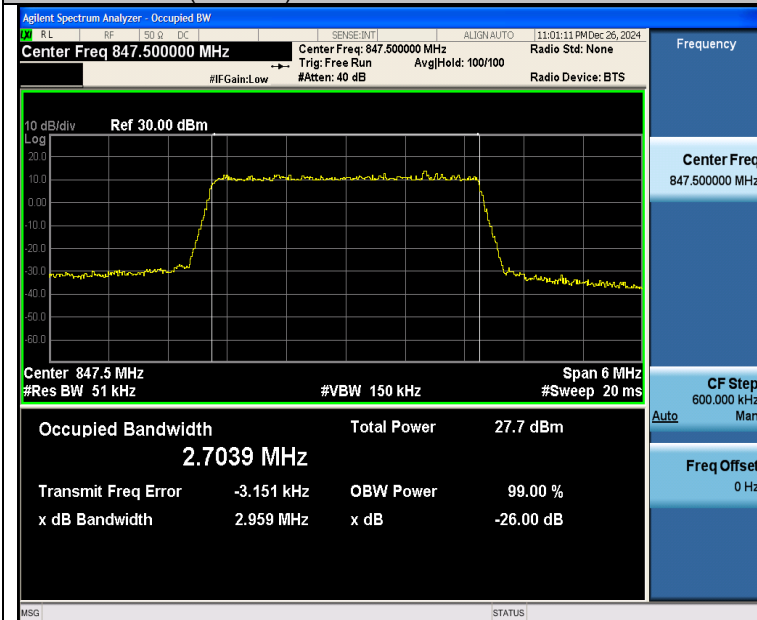



Band26(824-849)-3MHz-QPSK-27025-15RB#0-PASS

Band26(824-849)-3MHz-16QAM-27025-15RB#0-PASS

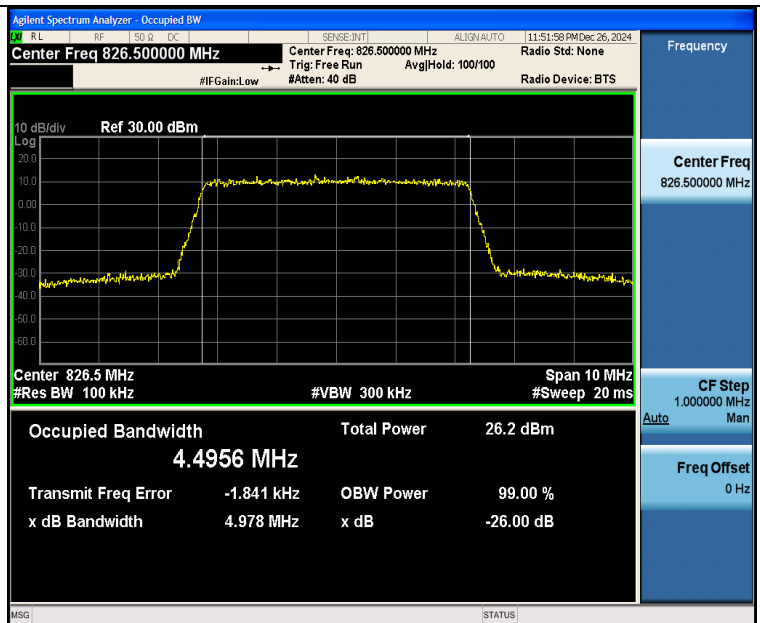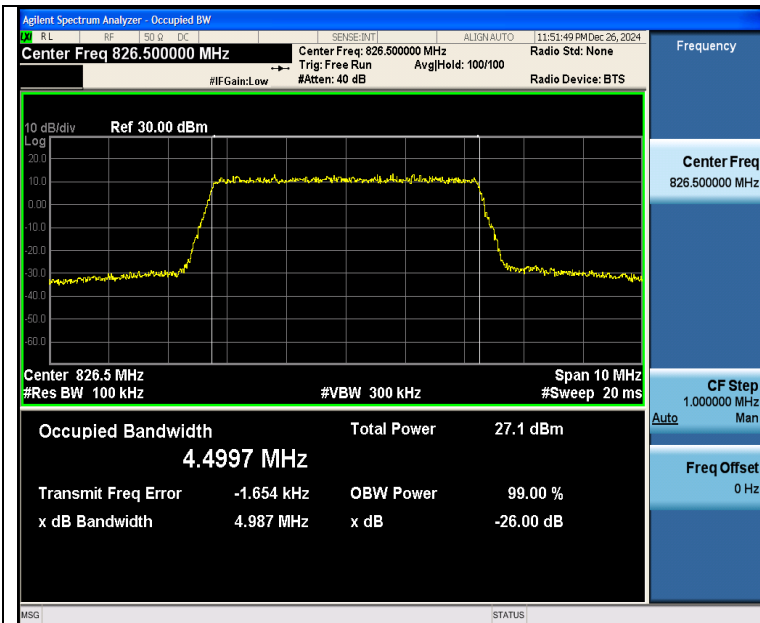


Band26(824-849)-5MHz-QPSK-26815-25RB#0-PASS

Band26(824-849)-5MHz-16QAM-26815-25RB#0-PASS

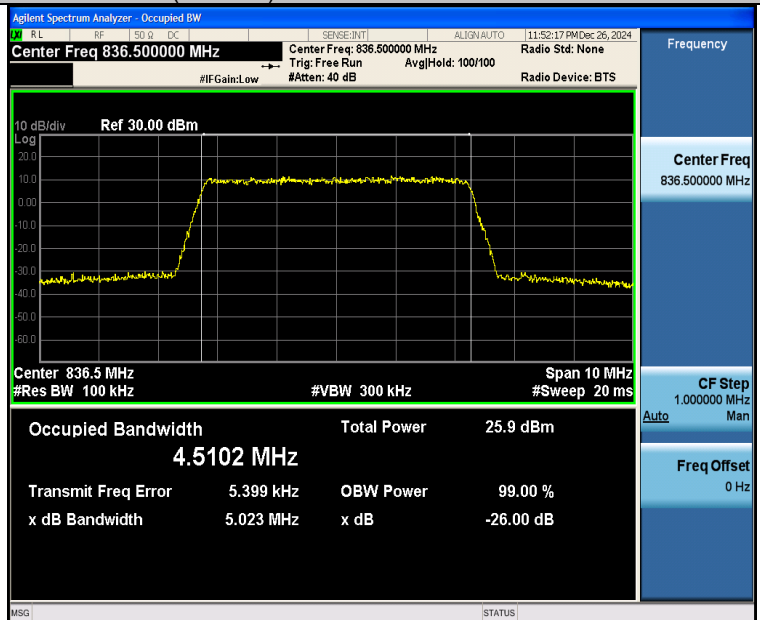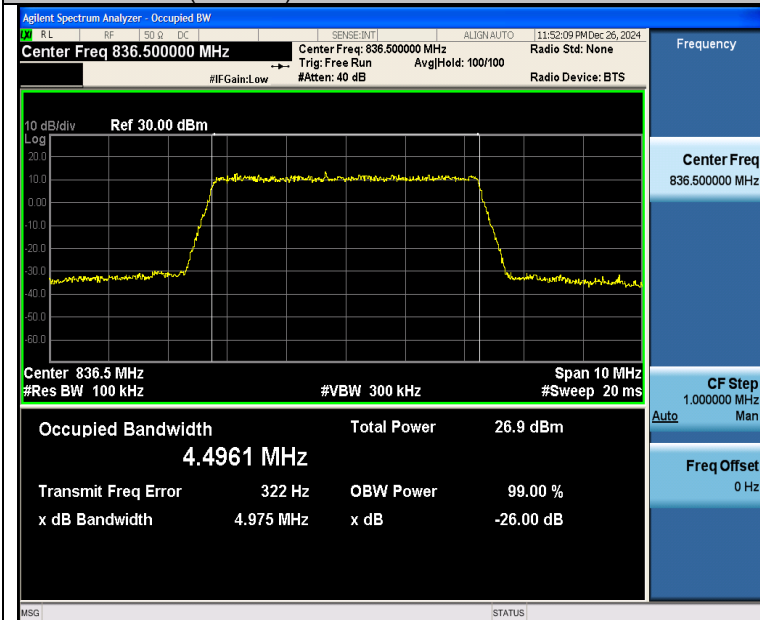



Band26(824-849)-5MHz-QPSK-26915-25RB#0-PASS

Band26(824-849)-5MHz-16QAM-26915-25RB#0-PASS

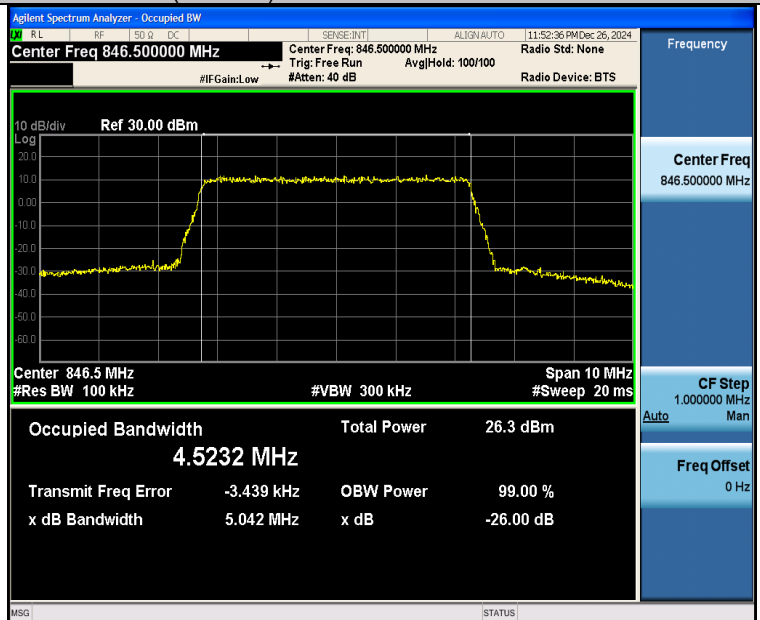


Band26(824-849)-5MHz-QPSK-27015-25RB#0-PASS

Band26(824-849)-5MHz-16QAM-27015-25RB#0-PASS

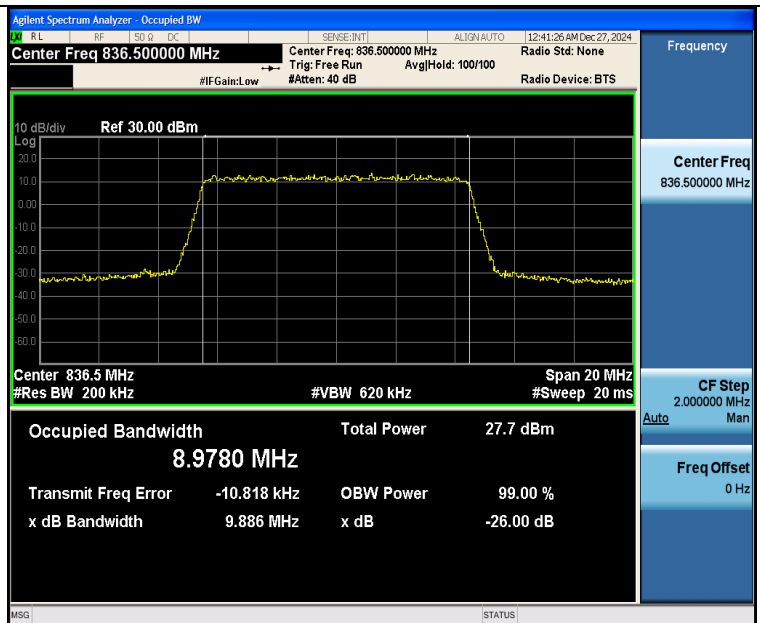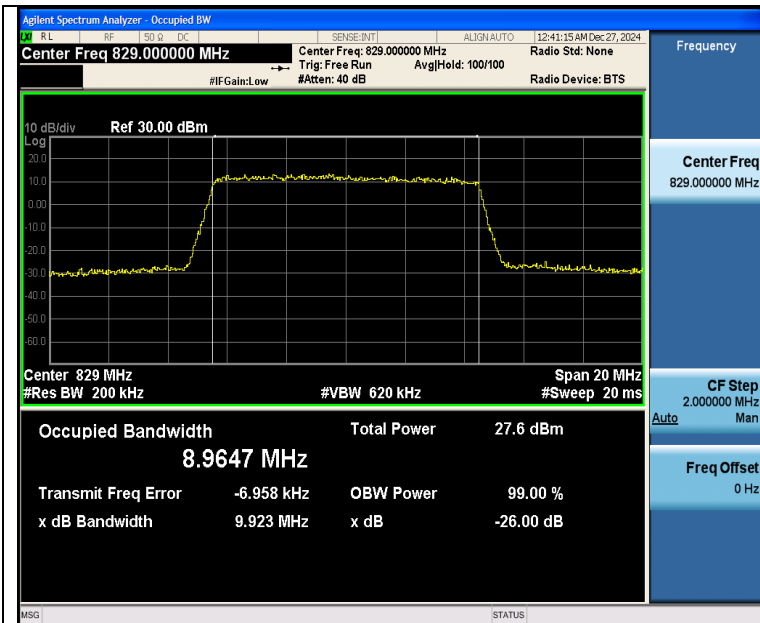

Band26(824-849)-10MHz-QPSK-26840-50RB#0-PASS

Band26(824-849)-10MHz-QPSK-26915-50RB#0-PASS

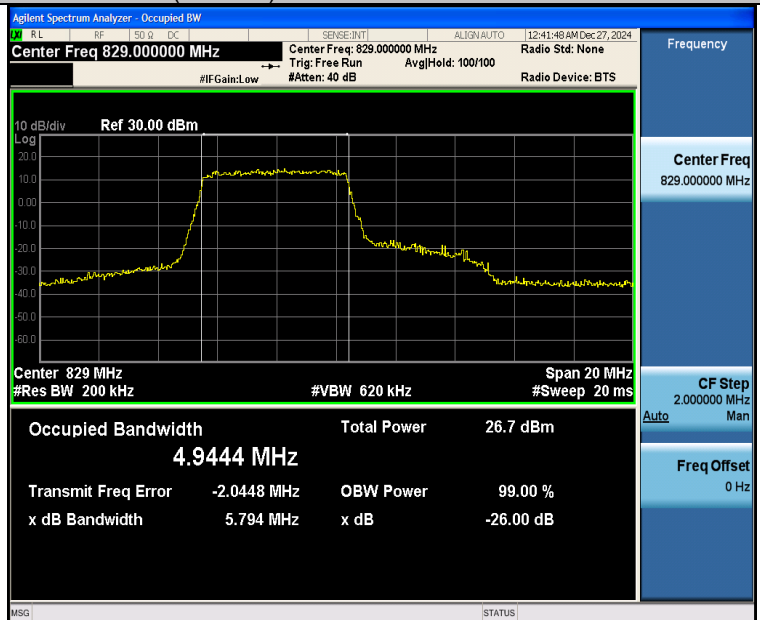



Band26(824-849)-10MHz-QPSK-26990-50RB#0-PASS

Band26(824-849)-10MHz-16QAM-26840-27RB#0-PASS





Band26(824-849)-10MHz-16QAM-26915-27RB#0-PASS

Band26(824-849)-10MHz-16QAM-26990-27RB#0-PASS

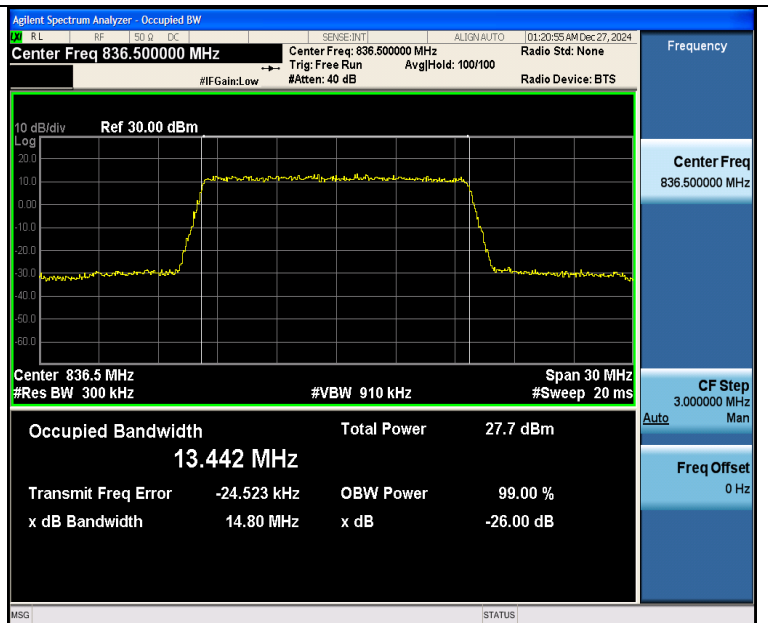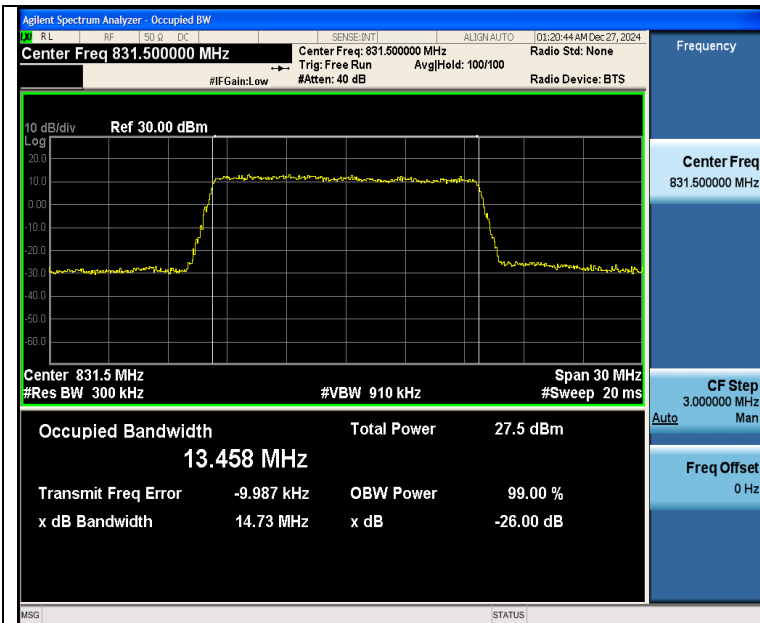



Band26(824-849)-15MHz-QPSK-26865-75RB#0-PASS

Band26(824-849)-15MHz-QPSK-26915-75RB#0-PASS

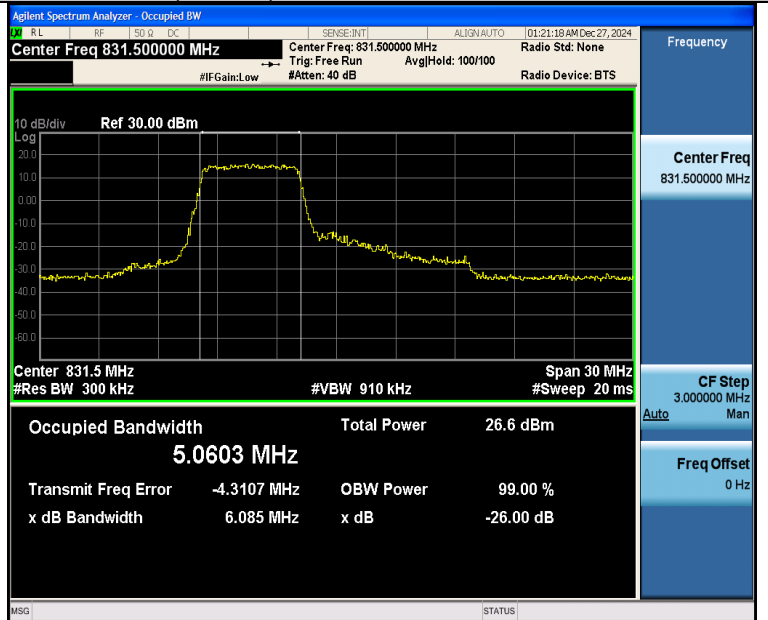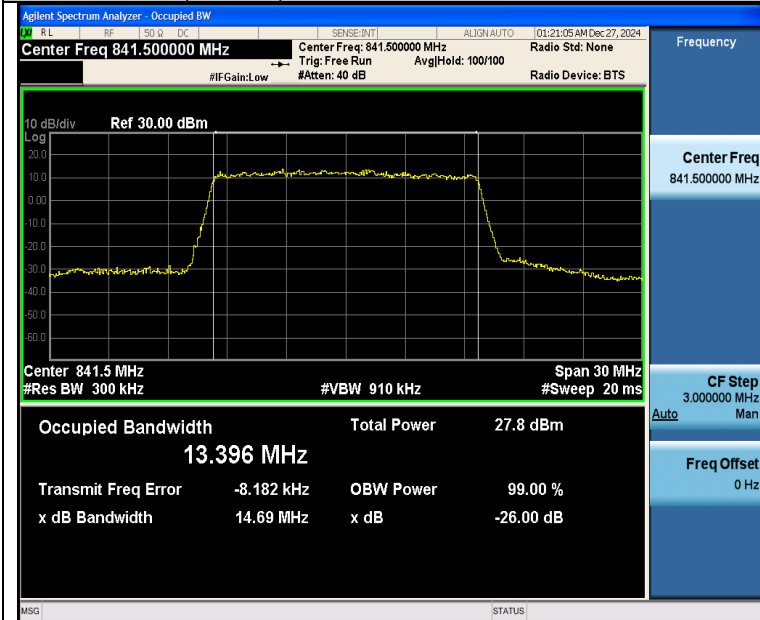

Band26(824-849)-15MHz-QPSK-26965-75RB#0-PASS

Band26(824-849)-15MHz-16QAM-26865-27RB#0-PASS

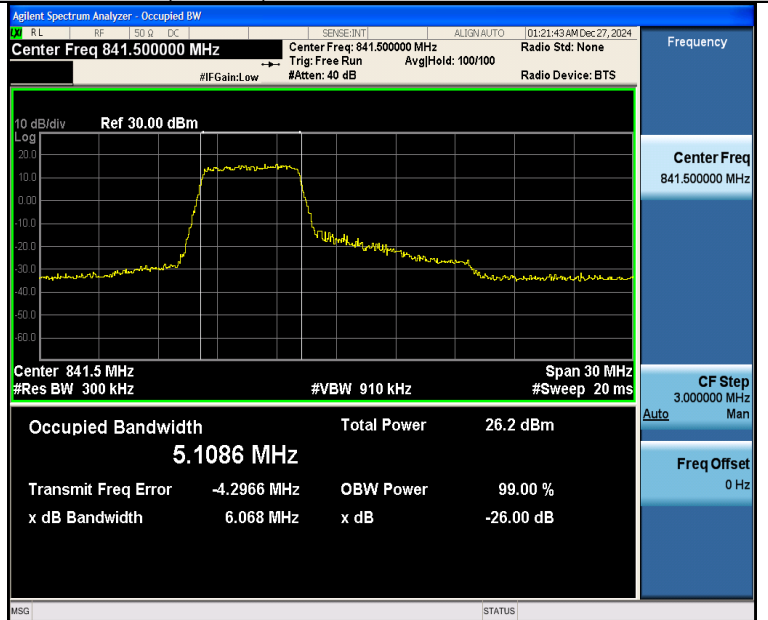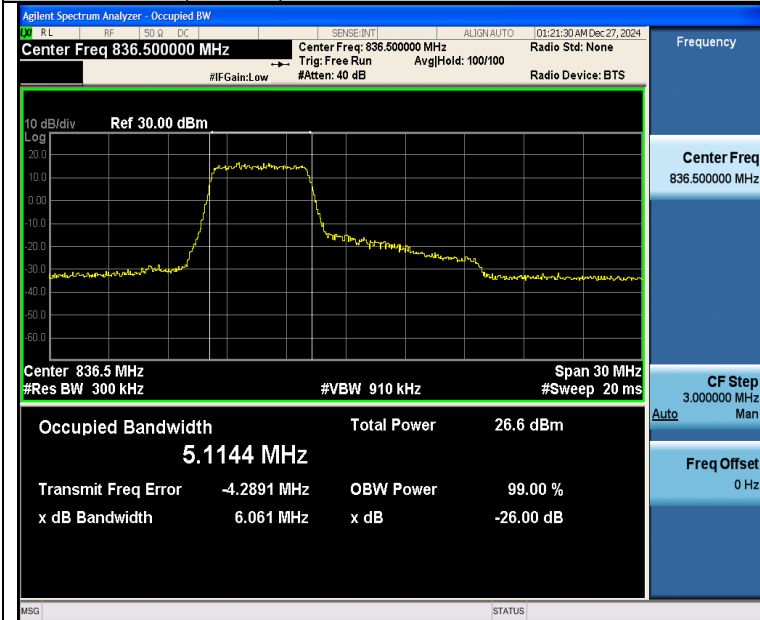

Band26(824-849)-15MHz-16QAM-26915-27RB#0-PASS

Band26(824-849)-15MHz-16QAM-26965-27RB#0-PASS

Appendix D: Band Edge




Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Limit (dBm)	Verdict
Band26(814-824)	1.4MHz	QPSK	26697	1RB#0	-32.29	-12.29	PASS
Band26(814-824)	1.4MHz	16QAM	26697	1RB#0	-33.94	-13.94	PASS
Band26(814-824)	1.4MHz	QPSK	26697	1RB#5	-35.53	-15.53	PASS
Band26(814-824)	1.4MHz	16QAM	26697	1RB#5	-39.99	-19.99	PASS
Band26(814-824)	1.4MHz	QPSK	26697	6RB#0	-39.24	-19.24	PASS
Band26(814-824)	1.4MHz	16QAM	26697	6RB#0	-41.55	-21.55	PASS
Band26(814-824)	1.4MHz	QPSK	26783	1RB#0	-35.98	-15.98	PASS
Band26(814-824)	1.4MHz	16QAM	26783	1RB#0	-36.45	-16.45	PASS
Band26(814-824)	1.4MHz	QPSK	26783	1RB#5	-37.53	-17.53	PASS
Band26(814-824)	1.4MHz	16QAM	26783	1RB#5	-36.32	-16.32	PASS
Band26(814-824)	1.4MHz	QPSK	26783	6RB#0	-41.24	-21.24	PASS
Band26(814-824)	1.4MHz	16QAM	26783	6RB#0	-39.97	-19.97	PASS
Band26(814-824)	3MHz	QPSK	26705	1RB#0	-32.37	-12.37	PASS
Band26(814-824)	3MHz	16QAM	26705	1RB#0	-39.70	-19.7	PASS
Band26(814-824)	3MHz	QPSK	26705	1RB#14	-36.77	-16.77	PASS
Band26(814-824)	3MHz	16QAM	26705	1RB#14	-39.54	-19.54	PASS
Band26(814-824)	3MHz	QPSK	26705	15RB#0	-38.19	-18.19	PASS
Band26(814-824)	3MHz	16QAM	26705	15RB#0	-39.73	-19.73	PASS
Band26(814-824)	3MHz	QPSK	26775	1RB#0	-33.98	-13.98	PASS
Band26(814-824)	3MHz	16QAM	26775	1RB#0	-32.28	-12.28	PASS
Band26(814-824)	3MHz	QPSK	26775	1RB#14	-34.44	-14.44	PASS
Band26(814-824)	3MHz	16QAM	26775	1RB#14	-37.07	-17.07	PASS
Band26(814-824)	3MHz	QPSK	26775	15RB#0	-40.69	-20.69	PASS
Band26(814-824)	3MHz	16QAM	26775	15RB#0	-40.84	-20.84	PASS
Band26(814-824)	5MHz	QPSK	26715	1RB#0	-37.78	-17.78	PASS
Band26(814-824)	5MHz	16QAM	26715	1RB#0	-41.28	-21.28	PASS
Band26(814-824)	5MHz	QPSK	26715	1RB#24	-34.13	-14.13	PASS
Band26(814-824)	5MHz	16QAM	26715	1RB#24	-39.68	-19.68	PASS
Band26(814-824)	5MHz	QPSK	26715	25RB#0	-43.27	-23.27	PASS
Band26(814-824)	5MHz	16QAM	26715	25RB#0	-42.93	-22.93	PASS
Band26(814-824)	5MHz	QPSK	26765	1RB#0	-33.89	-13.89	PASS

Band26(814-824)	5MHz	16QAM	26765	1RB#0	-37.87	-17.87	PASS
Band26(814-824)	5MHz	QPSK	26765	1RB#24	-40.63	-20.63	PASS
Band26(814-824)	5MHz	16QAM	26765	1RB#24	-37.19	-17.19	PASS
Band26(814-824)	5MHz	QPSK	26765	25RB#0	-42.82	-22.82	PASS
Band26(814-824)	5MHz	16QAM	26765	25RB#0	-43.58	-23.58	PASS
Band26(814-824)	10MHz	QPSK	26740	1RB#0	-50.57	-30.57	PASS
Band26(814-824)	10MHz	16QAM	26740	1RB#0	-51.18	-31.18	PASS
Band26(814-824)	10MHz	QPSK	26740	1RB#49	-48.66	-28.66	PASS
Band26(814-824)	10MHz	16QAM	26740	1RB#49	-46.96	-26.96	PASS
Band26(814-824)	10MHz	QPSK	26740	50RB#0	-45.82	-25.82	PASS
Band26(824-849)	1.4MHz	QPSK	26797	1RB#0	-30.96	-17.96	PASS
Band26(824-849)	1.4MHz	16QAM	26797	1RB#0	-34.53	-21.53	PASS
Band26(824-849)	1.4MHz	QPSK	26797	1RB#5	-52.97	-39.97	PASS
Band26(824-849)	1.4MHz	16QAM	26797	1RB#5	-52.72	-39.72	PASS
Band26(824-849)	1.4MHz	QPSK	26797	6RB#0	-36.72	-23.72	PASS
Band26(824-849)	1.4MHz	16QAM	26797	6RB#0	-39.07	-26.07	PASS
Band26(824-849)	1.4MHz	QPSK	27033	1RB#0	-49.14	-36.14	PASS
Band26(824-849)	1.4MHz	16QAM	27033	1RB#0	-49.42	-36.42	PASS
Band26(824-849)	1.4MHz	QPSK	27033	1RB#5	-31.25	-18.25	PASS
Band26(824-849)	1.4MHz	16QAM	27033	1RB#5	-33.76	-20.76	PASS
Band26(824-849)	1.4MHz	QPSK	27033	6RB#0	-37.86	-24.86	PASS
Band26(824-849)	1.4MHz	16QAM	27033	6RB#0	-37.54	-24.54	PASS
Band26(824-849)	3MHz	QPSK	26805	1RB#0	-31.31	-18.31	PASS
Band26(824-849)	3MHz	16QAM	26805	1RB#0	-32.27	-19.27	PASS
Band26(824-849)	3MHz	QPSK	26805	1RB#14	-49.31	-36.31	PASS
Band26(824-849)	3MHz	16QAM	26805	1RB#14	-49.64	-36.64	PASS
Band26(824-849)	3MHz	QPSK	26805	15RB#0	-35.95	-22.95	PASS
Band26(824-849)	3MHz	16QAM	26805	15RB#0	-38.76	-25.76	PASS
Band26(824-849)	3MHz	QPSK	27025	1RB#0	-48.66	-35.66	PASS
Band26(824-849)	3MHz	16QAM	27025	1RB#0	-49.85	-36.85	PASS
Band26(824-849)	3MHz	QPSK	27025	1RB#14	-30.06	-17.06	PASS
Band26(824-849)	3MHz	16QAM	27025	1RB#14	-32.48	-19.48	PASS
Band26(824-849)	3MHz	QPSK	27025	15RB#0	-37.12	-24.12	PASS
Band26(824-849)	3MHz	16QAM	27025	15RB#0	-37.87	-24.87	PASS
Band26(824-849)	5MHz	QPSK	26815	1RB#0	-35.96	-22.96	PASS



849)							
Band26(824-849)	5MHz	16QAM	26815	1RB#0	-36.73	-23.73	PASS
Band26(824-849)	5MHz	QPSK	26815	1RB#24	-52.32	-39.32	PASS
Band26(824-849)	5MHz	16QAM	26815	1RB#24	-52.66	-39.66	PASS
Band26(824-849)	5MHz	QPSK	26815	25RB#0	-37.82	-24.82	PASS
Band26(824-849)	5MHz	16QAM	26815	25RB#0	-39.58	-26.58	PASS
Band26(824-849)	5MHz	QPSK	27015	1RB#0	-52.48	-39.48	PASS
Band26(824-849)	5MHz	16QAM	27015	1RB#0	-52.50	-39.5	PASS
Band26(824-849)	5MHz	QPSK	27015	1RB#24	-34.01	-21.01	PASS
Band26(824-849)	5MHz	16QAM	27015	1RB#24	-35.80	-22.8	PASS
Band26(824-849)	5MHz	QPSK	27015	25RB#0	-37.62	-24.62	PASS
Band26(824-849)	5MHz	16QAM	27015	25RB#0	-38.68	-25.68	PASS
Band26(824-849)	10MHz	QPSK	26840	1RB#0	-43.50	-30.5	PASS
Band26(824-849)	10MHz	16QAM	26840	1RB#0	-44.25	-31.25	PASS
Band26(824-849)	10MHz	QPSK	26840	1RB#49	-49.69	-36.69	PASS
Band26(824-849)	10MHz	16QAM	26840	1RB#49	-49.74	-36.74	PASS
Band26(824-849)	10MHz	QPSK	26990	1RB#0	-49.96	-36.96	PASS
Band26(824-849)	10MHz	16QAM	26990	1RB#0	-49.74	-36.74	PASS
Band26(824-849)	10MHz	QPSK	26990	1RB#49	-43.07	-30.07	PASS
Band26(824-849)	10MHz	16QAM	26990	1RB#49	-44.14	-31.14	PASS
Band26(824-849)	10MHz	QPSK	26840	50RB#0	-38.85	-25.85	PASS
Band26(824-849)	10MHz	QPSK	26990	50RB#0	-38.13	-25.13	PASS
Band26(824-849)	15MHz	QPSK	26865	1RB#0	-42.95	-29.95	PASS
Band26(824-849)	15MHz	16QAM	26865	1RB#0	-43.96	-30.96	PASS
Band26(824-849)	15MHz	QPSK	26865	1RB#74	-48.05	-35.05	PASS
Band26(824-849)	15MHz	16QAM	26865	1RB#74	-48.05	-35.05	PASS
Band26(824-849)	15MHz	QPSK	26965	1RB#0	-48.06	-35.06	PASS
Band26(824-849)	15MHz	16QAM	26965	1RB#0	-48.16	-35.16	PASS
Band26(824-849)	15MHz	QPSK	26965	1RB#74	-43.33	-30.33	PASS
Band26(824-849)	15MHz	16QAM	26965	1RB#74	-43.78	-30.78	PASS
Band26(824-849)	15MHz	QPSK	26865	75RB#0	-40.12	-27.12	PASS
Band26(824-849)	15MHz	QPSK	26965	75RB#0	-39.13	-26.13	PASS

Test Graphs

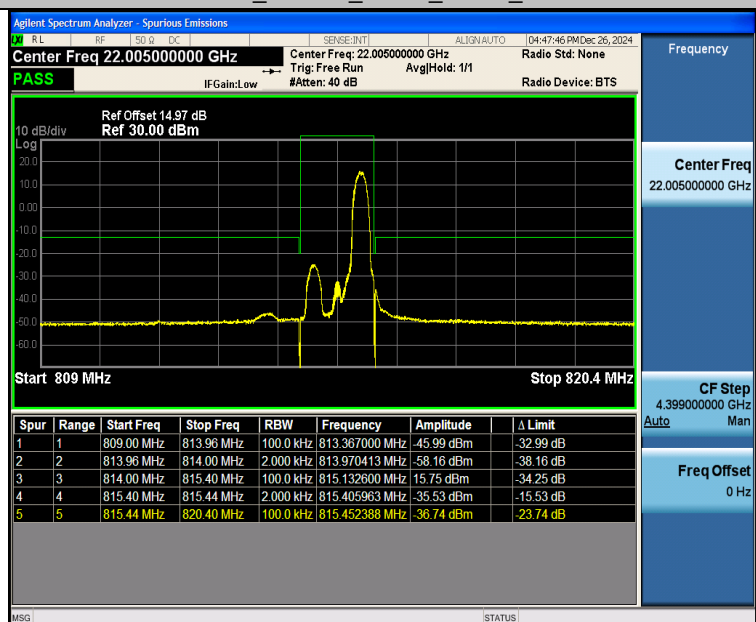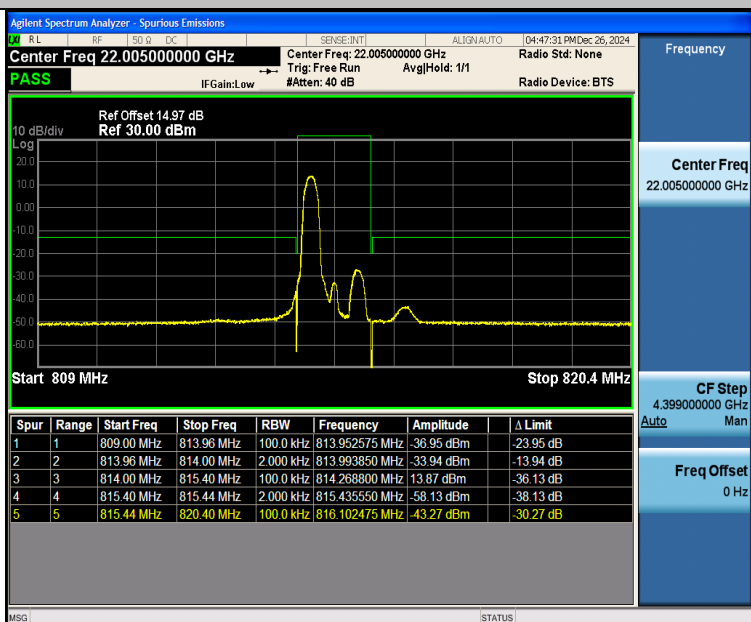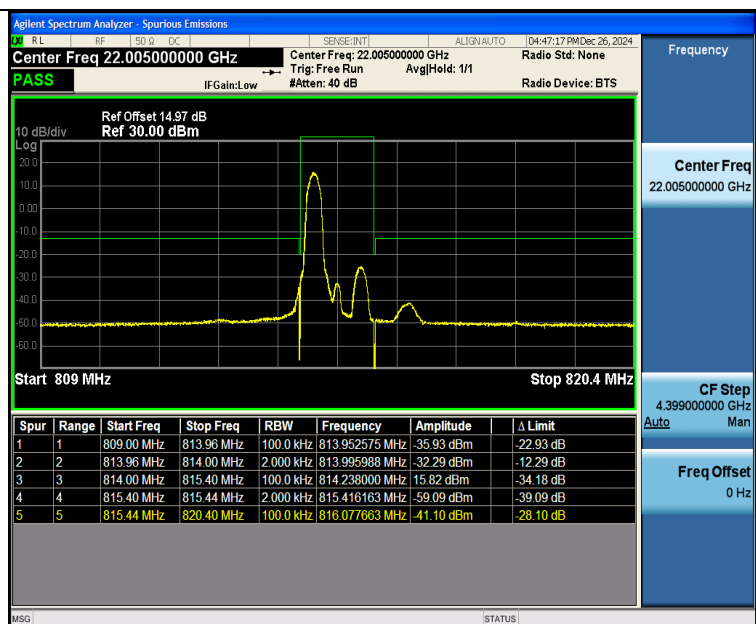



Band26	1.4MHz	16QAM	26697	1RB#0
--------	--------	-------	-------	-------

Band26 1.4MHz QPSK 26697 1RB#5

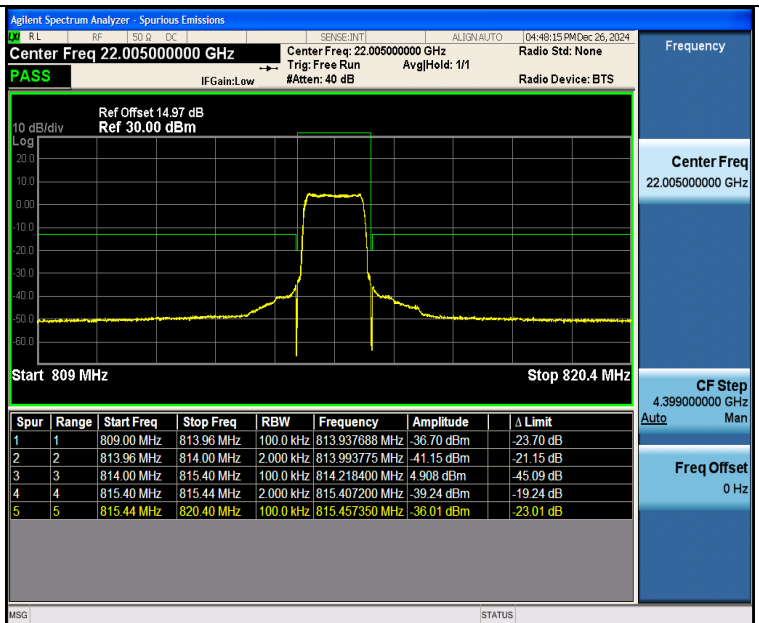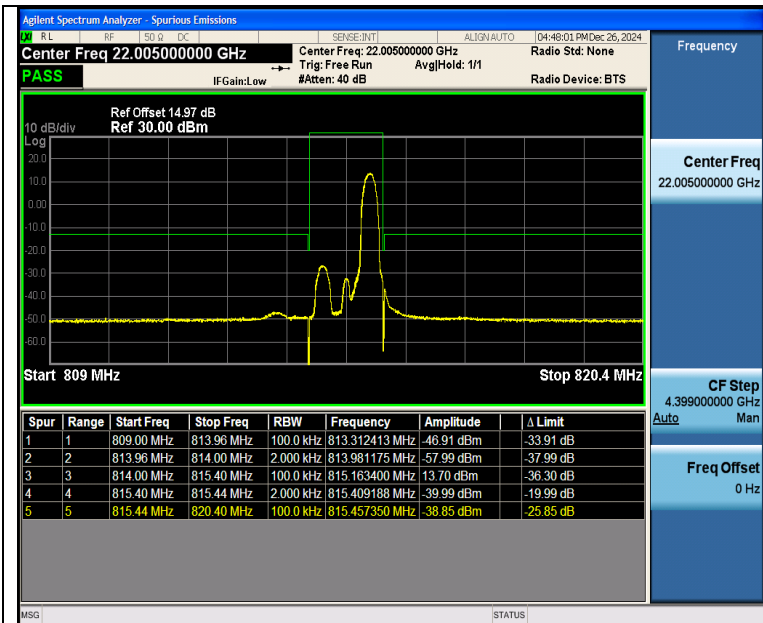



Band26 1.4MHz 16QAM 26697 1RB#5

Band26 1.4MHz QPSK 26697 6RB#0

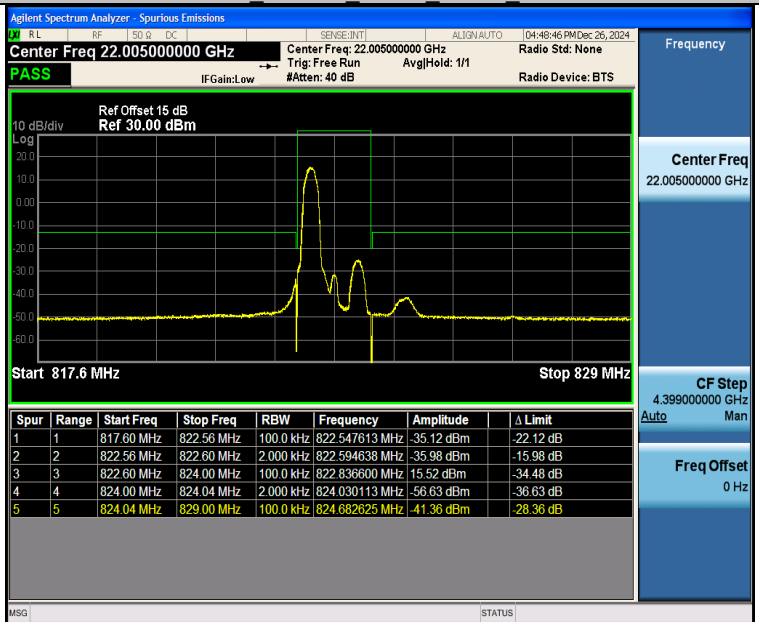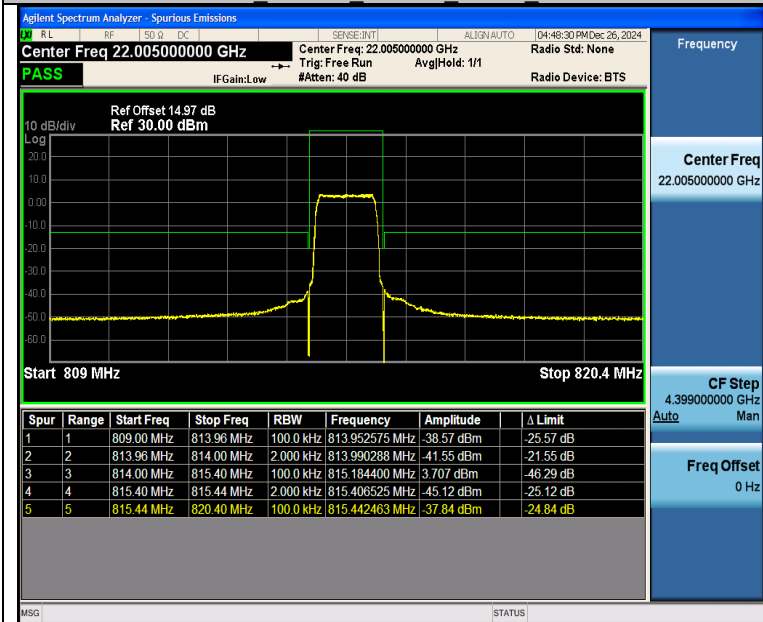



Band26 1.4MHz 16QAM 26697 6RB#0

Band26 1.4MHz QPSK 26783 1RB#0

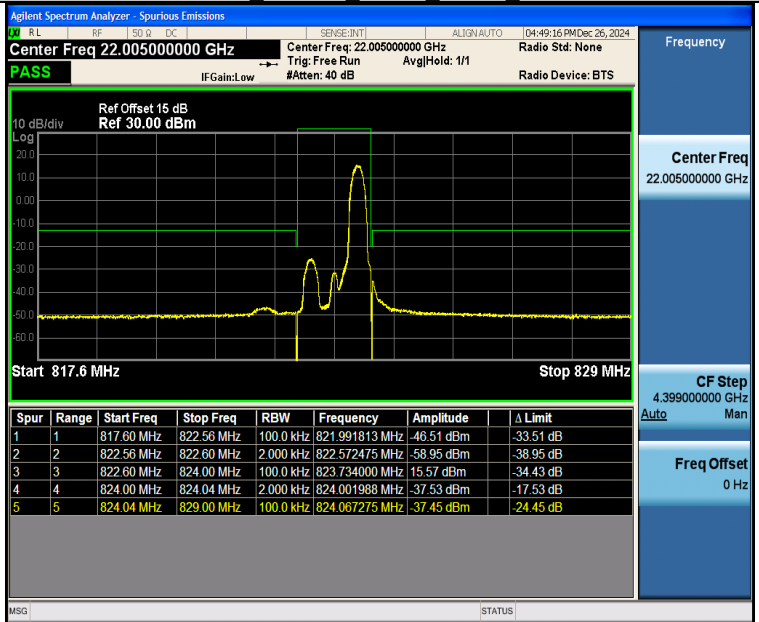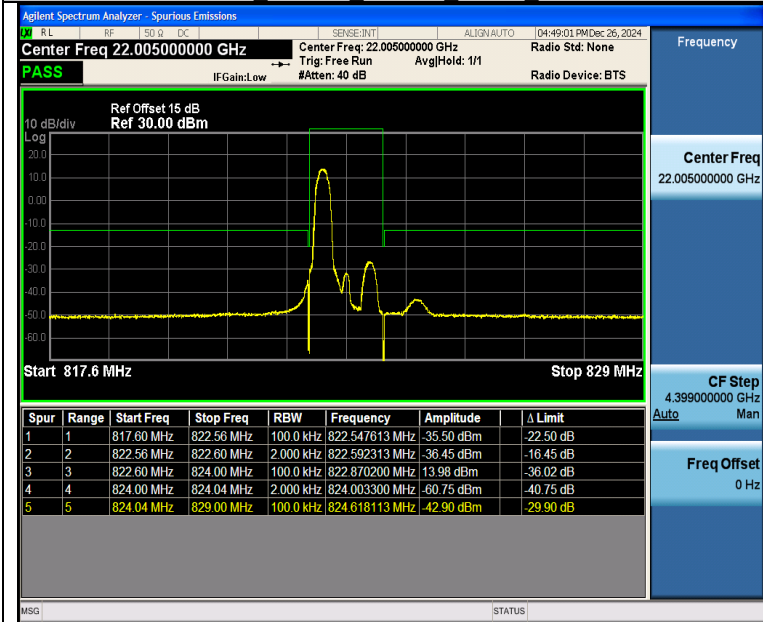



Band26 1.4MHz 16QAM 26783 1RB#0

Band26 1.4MHz QPSK 26783 1RB#5

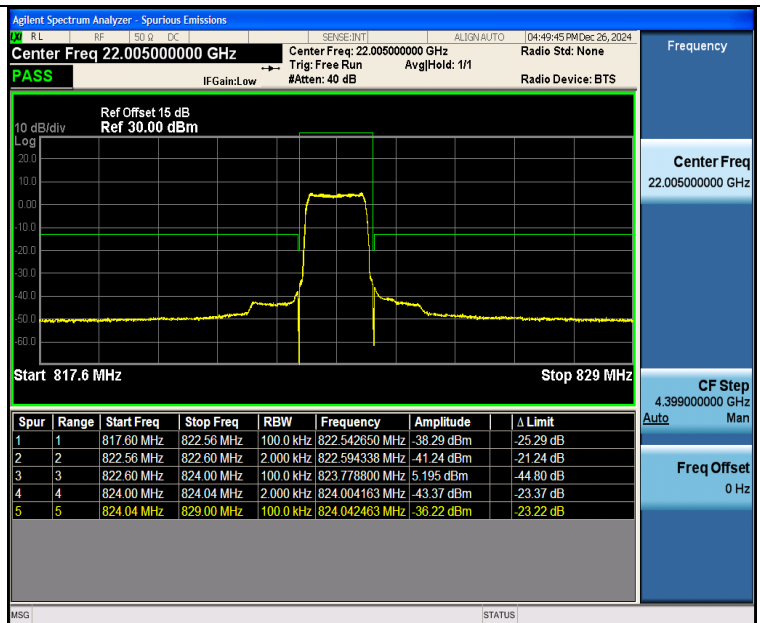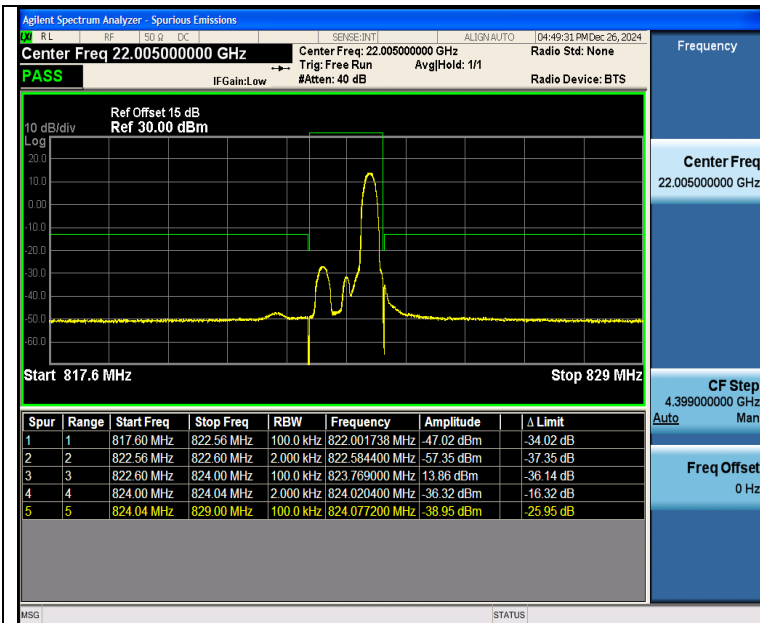



Band26 1.4MHz 16QAM 26783 1RB#5

Band26 1.4MHz QPSK 26783 6RB#0

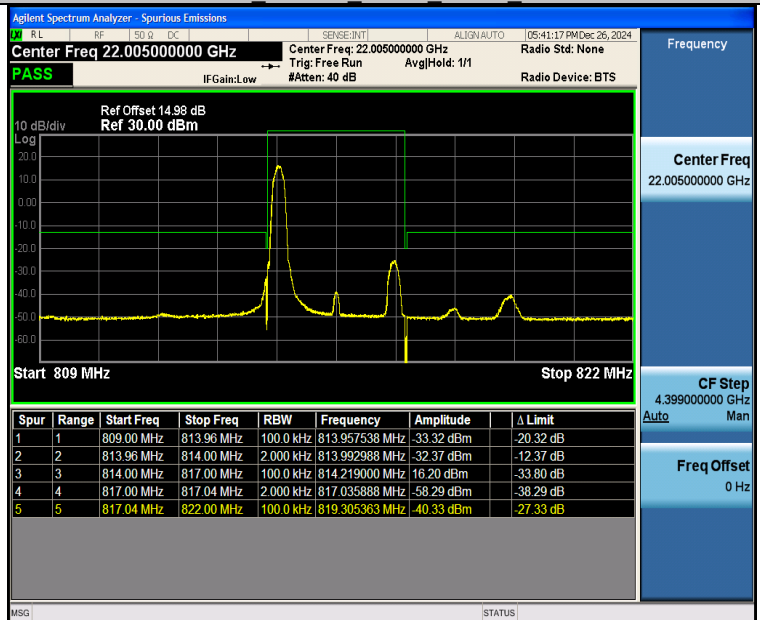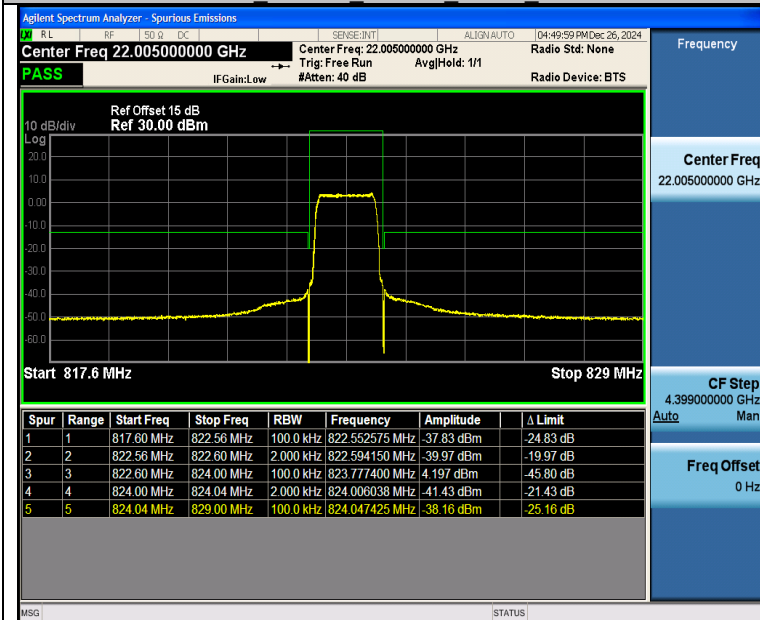



Band26 1.4MHz 16QAM 26783 6RB#0

Band26 3MHz QPSK 26705 1RB#0

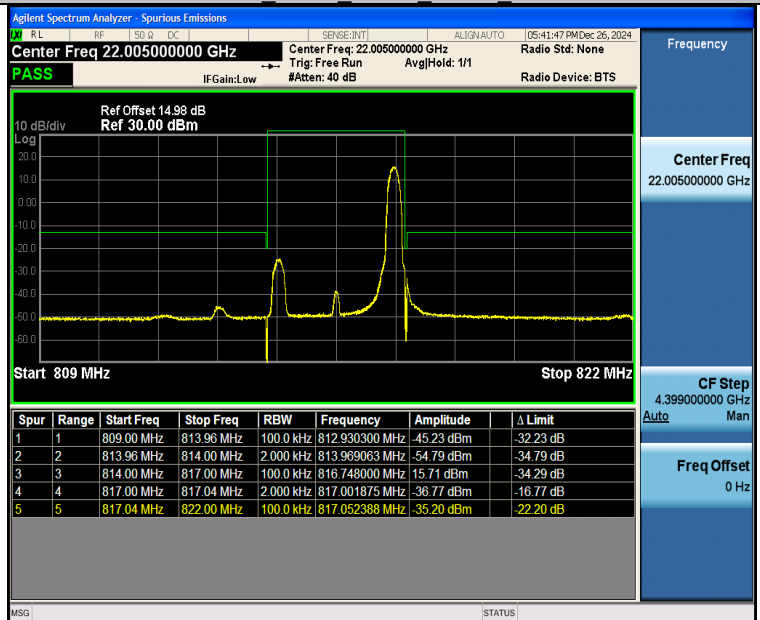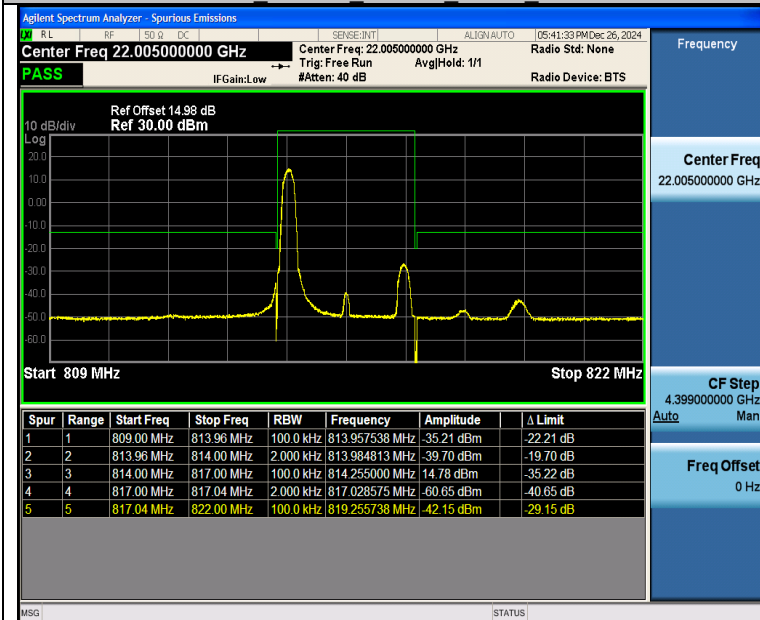



Band26 3MHz 16QAM 26705 1RB#0

Band26 3MHz QPSK 26705 1RB#14

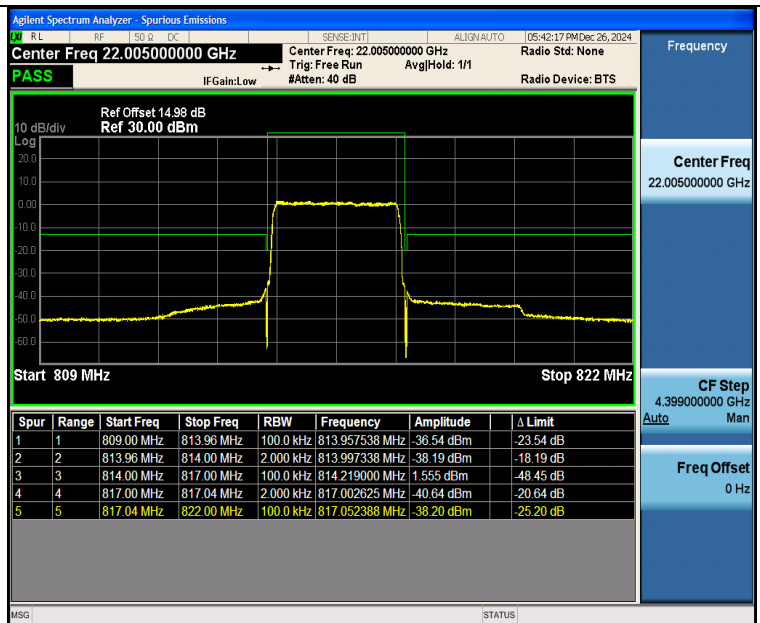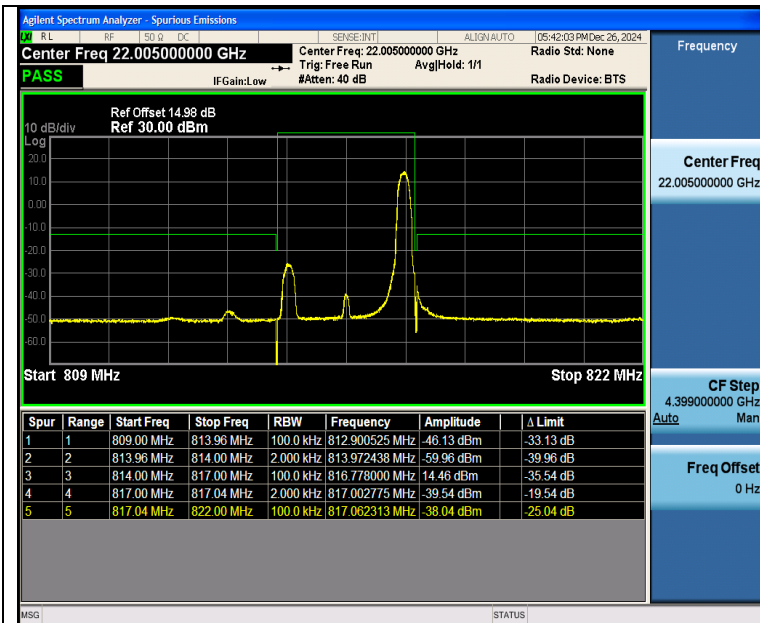



Band26 3MHz 16QAM 26705 1RB#14

Band26 3MHz QPSK 26705 15RB#0

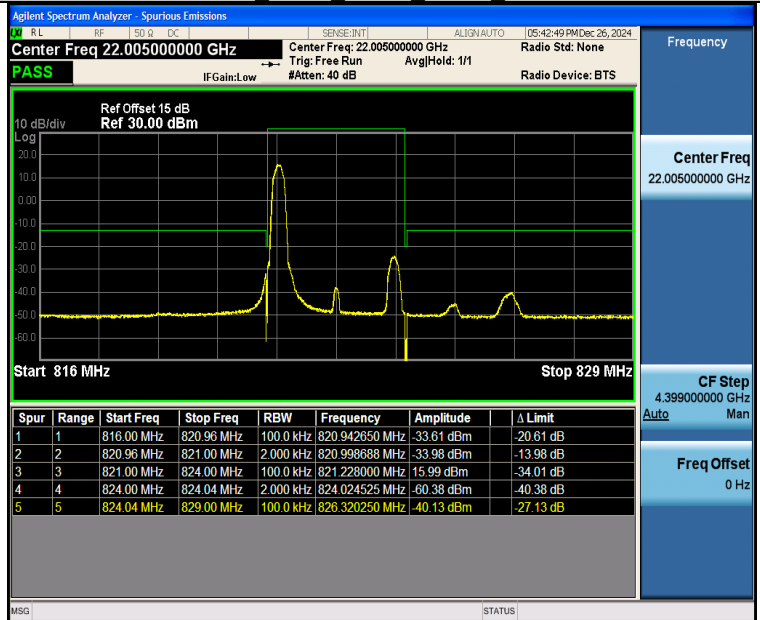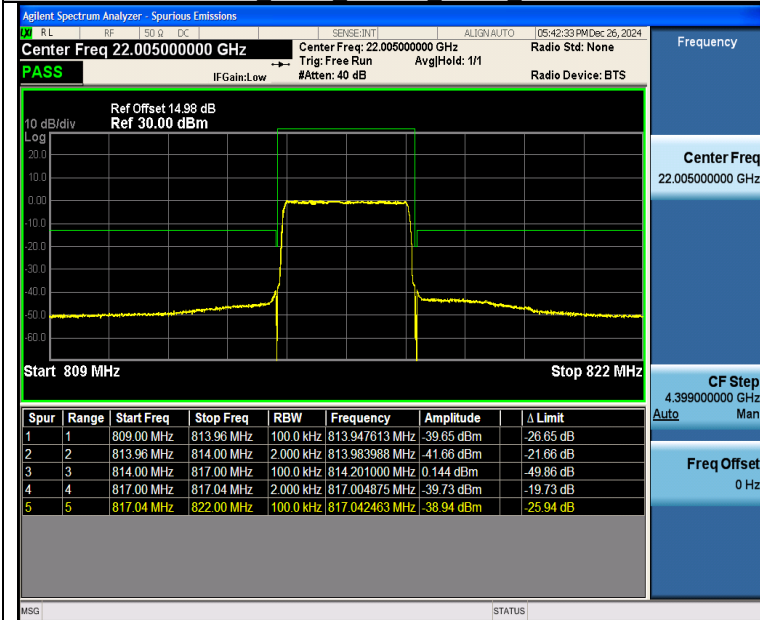



Band26 3MHz 16QAM 26705 15RB#0

Band26 3MHz QPSK 26775 1RB#0

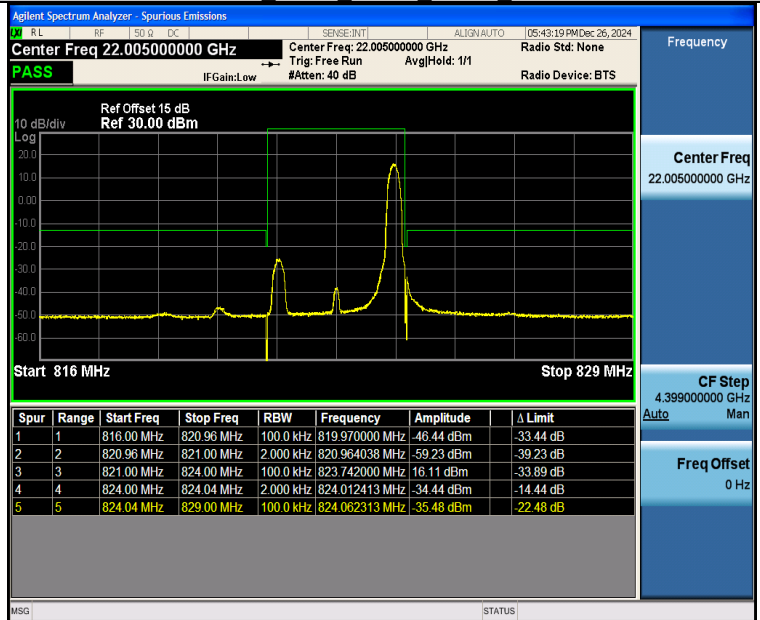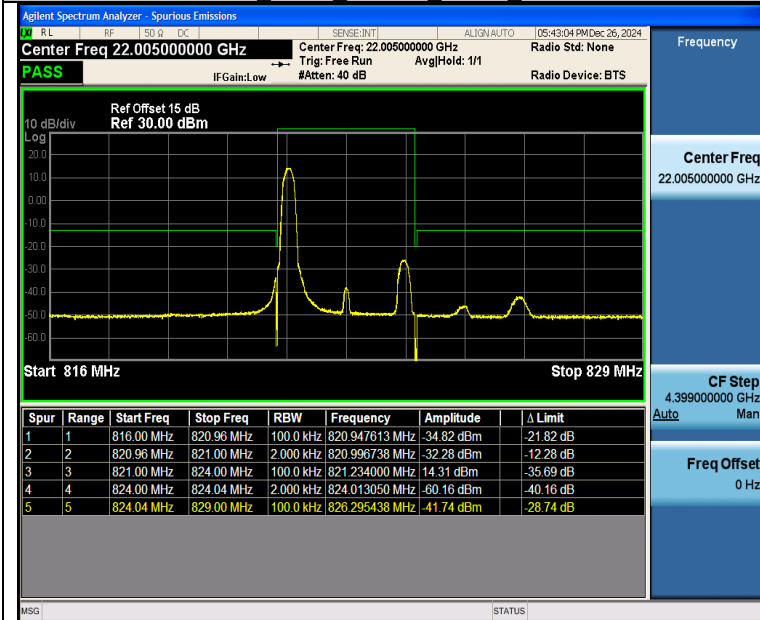


Band26_3MHz_16QAM_26775_1RB#0


Band26_3MHz_QPSK_26775_1RB#14

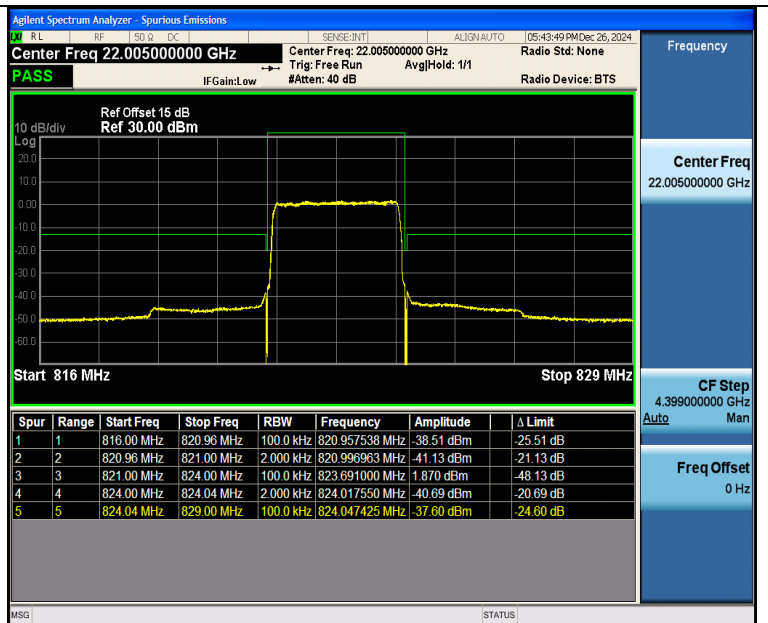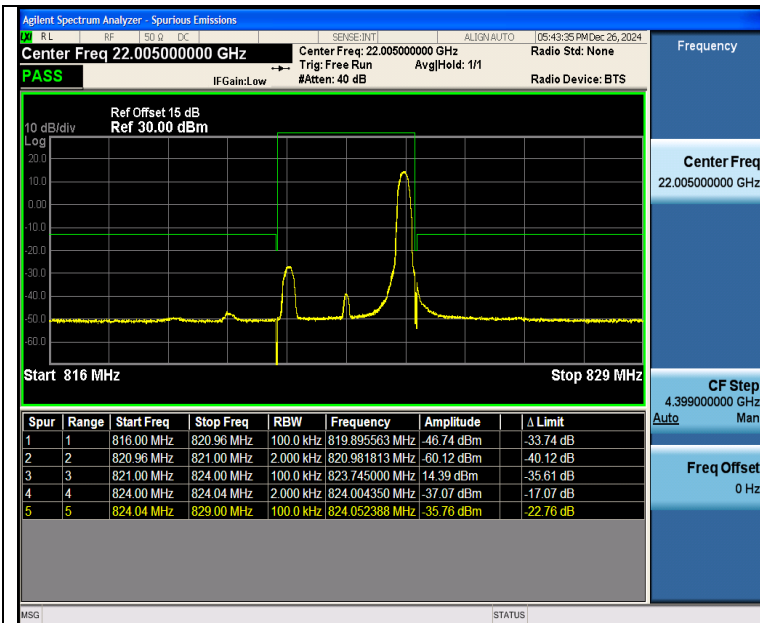


Band26 3MHz 16QAM 26775 1RB#14

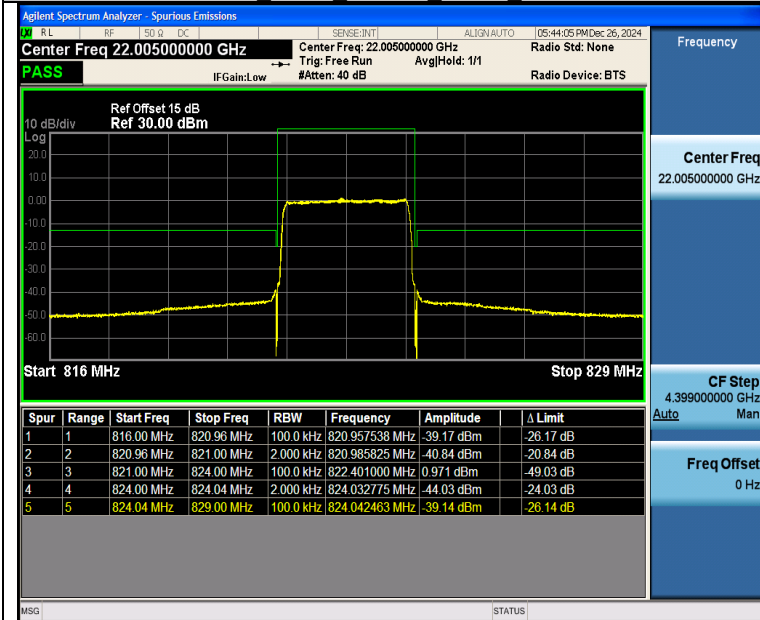


Band26 3MHz QPSK 26775 15RB#0

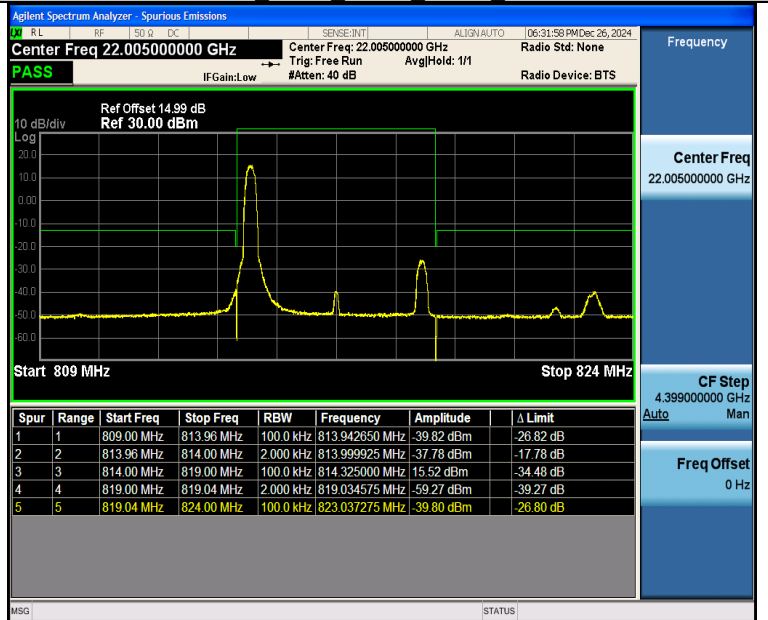

Band26 3MHz 16QAM 26775 15RB#0


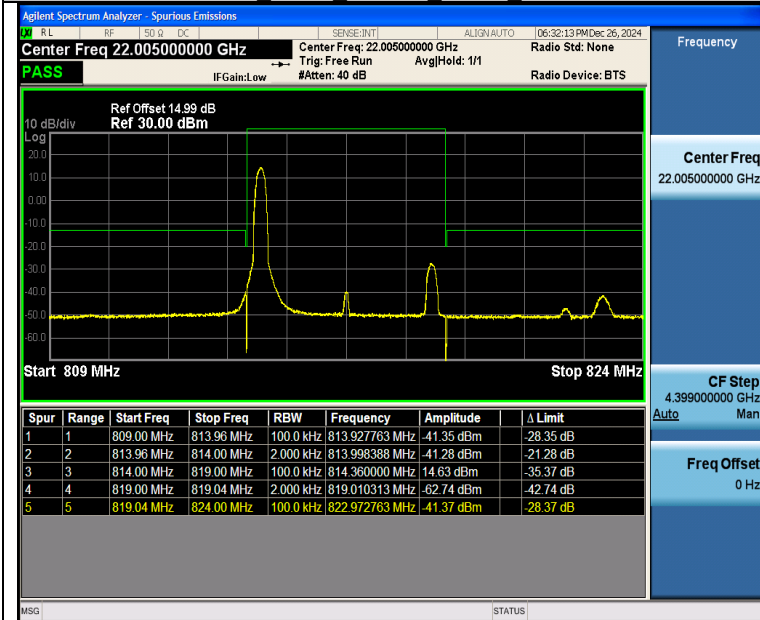


Band26 5MHz QPSK 26715 1RB#0


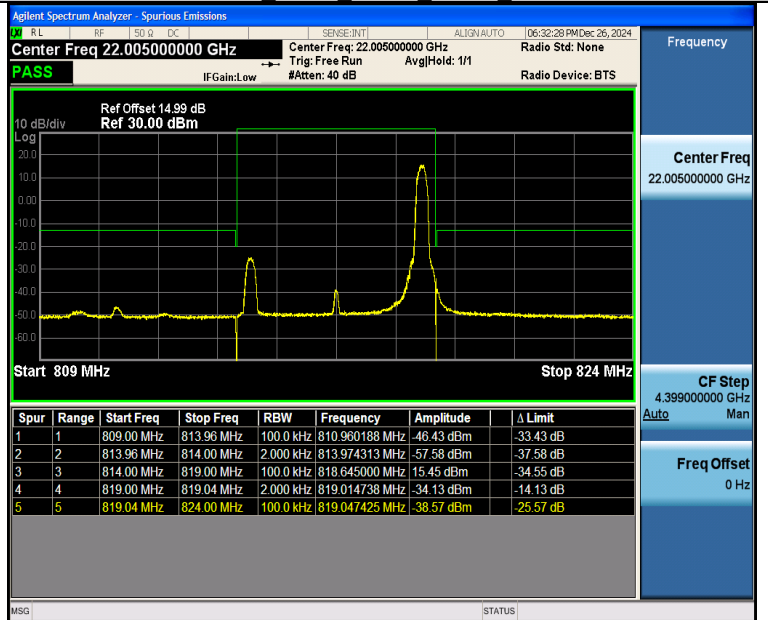


Band26 5MHz 16QAM 26715 1RB#0

Band26 5MHz QPSK 26715 1RB#24

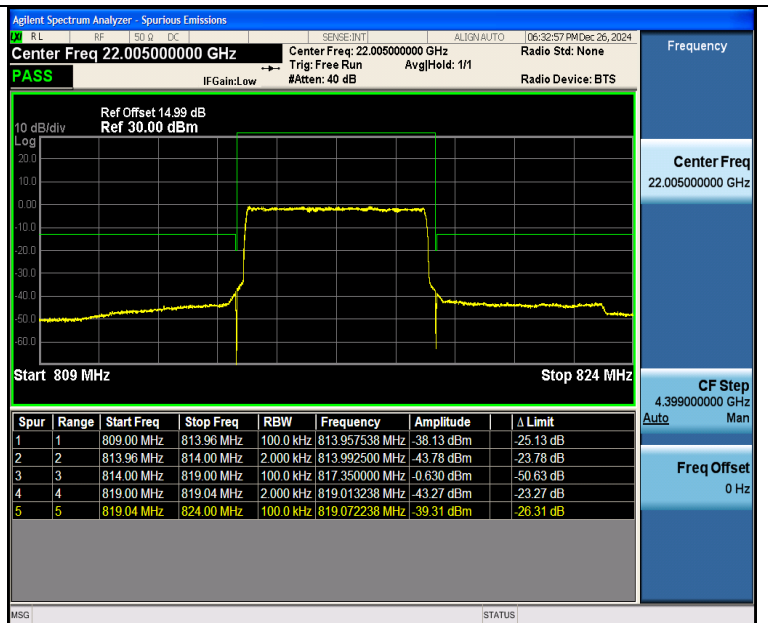
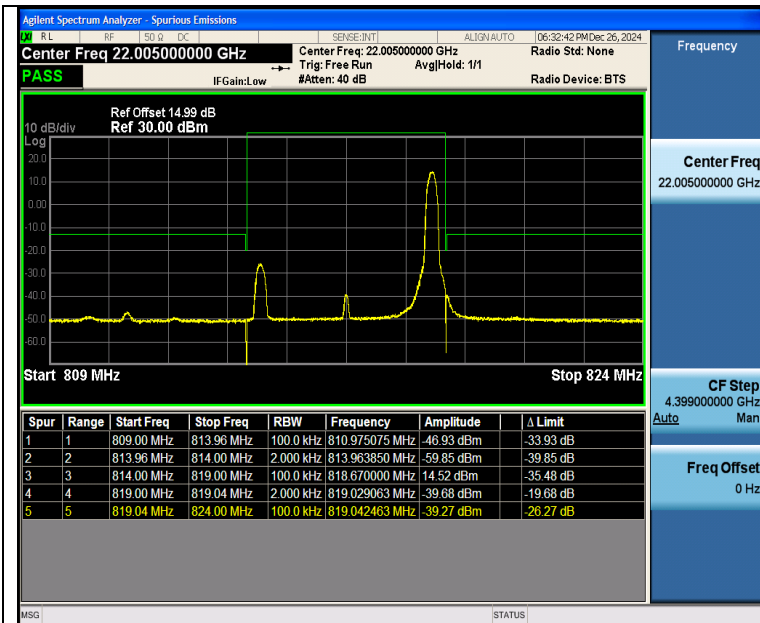


Band26 5MHz 16QAM 26715 1RB#24

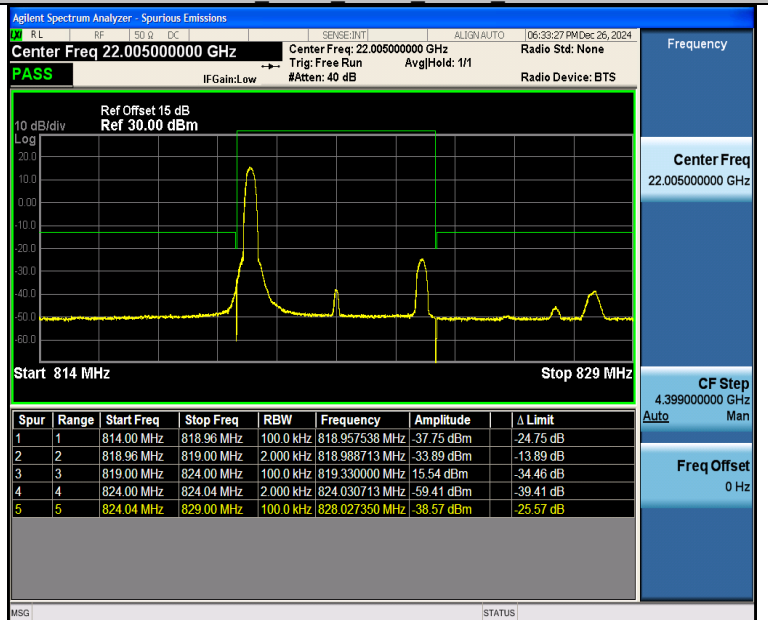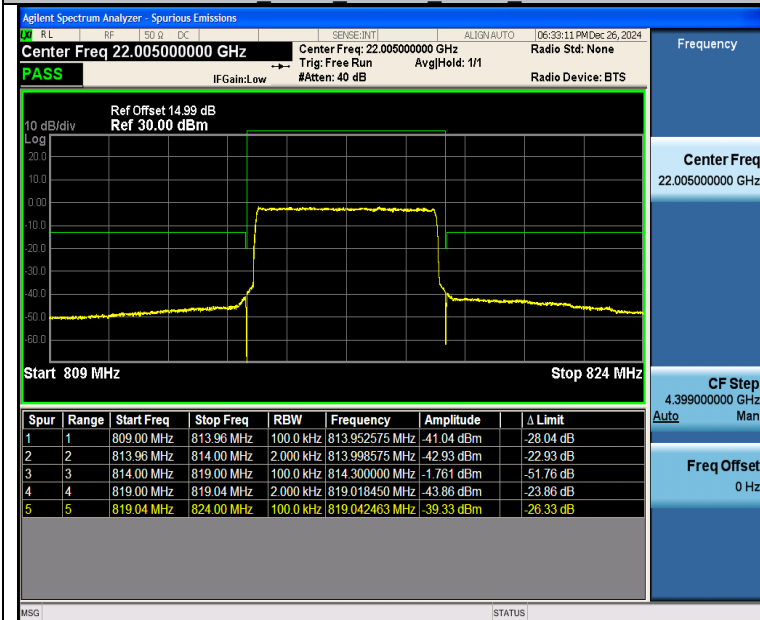

Band26 5MHz QPSK 26715 25RB#0



Band26 5MHz 16QAM 26715 25RB#0

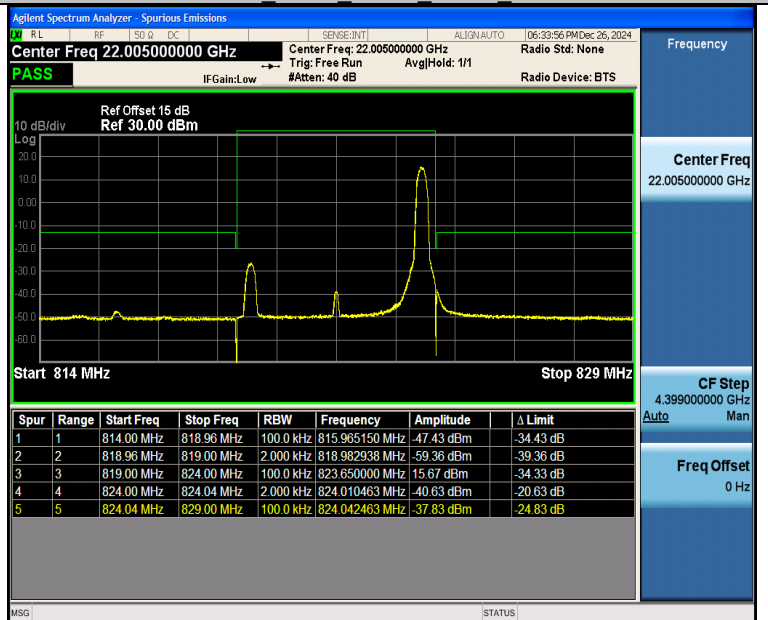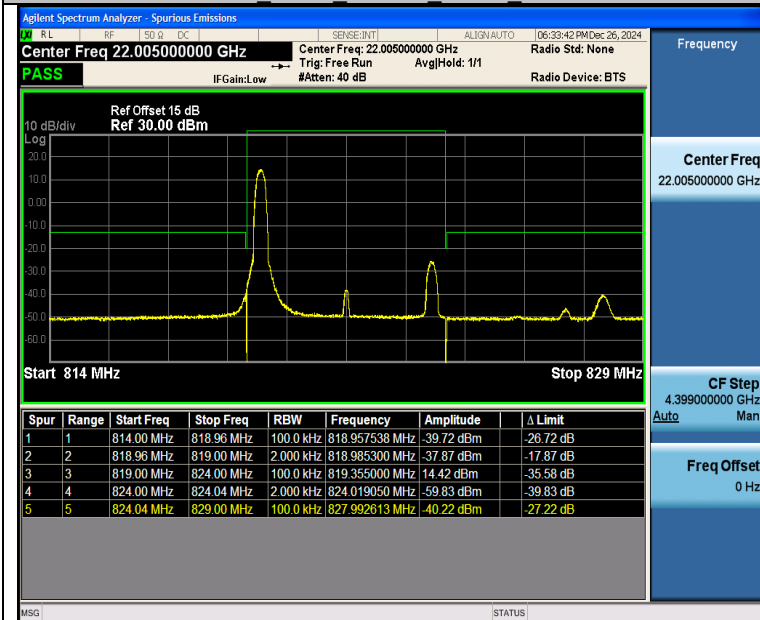

Band26 5MHz QPSK 26765 1RB#0



Band26 5MHz 16QAM 26765 1RB#0

Band26 5MHz QPSK 26765 1RB#24

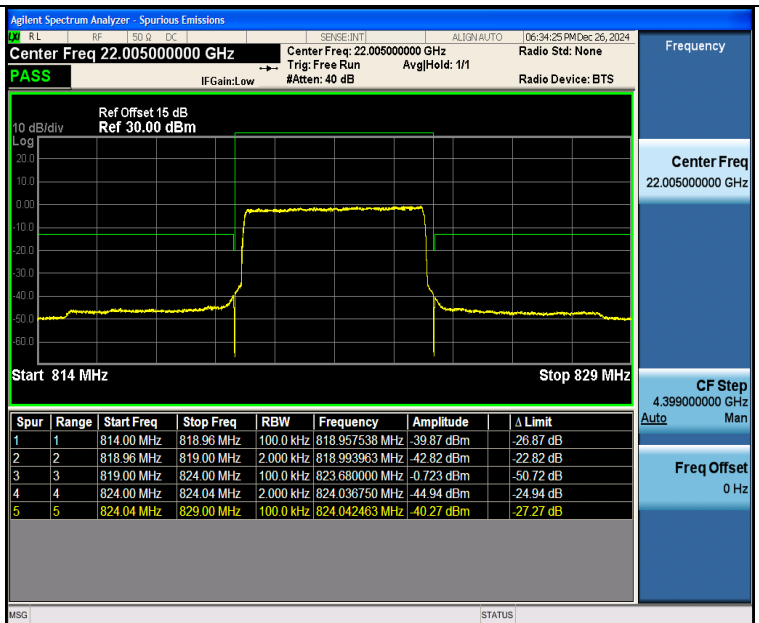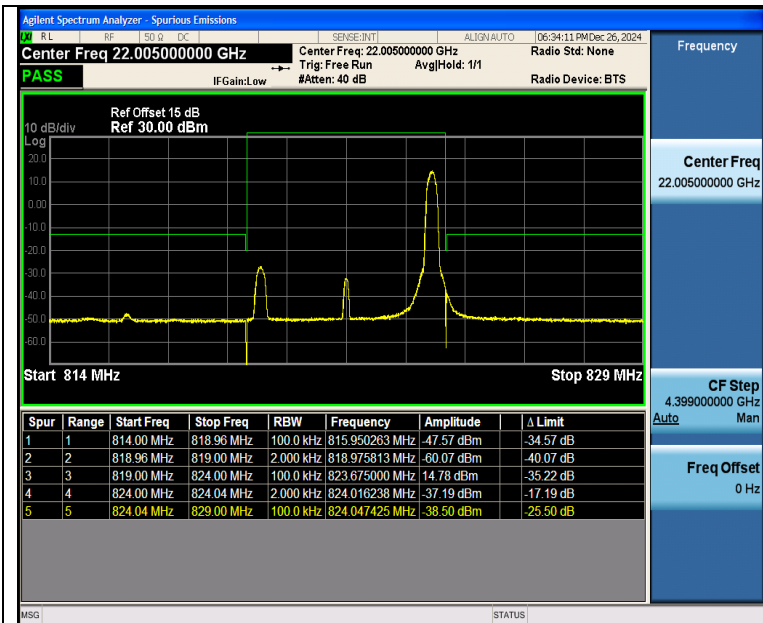



Band26 5MHz 16QAM 26765 1RB#24

Band26 5MHz QPSK 26765 25RB#0

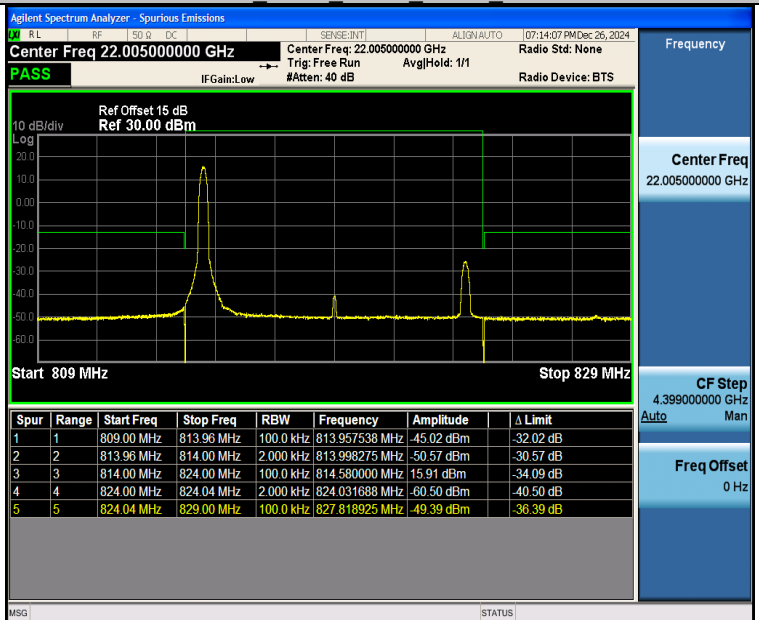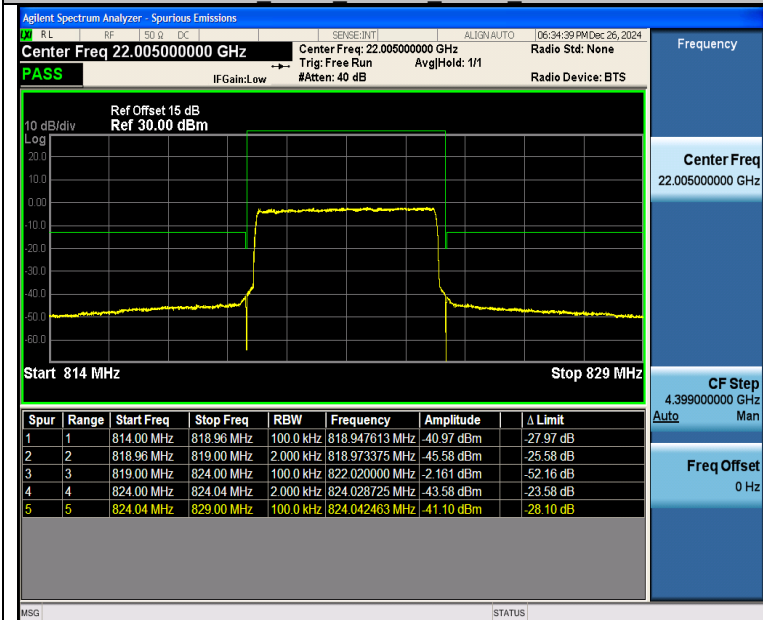







Band26 5MHz 16QAM 26765 25RB#0

Band26 10MHz QPSK 26740 1RB#0

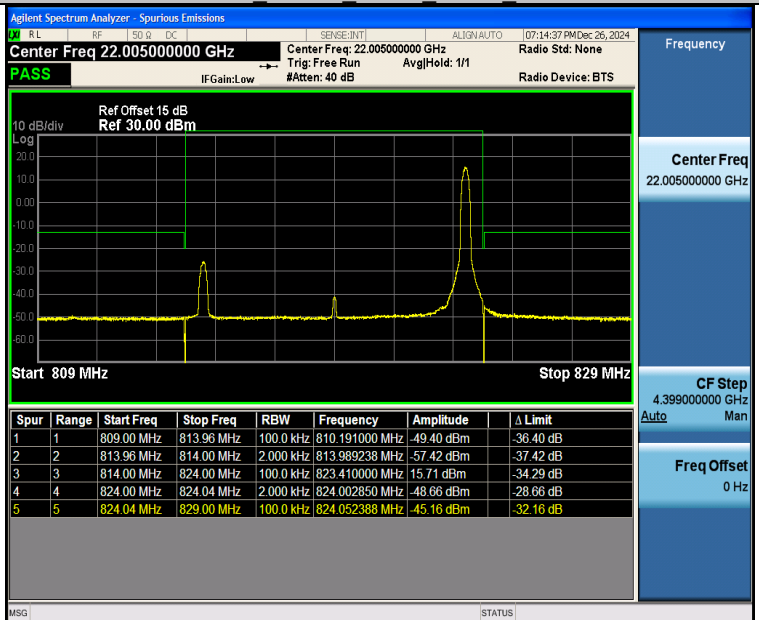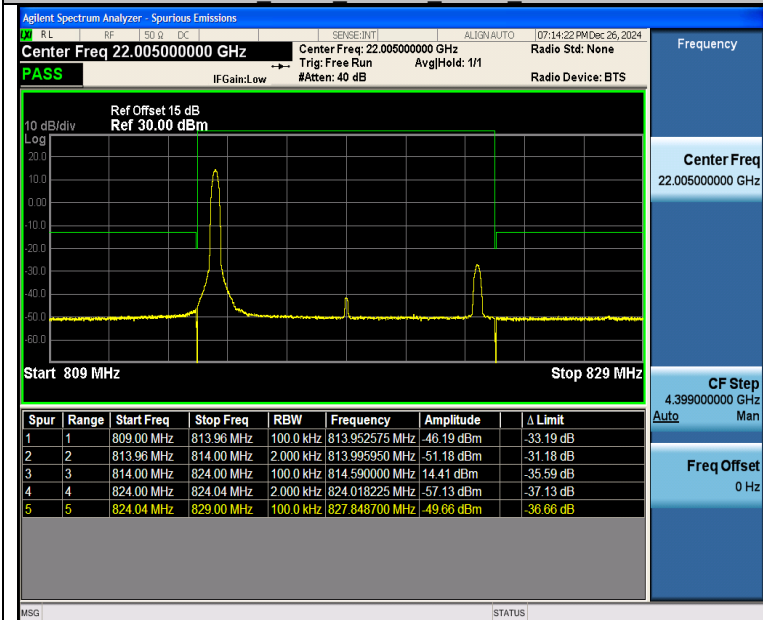

Band26 10MHz 16QAM 26740 1RB#0

Band26 10MHz QPSK 26740 1RB#49

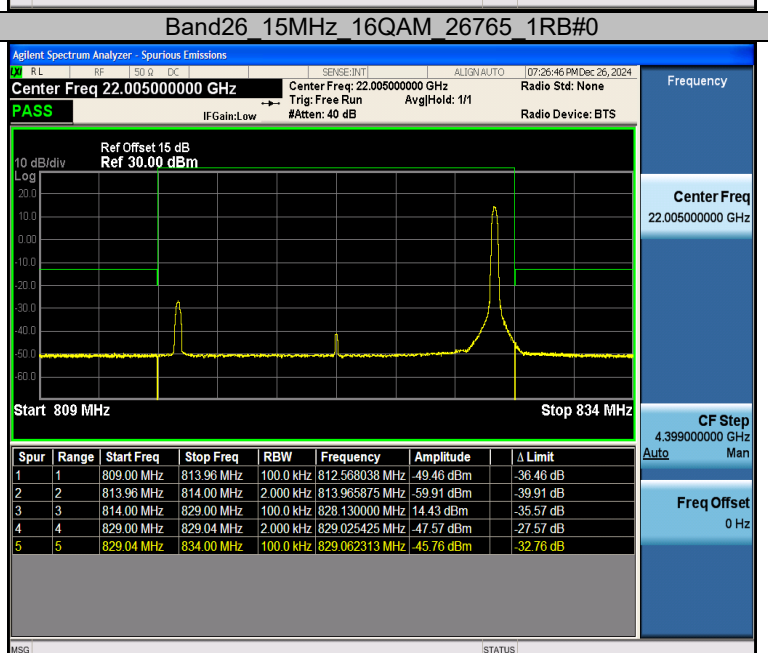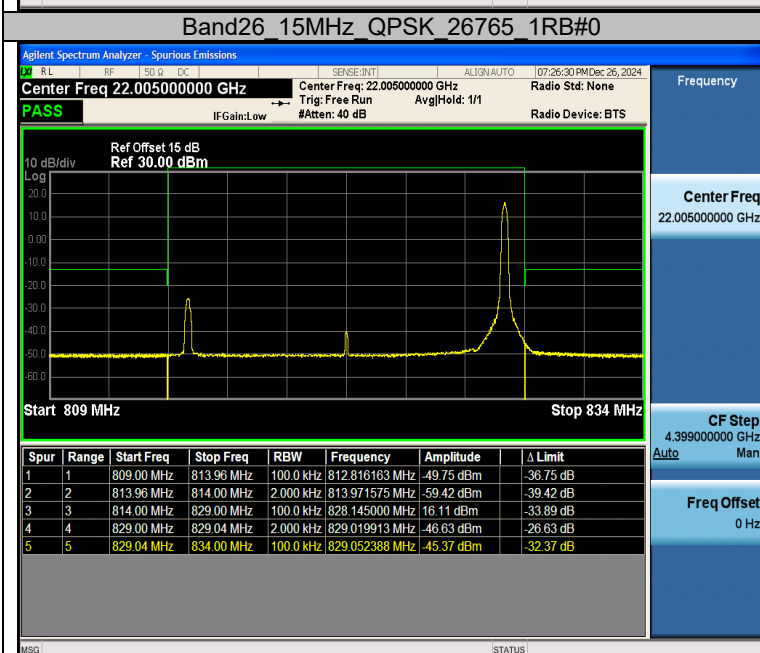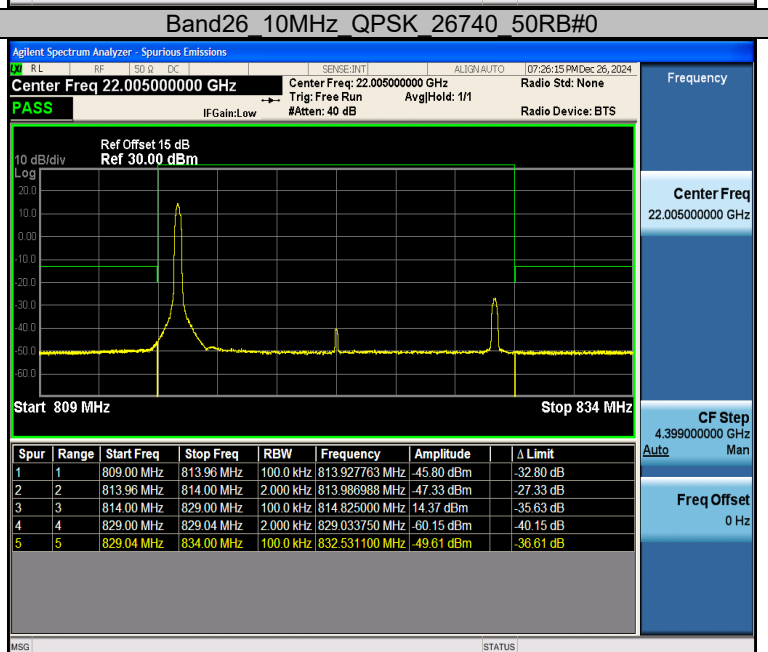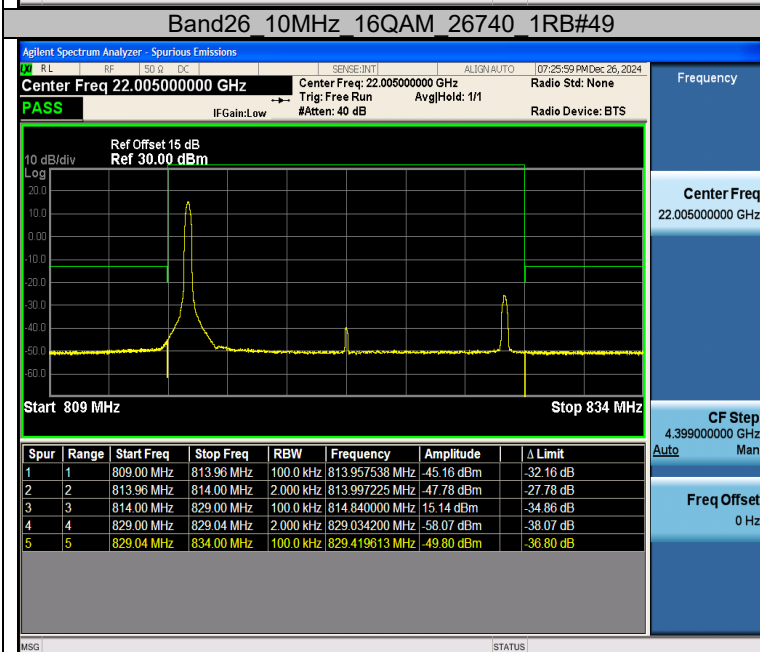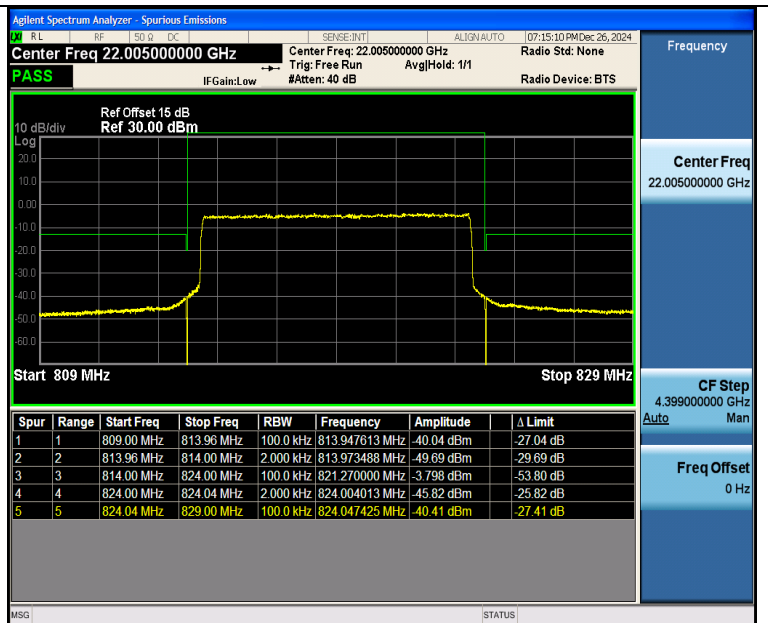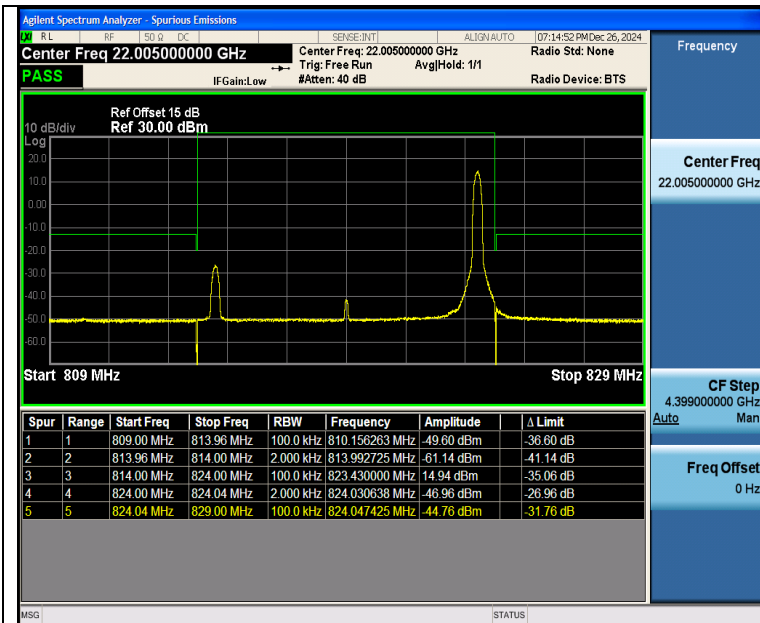

Band26 15MHz_QPSK_26765_1RB#74

Band26 15MHz_16QAM_26765_1RB#74