



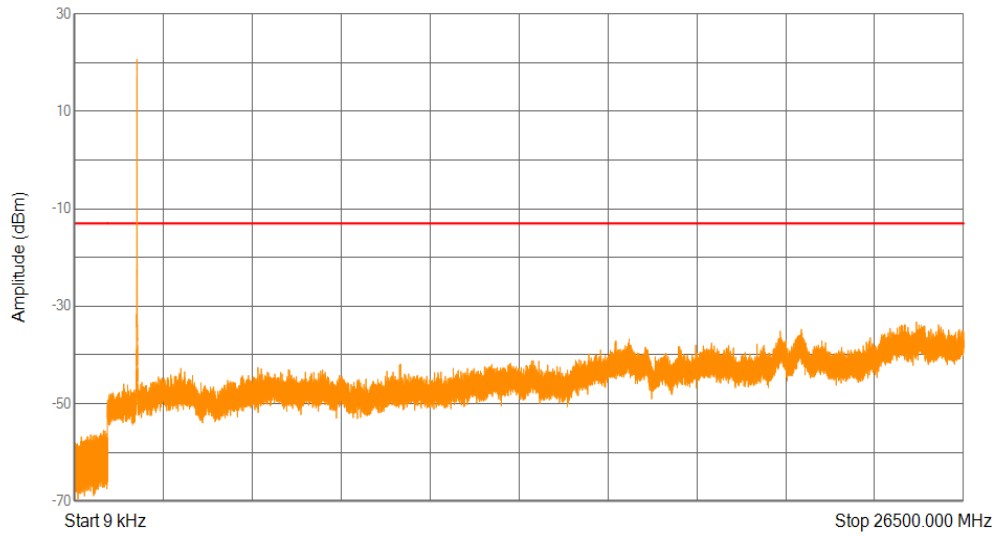


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0127083       | -52.59           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17985         | -54.76           | -13         |
| 3     | 30          | 1000       | 100       | 883.09075       | -55.52           | -13         |
| 4     | 1000        | 26500      | 1000      | 25096.225       | -33.23           | -13         |

Band2 QPSK BW=5MHz Channel=19175 RB Size=25 Position=#0

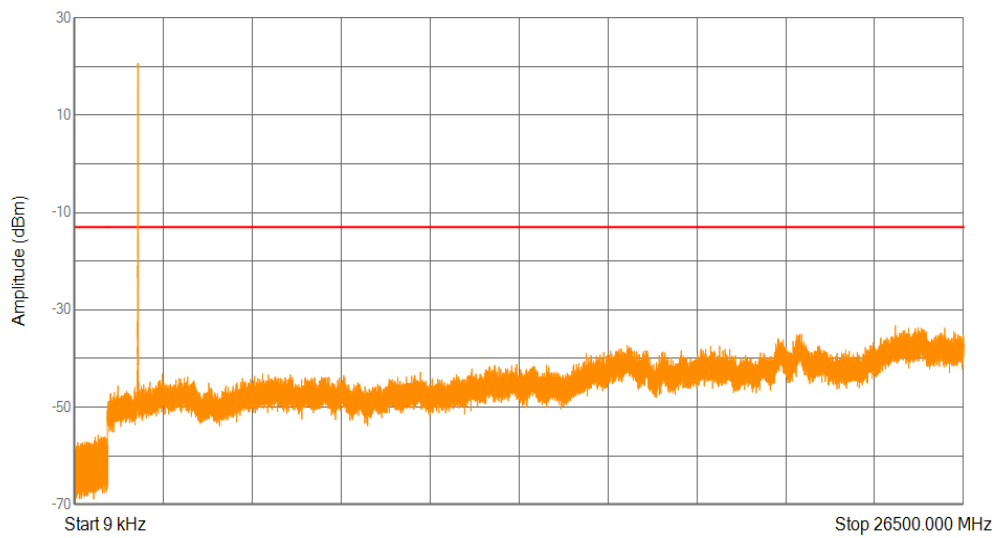


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -52.34           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15671625      | -54.25           | -13         |
| 3     | 30          | 1000       | 100       | 723.744         | -55.79           | -13         |
| 4     | 1000        | 26500      | 1000      | 24466.375       | -33.25           | -13         |

Band26(814-824) 16QAM BW=1.4MHz Channel=26697 RB Size=6 Position=#0

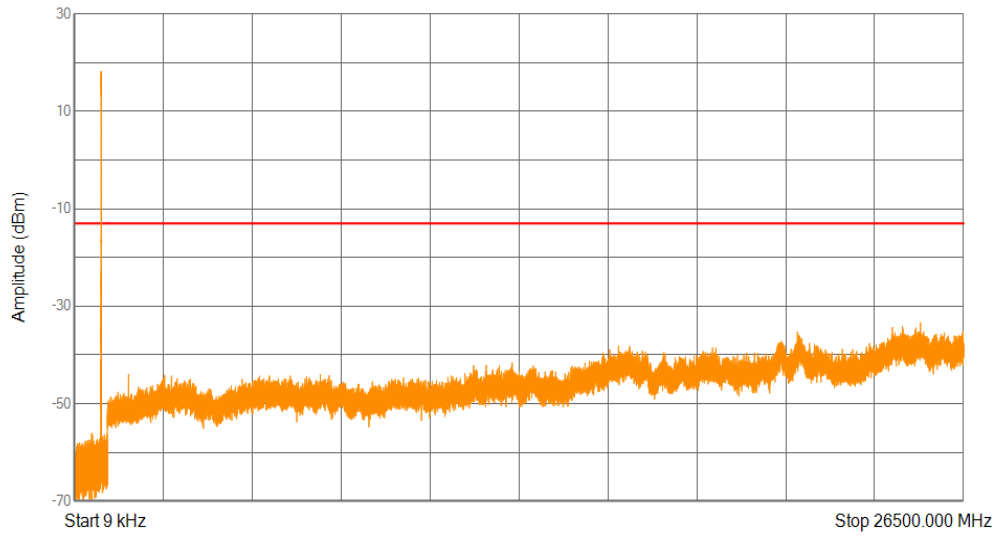


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.012620175     | -54.16           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1664175       | -55.96           | -13         |
| 3     | 30          | 1000       | 100       | 532.82375       | -56.07           | -13         |
| 4     | 1000        | 26500      | 1000      | 25215.4375      | -33.37           | -13         |

Band26(814-824) 16QAM BW=1.4MHz Channel=26740 RB Size=6 Position=#0

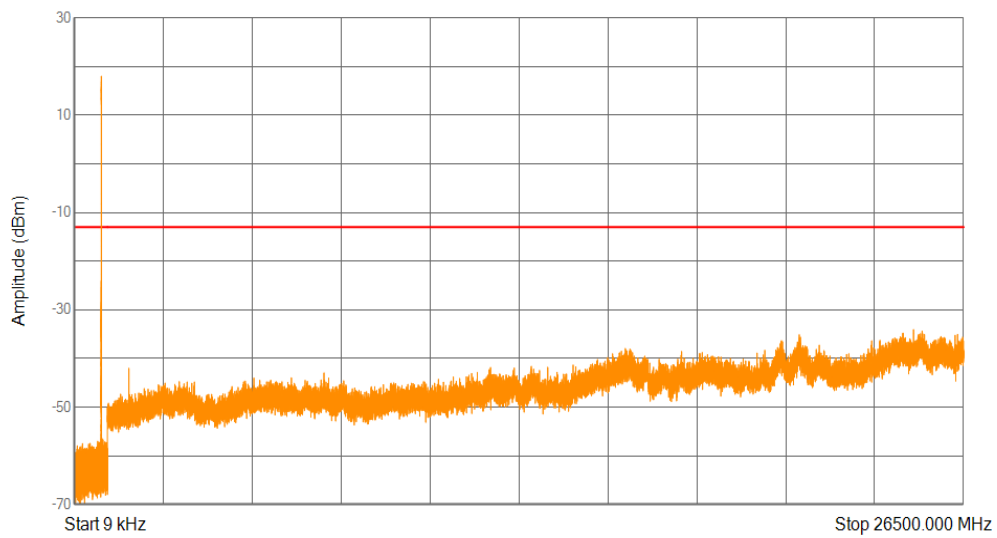


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009532275     | -51.5            | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -55.24           | -13         |
| 3     | 30          | 1000       | 100       | 839.53775       | -56.51           | -13         |
| 4     | 1000        | 26500      | 1000      | 25010.1625      | -34.07           | -13         |

Band26(814-824) 16QAM BW=1.4MHz Channel=26783 RB Size=6 Position=#0

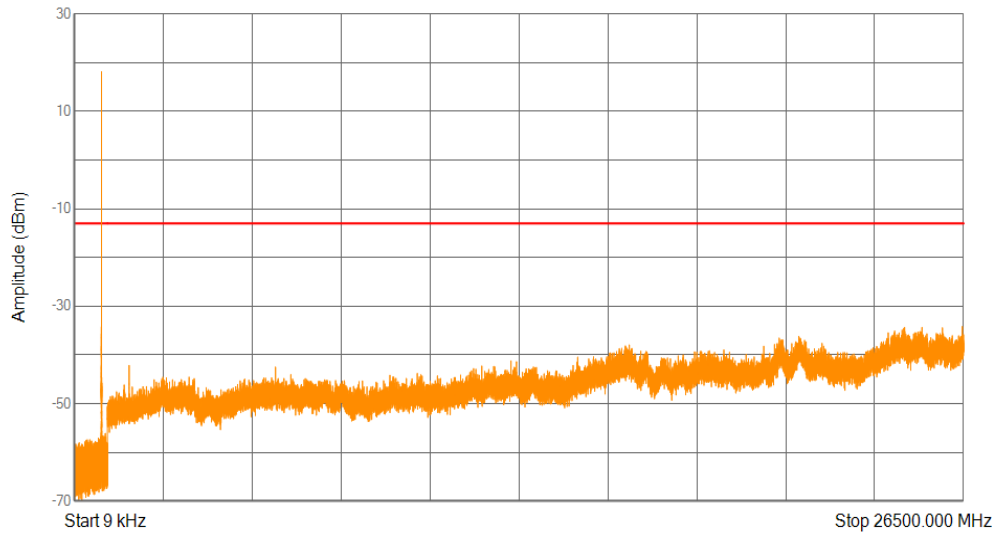


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -52.24           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16417875      | -55.42           | -13         |
| 3     | 30          | 1000       | 100       | 937.31375       | -56.11           | -13         |
| 4     | 1000        | 26500      | 1000      | 26463.6625      | -34.18           | -13         |

Band26(814-824) 16QAM BW=10MHz Channel=26740 RB Size=50 Position=#0

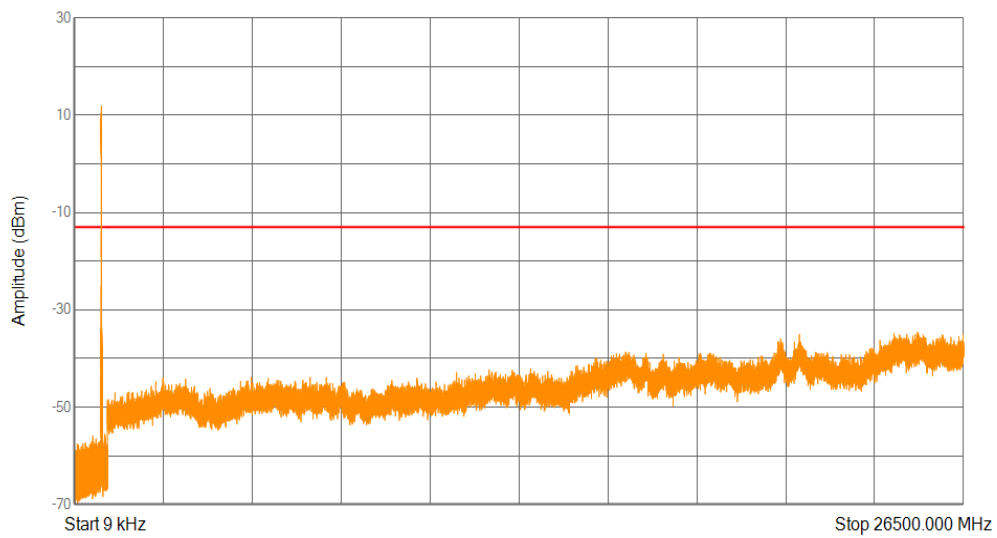


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009193875     | -51.21           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16194         | -54.86           | -13         |
| 3     | 30          | 1000       | 100       | 920.266         | -55.55           | -13         |
| 4     | 1000        | 26500      | 1000      | 25129.375       | -34.56           | -13         |

Band26(814-824) 16QAM BW=3MHz Channel=26705 RB Size=15 Position=#0

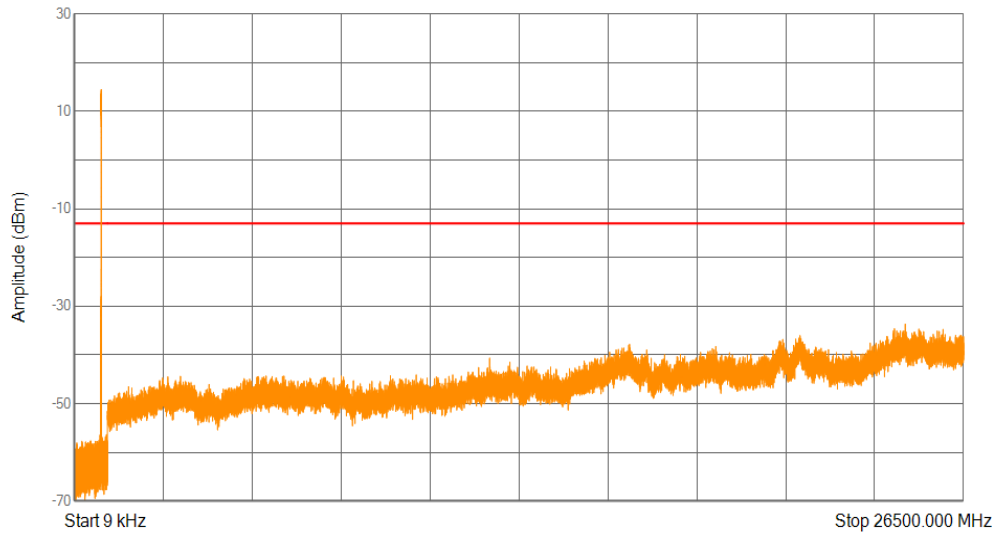


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01332165      | -54.21           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -55.16           | -13         |
| 3     | 30          | 1000       | 100       | 973.034         | -56.36           | -13         |
| 4     | 1000        | 26500      | 1000      | 24764.0875      | -33.67           | -13         |

Band26(814-824) 16QAM BW=3MHz Channel=26740 RB Size=15 Position=#0

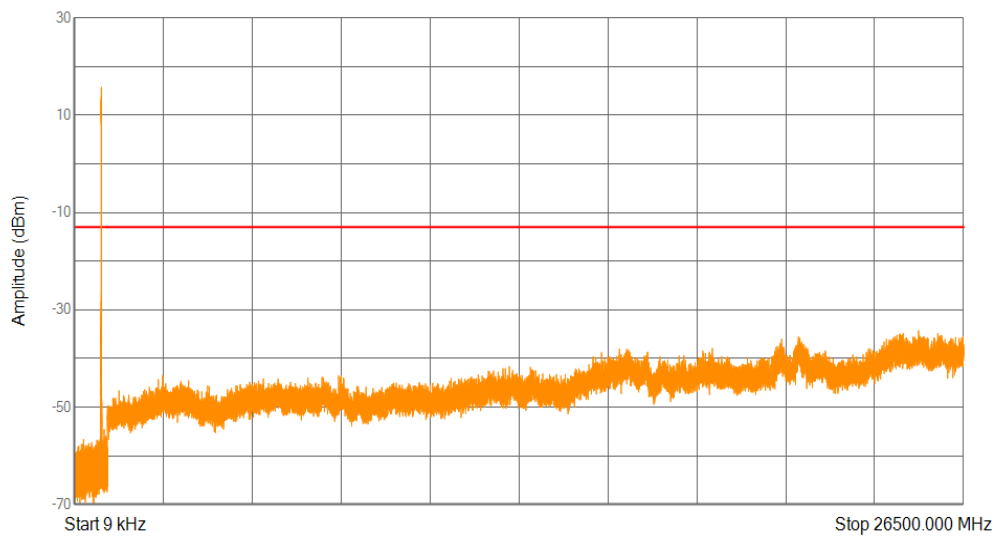


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009264375     | -53.41           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1873125       | -54.97           | -13         |
| 3     | 30          | 1000       | 100       | 902.05425       | -54.6            | -13         |
| 4     | 1000        | 26500      | 1000      | 25161.8875      | -34.27           | -13         |

Band26(814-824) 16QAM BW=3MHz Channel=26775 RB Size=15 Position=#0

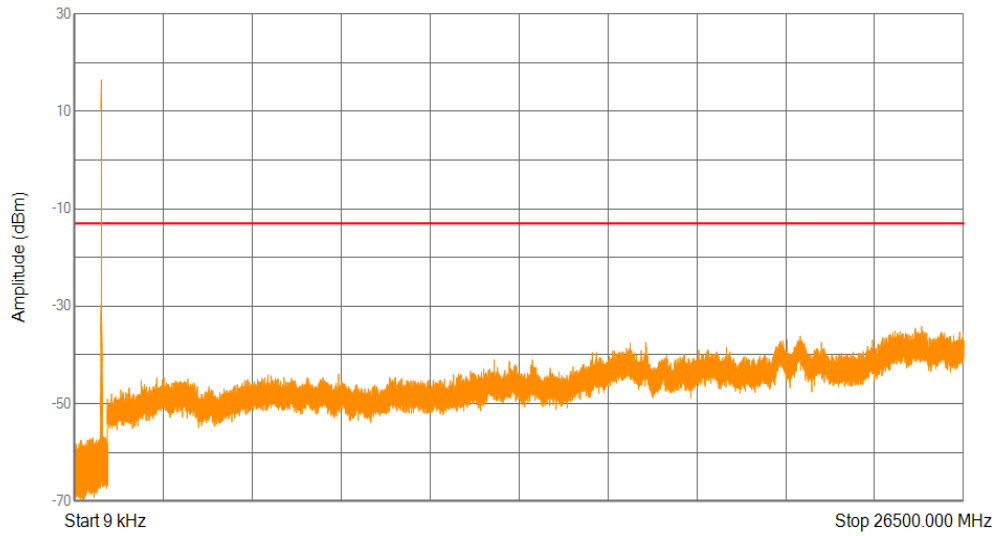


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010660275     | -52.25           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16268625      | -53.71           | -13         |
| 3     | 30          | 1000       | 100       | 887.26175       | -56.87           | -13         |
| 4     | 1000        | 26500      | 1000      | 25249.8625      | -34.16           | -13         |

Band26(814-824) 16QAM BW=5MHz Channel=26715 RB Size=25 Position=#0

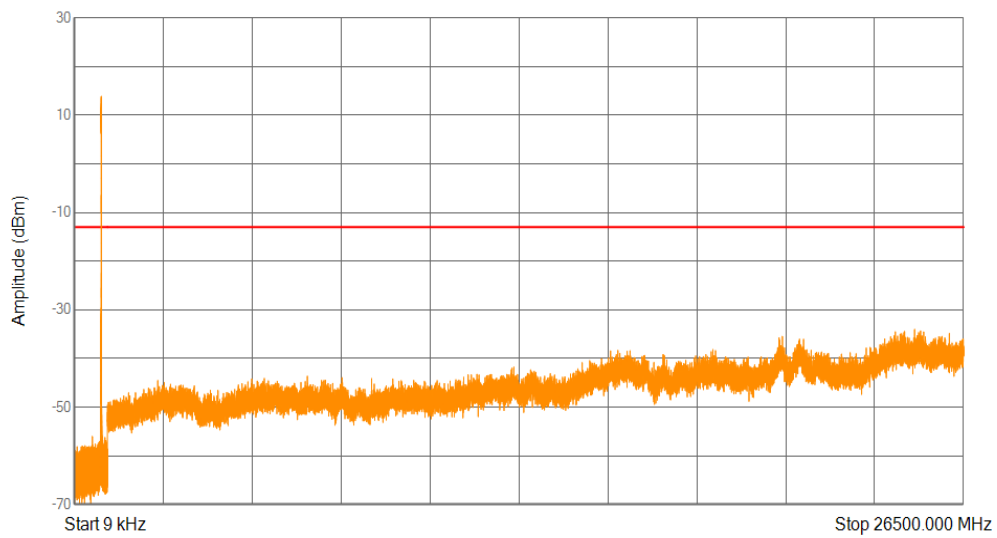


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01404075      | -53.91           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15522375      | -54.65           | -13         |
| 3     | 30          | 1000       | 100       | 852.8025        | -56              | -13         |
| 4     | 1000        | 26500      | 1000      | 25041.4         | -34.03           | -13         |

Band26(814-824) 16QAM BW=5MHz Channel=26740 RB Size=25 Position=#0

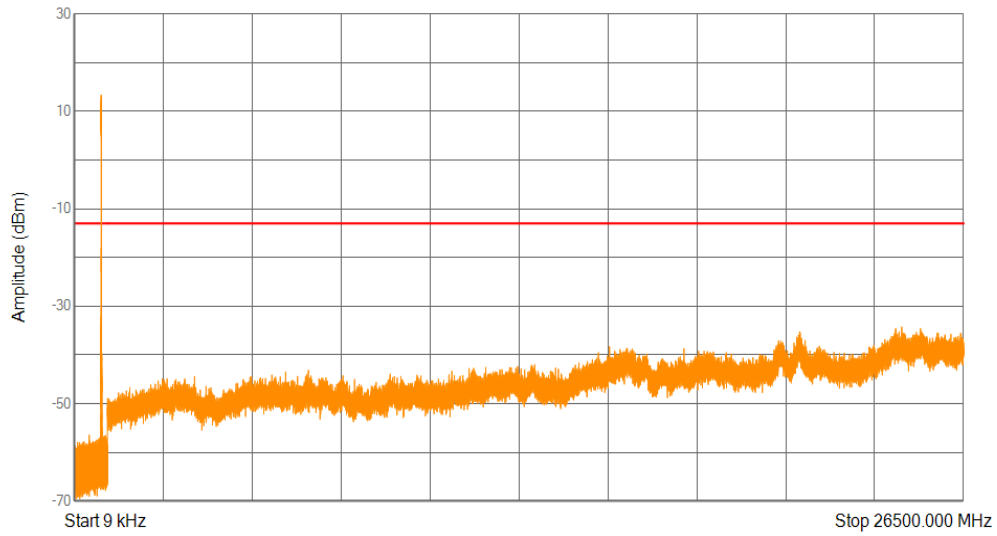


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011245425     | -51.77           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1514925       | -55.95           | -13         |
| 3     | 30          | 1000       | 100       | 455.927         | -56.49           | -13         |
| 4     | 1000        | 26500      | 1000      | 24659.5375      | -34.27           | -13         |

Band26(814-824) 16QAM BW=5MHz Channel=26765 RB Size=25 Position=#0

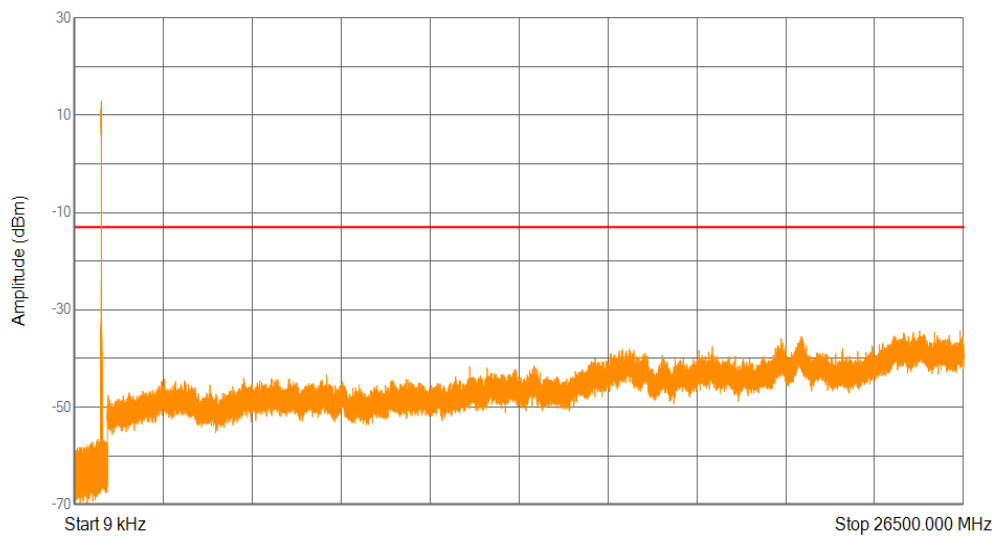


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010279575     | -53.41           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1604475       | -54.81           | -13         |
| 3     | 30          | 1000       | 100       | 714.01975       | -56.64           | -13         |
| 4     | 1000        | 26500      | 1000      | 26394.8125      | -34.27           | -13         |

Band26(814-824) QPSK BW=1.4MHz Channel=26697 RB Size=6 Position=#0

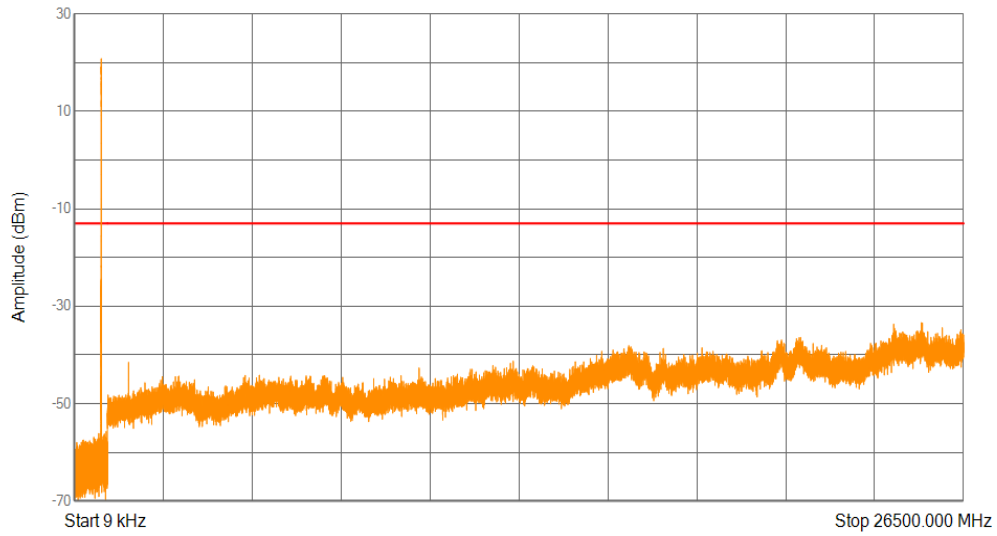


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.015665775     | -53.17           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15223875      | -54.43           | -13         |
| 3     | 30          | 1000       | 100       | 962.849         | -55.71           | -13         |
| 4     | 1000        | 26500      | 1000      | 25244.7625      | -33.39           | -13         |

Band26(814-824) QPSK BW=1.4MHz Channel=26740 RB Size=6 Position=#0

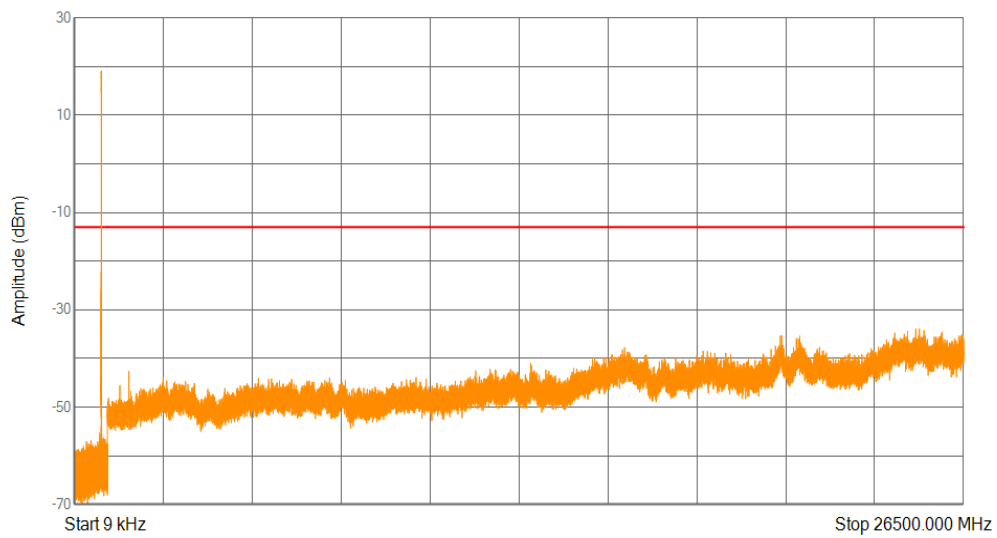


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0105087       | -52.05           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16791         | -54.4            | -13         |
| 3     | 30          | 1000       | 100       | 764.50825       | -55.34           | -13         |
| 4     | 1000        | 26500      | 1000      | 25076.4625      | -33.97           | -13         |

Band26(814-824) QPSK BW=1.4MHz Channel=26783 RB Size=6 Position=#0

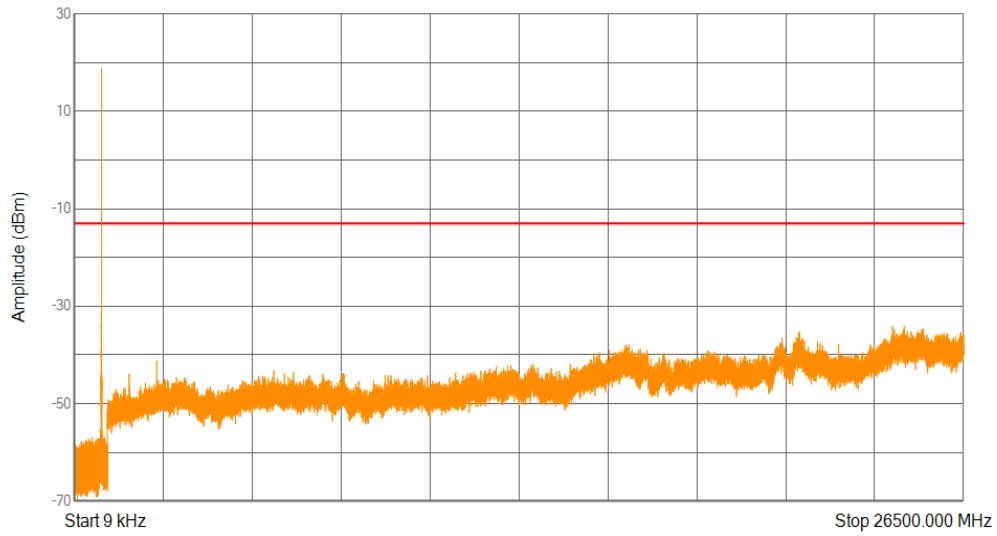


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0135402       | -52.73           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.64           | -13         |
| 3     | 30          | 1000       | 100       | 794.23875       | -55.36           | -13         |
| 4     | 1000        | 26500      | 1000      | 24732.2125      | -34.15           | -13         |

Band26(814-824) QPSK BW=10MHz Channel=26740 RB Size=50 Position=#0

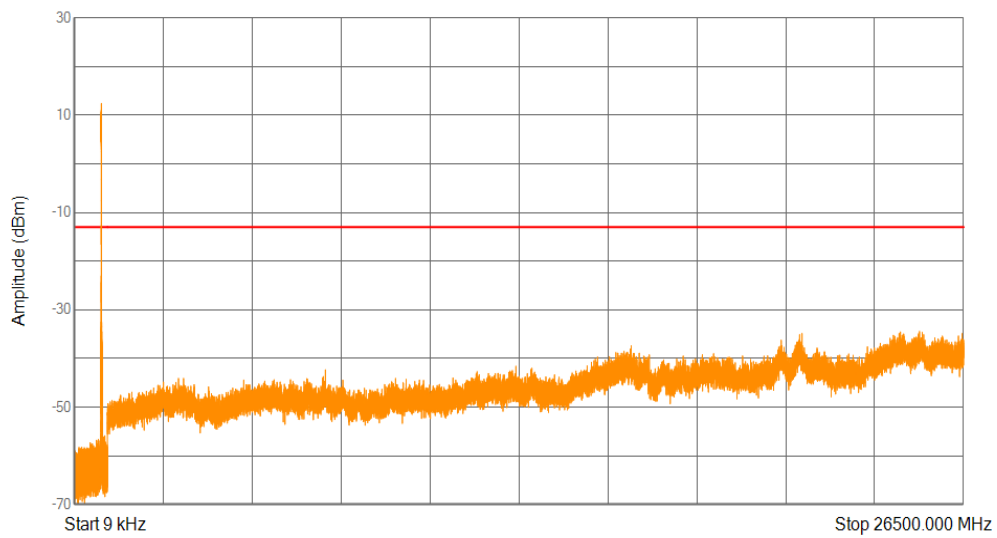


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011026875     | -54.67           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.82           | -13         |
| 3     | 30          | 1000       | 100       | 921.3815        | -55.89           | -13         |
| 4     | 1000        | 26500      | 1000      | 25188.6625      | -34.44           | -13         |

Band26(814-824) QPSK BW=3MHz Channel=26705 RB Size=15 Position=#0

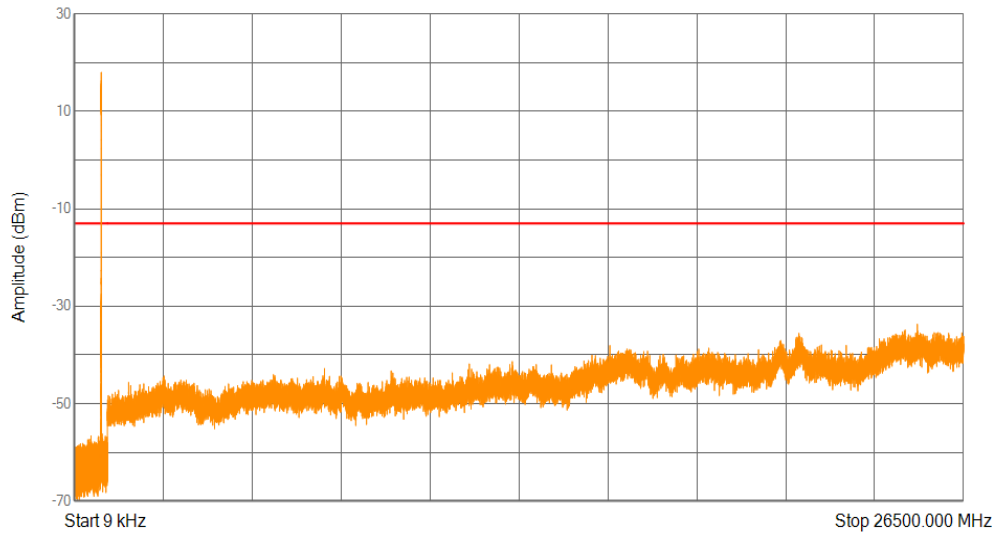


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -52.92           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17014875      | -54.18           | -13         |
| 3     | 30          | 1000       | 100       | 840.6775        | -56.2            | -13         |
| 4     | 1000        | 26500      | 1000      | 25123           | -33.7            | -13         |

Band26(814-824) QPSK BW=3MHz Channel=26740 RB Size=15 Position=#0

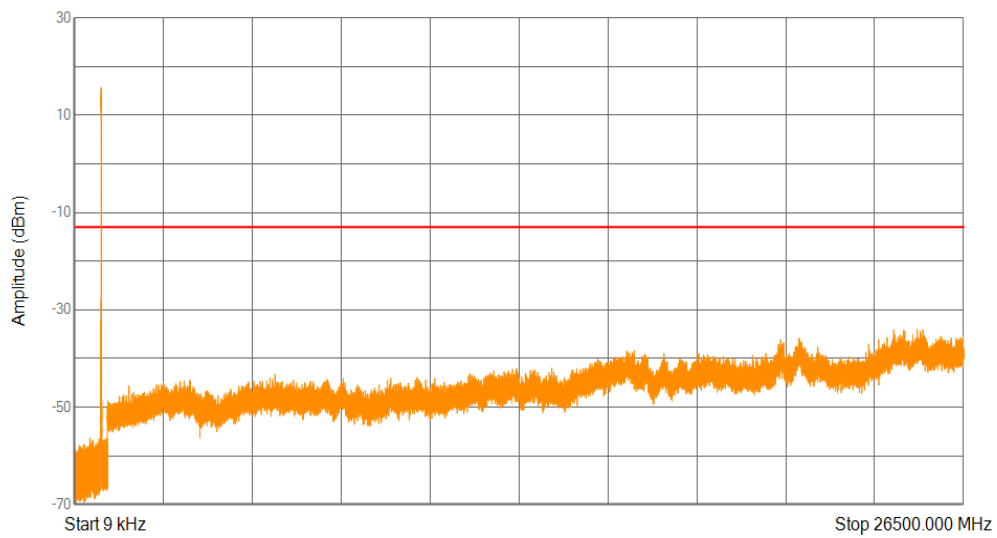


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010321875     | -52.99           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1604475       | -53.58           | -13         |
| 3     | 30          | 1000       | 100       | 985.81375       | -56.34           | -13         |
| 4     | 1000        | 26500      | 1000      | 25116.625       | -34.03           | -13         |

Band26(814-824) QPSK BW=3MHz Channel=26775 RB Size=15 Position=#0

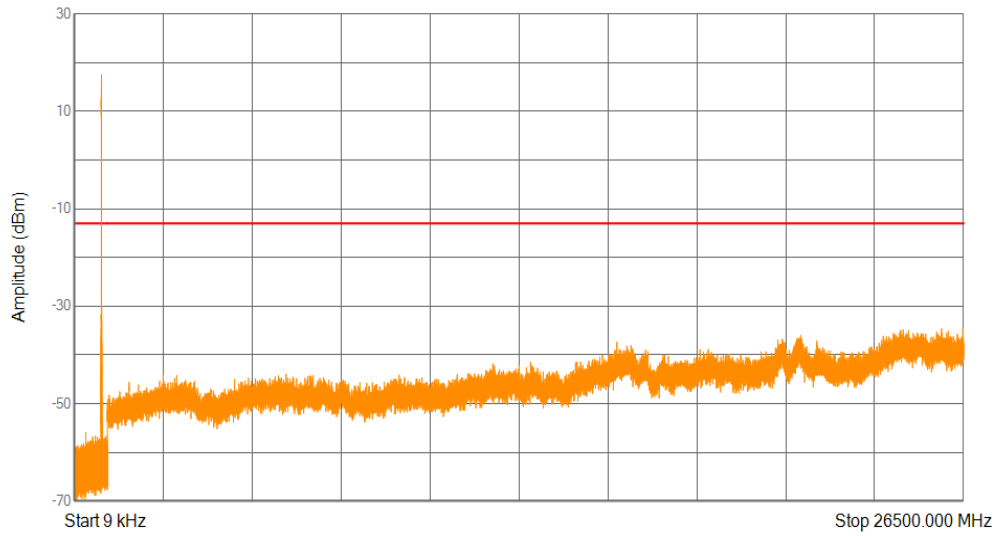


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0121725       | -52.47           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -53.2            | -13         |
| 3     | 30          | 1000       | 100       | 355.11975       | -55.96           | -13         |
| 4     | 1000        | 26500      | 1000      | 25843.375       | -34.63           | -13         |

Band26(814-824) QPSK BW=5MHz Channel=26715 RB Size=25 Position=#0

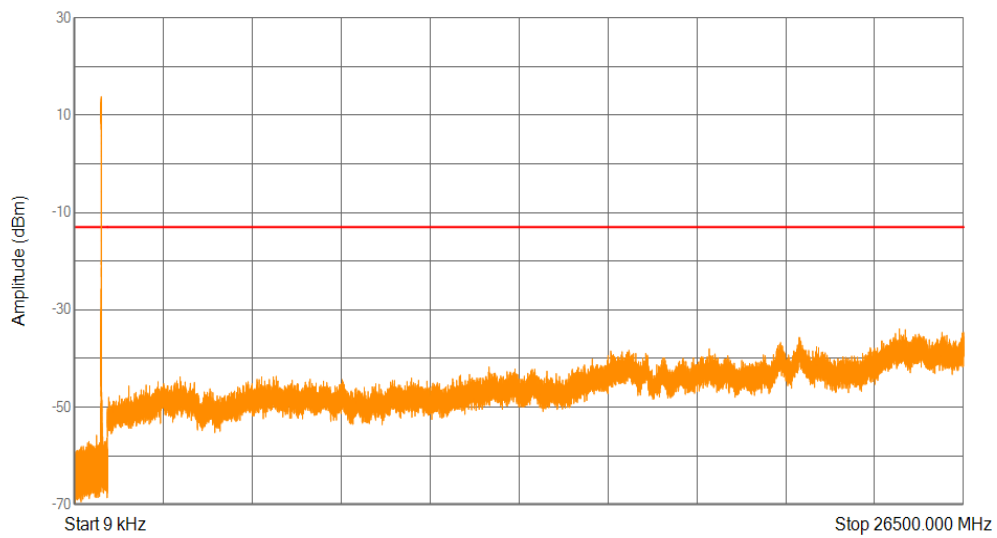


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0103677       | -52.35           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1604475       | -53.28           | -13         |
| 3     | 30          | 1000       | 100       | 676.67475       | -55.81           | -13         |
| 4     | 1000        | 26500      | 1000      | 24588.775       | -33.9            | -13         |

Band26(814-824) QPSK BW=5MHz Channel=26740 RB Size=25 Position=#0

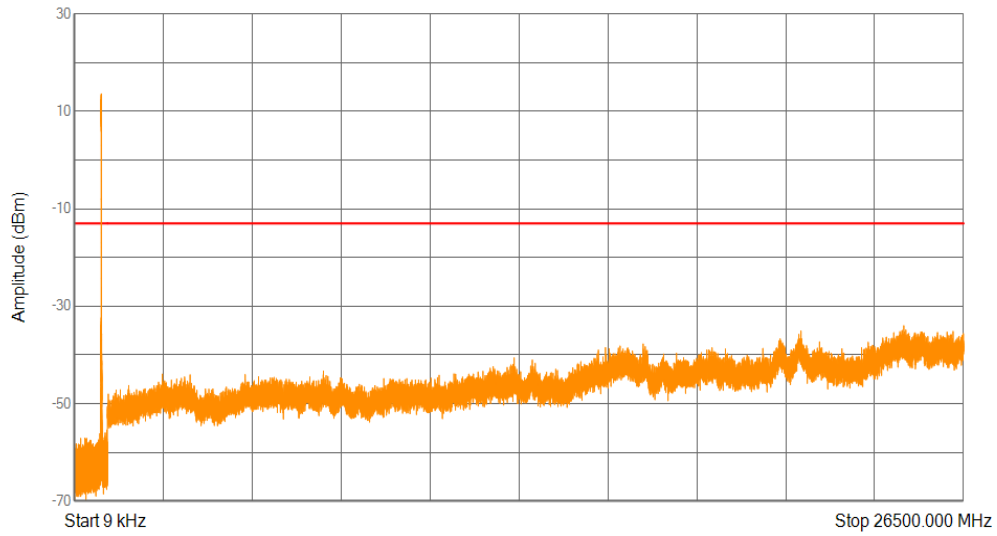


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.012948        | -52.85           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15671625      | -54.05           | -13         |
| 3     | 30          | 1000       | 100       | 979.8725        | -55.42           | -13         |
| 4     | 1000        | 26500      | 1000      | 24721.375       | -34.01           | -13         |

Band26(814-824) QPSK BW=5MHz Channel=26765 RB Size=25 Position=#0

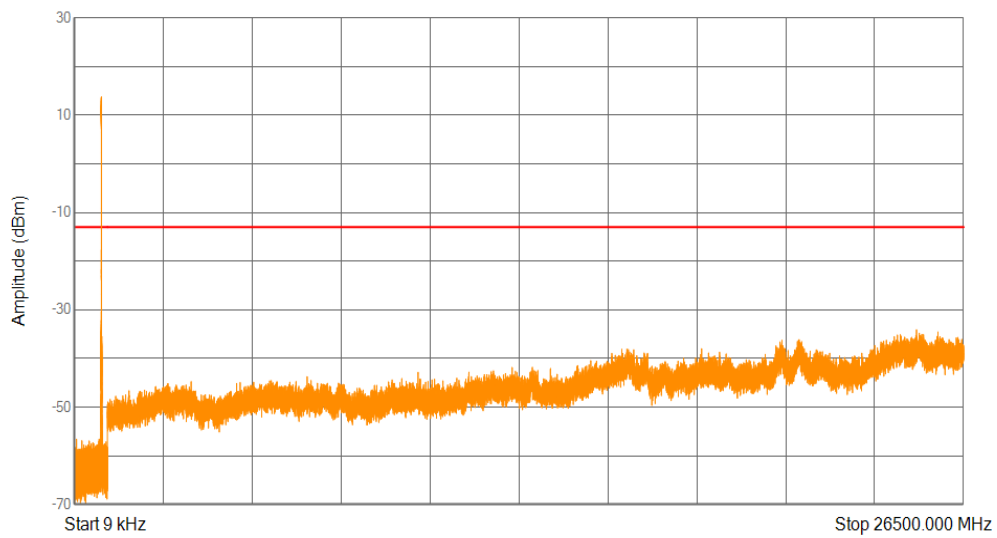


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0091551       | -51.48           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15373125      | -54.15           | -13         |
| 3     | 30          | 1000       | 100       | 752.0195        | -56.57           | -13         |
| 4     | 1000        | 26500      | 1000      | 25098.1375      | -34.1            | -13         |

Band26(824-849) 16QAM BW=1.4MHz Channel=26797 RB Size=6 Position=#0

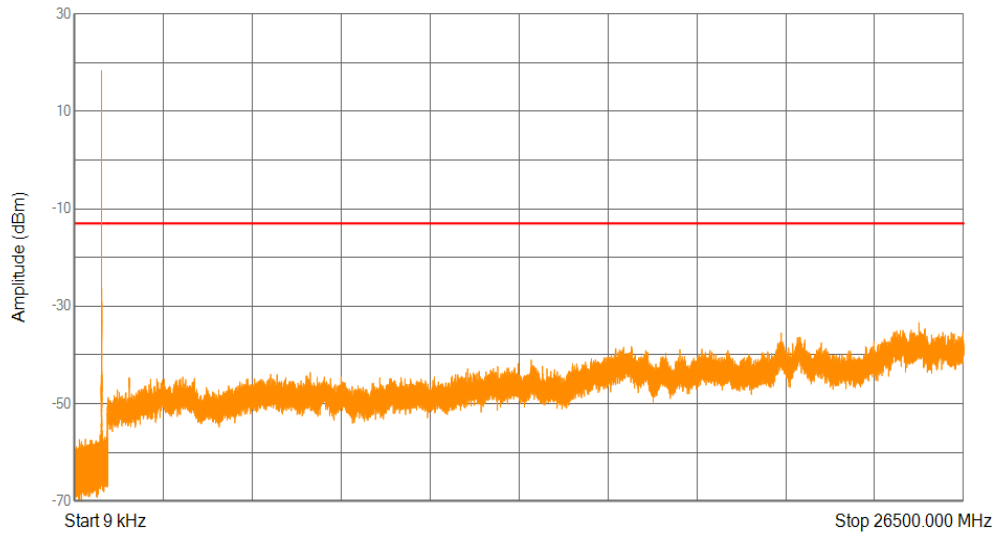


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009786075     | -52.89           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15597         | -54.1            | -13         |
| 3     | 30          | 1000       | 100       | 993.1615        | -55.6            | -13         |
| 4     | 1000        | 26500      | 1000      | 25172.725       | -33.4            | -13         |

Band26(824-849) 16QAM BW=1.4MHz Channel=26915 RB Size=6 Position=#0

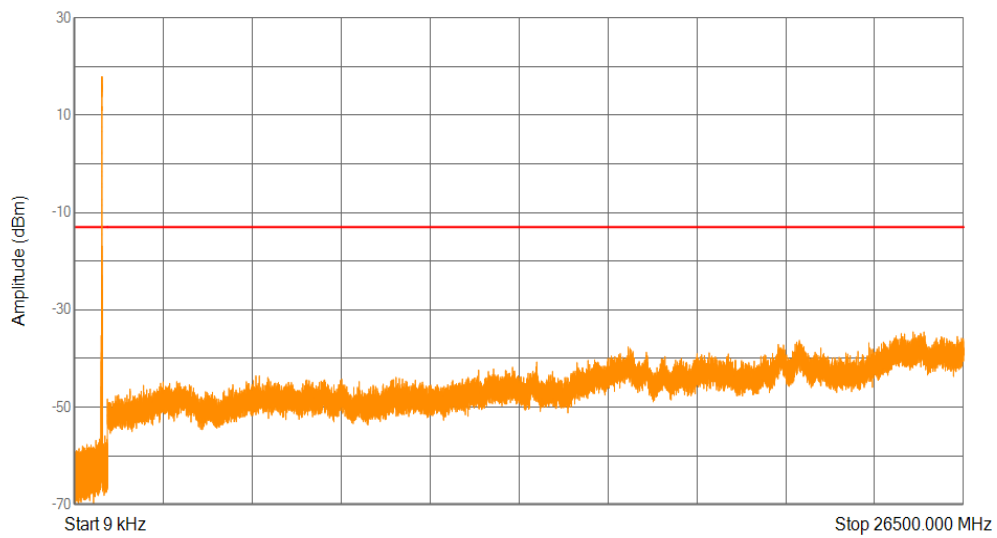


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0155706       | -54.22           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1694025       | -54.23           | -13         |
| 3     | 30          | 1000       | 100       | 816.35475       | -40.58           | -13         |
| 4     | 1000        | 26500      | 1000      | 24997.4125      | -34.53           | -13         |

Band26(824-849) 16QAM BW=1.4MHz Channel=27033 RB Size=6 Position=#0

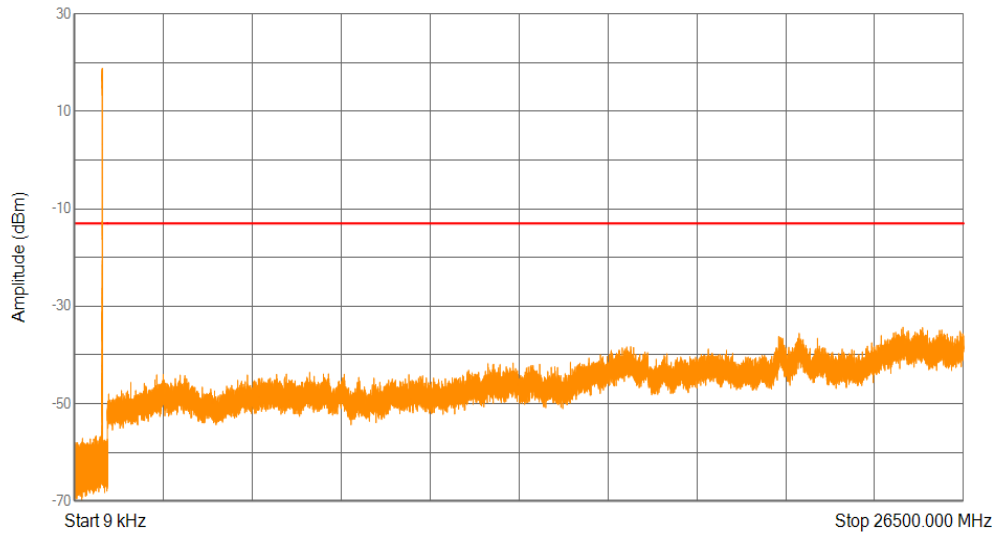


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0125673       | -51.74           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -54.23           | -13         |
| 3     | 30          | 1000       | 100       | 658.7055        | -56.64           | -13         |
| 4     | 1000        | 26500      | 1000      | 24696.5125      | -34.32           | -13         |

Band26(824-849) 16QAM BW=10MHz Channel=26840 RB Size=50 Position=#0

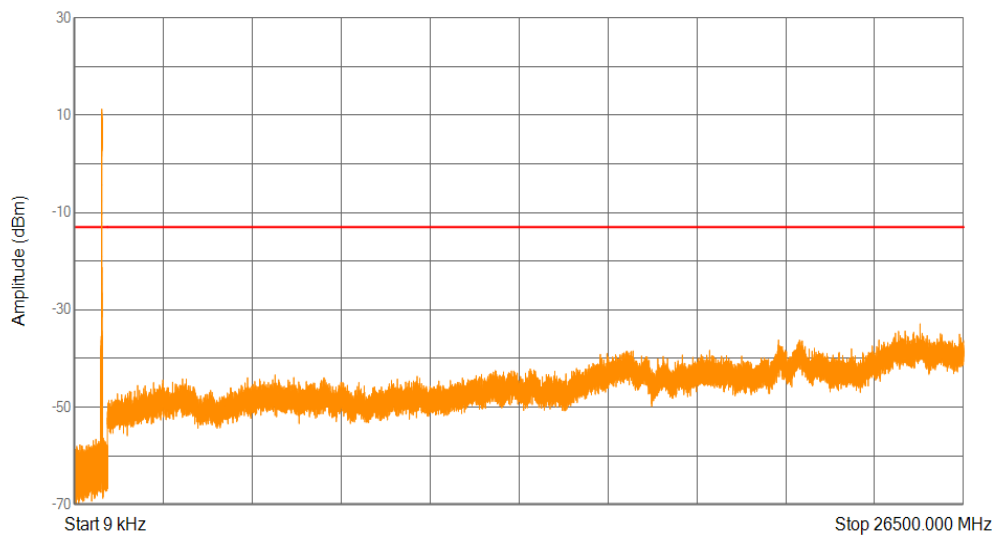


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00941595      | -53.19           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17910375      | -54.49           | -13         |
| 3     | 30          | 1000       | 100       | 657.299         | -56.61           | -13         |
| 4     | 1000        | 26500      | 1000      | 25205.2375      | -32.89           | -13         |

Band26(824-849) 16QAM BW=10MHz Channel=26915 RB Size=50 Position=#0

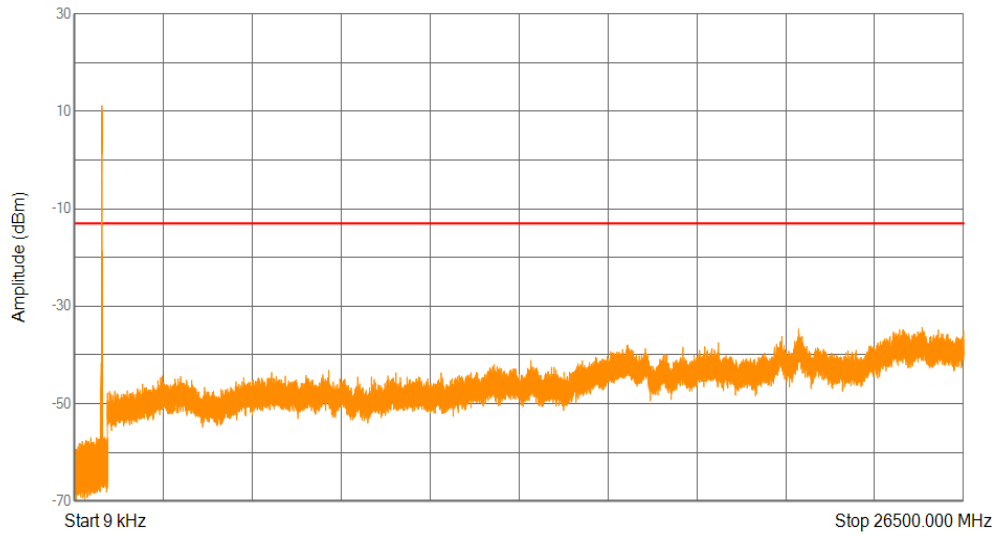


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -54.49           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.96           | -13         |
| 3     | 30          | 1000       | 100       | 906.395         | -56.87           | -13         |
| 4     | 1000        | 26500      | 1000      | 25266.4375      | -34.34           | -13         |

Band26(824-849) 16QAM BW=10MHz Channel=26990 RB Size=50 Position=#0

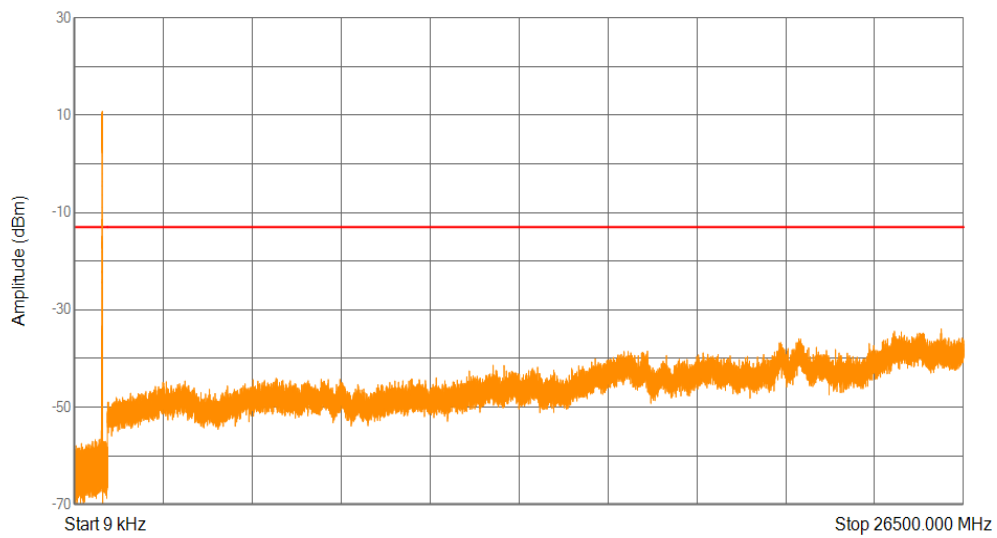


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01217955      | -54.5            | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.3            | -13         |
| 3     | 30          | 1000       | 100       | 754.85675       | -56.68           | -13         |
| 4     | 1000        | 26500      | 1000      | 25833.8125      | -33.92           | -13         |

Band26(824-849) 16QAM BW=15MHz Channel=26865 RB Size=75 Position=#0

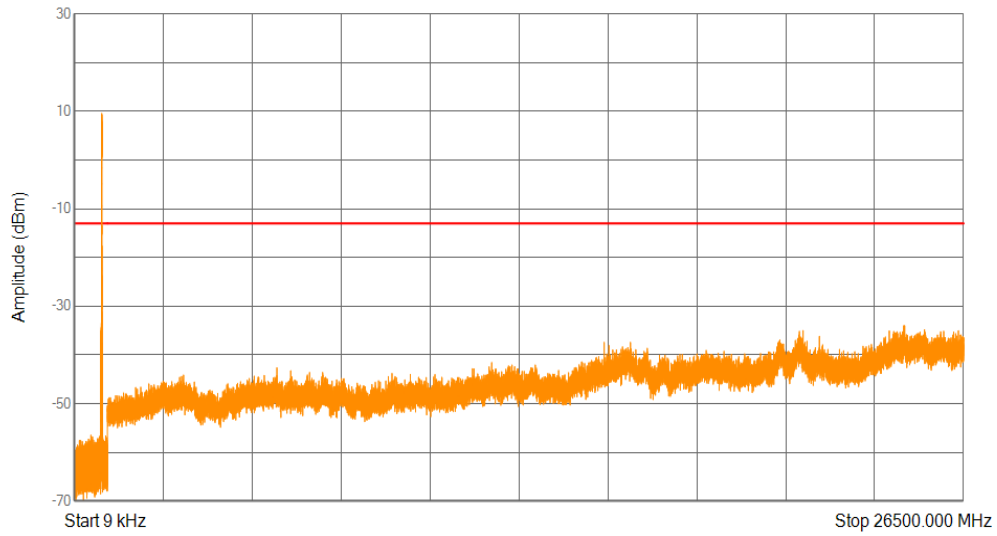


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0100152       | -53.88           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -53.91           | -13         |
| 3     | 30          | 1000       | 100       | 507.31275       | -56.47           | -13         |
| 4     | 1000        | 26500      | 1000      | 24745.6         | -33.99           | -13         |

Band26(824-849) 16QAM BW=15MHz Channel=26915 RB Size=75 Position=#0

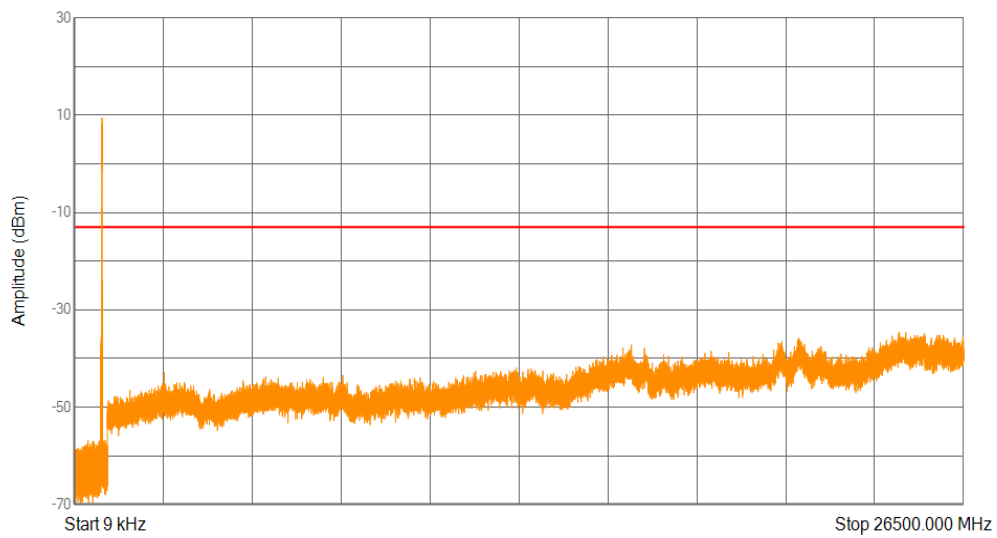


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00968385      | -52.84           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15373125      | -53.88           | -13         |
| 3     | 30          | 1000       | 100       | 421.37075       | -56.81           | -13         |
| 4     | 1000        | 26500      | 1000      | 24778.1125      | -34.59           | -13         |

Band26(824-849) 16QAM BW=15MHz Channel=26965 RB Size=75 Position=#0

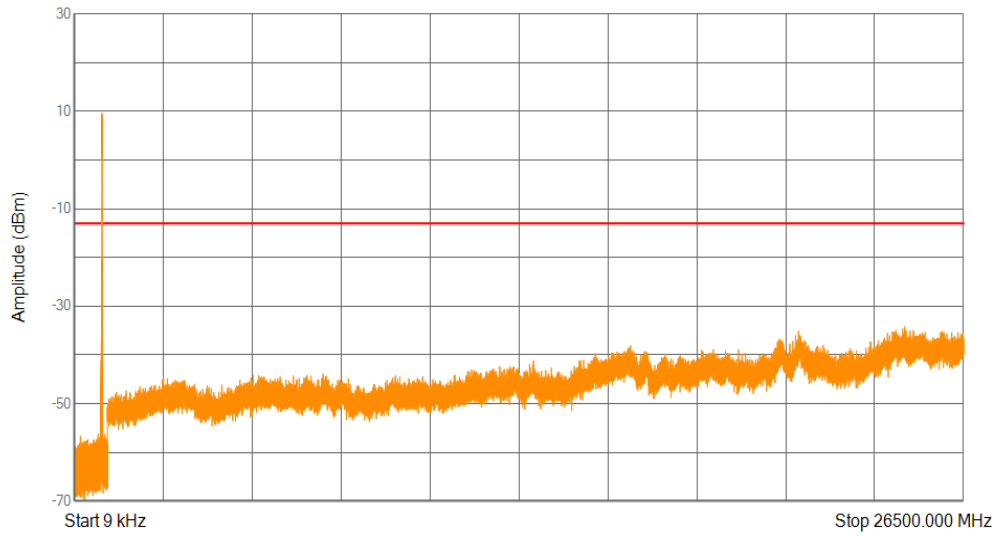


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -52.57           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15373125      | -55.04           | -13         |
| 3     | 30          | 1000       | 100       | 727.45425       | -56.25           | -13         |
| 4     | 1000        | 26500      | 1000      | 24739.225       | -34.24           | -13         |

Band26(824-849) 16QAM BW=3MHz Channel=26805 RB Size=15 Position=#0

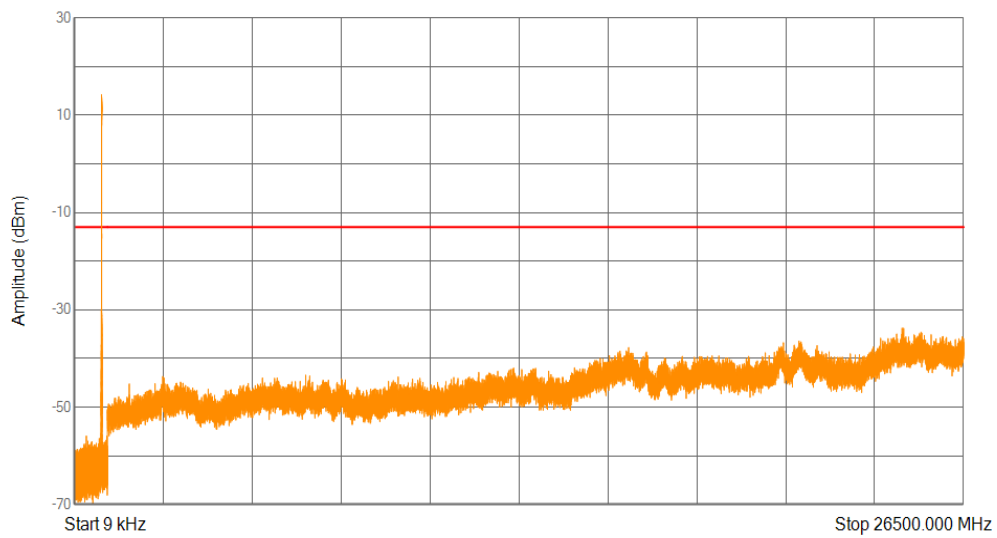


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00947235      | -52.14           | -13         |
| 2     | 0.15        | 30         | 10        | 0.176865        | -57.29           | -13         |
| 3     | 30          | 1000       | 100       | 372.96775       | -55.94           | -13         |
| 4     | 1000        | 26500      | 1000      | 24667.825       | -33.77           | -13         |

Band26(824-849) 16QAM BW=3MHz Channel=26915 RB Size=15 Position=#0

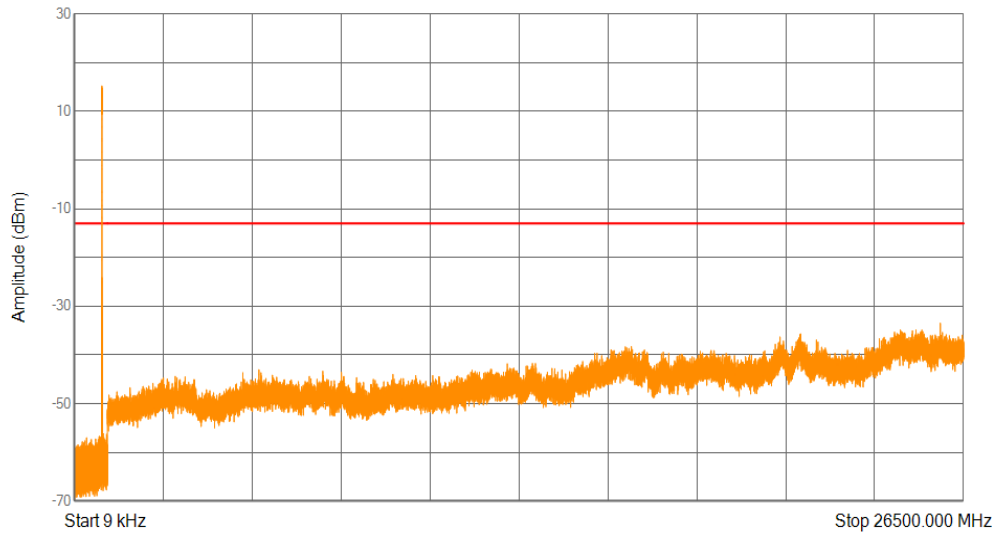


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0092115       | -52.11           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17313375      | -55.1            | -13         |
| 3     | 30          | 1000       | 100       | 875.03975       | -56.17           | -13         |
| 4     | 1000        | 26500      | 1000      | 25806.4         | -33.49           | -13         |

Band26(824-849) 16QAM BW=3MHz Channel=27025 RB Size=15 Position=#0

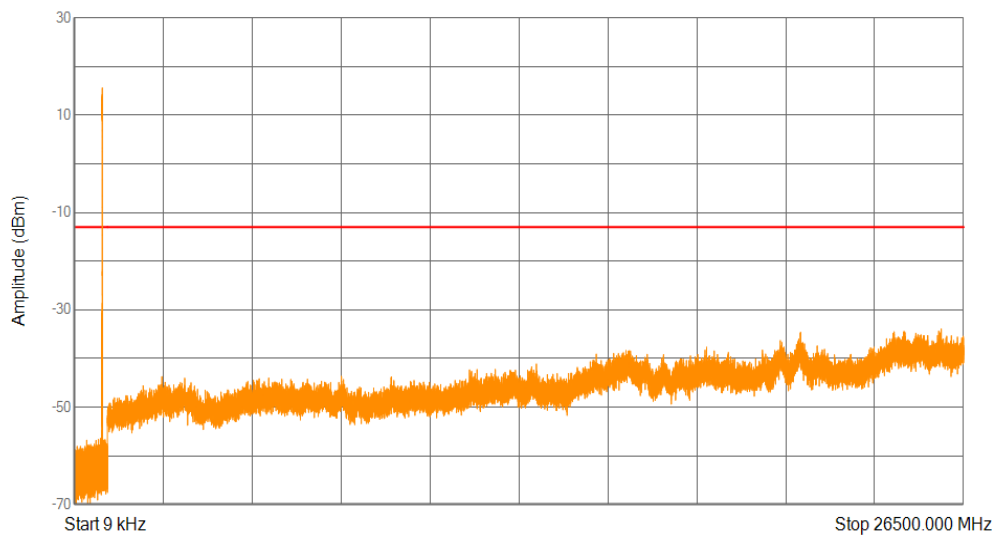


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0125109       | -52.8            | -13         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -54.53           | -13         |
| 3     | 30          | 1000       | 100       | 798.21575       | -56.45           | -13         |
| 4     | 1000        | 26500      | 1000      | 25835.0875      | -33.93           | -13         |

Band26(824-849) 16QAM BW=5MHz Channel=26815 RB Size=25 Position=#0

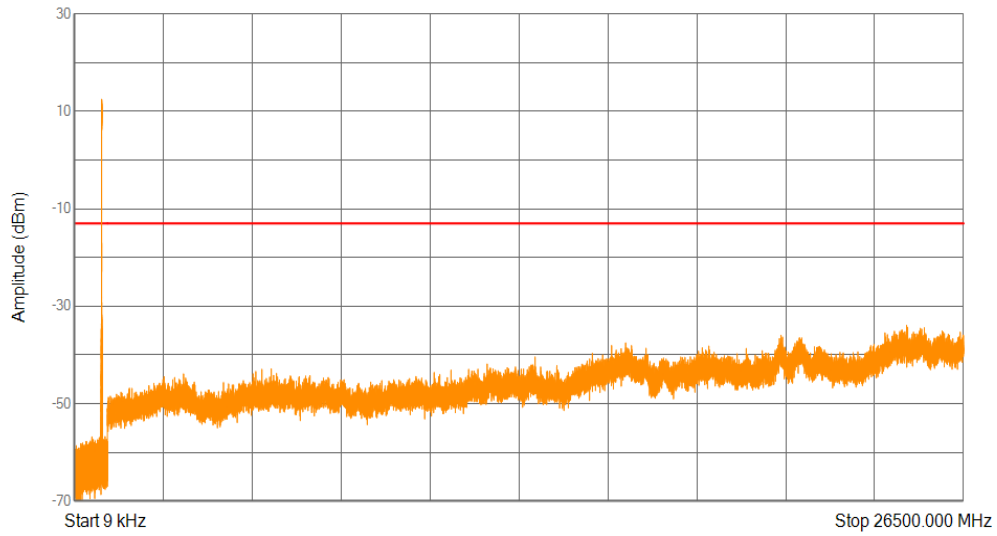


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0110868       | -53.11           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15597         | -54.43           | -13         |
| 3     | 30          | 1000       | 100       | 929.74775       | -56.78           | -13         |
| 4     | 1000        | 26500      | 1000      | 24800.425       | -33.93           | -13         |

Band26(824-849) 16QAM BW=5MHz Channel=26915 RB Size=25 Position=#0

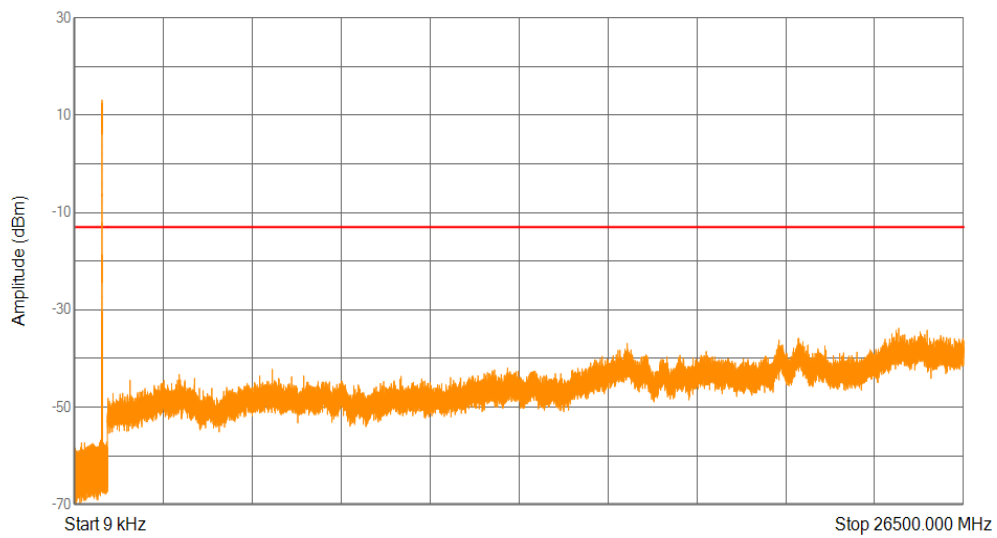


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00965565      | -53.11           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15522375      | -53.75           | -13         |
| 3     | 30          | 1000       | 100       | 790.868         | -56.77           | -13         |
| 4     | 1000        | 26500      | 1000      | 24569.0125      | -33.78           | -13         |

Band26(824-849) 16QAM BW=5MHz Channel=27015 RB Size=25 Position=#0

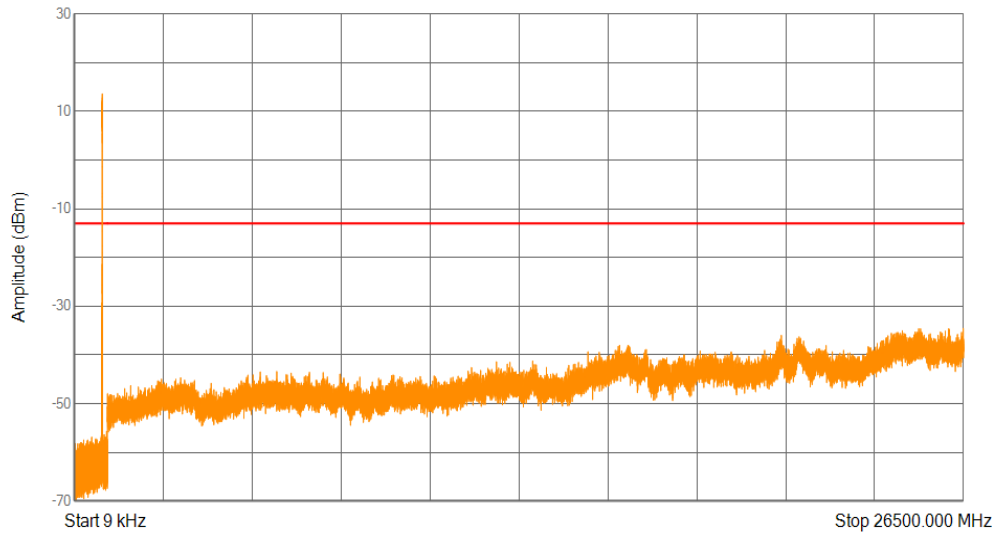


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010124475     | -53.16           | -13         |
| 2     | 0.15        | 30         | 10        | 0.164925        | -54.9            | -13         |
| 3     | 30          | 1000       | 100       | 976.623         | -55.69           | -13         |
| 4     | 1000        | 26500      | 1000      | 26488.525       | -34.54           | -13         |

Band26(824-849) QPSK BW=1.4MHz Channel=26797 RB Size=6 Position=#0

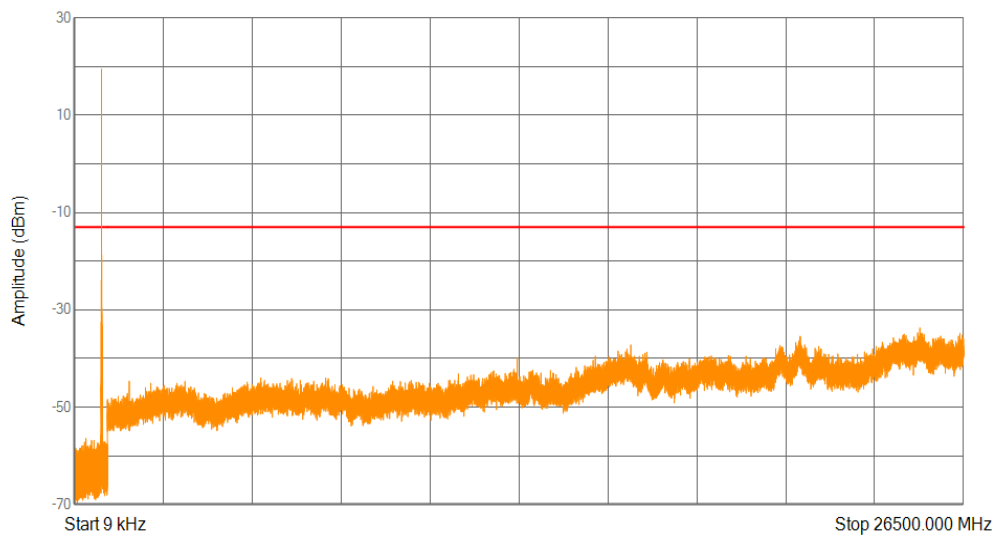


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01051575      | -51.1            | -13         |
| 2     | 0.15        | 30         | 10        | 0.16791         | -52.54           | -13         |
| 3     | 30          | 1000       | 100       | 816.67          | -32.49           | -13         |
| 4     | 1000        | 26500      | 1000      | 25199.5         | -33.73           | -13         |

Band26(824-849) QPSK BW=1.4MHz Channel=26915 RB Size=6 Position=#0

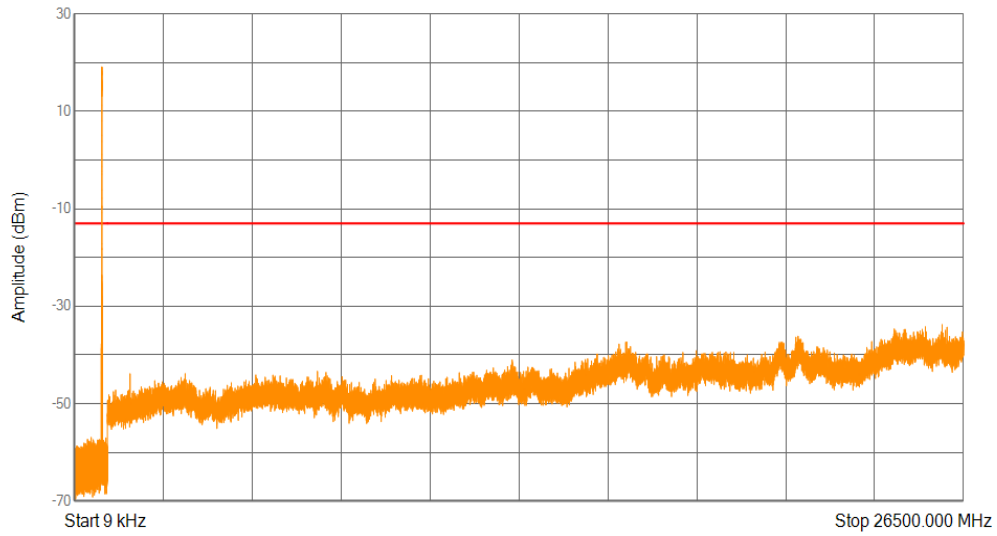


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.013212375     | -54.42           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.23           | -13         |
| 3     | 30          | 1000       | 100       | 516.261         | -56.95           | -13         |
| 4     | 1000        | 26500      | 1000      | 25862.5         | -33.79           | -13         |

Band26(824-849) QPSK BW=1.4MHz Channel=27033 RB Size=6 Position=#0

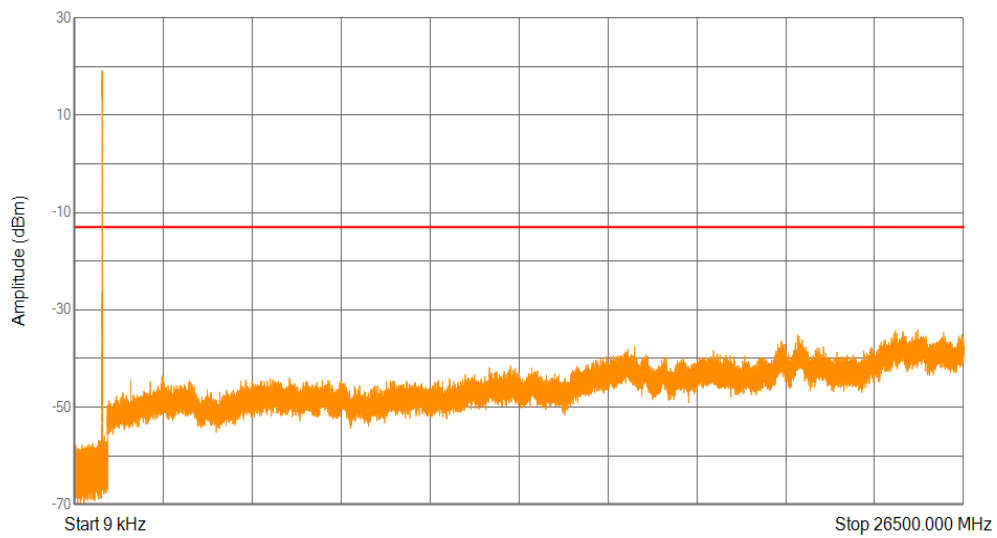


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00904935      | -51.76           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15373125      | -56.26           | -13         |
| 3     | 30          | 1000       | 100       | 903.70325       | -55.93           | -13         |
| 4     | 1000        | 26500      | 1000      | 25132.5625      | -34.06           | -13         |

Band26(824-849) QPSK BW=10MHz Channel=26840 RB Size=50 Position=#0

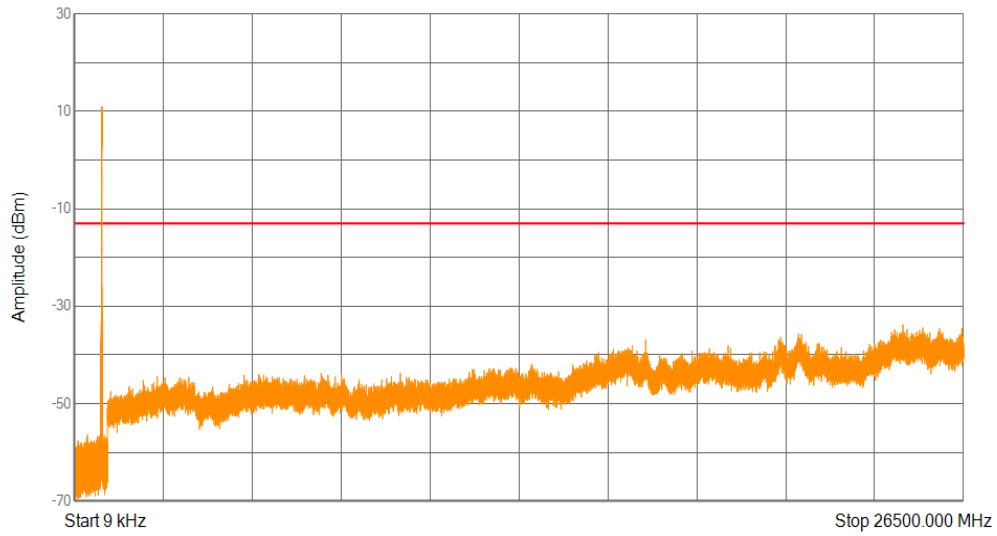


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00911985      | -52.13           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17014875      | -56.12           | -13         |
| 3     | 30          | 1000       | 100       | 404.20175       | -56.45           | -13         |
| 4     | 1000        | 26500      | 1000      | 24692.05        | -33.82           | -13         |

Band26(824-849) QPSK BW=10MHz Channel=26915 RB Size=50 Position=#0

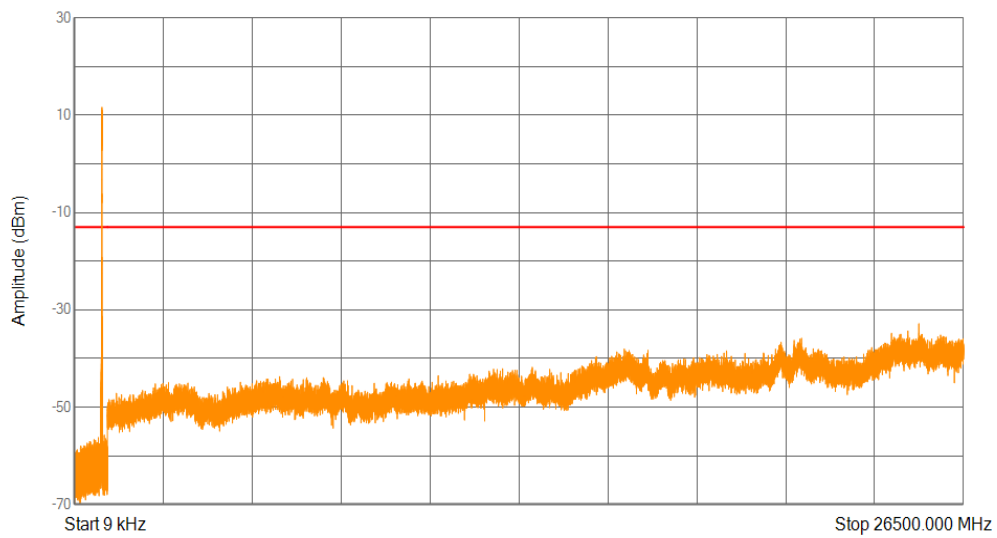


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009426525     | -50.08           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.9            | -13         |
| 3     | 30          | 1000       | 100       | 906.66175       | -55.76           | -13         |
| 4     | 1000        | 26500      | 1000      | 25166.9875      | -32.87           | -13         |

Band26(824-849) QPSK BW=10MHz Channel=26990 RB Size=50 Position=#0

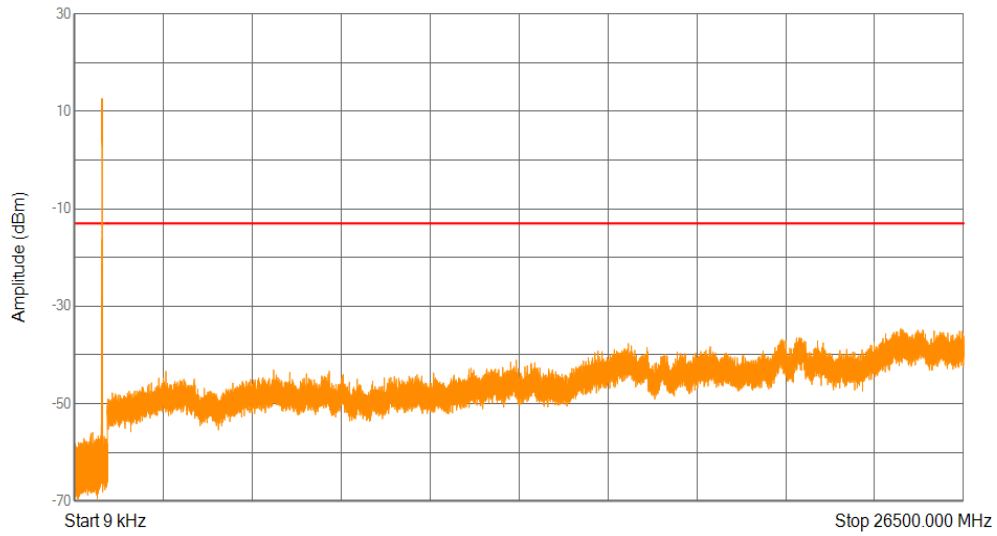


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009856575     | -53.63           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15522375      | -53.96           | -13         |
| 3     | 30          | 1000       | 100       | 557.7285        | -55.91           | -13         |
| 4     | 1000        | 26500      | 1000      | 24630.2125      | -34.65           | -13         |

Band26(824-849) QPSK BW=15MHz Channel=26865 RB Size=75 Position=#0

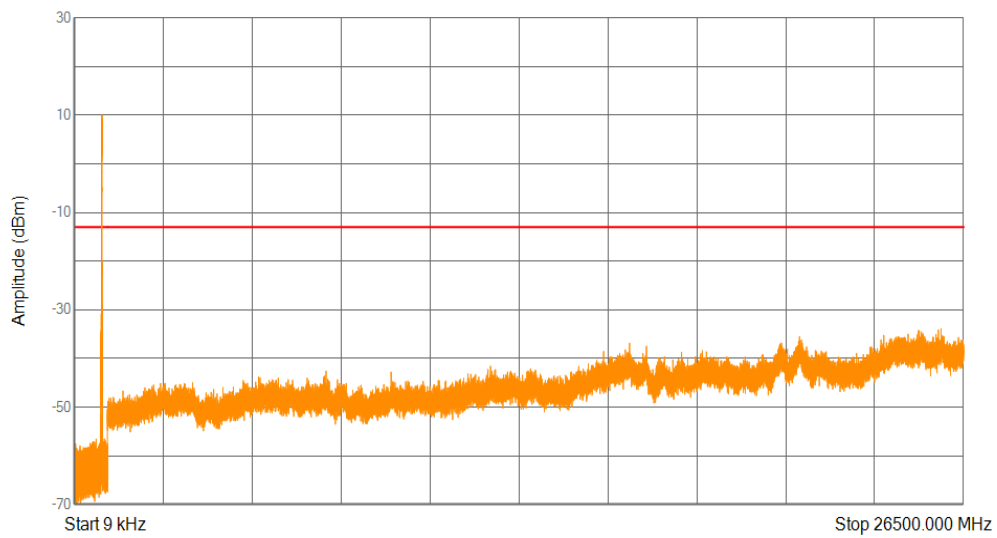


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -51.81           | -13         |
| 2     | 0.15        | 30         | 10        | 0.164925        | -53.87           | -13         |
| 3     | 30          | 1000       | 100       | 664.88925       | -56.57           | -13         |
| 4     | 1000        | 26500      | 1000      | 25829.35        | -33.87           | -13         |

Band26(824-849) QPSK BW=15MHz Channel=26915 RB Size=75 Position=#0

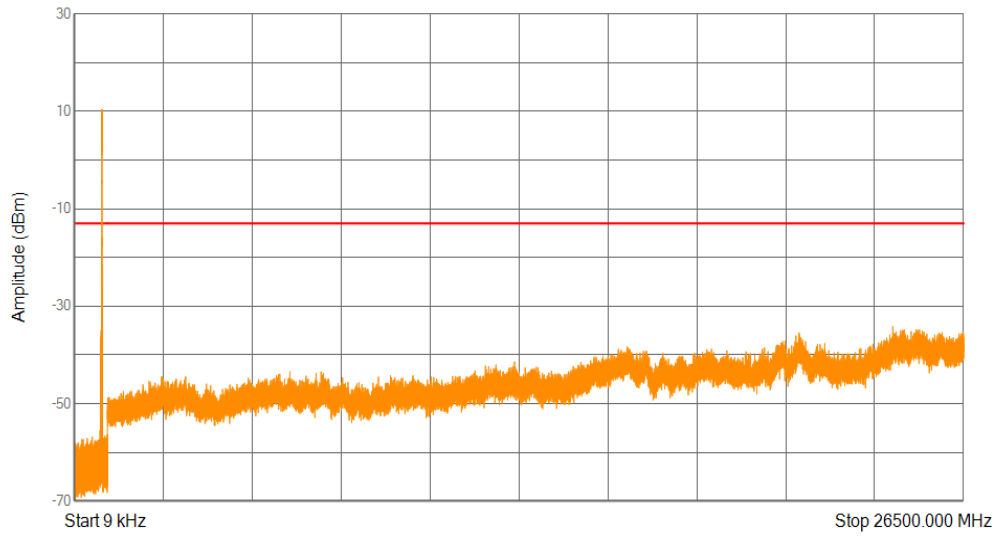


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00955695      | -51.42           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.45           | -13         |
| 3     | 30          | 1000       | 100       | 994.34975       | -56.42           | -13         |
| 4     | 1000        | 26500      | 1000      | 24392.425       | -34.17           | -13         |

Band26(824-849) QPSK BW=15MHz Channel=26965 RB Size=75 Position=#0

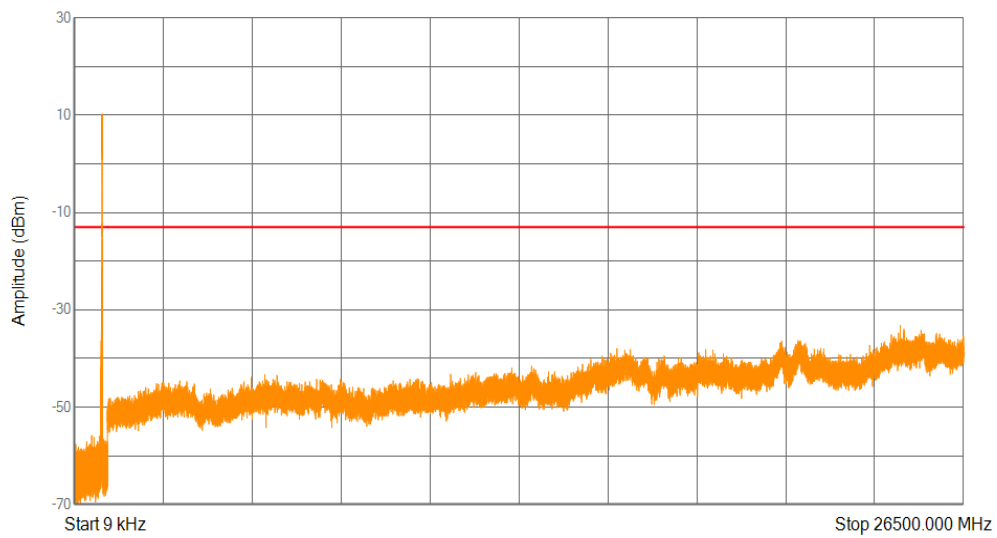


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0104382       | -53.67           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -53.59           | -13         |
| 3     | 30          | 1000       | 100       | 529.76825       | -55.85           | -13         |
| 4     | 1000        | 26500      | 1000      | 24613.6375      | -33.23           | -13         |

Band26(824-849) QPSK BW=3MHz Channel=26805 RB Size=15 Position=#0

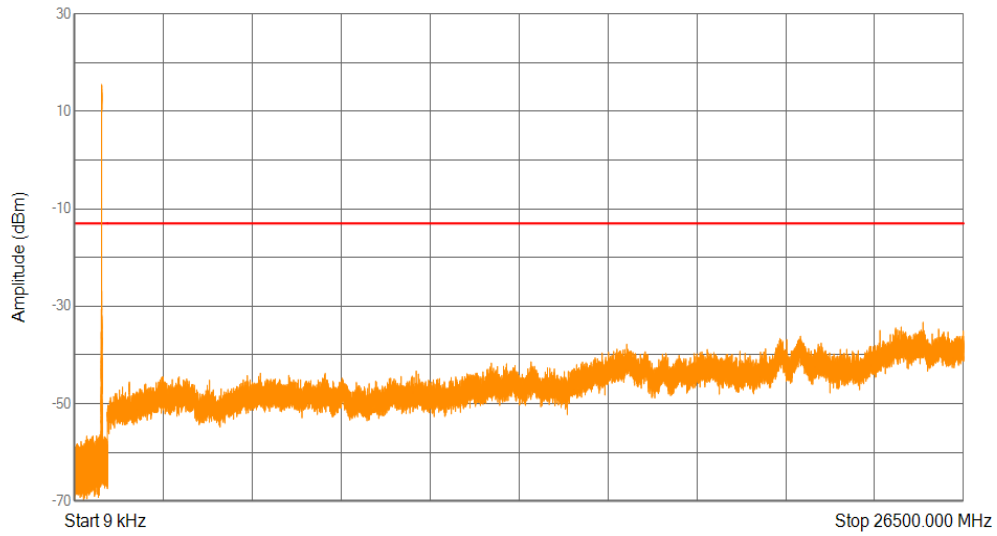


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0099165       | -52.11           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15970125      | -55.25           | -13         |
| 3     | 30          | 1000       | 100       | 780.02825       | -56.38           | -13         |
| 4     | 1000        | 26500      | 1000      | 25293.85        | -33.31           | -13         |

Band26(824-849) QPSK BW=3MHz Channel=26915 RB Size=15 Position=#0

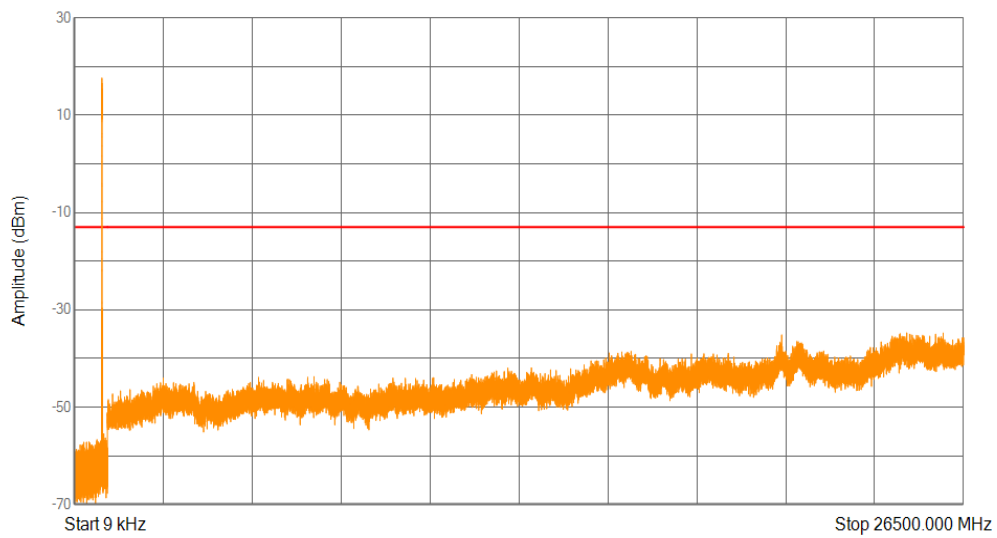


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009151575     | -52.07           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15522375      | -54.97           | -13         |
| 3     | 30          | 1000       | 100       | 890.39          | -55.47           | -13         |
| 4     | 1000        | 26500      | 1000      | 24807.4375      | -34.74           | -13         |

Band26(824-849) QPSK BW=3MHz Channel=27025 RB Size=15 Position=#0

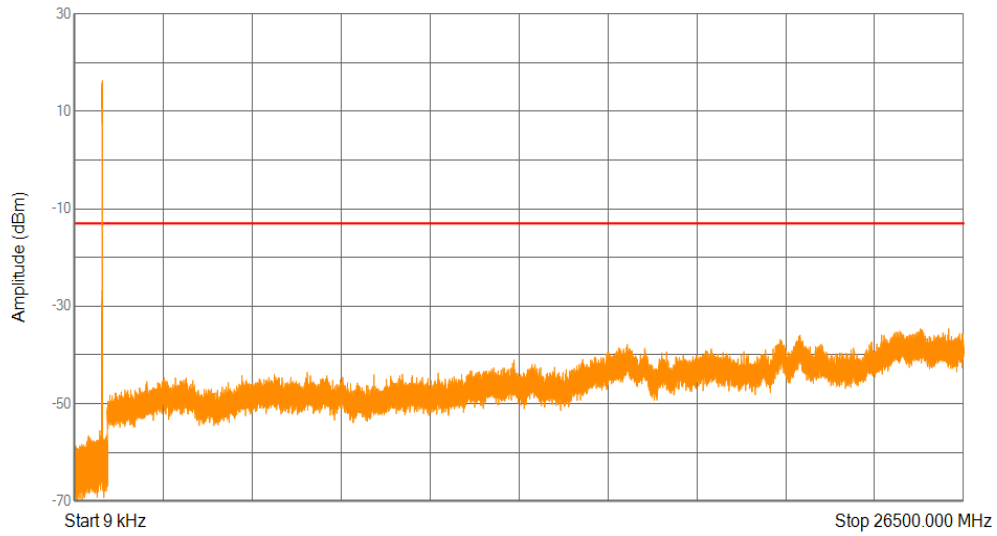


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009694425     | -49.86           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -53.74           | -13         |
| 3     | 30          | 1000       | 100       | 773.699         | -55.59           | -13         |
| 4     | 1000        | 26500      | 1000      | 26056.3         | -34.64           | -13         |

Band26(824-849) QPSK BW=5MHz Channel=26815 RB Size=25 Position=#0

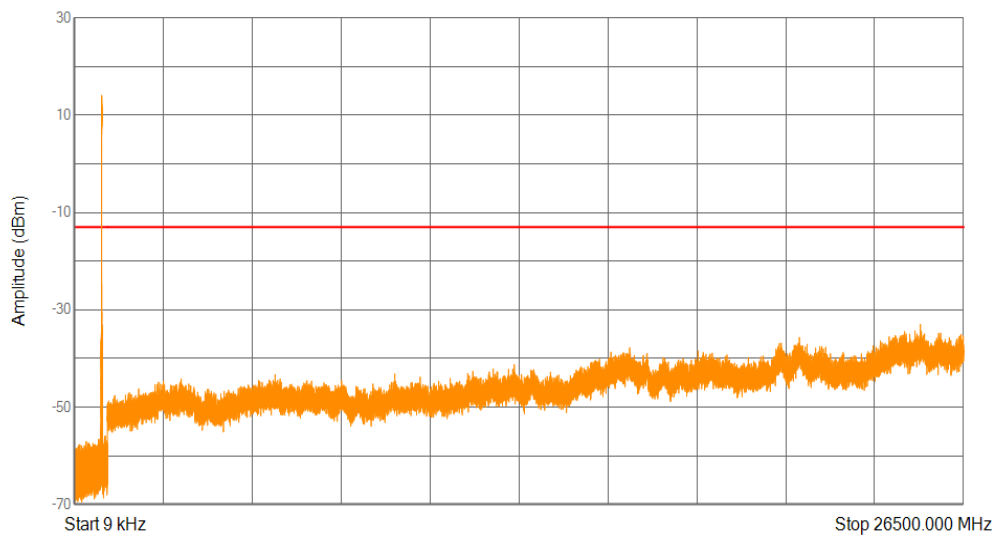


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010378275     | -51.61           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -55.74           | -13         |
| 3     | 30          | 1000       | 100       | 936.4165        | -55.91           | -13         |
| 4     | 1000        | 26500      | 1000      | 25212.8875      | -32.99           | -13         |

Band26(824-849) QPSK BW=5MHz Channel=26915 RB Size=25 Position=#0

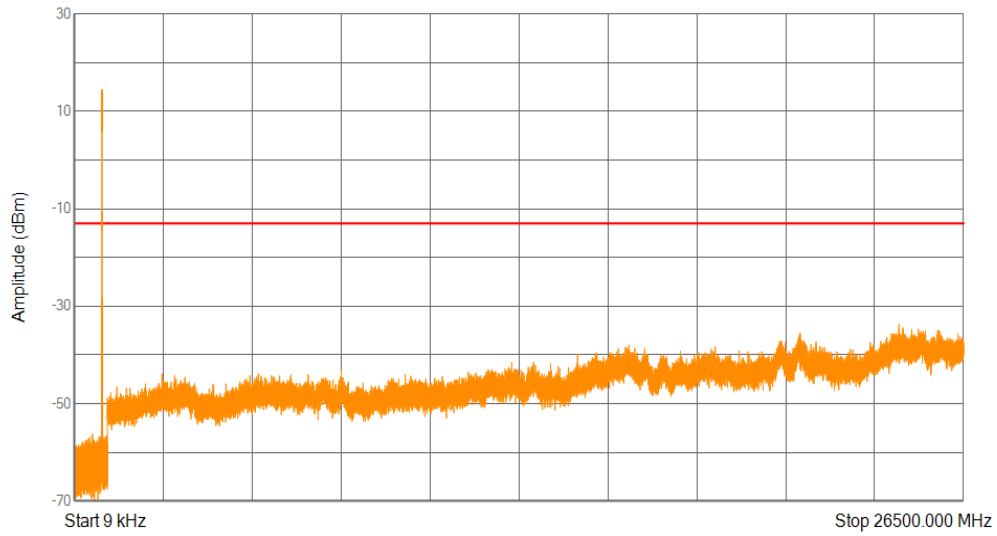


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009151575     | -51.22           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -55.52           | -13         |
| 3     | 30          | 1000       | 100       | 555.5945        | -56.27           | -13         |
| 4     | 1000        | 26500      | 1000      | 24573.475       | -33.77           | -13         |

Band26(824-849) QPSK BW=5MHz Channel=27015 RB Size=25 Position=#0

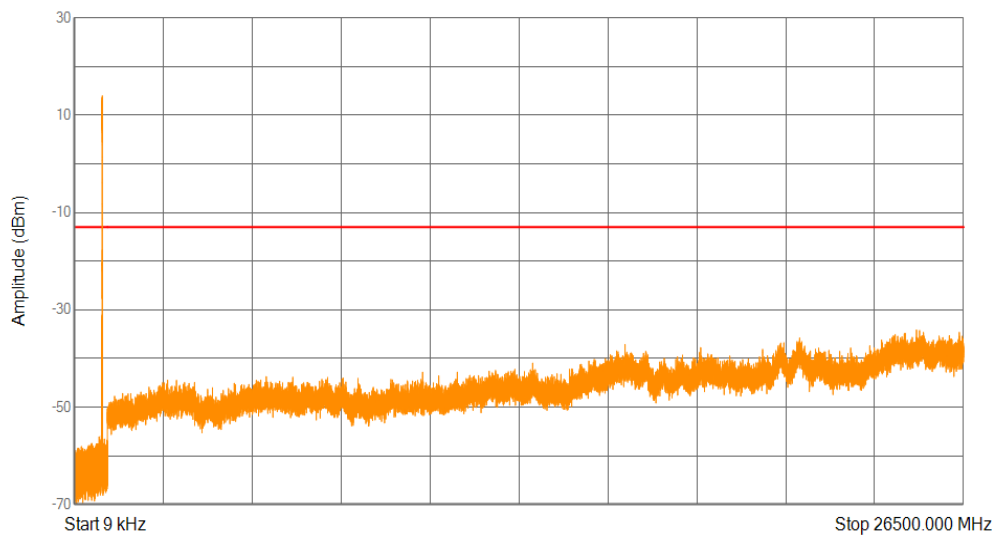


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00926085      | -52.42           | -13         |
| 2     | 0.15        | 30         | 10        | 0.18805875      | -56.04           | -13         |
| 3     | 30          | 1000       | 100       | 751.874         | -56.11           | -13         |
| 4     | 1000        | 26500      | 1000      | 25097.5         | -34.14           | -13         |

Band38 16QAM BW=10MHz Channel=37800 RB Size=50 Position=#0

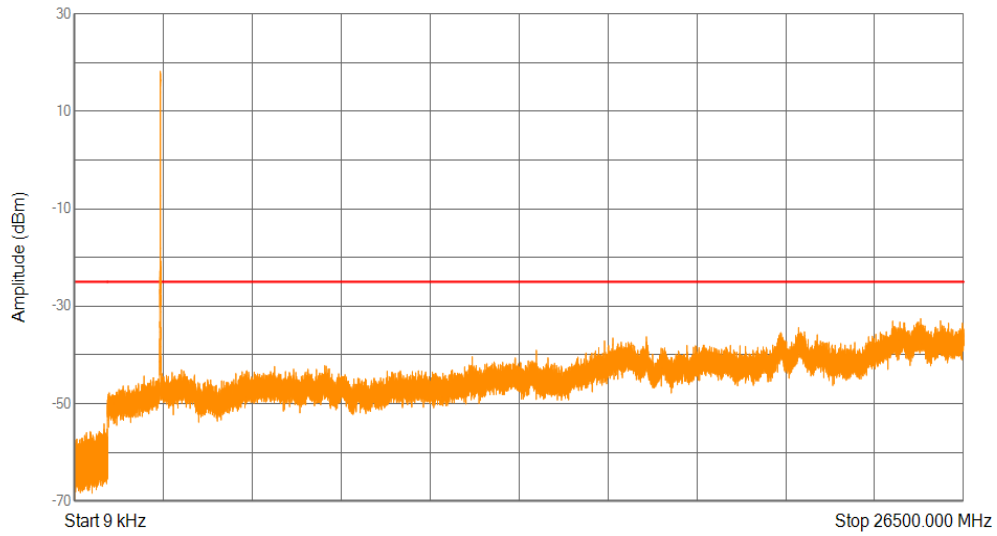


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009144525     | -50.03           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -52.25           | -25         |
| 3     | 30          | 1000       | 100       | 899.77475       | -54.18           | -25         |
| 4     | 1000        | 26500      | 1000      | 25223.0875      | -32.56           | -25         |

Band38 16QAM BW=10MHz Channel=38000 RB Size=50 Position=#0

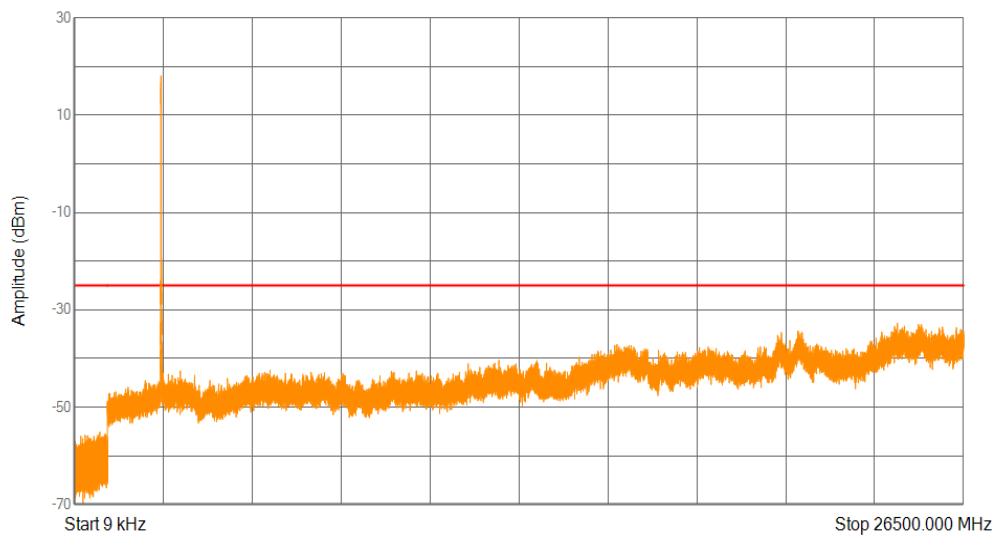


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009581625     | -51.15           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1634325       | -50.57           | -25         |
| 3     | 30          | 1000       | 100       | 773.33525       | -55.13           | -25         |
| 4     | 1000        | 26500      | 1000      | 24527.575       | -32.75           | -25         |

Band38 16QAM BW=10MHz Channel=38200 RB Size=50 Position=#0

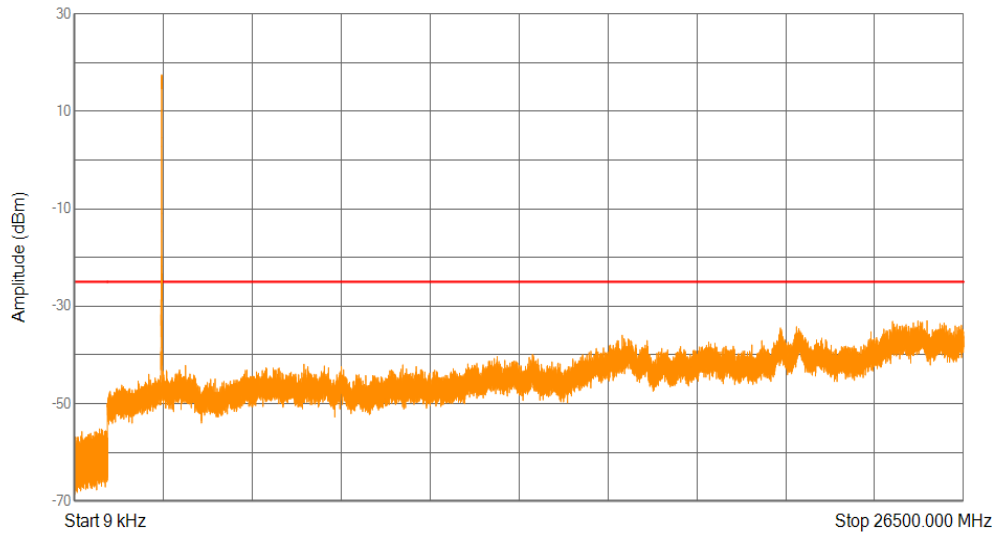


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -52.79           | -25         |
| 2     | 0.15        | 30         | 10        | 0.16268625      | -54.74           | -25         |
| 3     | 30          | 1000       | 100       | 764.79925       | -55.19           | -25         |
| 4     | 1000        | 26500      | 1000      | 25411.7875      | -33.01           | -25         |

Band38 16QAM BW=15MHz Channel=37825 RB Size=75 Position=#0

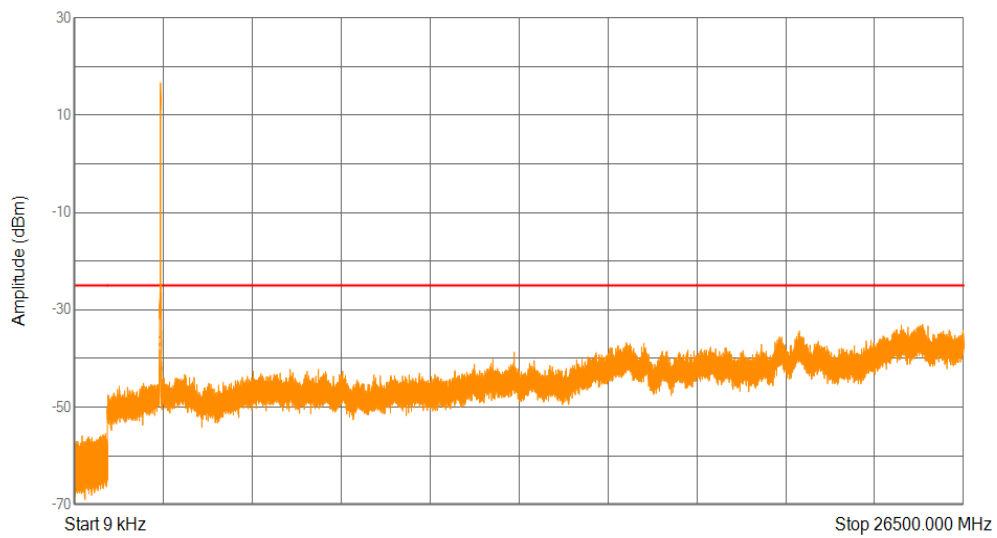


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009588675     | -51.54           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -52.58           | -25         |
| 3     | 30          | 1000       | 100       | 945.75275       | -55.45           | -25         |
| 4     | 1000        | 26500      | 1000      | 25279.825       | -33.02           | -25         |

Band38 16QAM BW=15MHz Channel=38000 RB Size=75 Position=#0

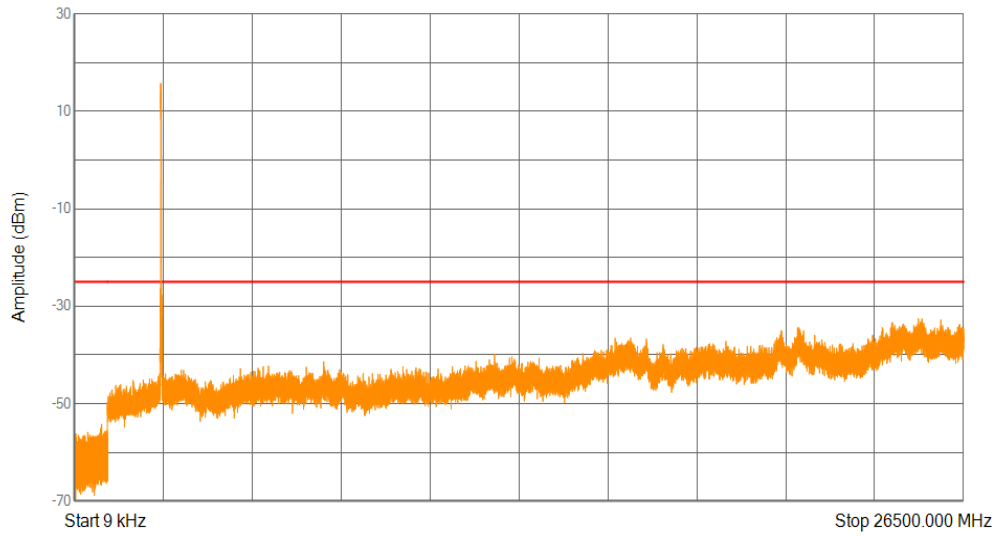


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -49.95           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15597         | -52.18           | -25         |
| 3     | 30          | 1000       | 100       | 827.8735        | -54.26           | -25         |
| 4     | 1000        | 26500      | 1000      | 25151.6875      | -32.56           | -25         |

Band38 16QAM BW=15MHz Channel=38175 RB Size=75 Position=#0

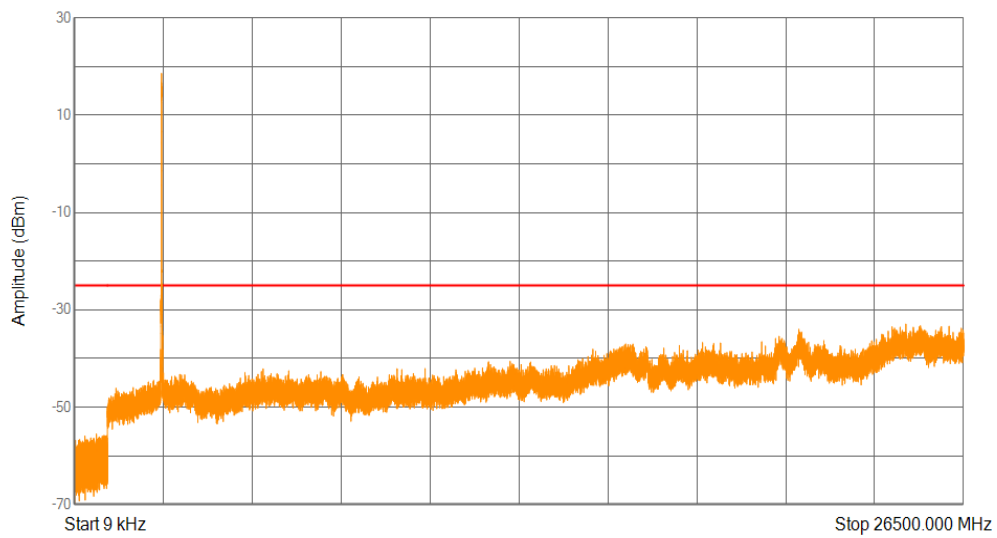


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009095175     | -48.04           | -25         |
| 2     | 0.15        | 30         | 10        | 0.170895        | -53.44           | -25         |
| 3     | 30          | 1000       | 100       | 670.588         | -55.56           | -25         |
| 4     | 1000        | 26500      | 1000      | 24782.575       | -32.94           | -25         |

Band38 16QAM BW=20MHz Channel=37850 RB Size=100 Position=#0

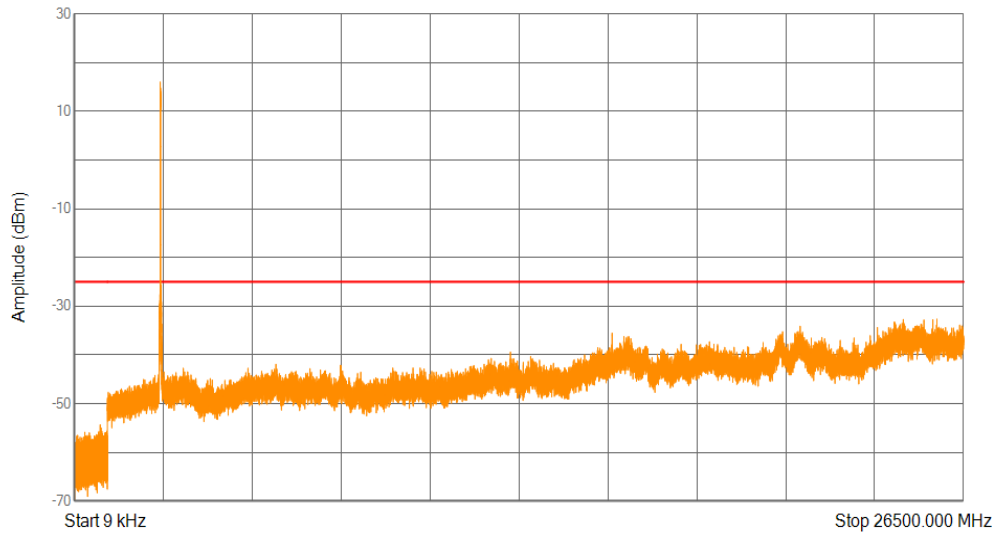


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -51.99           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.65           | -25         |
| 3     | 30          | 1000       | 100       | 783.884         | -54.37           | -25         |
| 4     | 1000        | 26500      | 1000      | 25705.675       | -32.66           | -25         |

Band38 16QAM BW=20MHz Channel=38000 RB Size=100 Position=#0

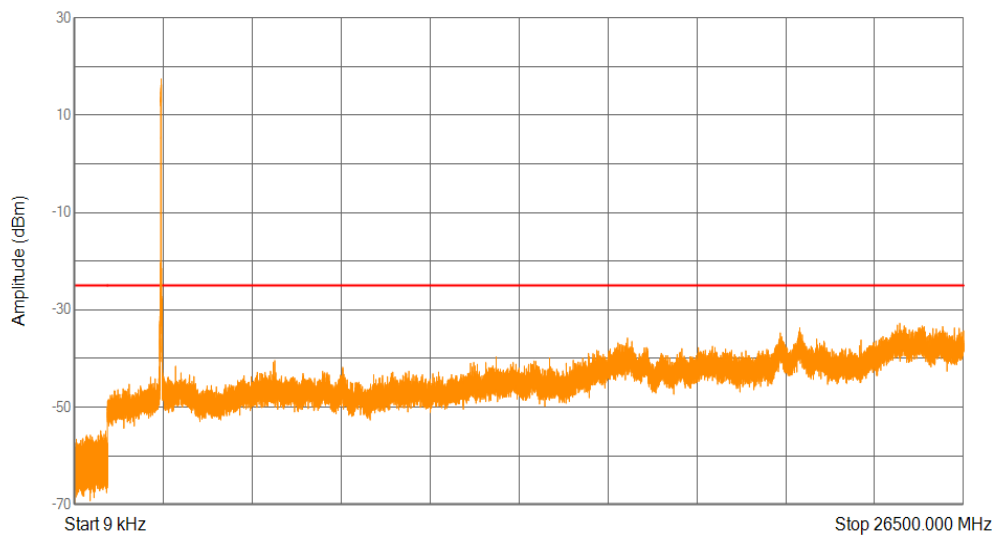


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00921855      | -51.95           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15671625      | -53.54           | -25         |
| 3     | 30          | 1000       | 100       | 801.4895        | -54.89           | -25         |
| 4     | 1000        | 26500      | 1000      | 24600.8875      | -32.78           | -25         |

Band38 16QAM BW=20MHz Channel=38150 RB Size=100 Position=#0

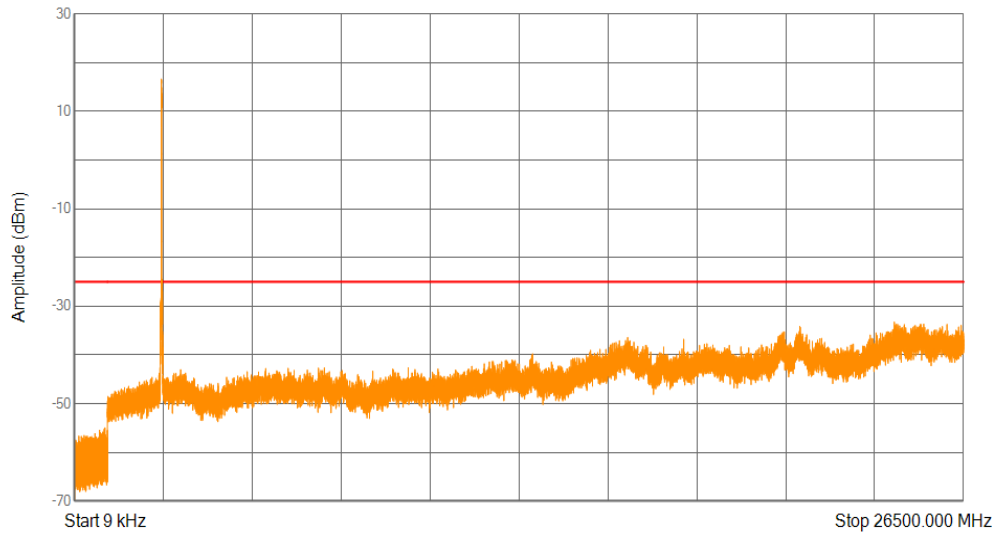


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009564        | -51.52           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -51.23           | -25         |
| 3     | 30          | 1000       | 100       | 924.0005        | -54.97           | -25         |
| 4     | 1000        | 26500      | 1000      | 24437.6875      | -33.27           | -25         |

Band38 16QAM BW=5MHz Channel=37775 RB Size=25 Position=#0

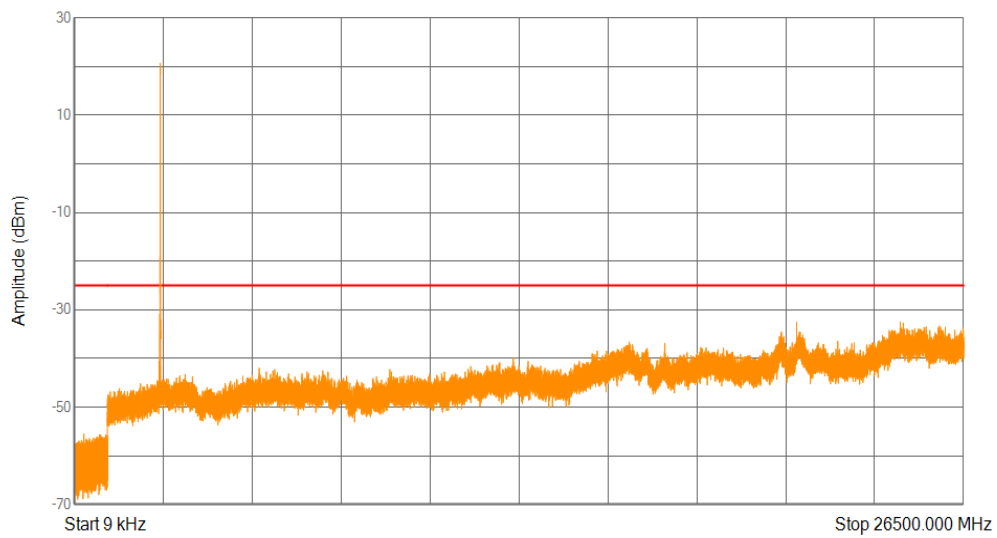


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010469925     | -51.45           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15            | -51.78           | -25         |
| 3     | 30          | 1000       | 100       | 296.6045        | -55.55           | -25         |
| 4     | 1000        | 26500      | 1000      | 24614.275       | -32.47           | -25         |

Band38 16QAM BW=5MHz Channel=38000 RB Size=25 Position=#0

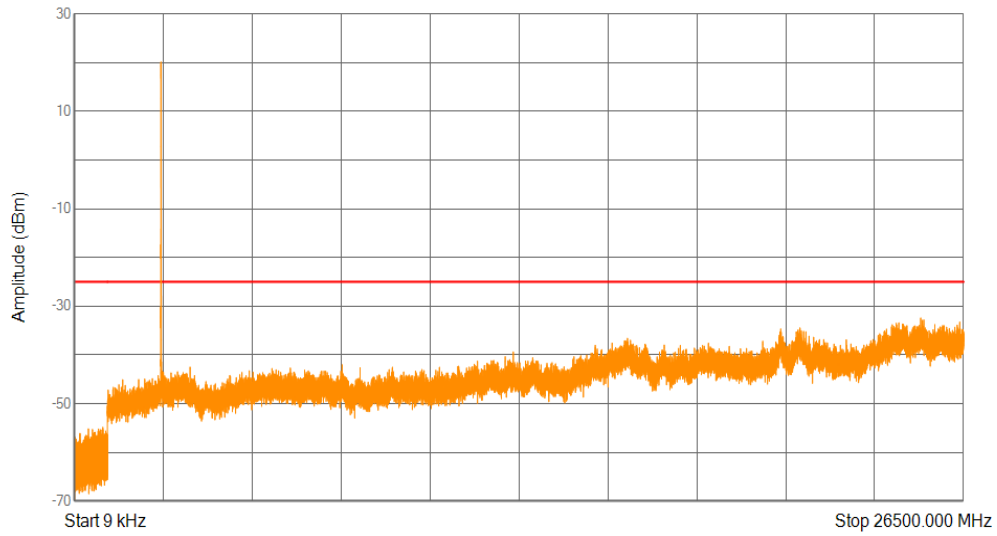


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00935955      | -50.37           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1634325       | -53.35           | -25         |
| 3     | 30          | 1000       | 100       | 864.1515        | -54.9            | -25         |
| 4     | 1000        | 26500      | 1000      | 25224.3625      | -32.43           | -25         |

Band38 16QAM BW=5MHz Channel=38225 RB Size=25 Position=#0

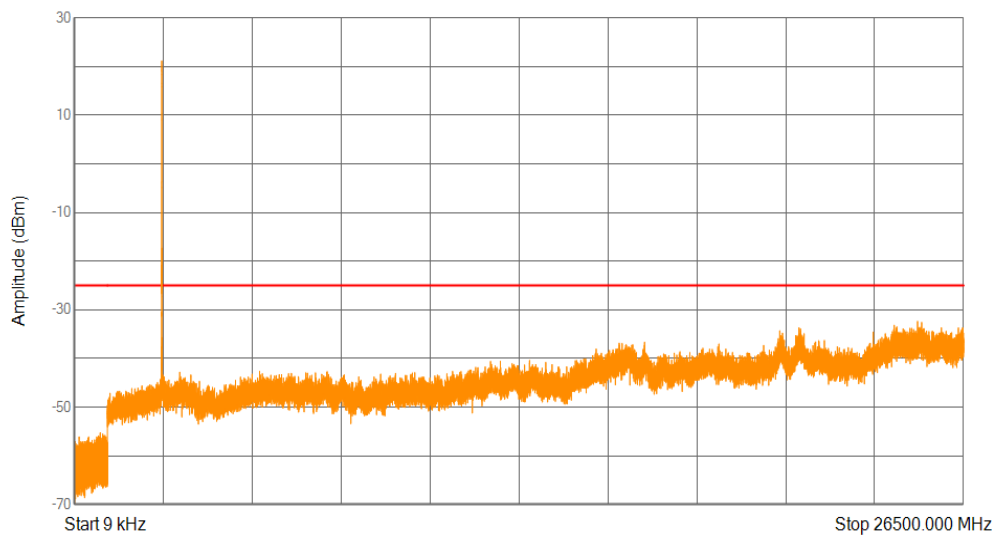


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009447675     | -49.16           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.58           | -25         |
| 3     | 30          | 1000       | 100       | 785.1935        | -55.3            | -25         |
| 4     | 1000        | 26500      | 1000      | 25130.65        | -32.38           | -25         |

Band38 QPSK BW=10MHz Channel=37800 RB Size=50 Position=#0

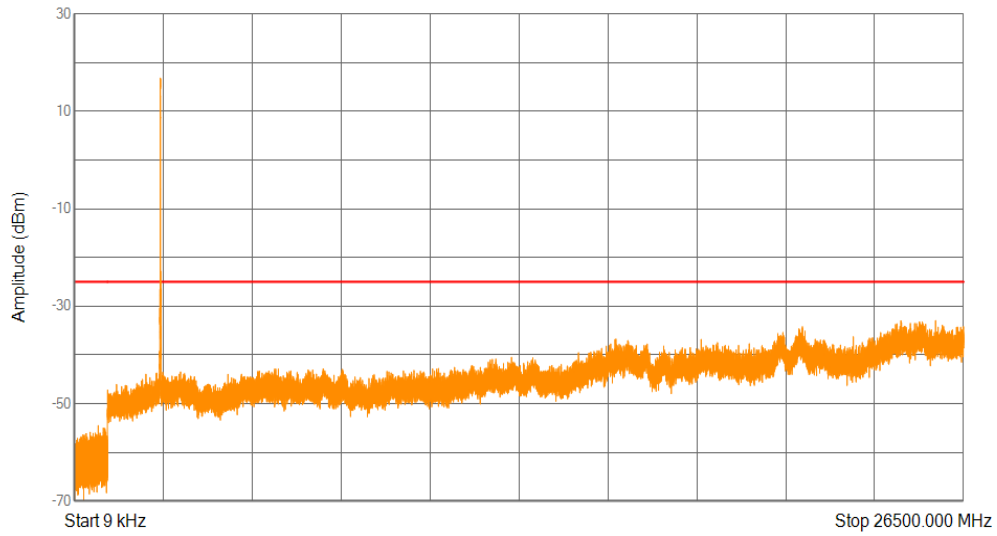


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0099447       | -50.23           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15223875      | -52.65           | -25         |
| 3     | 30          | 1000       | 100       | 727.93925       | -54.51           | -25         |
| 4     | 1000        | 26500      | 1000      | 25666.7875      | -32.95           | -25         |

Band38 QPSK BW=10MHz Channel=38000 RB Size=50 Position=#0

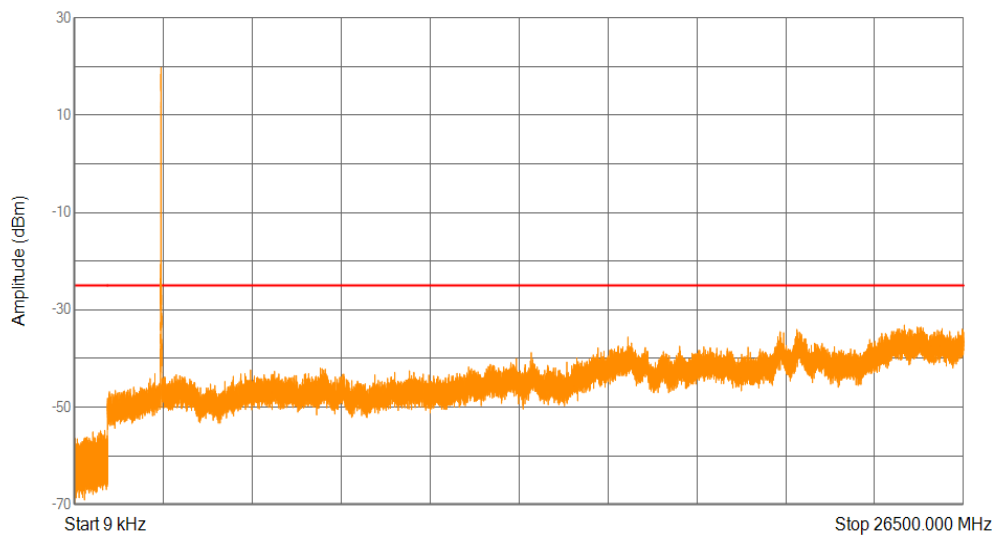


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011999775     | -52.15           | -25         |
| 2     | 0.15        | 30         | 10        | 0.16417875      | -53.48           | -25         |
| 3     | 30          | 1000       | 100       | 920.43575       | -54.79           | -25         |
| 4     | 1000        | 26500      | 1000      | 24734.125       | -33.14           | -25         |

Band38 QPSK BW=10MHz Channel=38200 RB Size=50 Position=#0

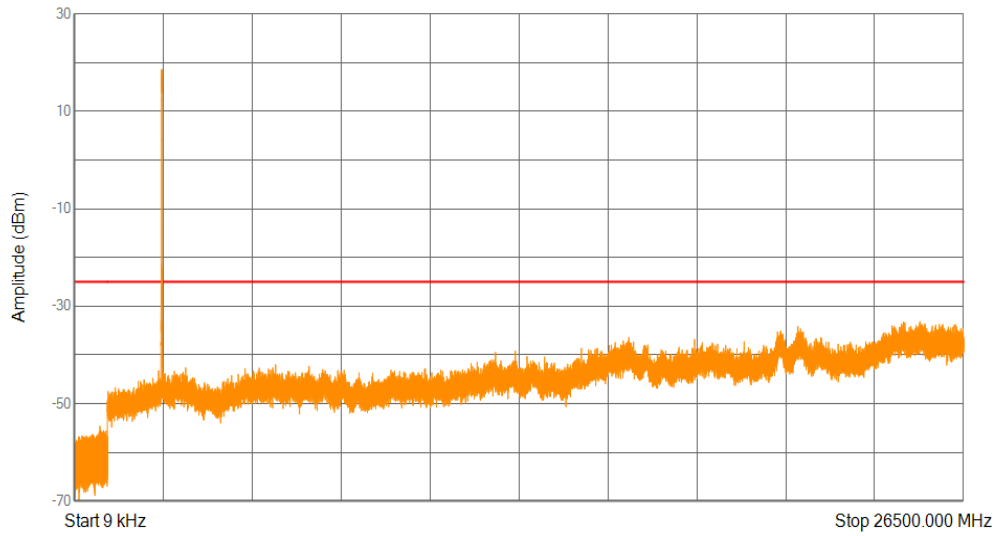


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011894025     | -51.12           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -53.52           | -25         |
| 3     | 30          | 1000       | 100       | 776.706         | -54.66           | -25         |
| 4     | 1000        | 26500      | 1000      | 25200.1375      | -33.17           | -25         |

Band38 QPSK BW=15MHz Channel=37825 RB Size=75 Position=#0

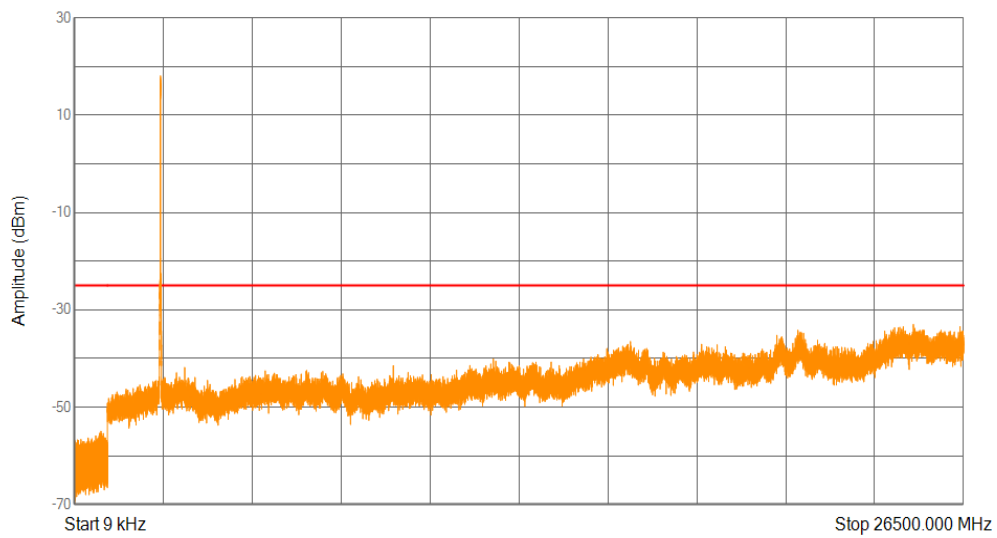


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01005045      | -52.91           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15522375      | -52.85           | -25         |
| 3     | 30          | 1000       | 100       | 806.21825       | -54.96           | -25         |
| 4     | 1000        | 26500      | 1000      | 25005.7         | -33.01           | -25         |

Band38 QPSK BW=15MHz Channel=38000 RB Size=75 Position=#0

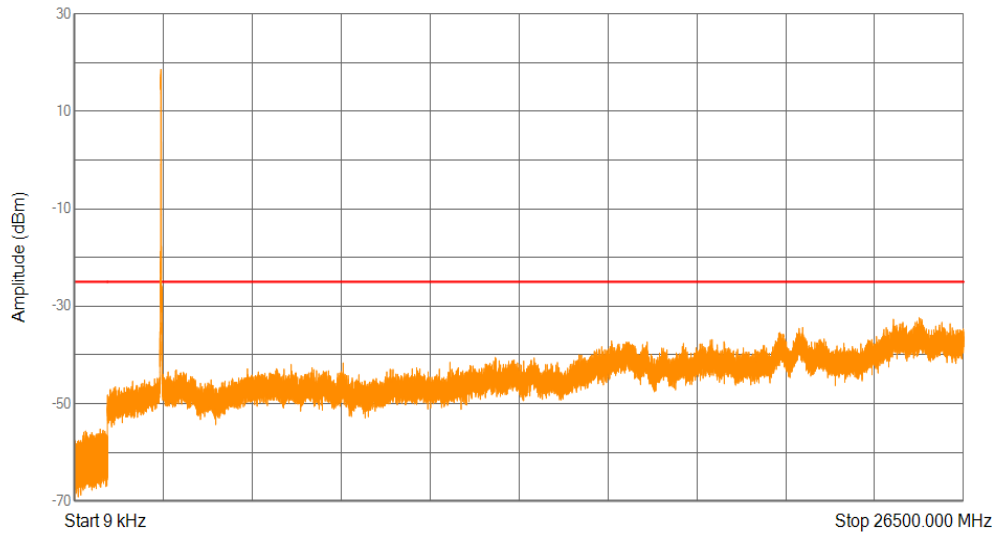


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0093384       | -51.66           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1694025       | -51.81           | -25         |
| 3     | 30          | 1000       | 100       | 784.05375       | -55.24           | -25         |
| 4     | 1000        | 26500      | 1000      | 25177.1875      | -32.4            | -25         |

Band38 QPSK BW=15MHz Channel=38175 RB Size=75 Position=#0

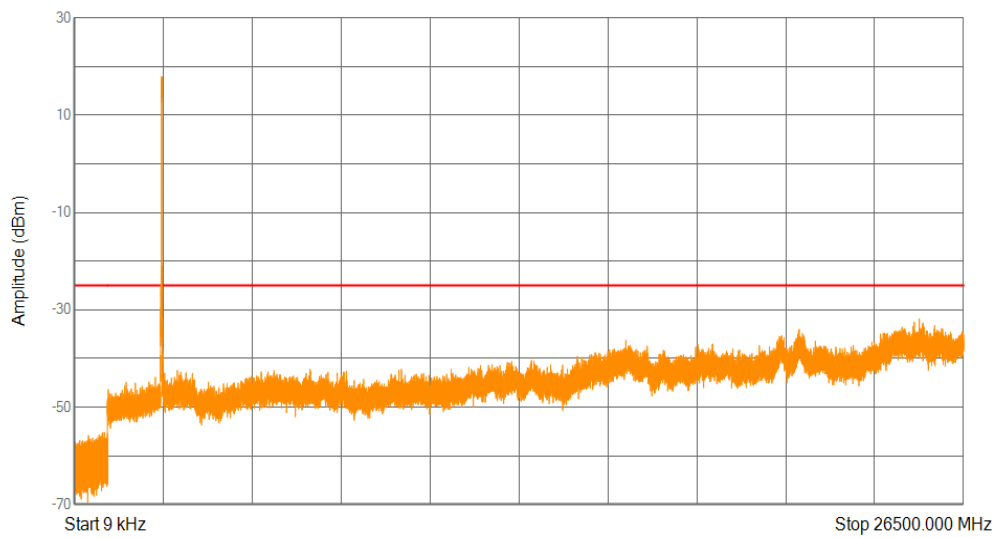


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011019825     | -51.13           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15671625      | -53.12           | -25         |
| 3     | 30          | 1000       | 100       | 863.64225       | -55.23           | -25         |
| 4     | 1000        | 26500      | 1000      | 25178.4625      | -31.88           | -25         |

Band38 QPSK BW=20MHz Channel=37850 RB Size=100 Position=#0

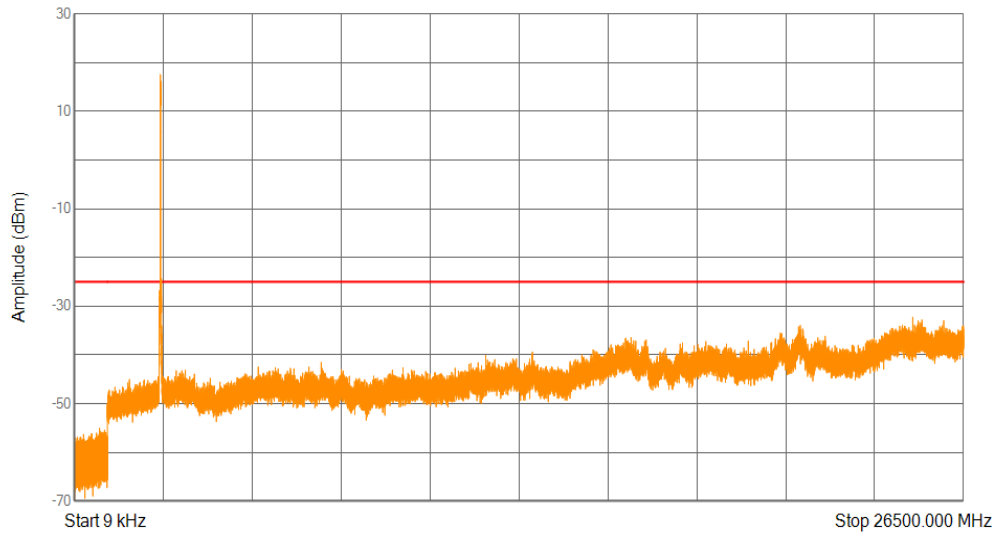


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009313725     | -50.56           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1634325       | -53.06           | -25         |
| 3     | 30          | 1000       | 100       | 764.4355        | -55.07           | -25         |
| 4     | 1000        | 26500      | 1000      | 24987.2125      | -32.26           | -25         |

Band38 QPSK BW=20MHz Channel=38000 RB Size=100 Position=#0

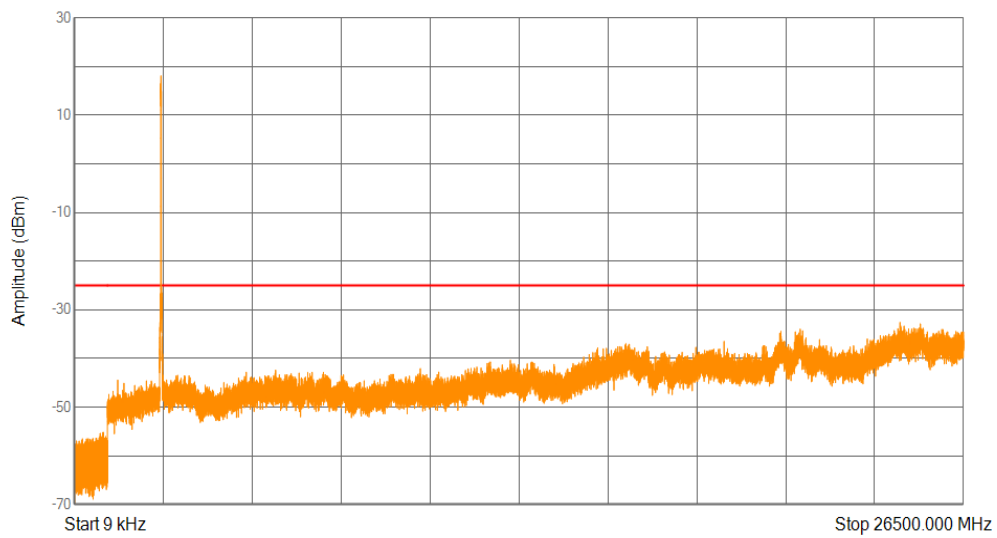


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01052985      | -50.87           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1574625       | -51              | -25         |
| 3     | 30          | 1000       | 100       | 873.73025       | -55.16           | -25         |
| 4     | 1000        | 26500      | 1000      | 24606.625       | -32.59           | -25         |

Band38 QPSK BW=20MHz Channel=38150 RB Size=100 Position=#0

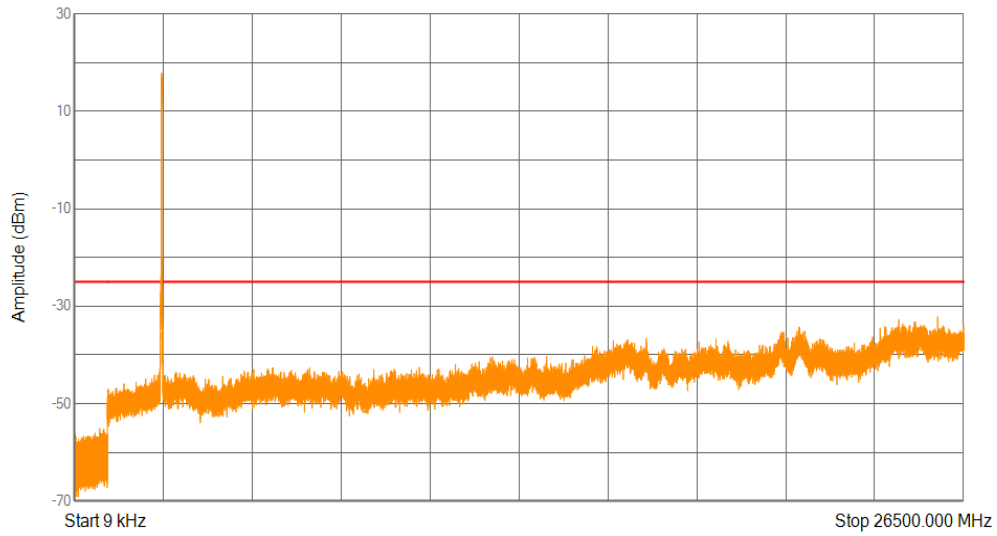


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -51.03           | -25         |
| 2     | 0.15        | 30         | 10        | 0.16119375      | -54.98           | -25         |
| 3     | 30          | 1000       | 100       | 770.498         | -55.11           | -25         |
| 4     | 1000        | 26500      | 1000      | 25727.9875      | -32.2            | -25         |

Band38 QPSK BW=5MHz Channel=37775 RB Size=25 Position=#0

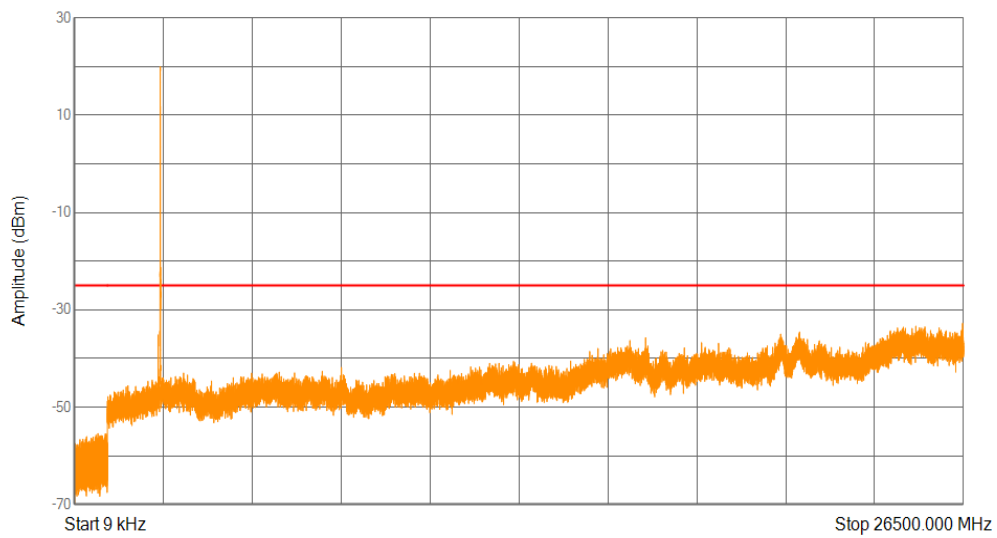


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01045935      | -49.49           | -25         |
| 2     | 0.15        | 30         | 10        | 0.16417875      | -52.54           | -25         |
| 3     | 30          | 1000       | 100       | 716.97825       | -55.45           | -25         |
| 4     | 1000        | 26500      | 1000      | 26470.675       | -32.8            | -25         |

Band38 QPSK BW=5MHz Channel=38000 RB Size=25 Position=#0

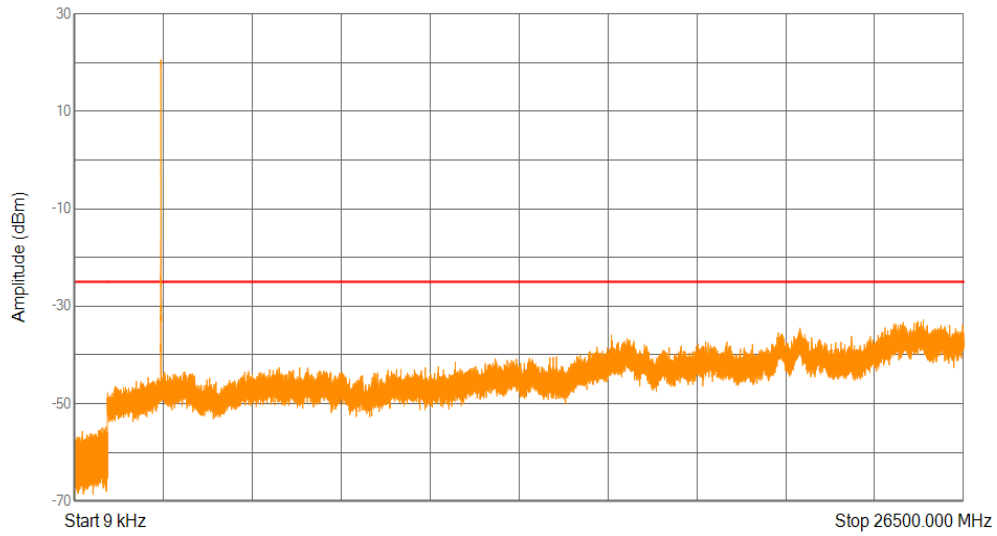


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009193875     | -51.86           | -25         |
| 2     | 0.15        | 30         | 10        | 0.16791         | -52.49           | -25         |
| 3     | 30          | 1000       | 100       | 956.66525       | -54.82           | -25         |
| 4     | 1000        | 26500      | 1000      | 25300.225       | -32.77           | -25         |

Band38 QPSK BW=5MHz Channel=38225 RB Size=25 Position=#0

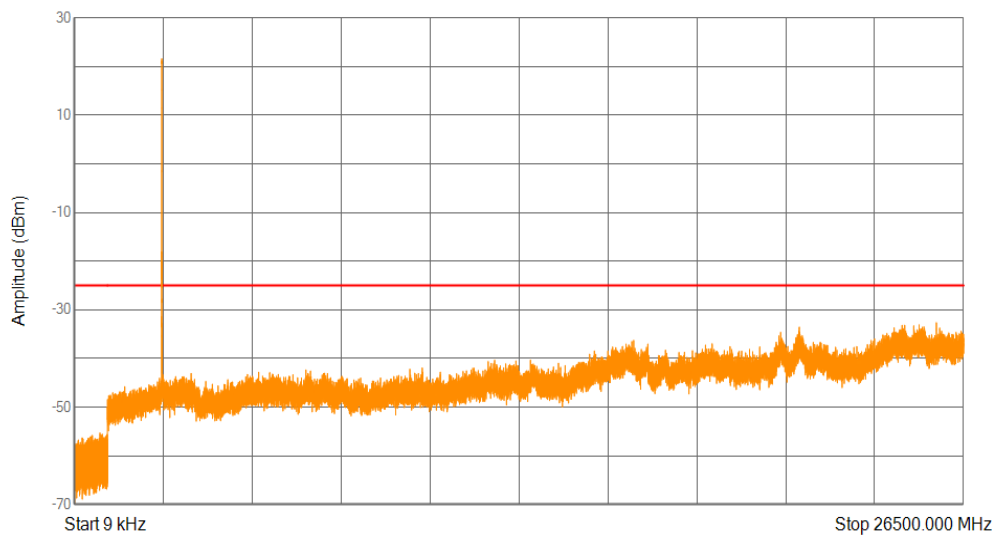


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009405375     | -51.68           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15            | -51.6            | -25         |
| 3     | 30          | 1000       | 100       | 777.385         | -55.32           | -25         |
| 4     | 1000        | 26500      | 1000      | 25689.7375      | -32.66           | -25         |

Band4 16QAM BW=1.4MHz Channel=19957 RB Size=6 Position=#0

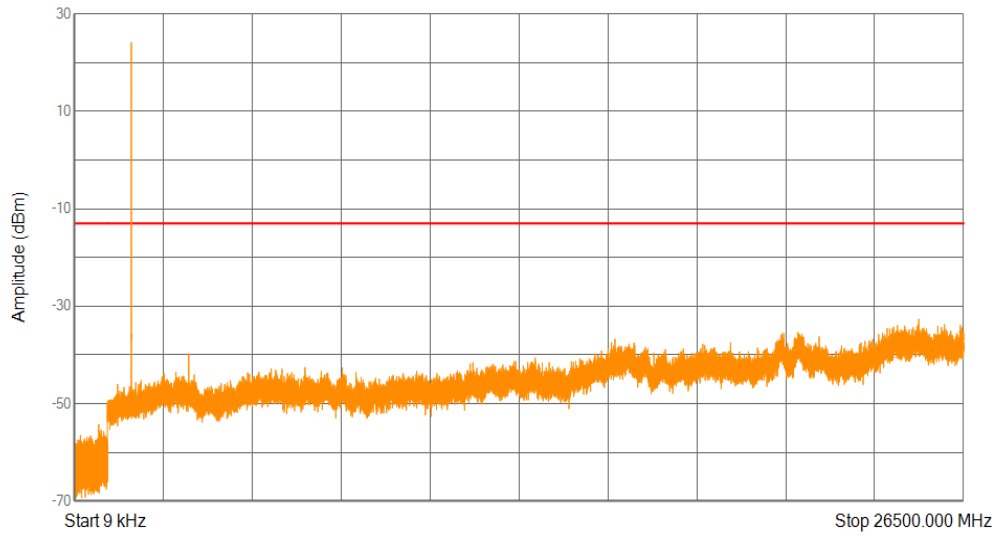


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01119255      | -52.57           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.32           | -13         |
| 3     | 30          | 1000       | 100       | 742.174         | -54.3            | -13         |
| 4     | 1000        | 26500      | 1000      | 25163.1625      | -32.66           | -13         |

Band4 16QAM BW=1.4MHz Channel=20175 RB Size=6 Position=#0

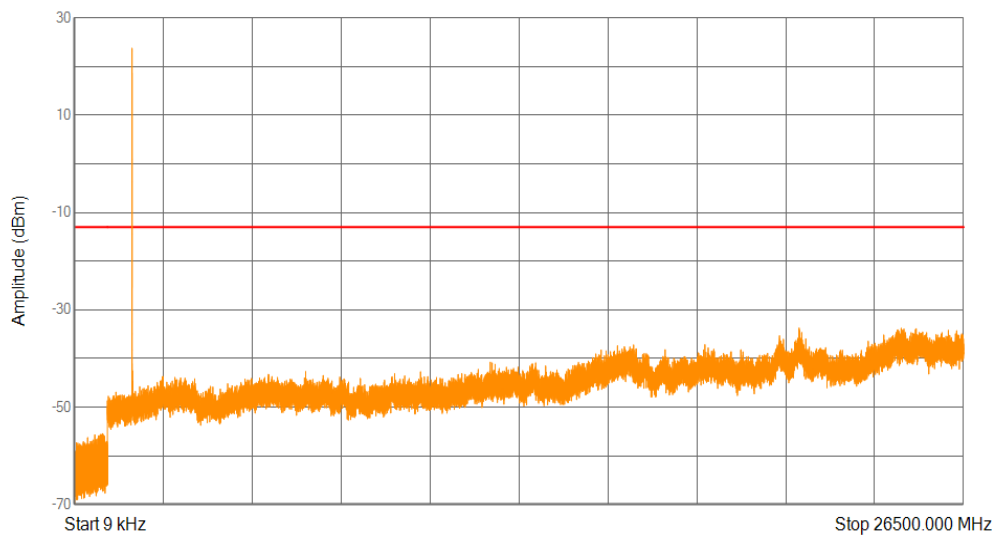


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009299625     | -52.27           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -54.85           | -13         |
| 3     | 30          | 1000       | 100       | 858.40425       | -55.45           | -13         |
| 4     | 1000        | 26500      | 1000      | 21600.8125      | -33.76           | -13         |

Band4 16QAM BW=1.4MHz Channel=20393 RB Size=6 Position=#0

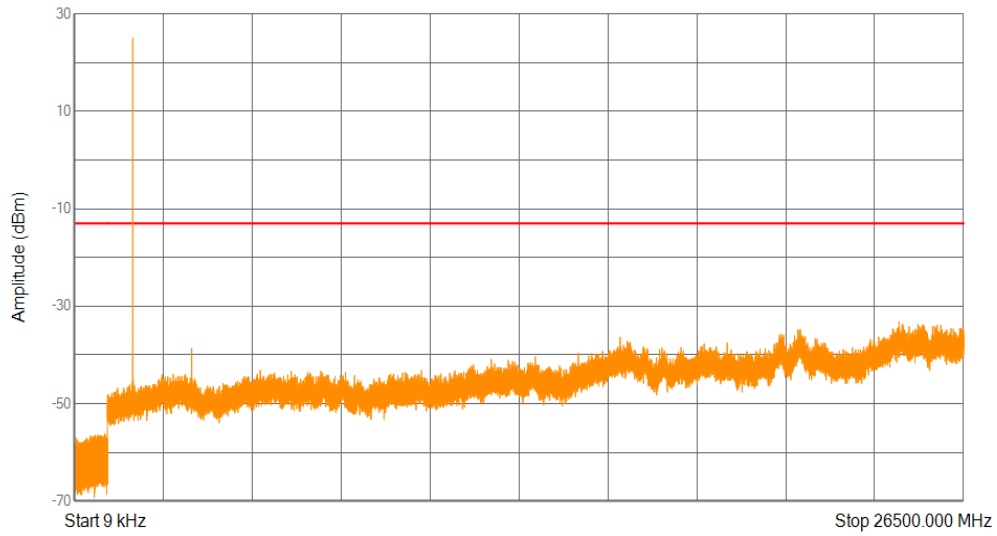


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009052875     | -53.28           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1514925       | -52.23           | -13         |
| 3     | 30          | 1000       | 100       | 923.24875       | -56.24           | -13         |
| 4     | 1000        | 26500      | 1000      | 24580.4875      | -33.19           | -13         |

Band4 16QAM BW=10MHz Channel=20000 RB Size=50 Position=#0

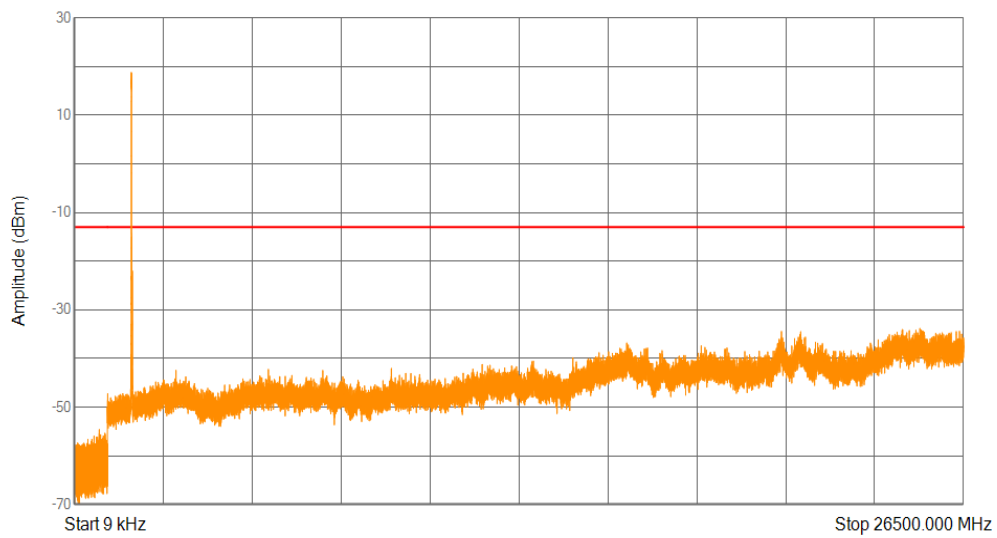


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.012415725     | -52.27           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1574625       | -52.56           | -13         |
| 3     | 30          | 1000       | 100       | 759.12475       | -54.61           | -13         |
| 4     | 1000        | 26500      | 1000      | 25198.8625      | -33.83           | -13         |

Band4 16QAM BW=10MHz Channel=20175 RB Size=50 Position=#0

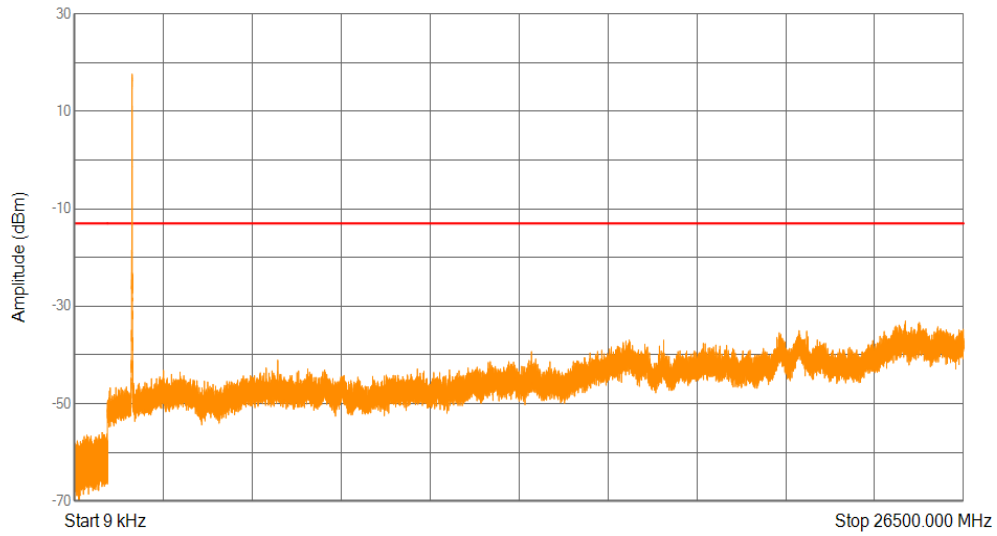


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009356025     | -52              | -13         |
| 2     | 0.15        | 30         | 10        | 0.19701375      | -54.65           | -13         |
| 3     | 30          | 1000       | 100       | 842.78725       | -55.92           | -13         |
| 4     | 1000        | 26500      | 1000      | 24767.9125      | -33.05           | -13         |

Band4 16QAM BW=10MHz Channel=20350 RB Size=50 Position=#0

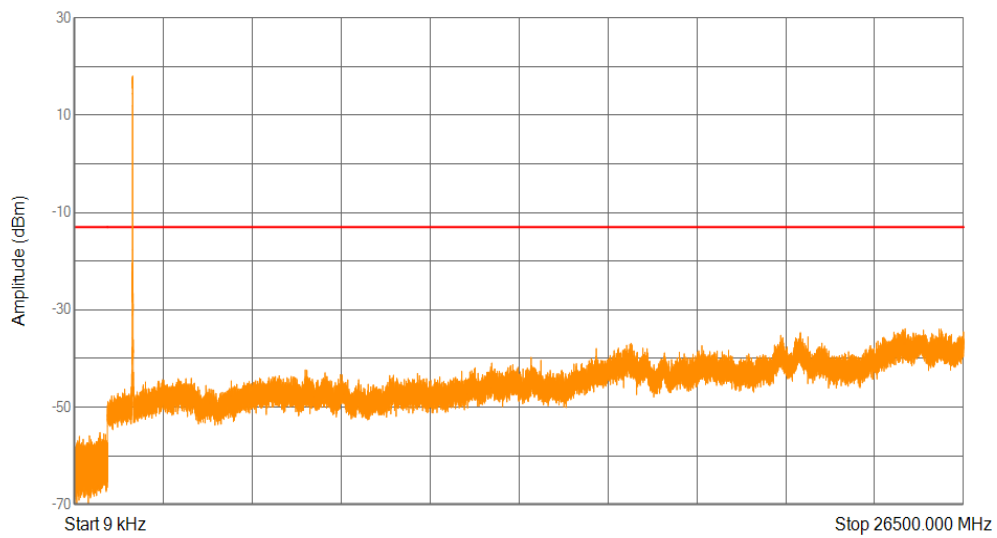


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0096768       | -50.77           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1514925       | -52.7            | -13         |
| 3     | 30          | 1000       | 100       | 778.13675       | -55.21           | -13         |
| 4     | 1000        | 26500      | 1000      | 24759.625       | -33.89           | -13         |

Band4 16QAM BW=15MHz Channel=20025 RB Size=75 Position=#0

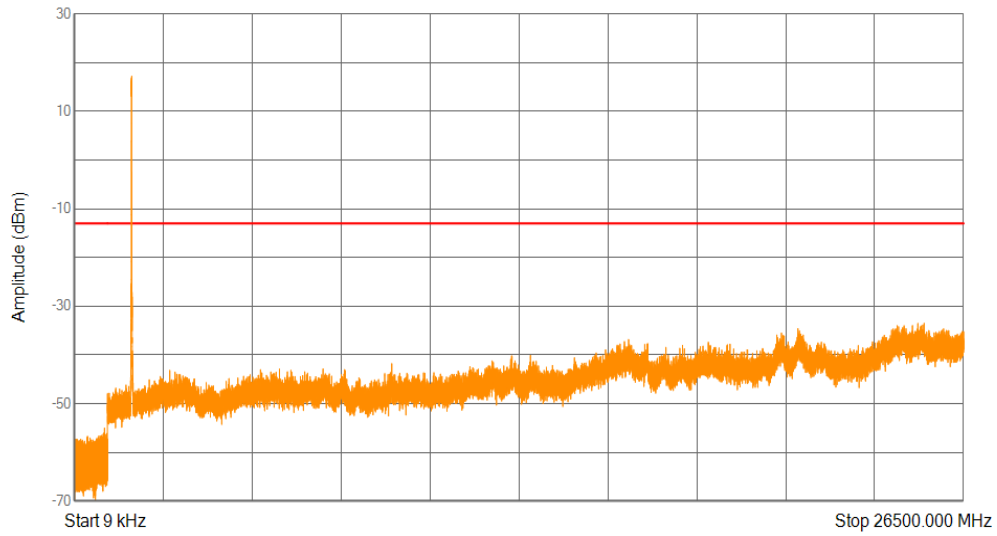


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010639125     | -51.09           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15970125      | -53.4            | -13         |
| 3     | 30          | 1000       | 100       | 912.72425       | -55.01           | -13         |
| 4     | 1000        | 26500      | 1000      | 25325.0875      | -33.52           | -13         |

Band4 16QAM BW=15MHz Channel=20175 RB Size=75 Position=#0

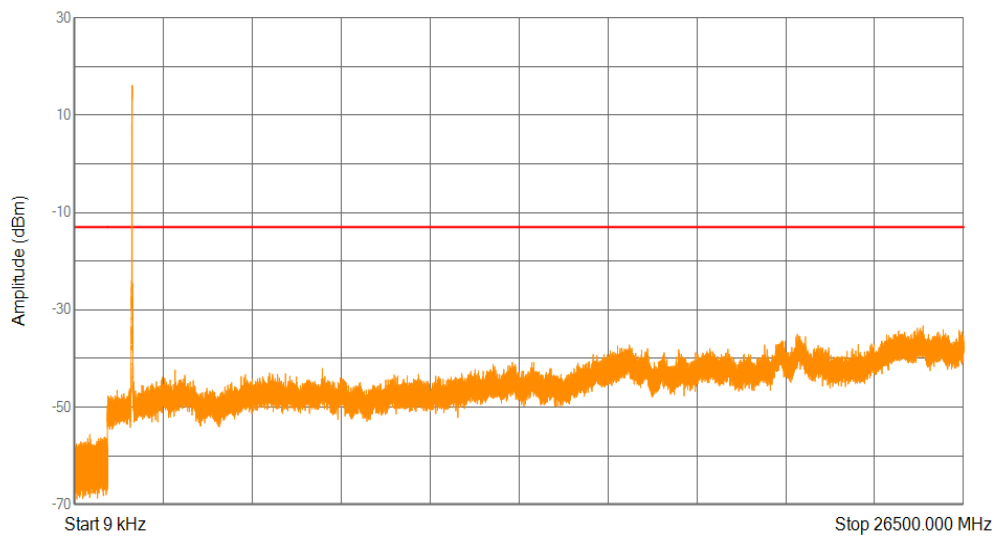


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01178475      | -51.37           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16268625      | -53.28           | -13         |
| 3     | 30          | 1000       | 100       | 476.1515        | -55.63           | -13         |
| 4     | 1000        | 26500      | 1000      | 25291.9375      | -33.31           | -13         |

Band4 16QAM BW=15MHz Channel=20325 RB Size=75 Position=#0

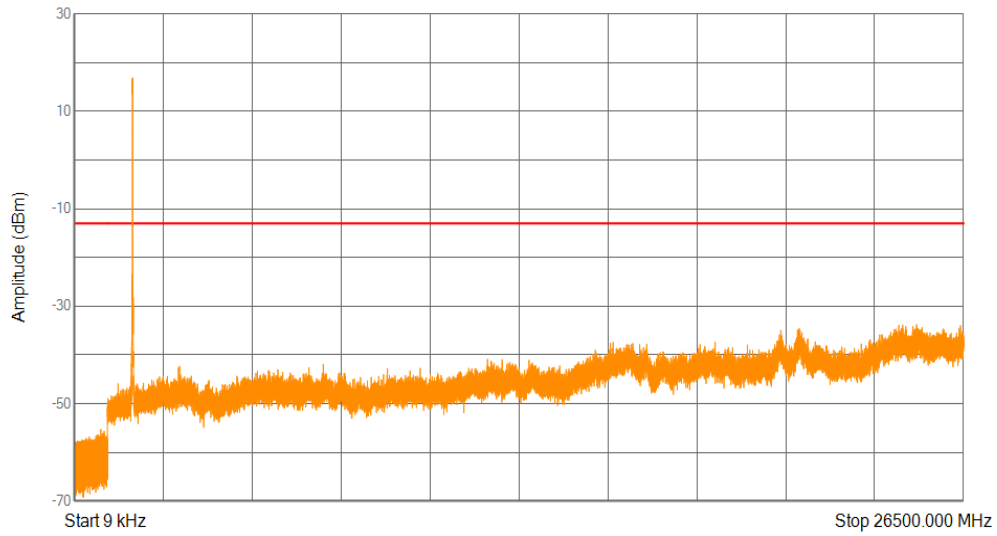


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.013480275     | -52.23           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.5            | -13         |
| 3     | 30          | 1000       | 100       | 803.50225       | -55.34           | -13         |
| 4     | 1000        | 26500      | 1000      | 25103.2375      | -33.78           | -13         |

Band4 16QAM BW=20MHz Channel=20050 RB Size=100 Position=#0

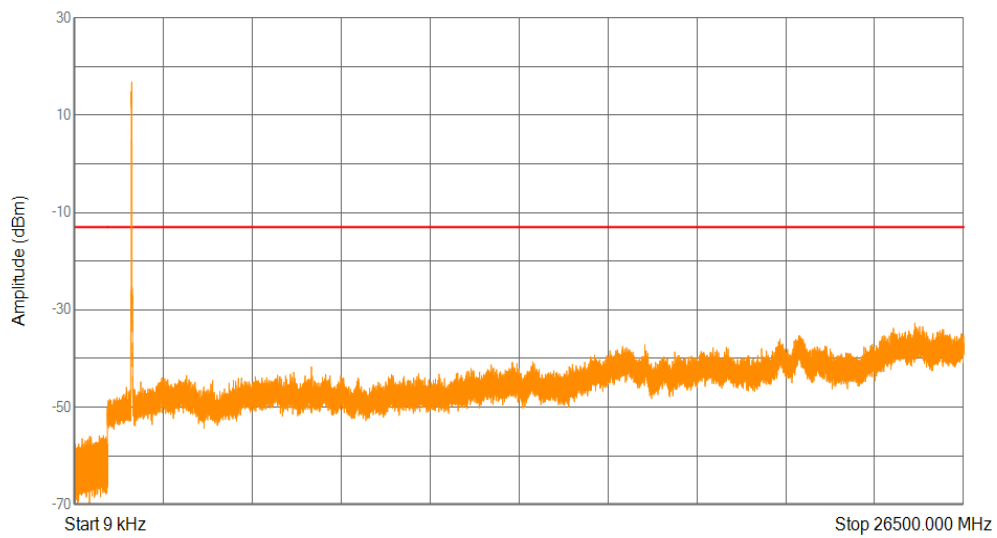


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01113615      | -51.76           | -13         |
| 2     | 0.15        | 30         | 10        | 0.158955        | -55.16           | -13         |
| 3     | 30          | 1000       | 100       | 881.05375       | -55.85           | -13         |
| 4     | 1000        | 26500      | 1000      | 25049.05        | -32.71           | -13         |

Band4 16QAM BW=20MHz Channel=20175 RB Size=100 Position=#0

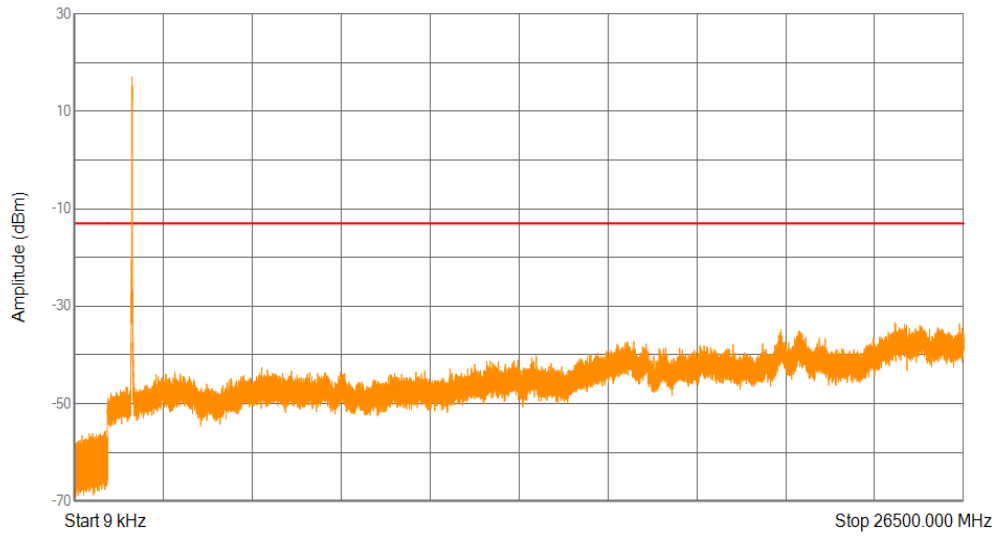


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011492175     | -53.08           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.2            | -13         |
| 3     | 30          | 1000       | 100       | 944.49175       | -55.65           | -13         |
| 4     | 1000        | 26500      | 1000      | 24453.625       | -33.37           | -13         |

Band4 16QAM BW=20MHz Channel=20300 RB Size=100 Position=#0

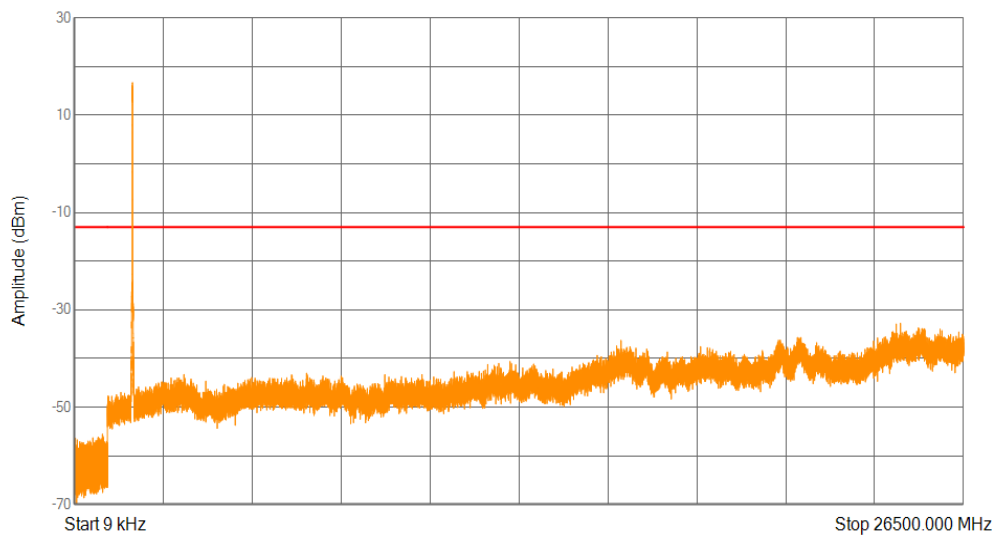


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009461775     | -51.6            | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -52.52           | -13         |
| 3     | 30          | 1000       | 100       | 851.17775       | -55.57           | -13         |
| 4     | 1000        | 26500      | 1000      | 24620.65        | -32.75           | -13         |

Band4 16QAM BW=3MHz Channel=19965 RB Size=15 Position=#0

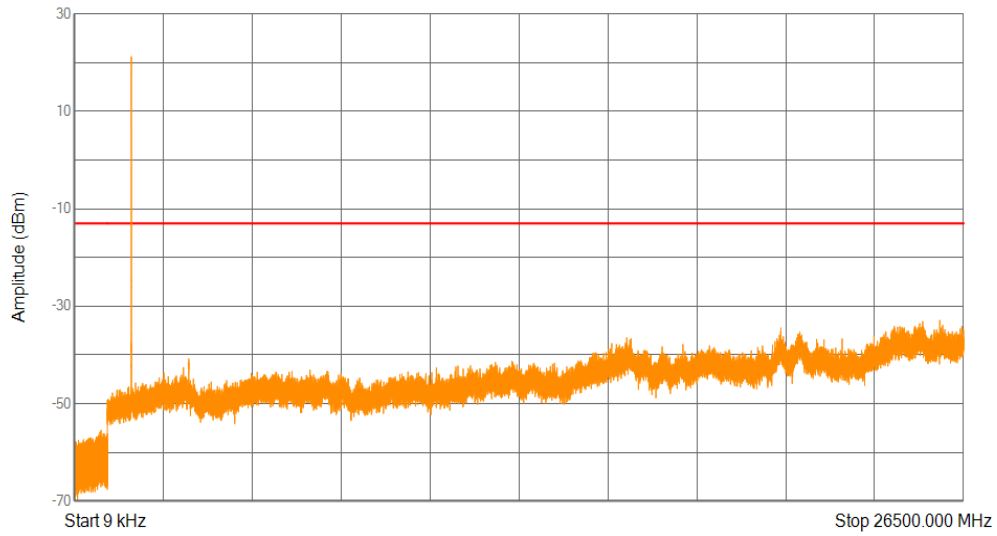


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01038885      | -50.14           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1694025       | -54.21           | -13         |
| 3     | 30          | 1000       | 100       | 809.0555        | -55.49           | -13         |
| 4     | 1000        | 26500      | 1000      | 25791.7375      | -32.89           | -13         |

Band4 16QAM BW=3MHz Channel=20175 RB Size=15 Position=#0

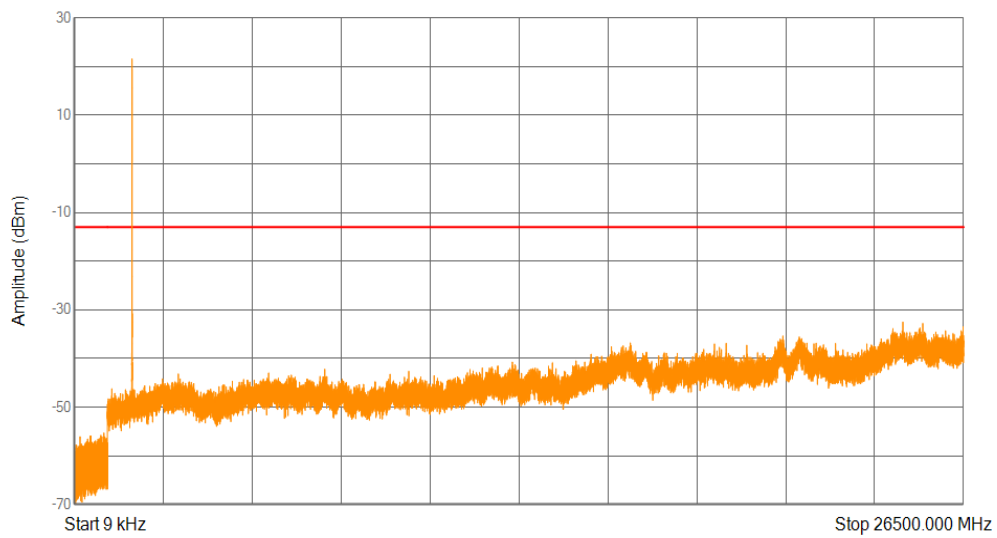


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010998675     | -49.95           | -13         |
| 2     | 0.15        | 30         | 10        | 0.152985        | -53.35           | -13         |
| 3     | 30          | 1000       | 100       | 894.48825       | -55.33           | -13         |
| 4     | 1000        | 26500      | 1000      | 24692.05        | -32.52           | -13         |

Band4 16QAM BW=3MHz Channel=20385 RB Size=15 Position=#0

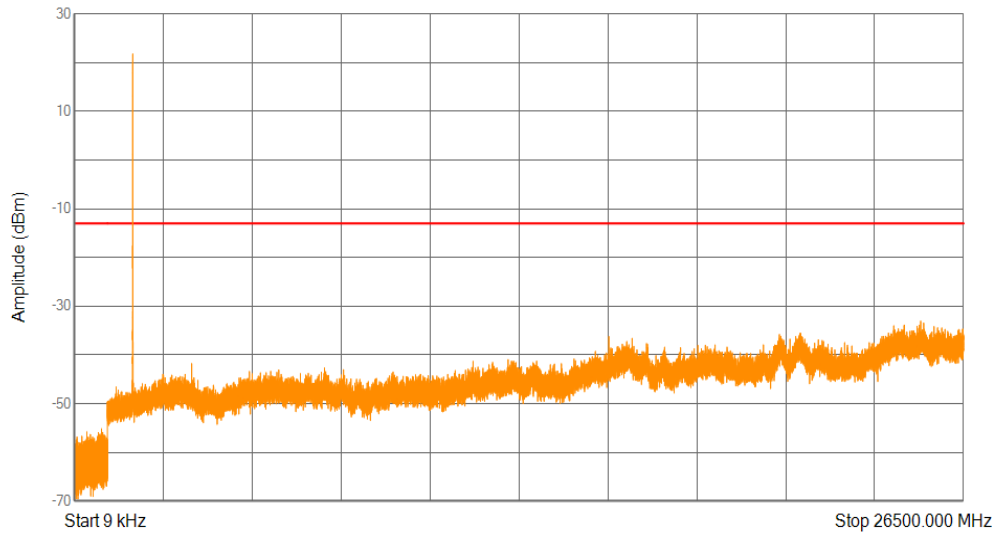


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0118341       | -52.47           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -51.57           | -13         |
| 3     | 30          | 1000       | 100       | 823.7995        | -55.15           | -13         |
| 4     | 1000        | 26500      | 1000      | 25221.8125      | -33.07           | -13         |

Band4 16QAM BW=5MHz Channel=19975 RB Size=25 Position=#0

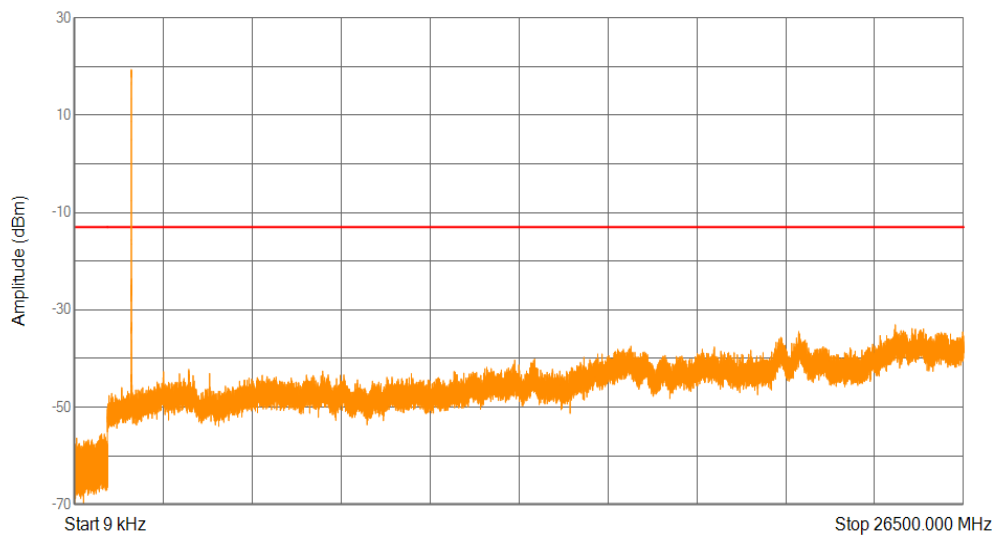


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00971205      | -51.87           | -13         |
| 2     | 0.15        | 30         | 10        | 0.17388         | -53.95           | -13         |
| 3     | 30          | 1000       | 100       | 827.922         | -55.55           | -13         |
| 4     | 1000        | 26500      | 1000      | 24466.375       | -33.09           | -13         |

Band4 16QAM BW=5MHz Channel=20175 RB Size=25 Position=#0

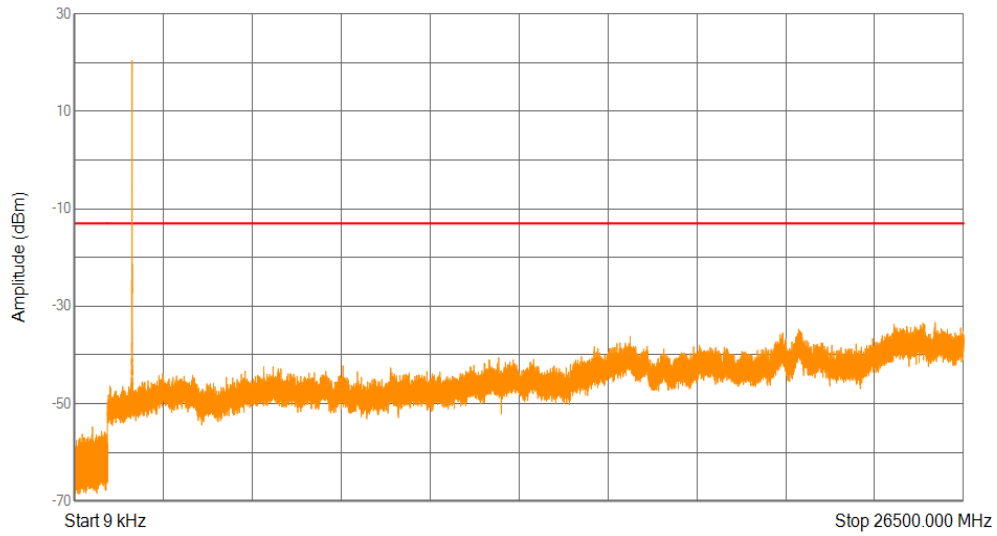


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00995175      | -49.86           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15970125      | -52.64           | -13         |
| 3     | 30          | 1000       | 100       | 553.8485        | -54.78           | -13         |
| 4     | 1000        | 26500      | 1000      | 25654.675       | -33.35           | -13         |

Band4 16QAM BW=5MHz Channel=20375 RB Size=25 Position=#0

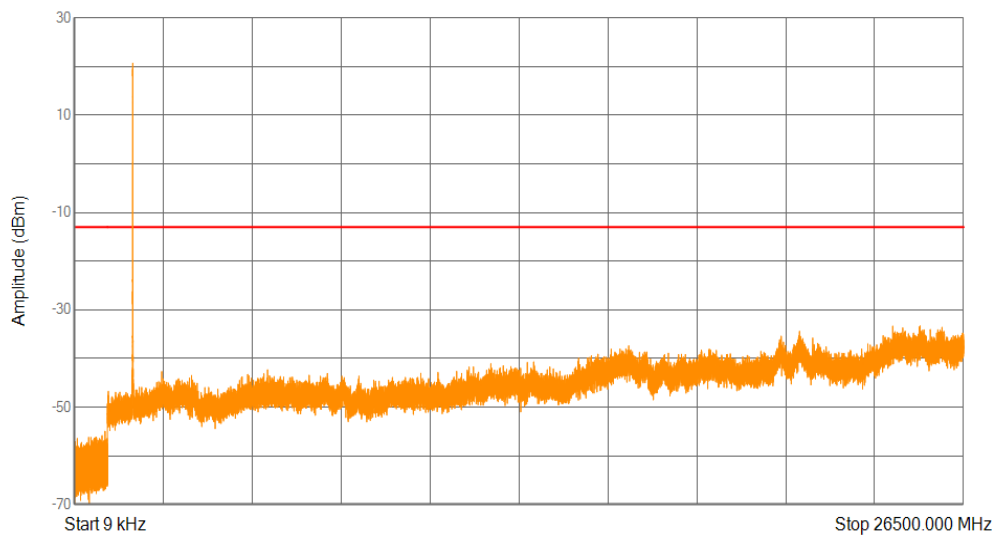


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01041         | -50.09           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15970125      | -55.79           | -13         |
| 3     | 30          | 1000       | 100       | 928.414         | -54.96           | -13         |
| 4     | 1000        | 26500      | 1000      | 25207.7875      | -33.31           | -13         |

Band4 QPSK BW=1.4MHz Channel=19957 RB Size=6 Position=#0

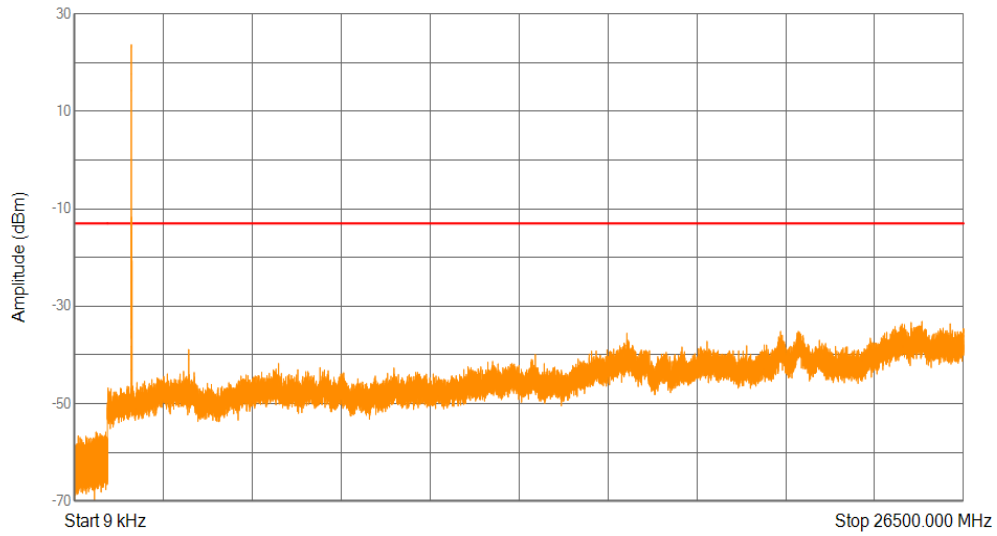


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011668425     | -52.05           | -13         |
| 2     | 0.15        | 30         | 10        | 0.158955        | -55.38           | -13         |
| 3     | 30          | 1000       | 100       | 661.05775       | -55.81           | -13         |
| 4     | 1000        | 26500      | 1000      | 25260.7         | -33.12           | -13         |

Band4 QPSK BW=1.4MHz Channel=20175 RB Size=6 Position=#0

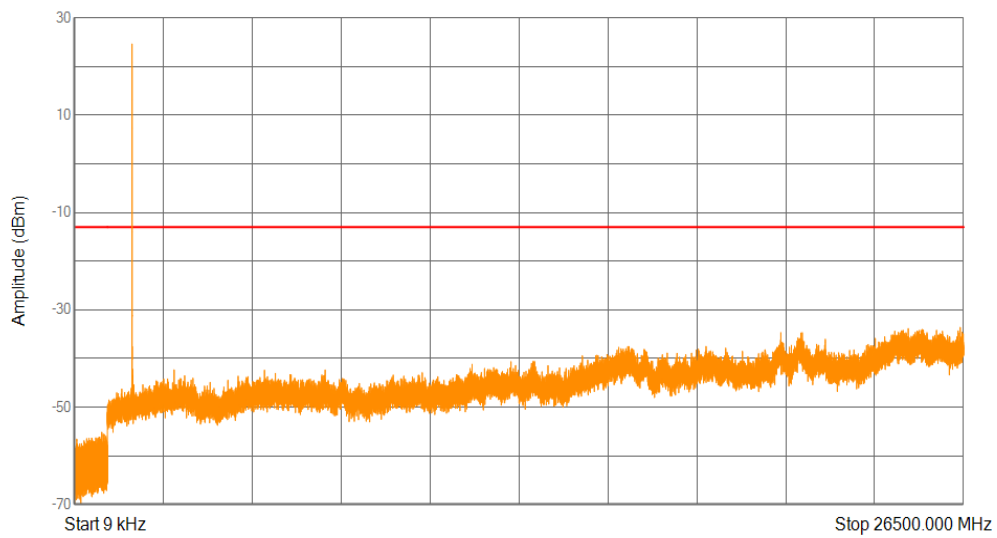


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -49.89           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -55.56           | -13         |
| 3     | 30          | 1000       | 100       | 832.02025       | -55.16           | -13         |
| 4     | 1000        | 26500      | 1000      | 26398.6375      | -33.62           | -13         |

Band4 QPSK BW=1.4MHz Channel=20393 RB Size=6 Position=#0

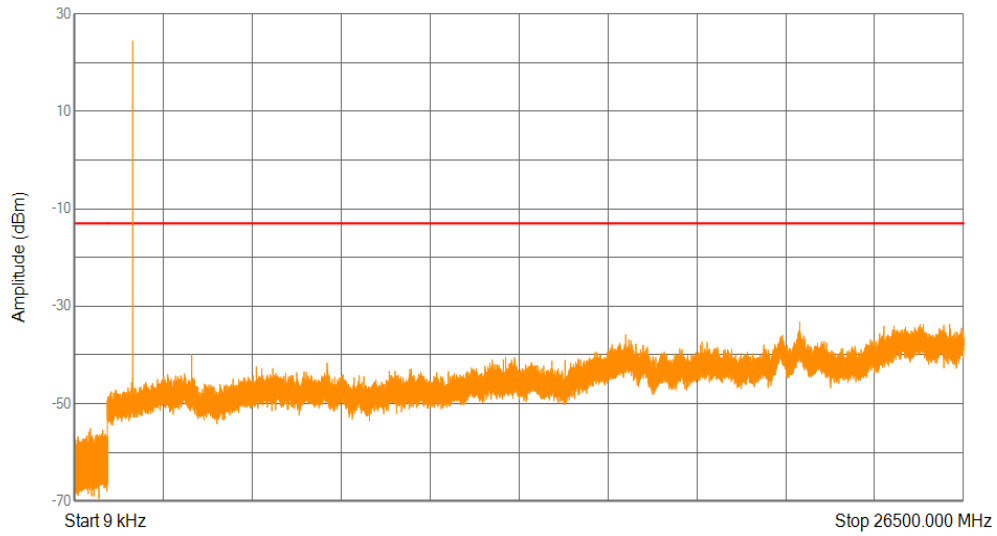


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009708525     | -52.81           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1604475       | -52.95           | -13         |
| 3     | 30          | 1000       | 100       | 490.75          | -55.09           | -13         |
| 4     | 1000        | 26500      | 1000      | 21621.2125      | -33.23           | -13         |

Band4 QPSK BW=10MHz Channel=20000 RB Size=50 Position=#0

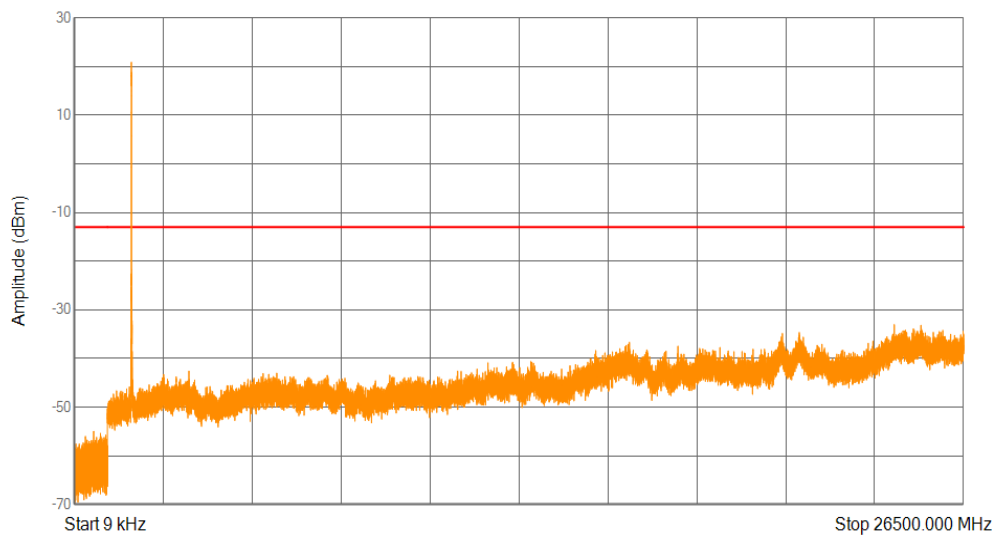


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00957105      | -51.08           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1783575       | -52.87           | -13         |
| 3     | 30          | 1000       | 100       | 590.87825       | -54.99           | -13         |
| 4     | 1000        | 26500      | 1000      | 24433.8625      | -33.05           | -13         |

Band4 QPSK BW=10MHz Channel=20175 RB Size=50 Position=#0

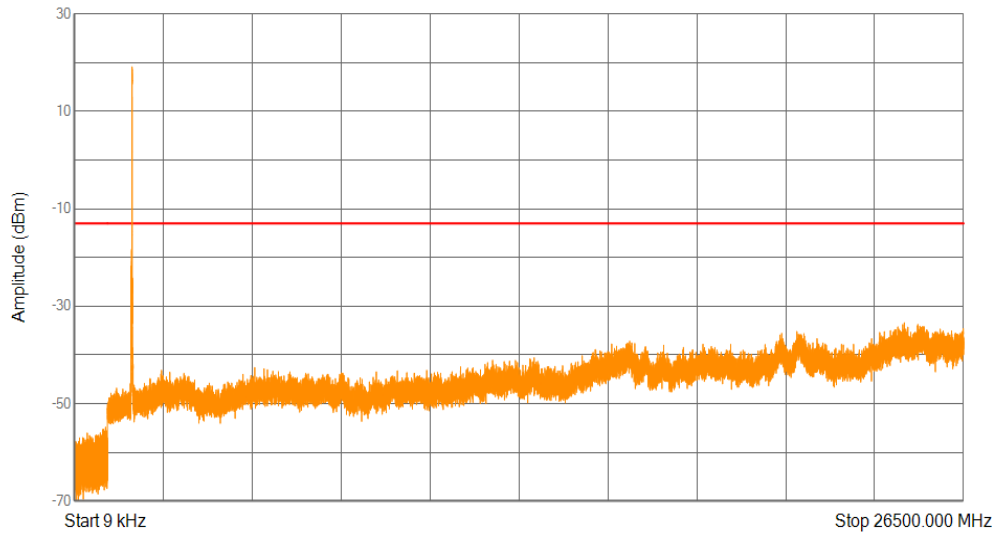


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -53.55           | -13         |
| 2     | 0.15        | 30         | 10        | 0.152985        | -53.78           | -13         |
| 3     | 30          | 1000       | 100       | 945.41325       | -54.84           | -13         |
| 4     | 1000        | 26500      | 1000      | 24736.675       | -33.4            | -13         |

Band4 QPSK BW=10MHz Channel=20350 RB Size=50 Position=#0

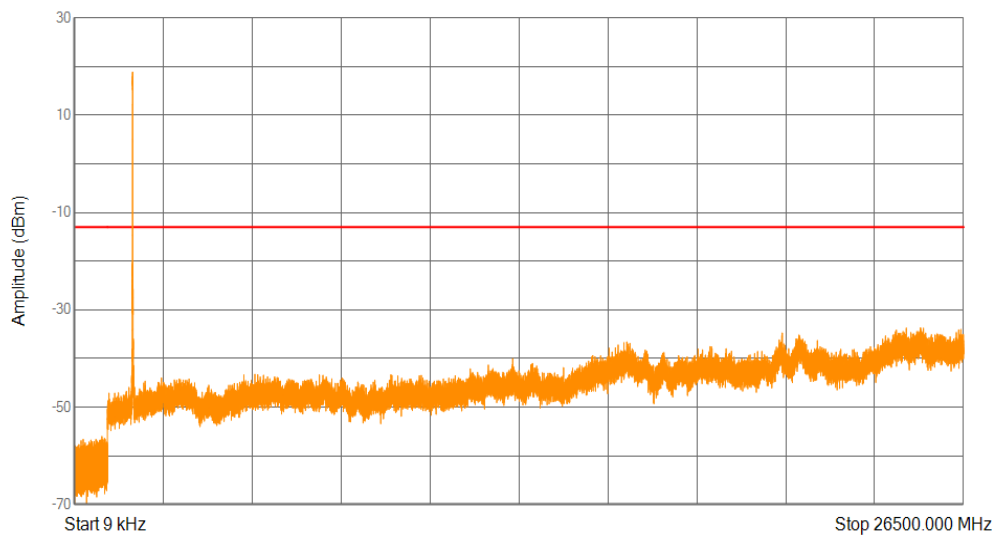


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009814275     | -50.21           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -55.33           | -13         |
| 3     | 30          | 1000       | 100       | 835.4395        | -56.03           | -13         |
| 4     | 1000        | 26500      | 1000      | 25218.625       | -33.68           | -13         |

Band4 QPSK BW=15MHz Channel=20025 RB Size=75 Position=#0

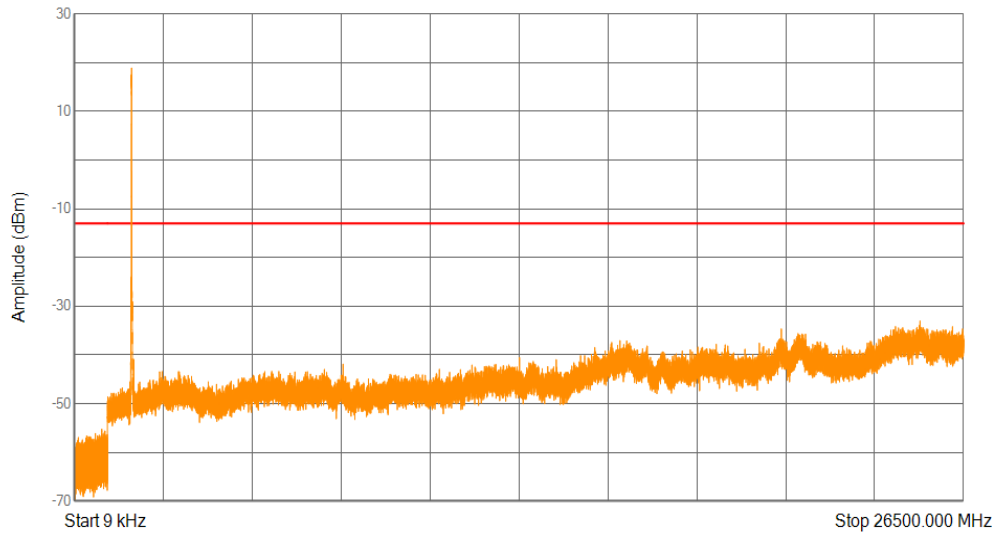


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010082175     | -50.94           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16268625      | -55.63           | -13         |
| 3     | 30          | 1000       | 100       | 833.23275       | -55.24           | -13         |
| 4     | 1000        | 26500      | 1000      | 25202.05        | -33.04           | -13         |

Band4 QPSK BW=15MHz Channel=20175 RB Size=75 Position=#0

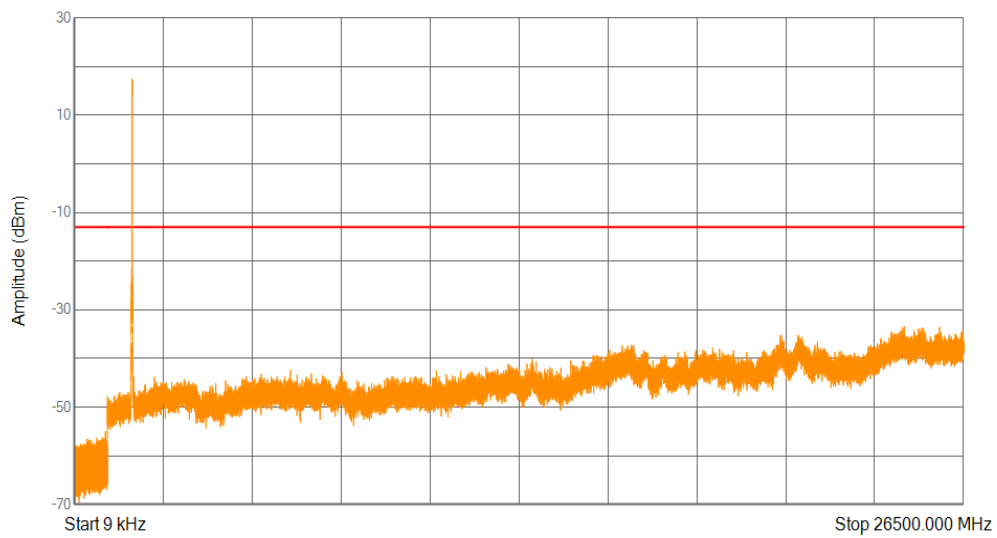


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0095358       | -50.45           | -13         |
| 2     | 0.15        | 30         | 10        | 0.1544775       | -54.05           | -13         |
| 3     | 30          | 1000       | 100       | 938.793         | -55.07           | -13         |
| 4     | 1000        | 26500      | 1000      | 24737.95        | -33.46           | -13         |

Band4 QPSK BW=15MHz Channel=20325 RB Size=75 Position=#0

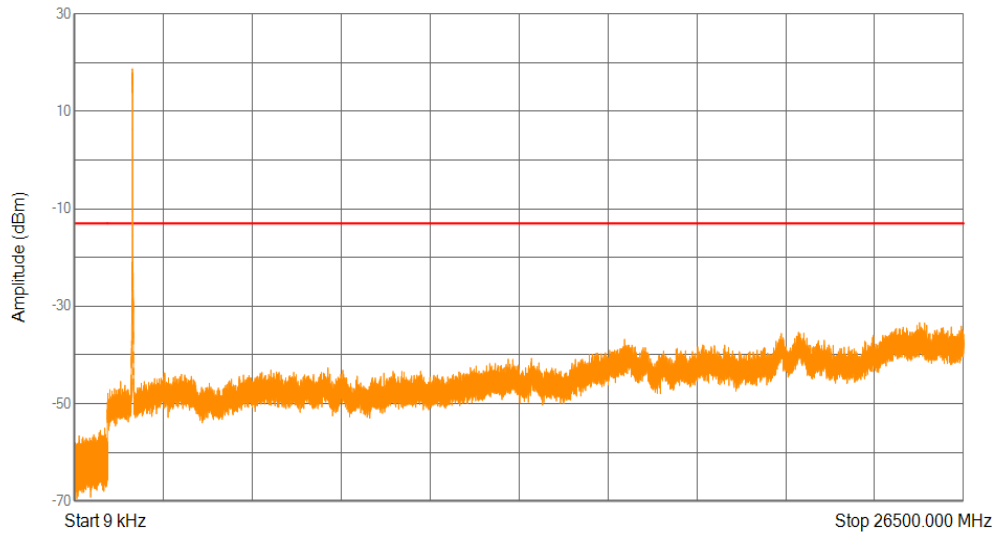


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01247565      | -51.18           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15970125      | -55.22           | -13         |
| 3     | 30          | 1000       | 100       | 920.04775       | -55.04           | -13         |
| 4     | 1000        | 26500      | 1000      | 25188.025       | -33.38           | -13         |

Band4 QPSK BW=20MHz Channel=20050 RB Size=100 Position=#0

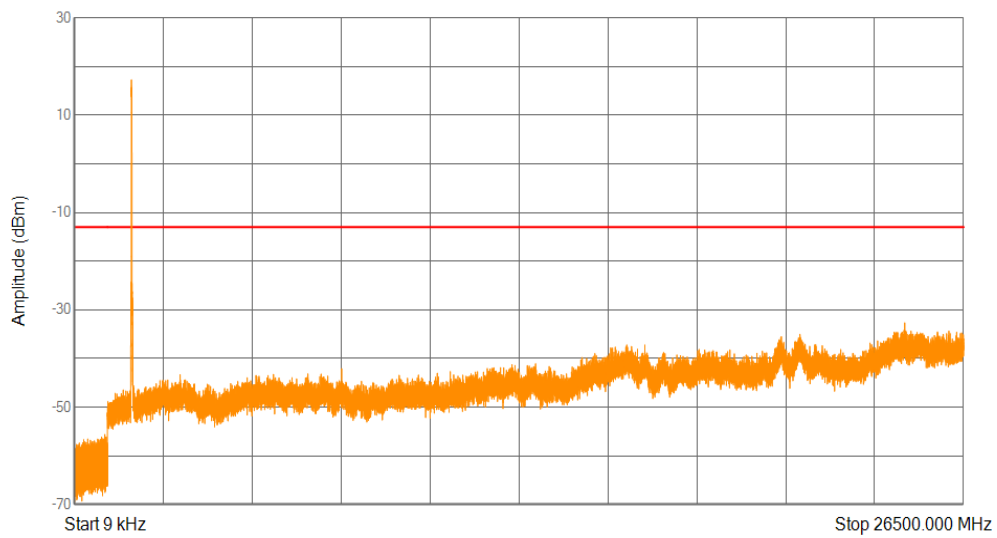


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009990525     | -52.66           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15597         | -53.08           | -13         |
| 3     | 30          | 1000       | 100       | 920.77525       | -55.63           | -13         |
| 4     | 1000        | 26500      | 1000      | 24748.15        | -32.68           | -13         |

Band4 QPSK BW=20MHz Channel=20175 RB Size=100 Position=#0

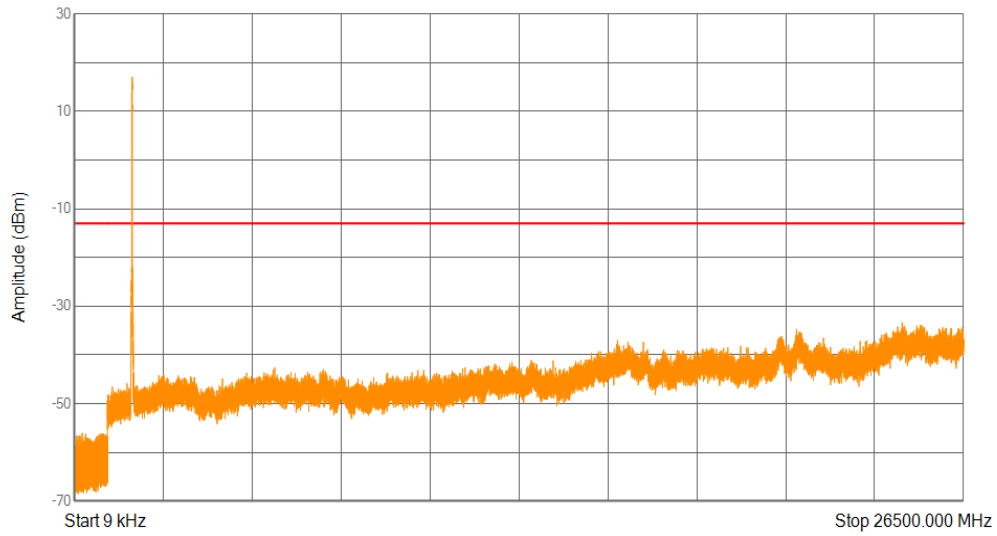


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00904935      | -50.38           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -55.82           | -13         |
| 3     | 30          | 1000       | 100       | 252.68775       | -56.09           | -13         |
| 4     | 1000        | 26500      | 1000      | 24671.0125      | -33.41           | -13         |

Band4 QPSK BW=20MHz Channel=20300 RB Size=100 Position=#0

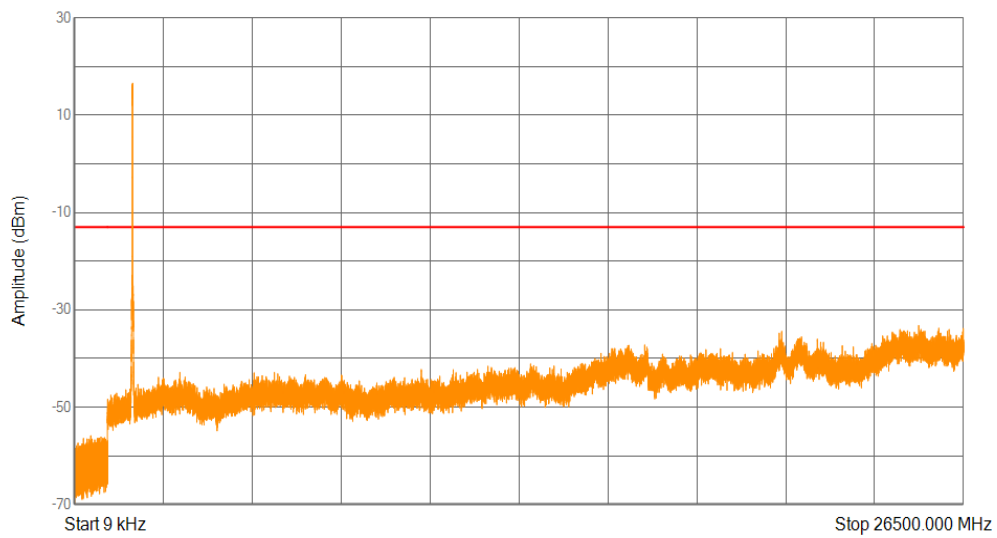


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009334875     | -50.73           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.84           | -13         |
| 3     | 30          | 1000       | 100       | 505.6395        | -55.88           | -13         |
| 4     | 1000        | 26500      | 1000      | 25164.4375      | -33.22           | -13         |

Band4 QPSK BW=3MHz Channel=19965 RB Size=15 Position=#0

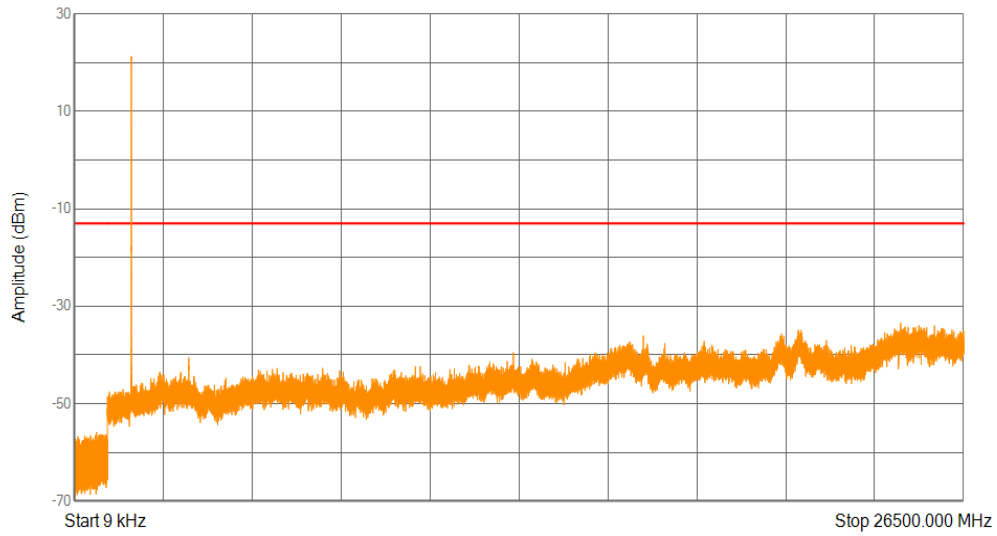


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010357125     | -50.83           | -13         |
| 2     | 0.15        | 30         | 10        | 0.152985        | -53.26           | -13         |
| 3     | 30          | 1000       | 100       | 675.244         | -55.89           | -13         |
| 4     | 1000        | 26500      | 1000      | 24627.025       | -33.43           | -13         |

Band4 QPSK BW=3MHz Channel=20175 RB Size=15 Position=#0

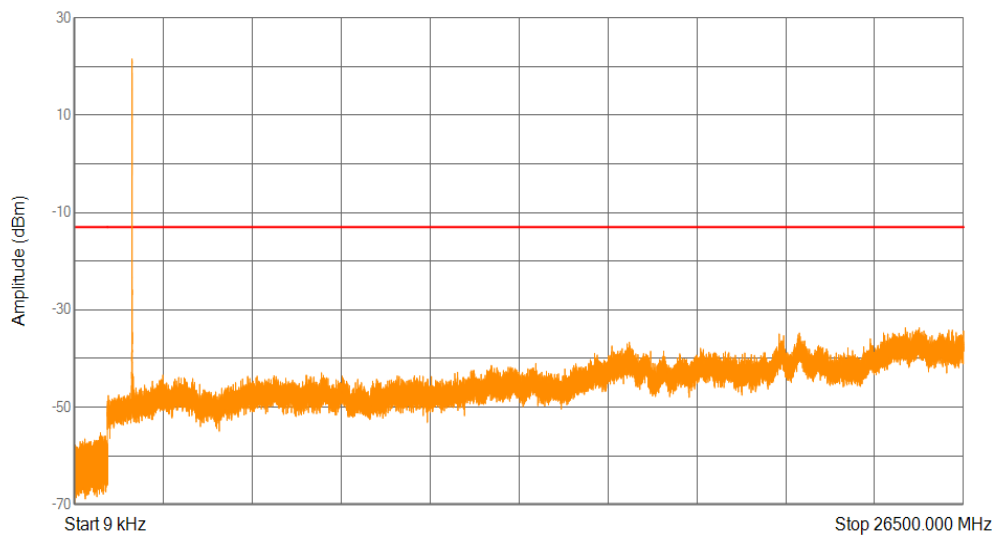


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010899975     | -52.13           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15            | -53.66           | -13         |
| 3     | 30          | 1000       | 100       | 794.09325       | -55.28           | -13         |
| 4     | 1000        | 26500      | 1000      | 24766           | -33.67           | -13         |

Band4 QPSK BW=3MHz Channel=20385 RB Size=15 Position=#0

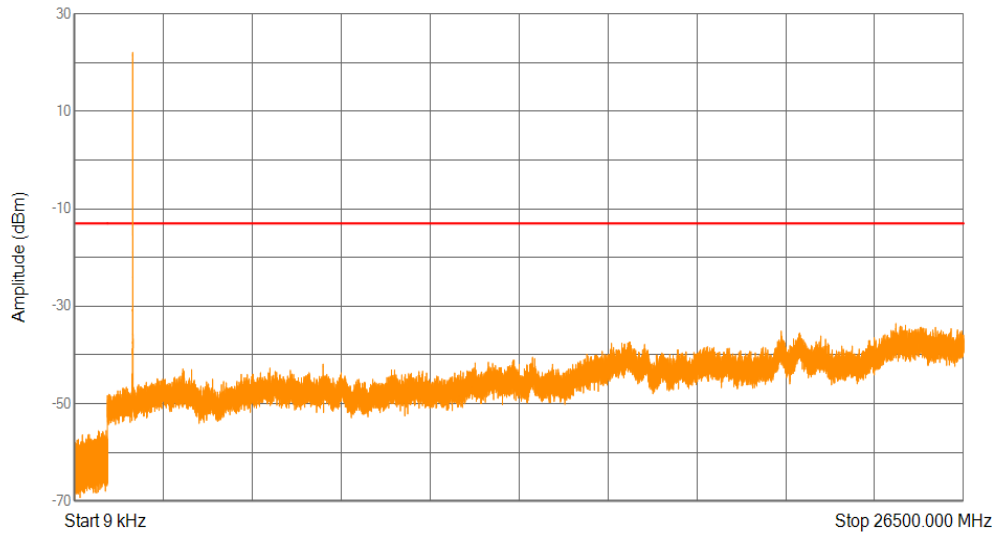


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01279995      | -52.34           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -52.82           | -13         |
| 3     | 30          | 1000       | 100       | 962.558         | -55.57           | -13         |
| 4     | 1000        | 26500      | 1000      | 24484.225       | -33.57           | -13         |

Band4 QPSK BW=5MHz Channel=19975 RB Size=25 Position=#0

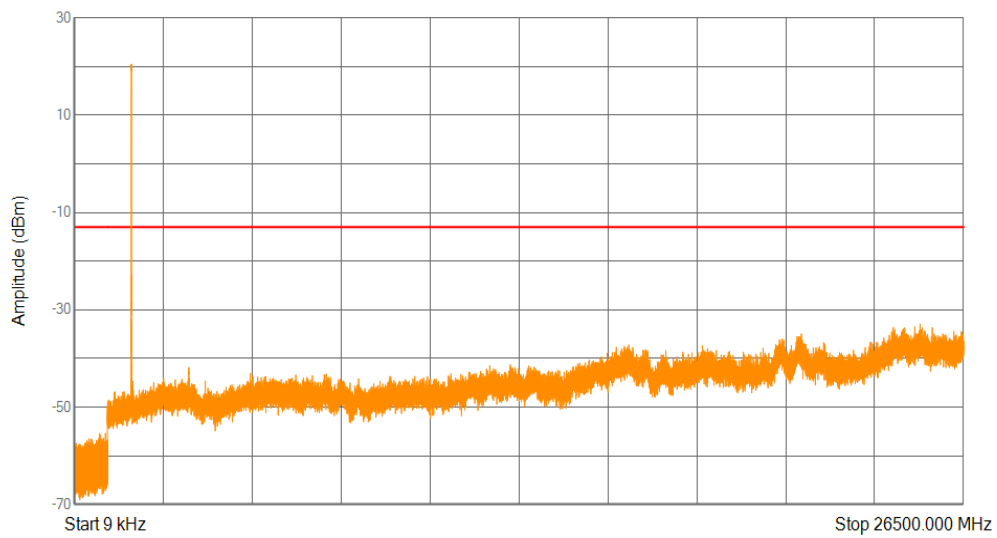


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -51.75           | -13         |
| 2     | 0.15        | 30         | 10        | 0.16567125      | -52.54           | -13         |
| 3     | 30          | 1000       | 100       | 940.8785        | -55.4            | -13         |
| 4     | 1000        | 26500      | 1000      | 25205.2375      | -32.94           | -13         |

Band4 QPSK BW=5MHz Channel=20175 RB Size=25 Position=#0

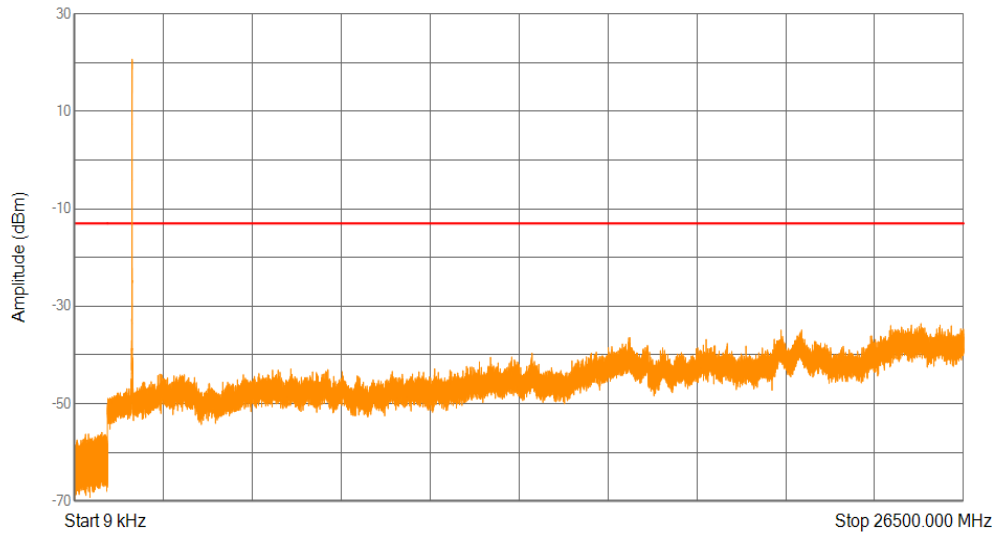


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009229125     | -53.12           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15223875      | -53.07           | -13         |
| 3     | 30          | 1000       | 100       | 835.02725       | -55.9            | -13         |
| 4     | 1000        | 26500      | 1000      | 25230.1         | -33.59           | -13         |

Band4 QPSK BW=5MHz Channel=20375 RB Size=25 Position=#0

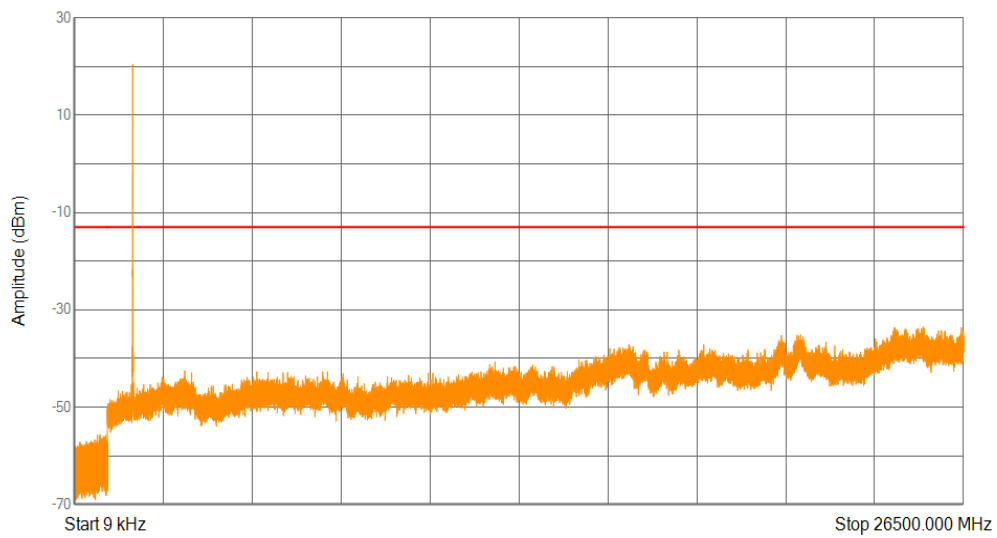


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -50.57           | -13         |
| 2     | 0.15        | 30         | 10        | 0.15223875      | -54.6            | -13         |
| 3     | 30          | 1000       | 100       | 778.08825       | -55.65           | -13         |
| 4     | 1000        | 26500      | 1000      | 25291.9375      | -33.52           | -13         |

Band40(2305-2315) 16QAM BW=10MHz Channel=38750 RB Size=50 Position=#0

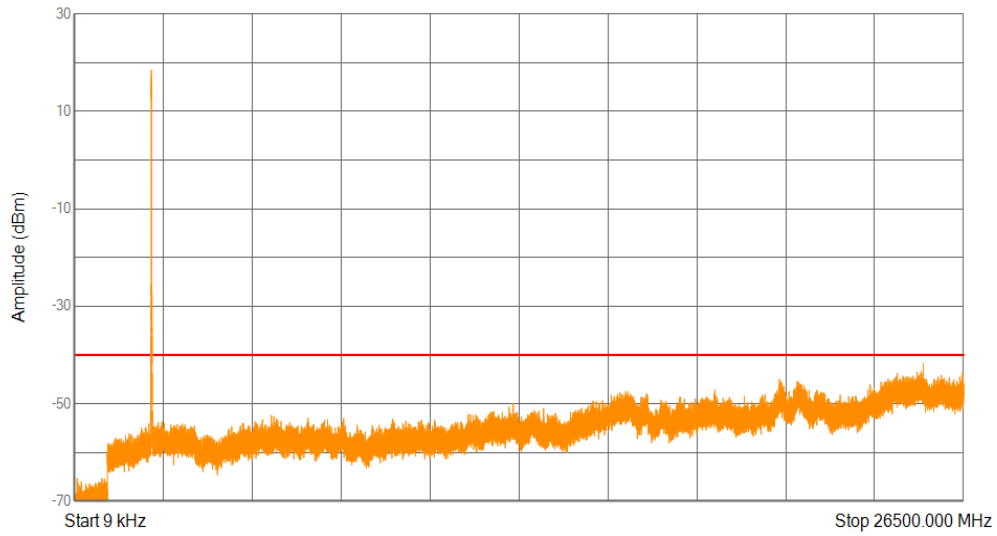


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009           | -61.53           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15            | -64.45           | -40         |
| 3     | 30          | 1000       | 100       | 835.94875       | -65.37           | -40         |
| 4     | 1000        | 26500      | 1000      | 25300.225       | -41.75           | -40         |

Band40(2305-2315) 16QAM BW=5MHz Channel=38725 RB Size=25 Position=#0

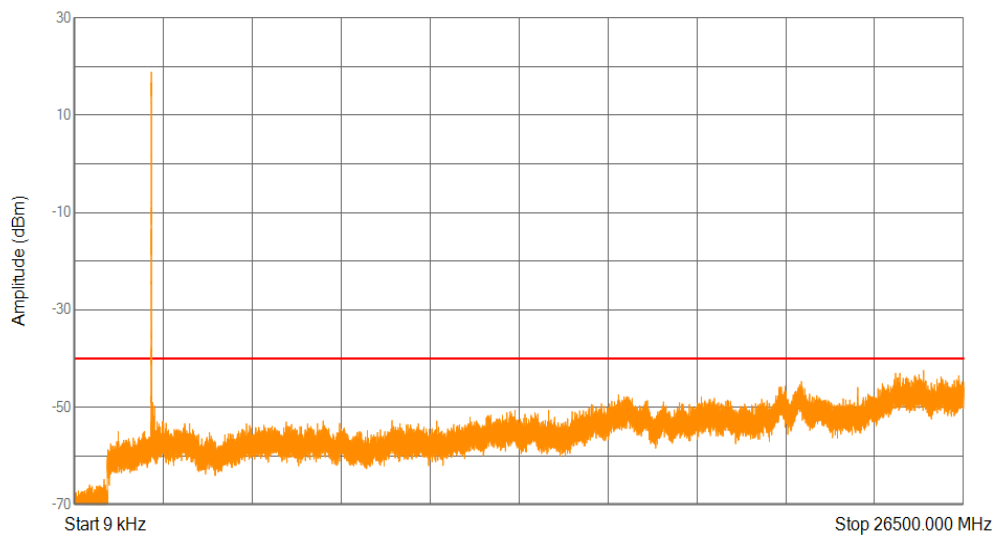


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009814275     | -60.86           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15597         | -61.11           | -40         |
| 3     | 30          | 1000       | 100       | 900.284         | -64.89           | -40         |
| 4     | 1000        | 26500      | 1000      | 25309.15        | -42.47           | -40         |

Band40(2305-2315) 16QAM BW=5MHz Channel=38750 RB Size=25 Position=#0

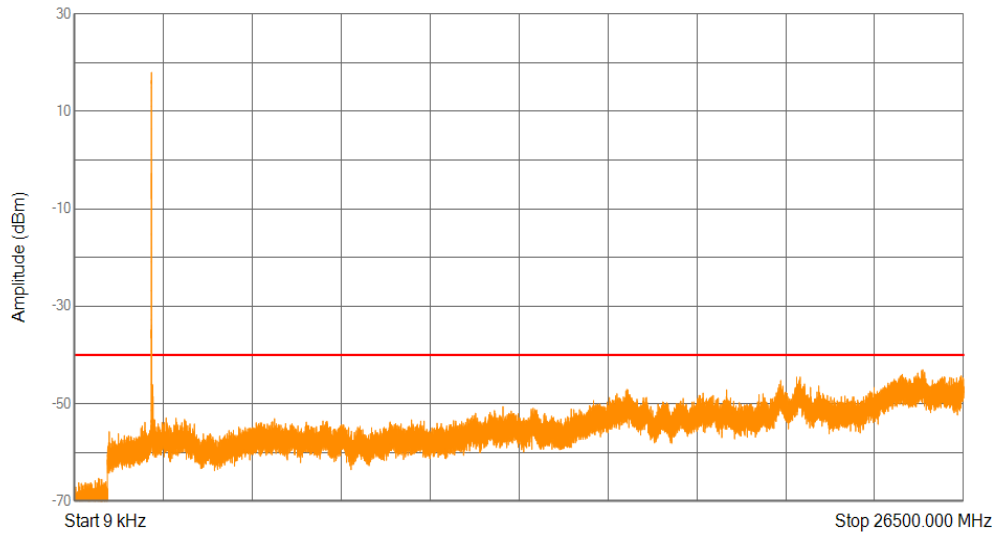


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0112137       | -60.05           | -40         |
| 2     | 0.15        | 30         | 10        | 0.1723875       | -64.79           | -40         |
| 3     | 30          | 1000       | 100       | 738.8275        | -65.38           | -40         |
| 4     | 1000        | 26500      | 1000      | 25284.2875      | -43.05           | -40         |

Band40(2305-2315) 16QAM BW=5MHz Channel=38775 RB Size=25 Position=#0

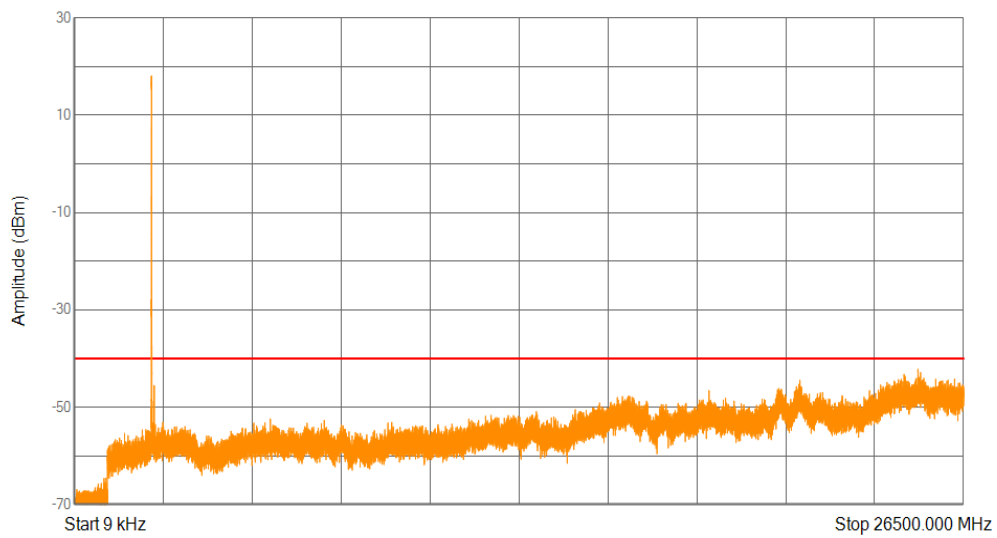


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00969795      | -60.48           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15            | -62.52           | -40         |
| 3     | 30          | 1000       | 100       | 961.2485        | -64.56           | -40         |
| 4     | 1000        | 26500      | 1000      | 25142.125       | -42.21           | -40         |

Band40(2305-2315) QPSK BW=10MHz Channel=38750 RB Size=50 Position=#0

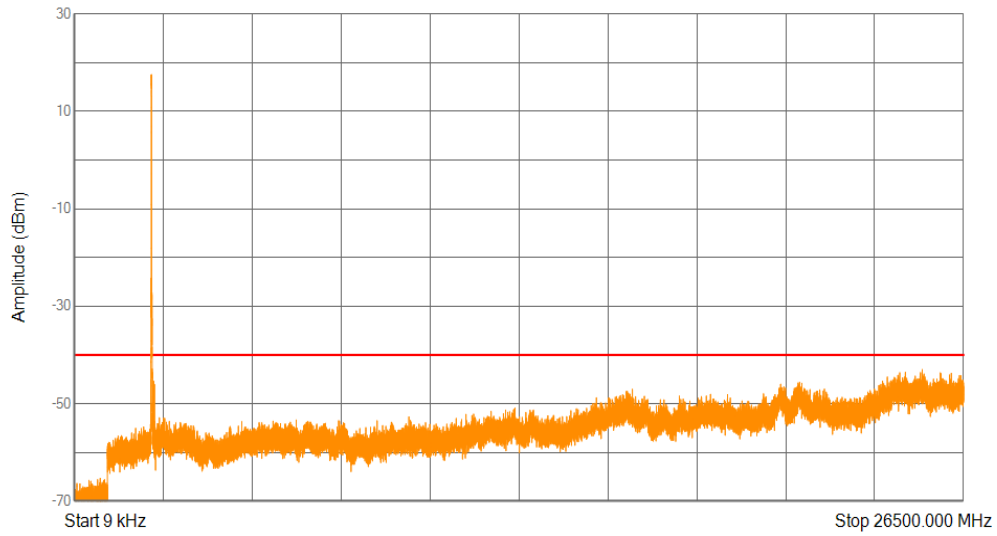


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00928905      | -59.69           | -40         |
| 2     | 0.15        | 30         | 10        | 0.17014875      | -64.64           | -40         |
| 3     | 30          | 1000       | 100       | 784.49025       | -65.35           | -40         |
| 4     | 1000        | 26500      | 1000      | 25268.35        | -43              | -40         |

Band40(2305-2315) QPSK BW=5MHz Channel=38725 RB Size=25 Position=#0

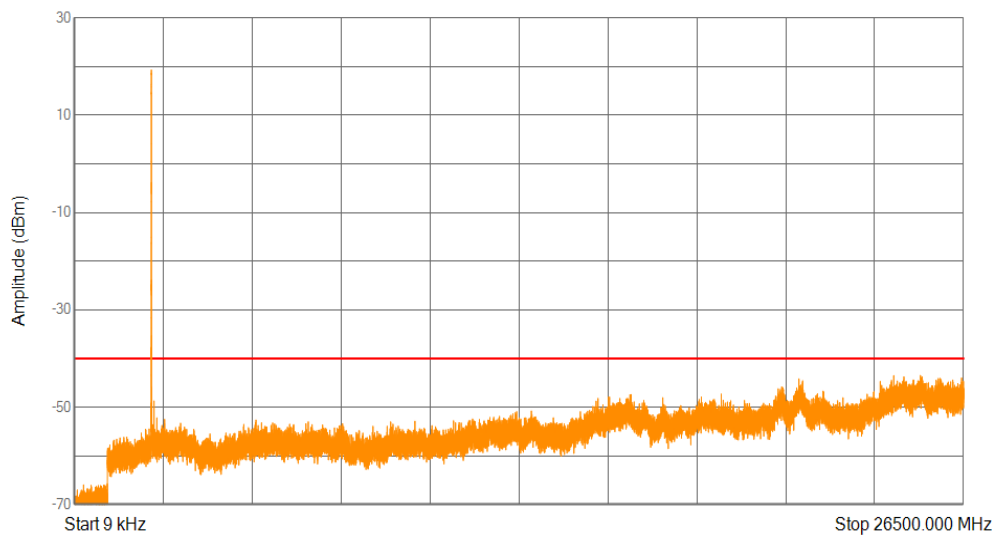


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.011492175     | -60.38           | -40         |
| 2     | 0.15        | 30         | 10        | 0.176865        | -65.56           | -40         |
| 3     | 30          | 1000       | 100       | 994.568         | -65.76           | -40         |
| 4     | 1000        | 26500      | 1000      | 25216.075       | -43.49           | -40         |

Band40(2305-2315) QPSK BW=5MHz Channel=38750 RB Size=25 Position=#0

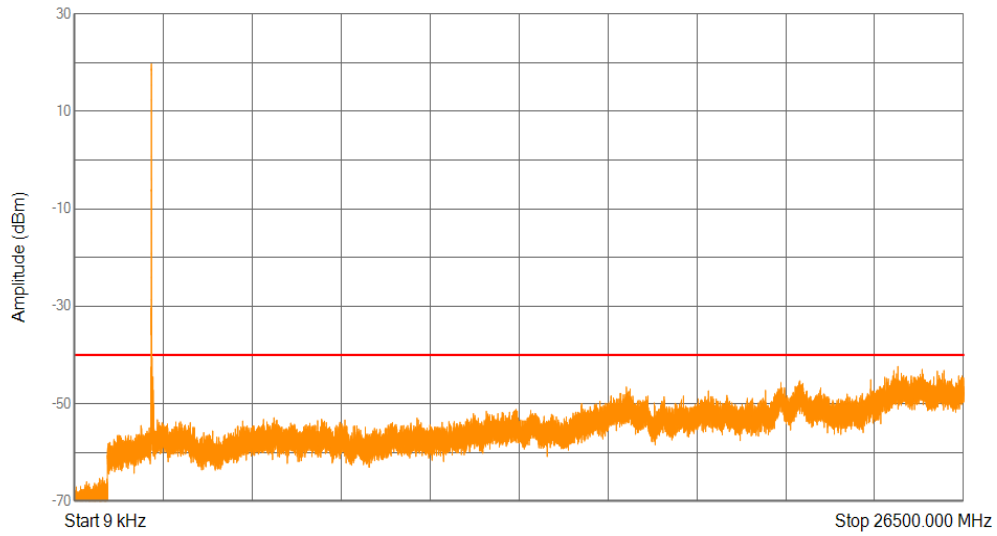


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009165675     | -60.04           | -40         |
| 2     | 0.15        | 30         | 10        | 0.1634325       | -65.51           | -40         |
| 3     | 30          | 1000       | 100       | 858.88925       | -65.17           | -40         |
| 4     | 1000        | 26500      | 1000      | 24544.7875      | -42.36           | -40         |

Band40(2305-2315) QPSK BW=5MHz Channel=38775 RB Size=25 Position=#0

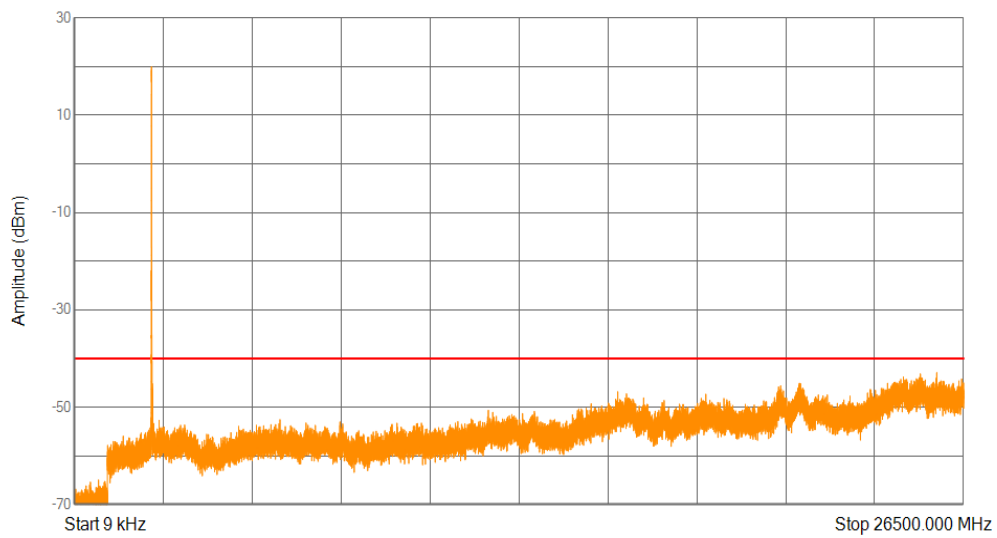


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009814275     | -58.6            | -40         |
| 2     | 0.15        | 30         | 10        | 0.17164125      | -64.61           | -40         |
| 3     | 30          | 1000       | 100       | 734.05025       | -64.98           | -40         |
| 4     | 1000        | 26500      | 1000      | 25703.125       | -42.91           | -40         |

Band40(2350-2360) 16QAM BW=10MHz Channel=39200 RB Size=50 Position=#0

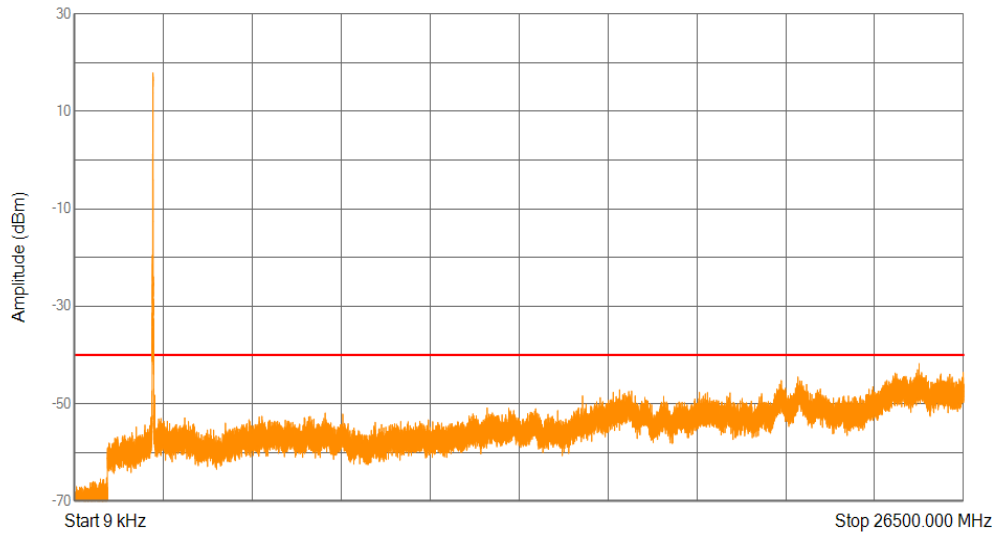


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.010124475     | -58.33           | -40         |
| 2     | 0.15        | 30         | 10        | 0.1783575       | -64.45           | -40         |
| 3     | 30          | 1000       | 100       | 975.19225       | -65.2            | -40         |
| 4     | 1000        | 26500      | 1000      | 25175.275       | -41.81           | -40         |

Band40(2350-2360) 16QAM BW=5MHz Channel=39175 RB Size=25 Position=#0

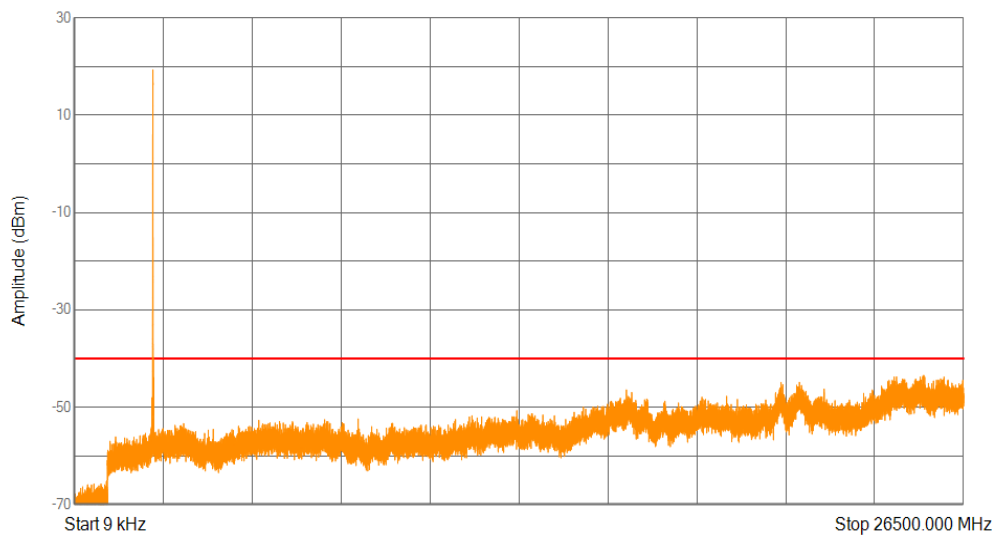


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.00976845      | -57.07           | -40         |
| 2     | 0.15        | 30         | 10        | 0.152985        | -63.23           | -40         |
| 3     | 30          | 1000       | 100       | 984.89225       | -65.18           | -40         |
| 4     | 1000        | 26500      | 1000      | 25316.1625      | -43.46           | -40         |

Band40(2350-2360) 16QAM BW=5MHz Channel=39200 RB Size=25 Position=#0

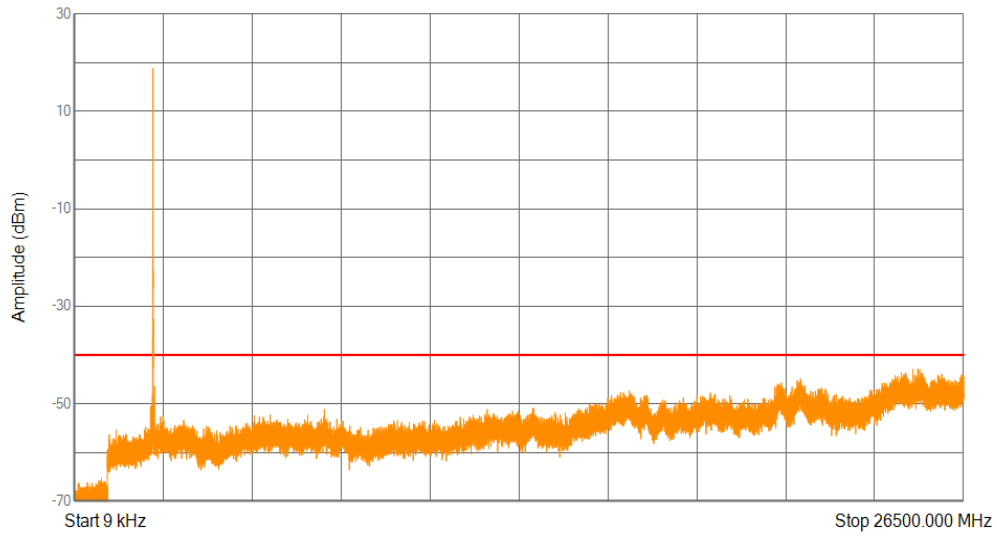


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01026195      | -62.12           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15            | -63.49           | -40         |
| 3     | 30          | 1000       | 100       | 822.61125       | -65.39           | -40         |
| 4     | 1000        | 26500      | 1000      | 25138.3         | -42.89           | -40         |

Band40(2350-2360) 16QAM BW=5MHz Channel=39225 RB Size=25 Position=#0

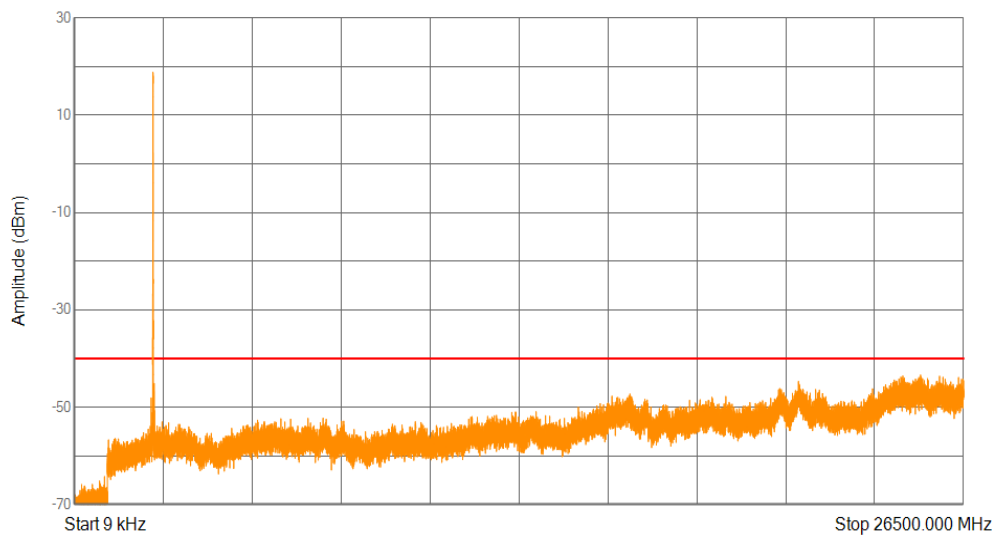


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.01178475      | -60.84           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15            | -65.13           | -40         |
| 3     | 30          | 1000       | 100       | 912.9425        | -64.27           | -40         |
| 4     | 1000        | 26500      | 1000      | 25219.2625      | -43.4            | -40         |

Band40(2350-2360) QPSK BW=10MHz Channel=39200 RB Size=50 Position=#0

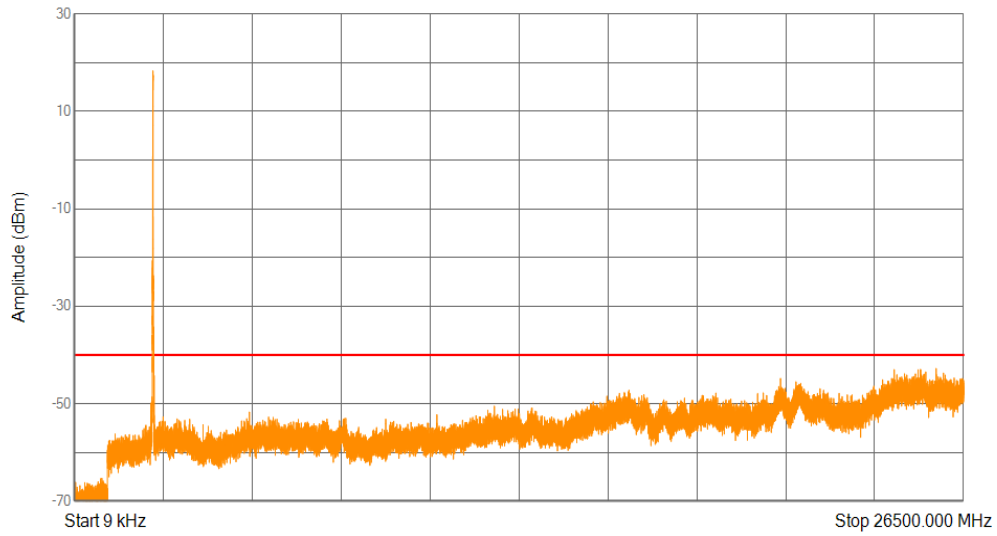


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0114111       | -61.18           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15074625      | -64.5            | -40         |
| 3     | 30          | 1000       | 100       | 834.20275       | -65.33           | -40         |
| 4     | 1000        | 26500      | 1000      | 25682.725       | -42.79           | -40         |

Band40(2350-2360) QPSK BW=5MHz Channel=39175 RB Size=25 Position=#0

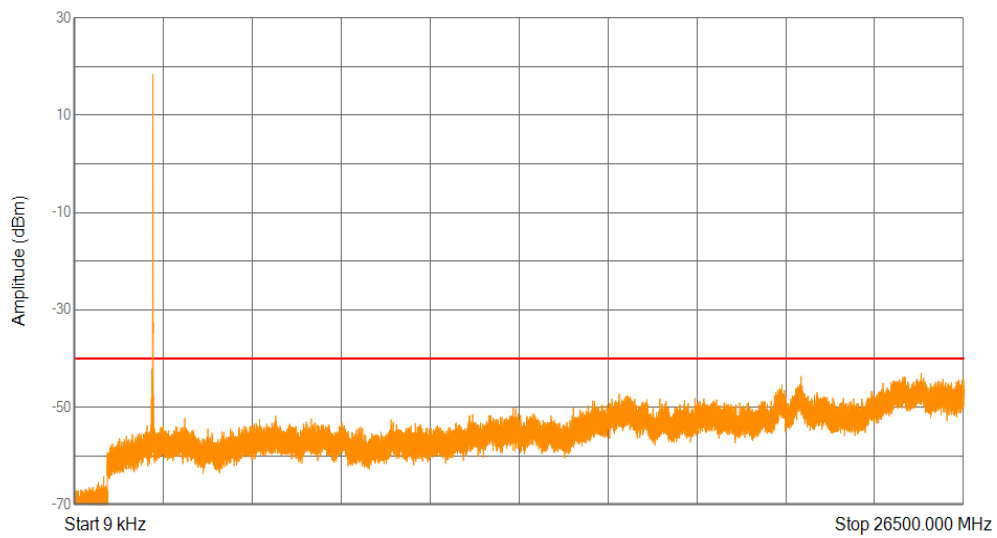


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.009059925     | -59.25           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15223875      | -63.29           | -40         |
| 3     | 30          | 1000       | 100       | 891.23875       | -64.28           | -40         |
| 4     | 1000        | 26500      | 1000      | 2322.175        | -42.21           | -40         |

Band40(2350-2360) QPSK BW=5MHz Channel=39200 RB Size=25 Position=#0

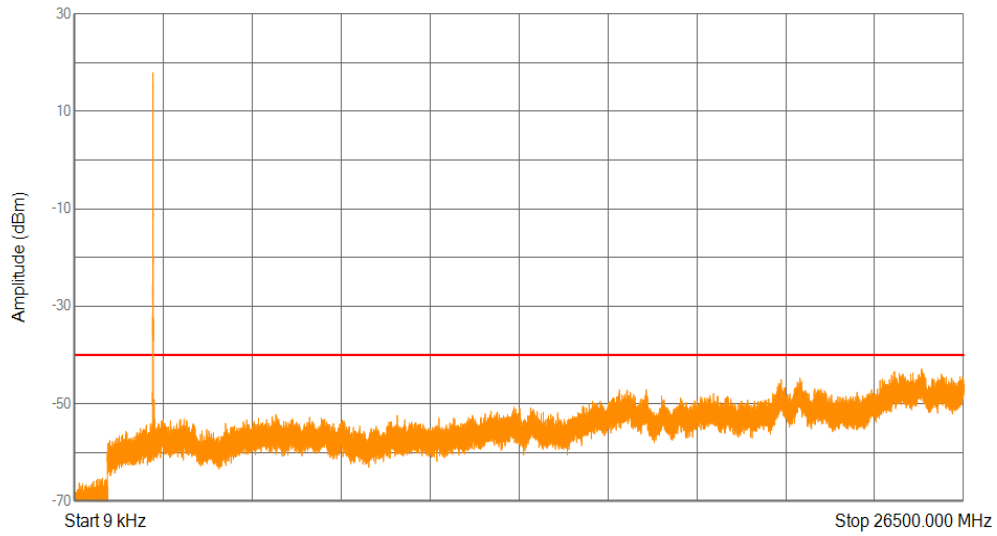


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0120879       | -58.58           | -40         |
| 2     | 0.15        | 30         | 10        | 0.15820875      | -63.73           | -40         |
| 3     | 30          | 1000       | 100       | 845.93975       | -65.38           | -40         |
| 4     | 1000        | 26500      | 1000      | 25247.95        | -42.94           | -40         |

Band40(2350-2360) QPSK BW=5MHz Channel=39225 RB Size=25 Position=#0

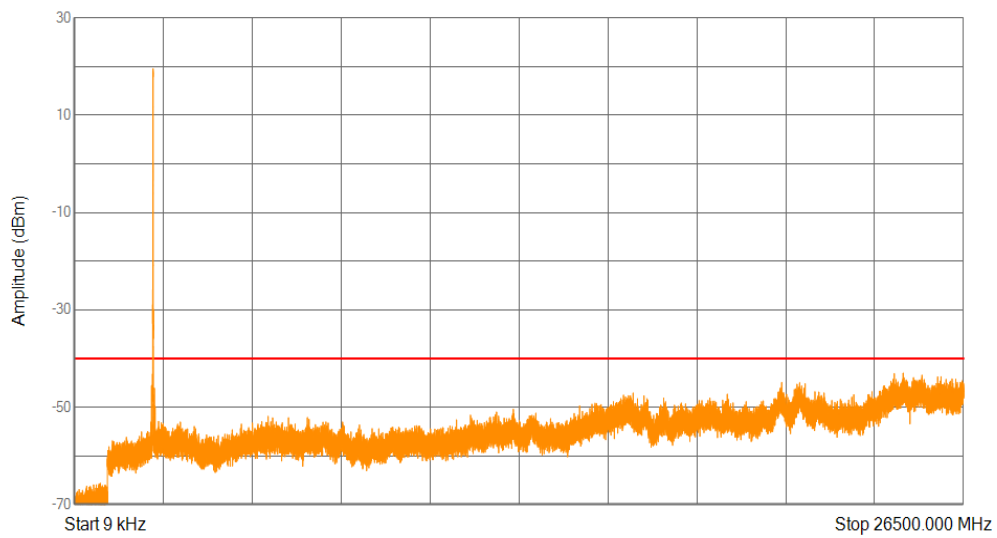


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.014587125     | -61.83           | -40         |
| 2     | 0.15        | 30         | 10        | 0.1514925       | -62.95           | -40         |
| 3     | 30          | 1000       | 100       | 793.46275       | -65.66           | -40         |
| 4     | 1000        | 26500      | 1000      | 24701.6125      | -43              | -40         |

Band41(2555-2655) 16QAM BW=10MHz Channel=40290 RB Size=50 Position=#0

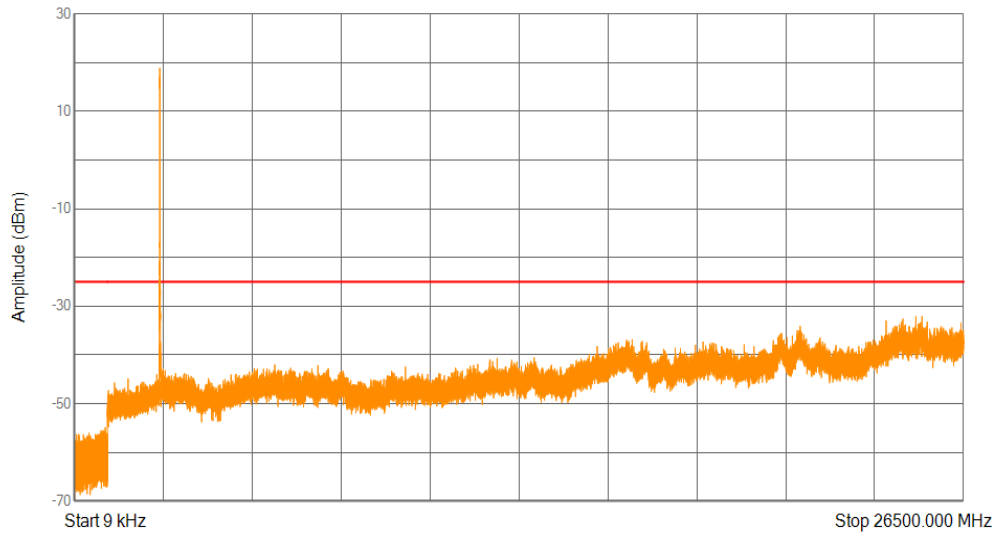


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.095528175     | -48.42           | -25         |
| 2     | 0.15        | 30         | 10        | 0.18805875      | -51.12           | -25         |
| 3     | 30          | 1000       | 100       | 935.17975       | -54.91           | -25         |
| 4     | 1000        | 26500      | 1000      | 25263.25        | -32.09           | -25         |

Band41(2555-2655) 16QAM BW=10MHz Channel=40740 RB Size=50 Position=#0

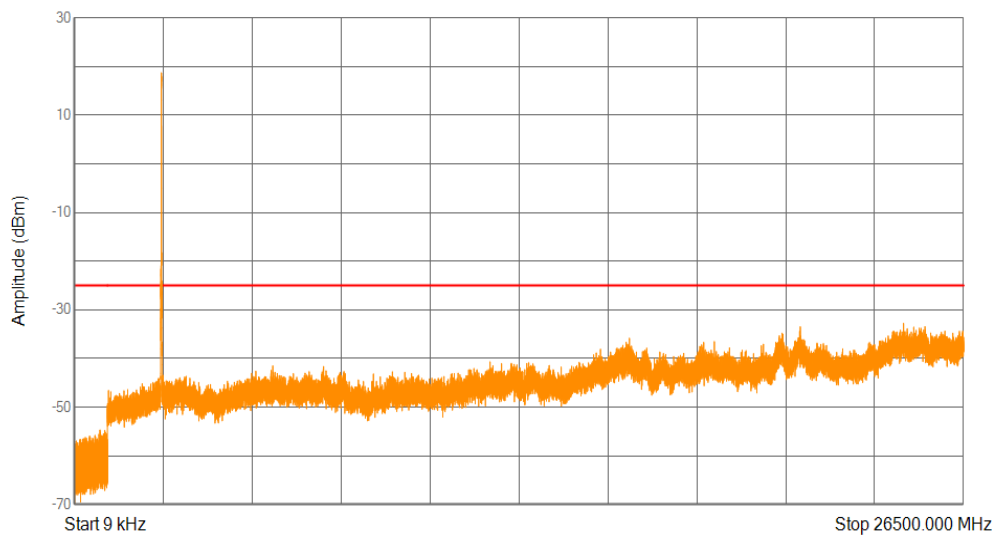


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09558105      | -47.97           | -25         |
| 2     | 0.15        | 30         | 10        | 0.19253625      | -51.52           | -25         |
| 3     | 30          | 1000       | 100       | 777.06975       | -54.7            | -25         |
| 4     | 1000        | 26500      | 1000      | 24711.8125      | -32.78           | -25         |

Band41(2555-2655) 16QAM BW=10MHz Channel=41190 RB Size=50 Position=#0

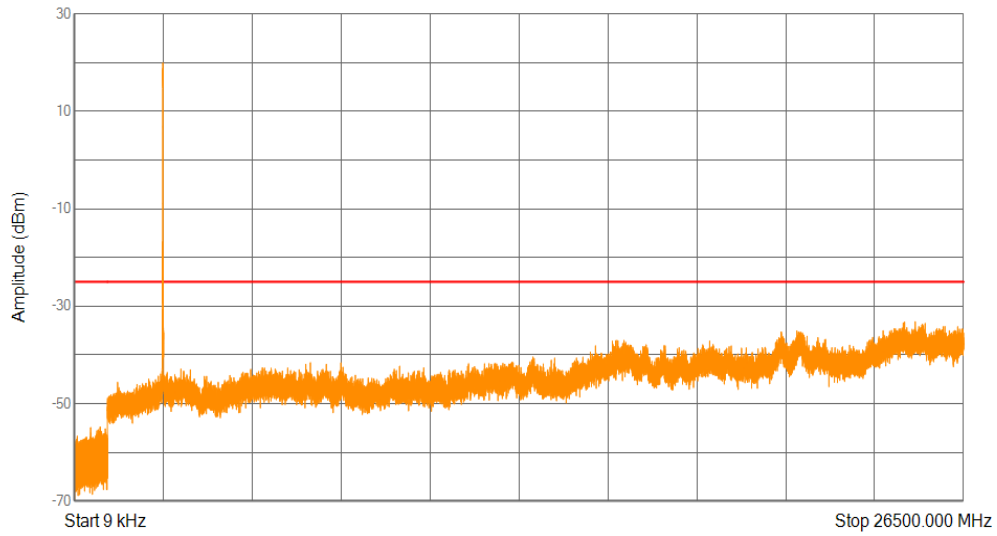


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09555285      | -48.12           | -25         |
| 2     | 0.15        | 30         | 10        | 0.19253625      | -52.42           | -25         |
| 3     | 30          | 1000       | 100       | 784.3205        | -54.79           | -25         |
| 4     | 1000        | 26500      | 1000      | 25059.25        | -33.19           | -25         |

Band41(2555-2655) 16QAM BW=15MHz Channel=40315 RB Size=75 Position=#0

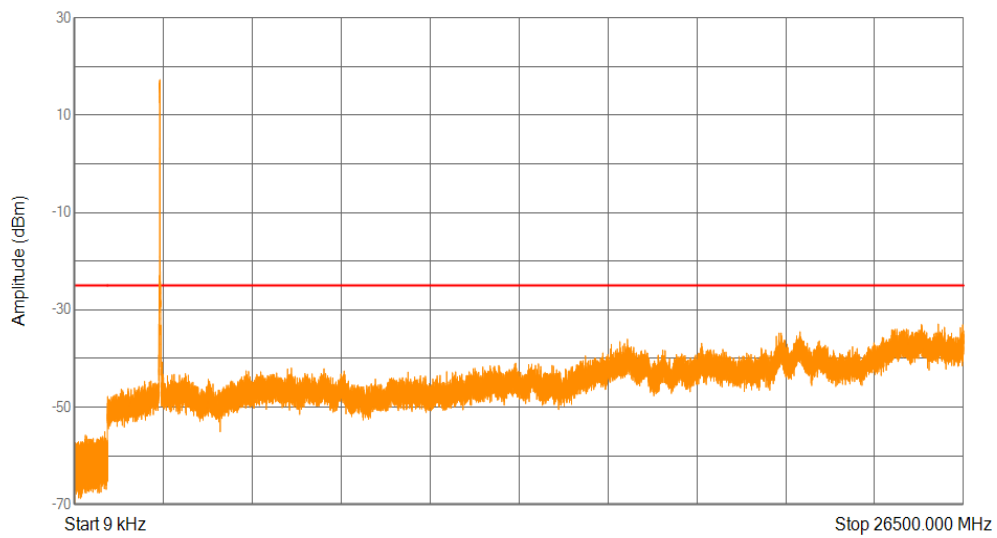


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09566565      | -47.83           | -25         |
| 2     | 0.15        | 30         | 10        | 0.18805875      | -51.64           | -25         |
| 3     | 30          | 1000       | 100       | 922.012         | -55.05           | -25         |
| 4     | 1000        | 26500      | 1000      | 25747.1125      | -32.93           | -25         |

Band41(2555-2655) 16QAM BW=15MHz Channel=40740 RB Size=75 Position=#0

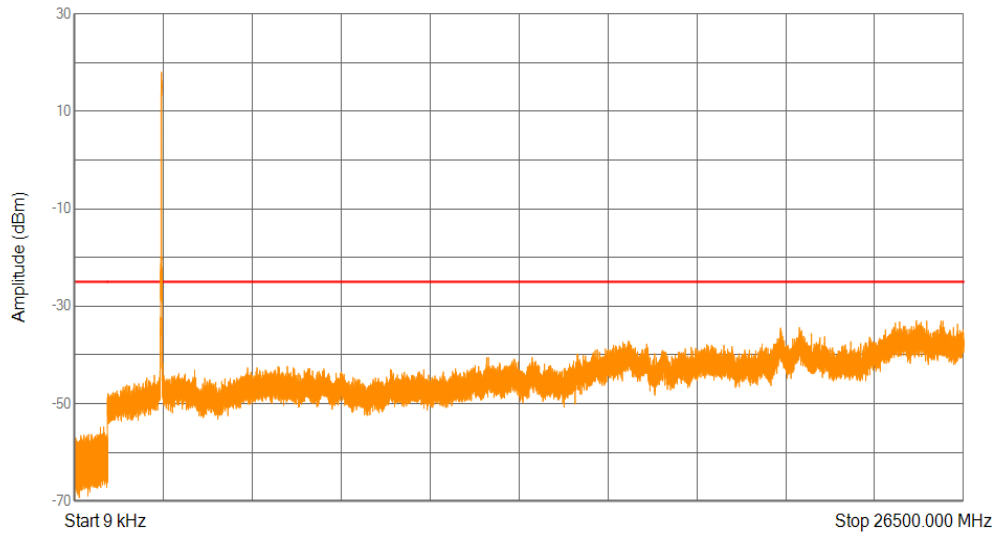


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09824595      | -45.23           | -25         |
| 2     | 0.15        | 30         | 10        | 0.15            | -51.96           | -25         |
| 3     | 30          | 1000       | 100       | 889.58975       | -54.76           | -25         |
| 4     | 1000        | 26500      | 1000      | 25094.95        | -32.95           | -25         |

Band41(2555-2655) 16QAM BW=15MHz Channel=41165 RB Size=75 Position=#0

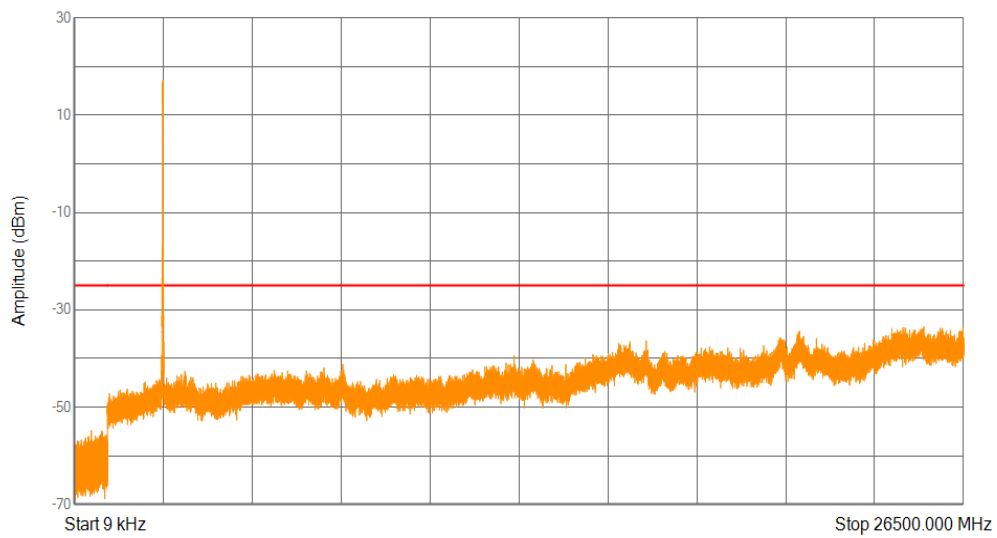


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.095993475     | -48.45           | -25         |
| 2     | 0.15        | 30         | 10        | 0.18805875      | -52.59           | -25         |
| 3     | 30          | 1000       | 100       | 520.74725       | -54.85           | -25         |
| 4     | 1000        | 26500      | 1000      | 25314.8875      | -33.45           | -25         |

Band41(2555-2655) 16QAM BW=20MHz Channel=40340 RB Size=100 Position=#0

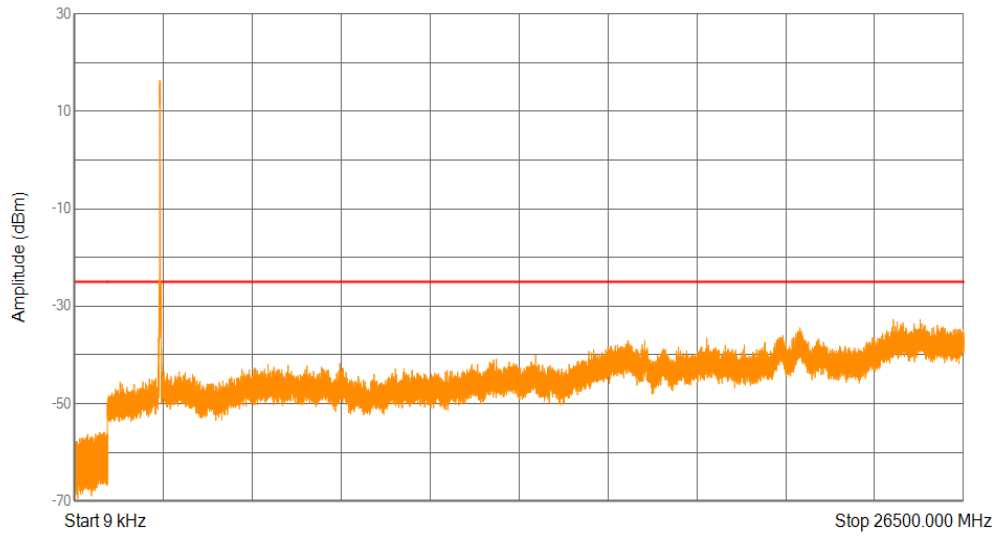


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.095997        | -48.25           | -25         |
| 2     | 0.15        | 30         | 10        | 0.188805        | -51.02           | -25         |
| 3     | 30          | 1000       | 100       | 764.79925       | -55.89           | -25         |
| 4     | 1000        | 26500      | 1000      | 25207.15        | -32.69           | -25         |

Band41(2555-2655) 16QAM BW=20MHz Channel=40740 RB Size=100 Position=#0

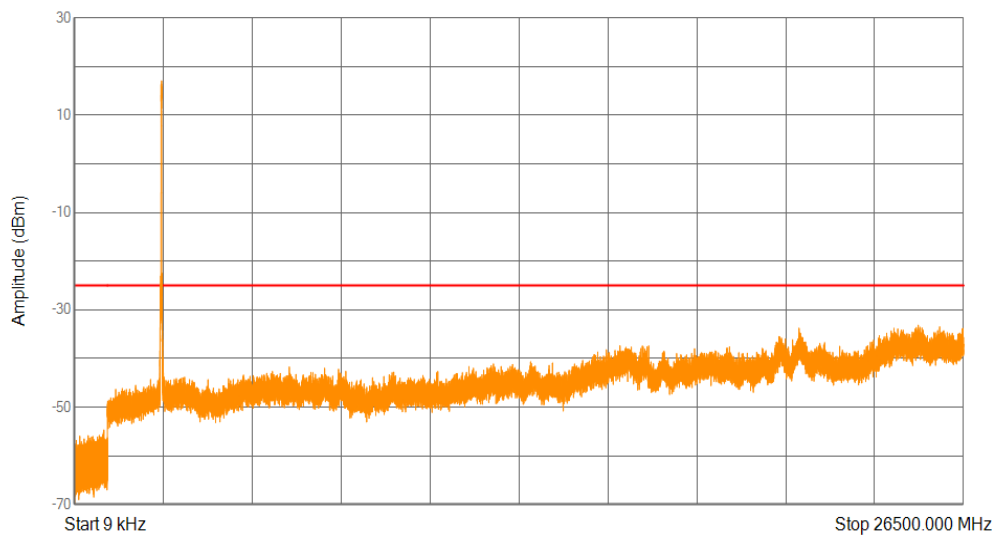


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.0957291       | -48.41           | -25         |
| 2     | 0.15        | 30         | 10        | 0.19253625      | -53.14           | -25         |
| 3     | 30          | 1000       | 100       | 894.77925       | -54.7            | -25         |
| 4     | 1000        | 26500      | 1000      | 25147.8625      | -33.16           | -25         |

Band41(2555-2655) 16QAM BW=20MHz Channel=41140 RB Size=100 Position=#0

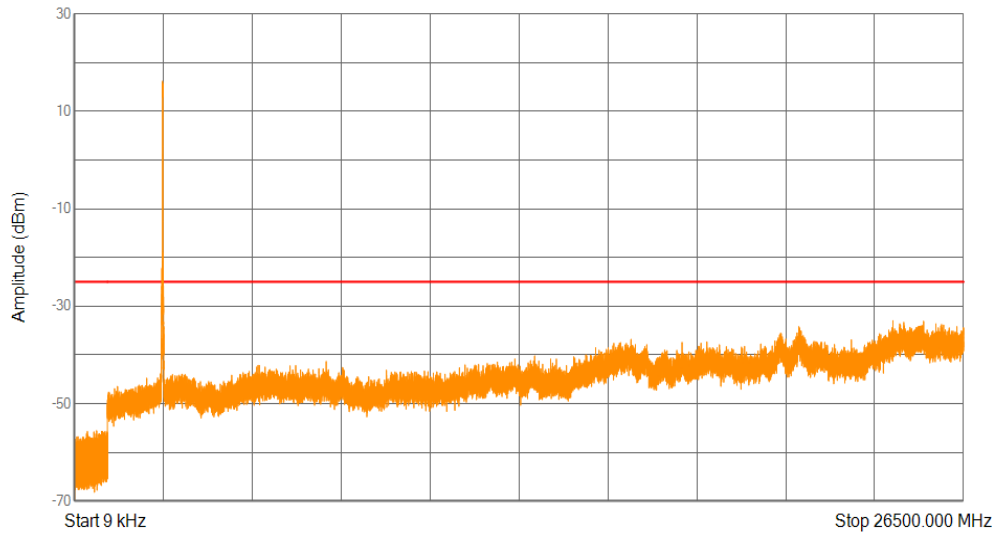


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.096028725     | -48.03           | -25         |
| 2     | 0.15        | 30         | 10        | 0.19104375      | -51.9            | -25         |
| 3     | 30          | 1000       | 100       | 679.00275       | -55.59           | -25         |
| 4     | 1000        | 26500      | 1000      | 24396.8875      | -32.97           | -25         |

Band41(2555-2655) 16QAM BW=5MHz Channel=40265 RB Size=25 Position=#0

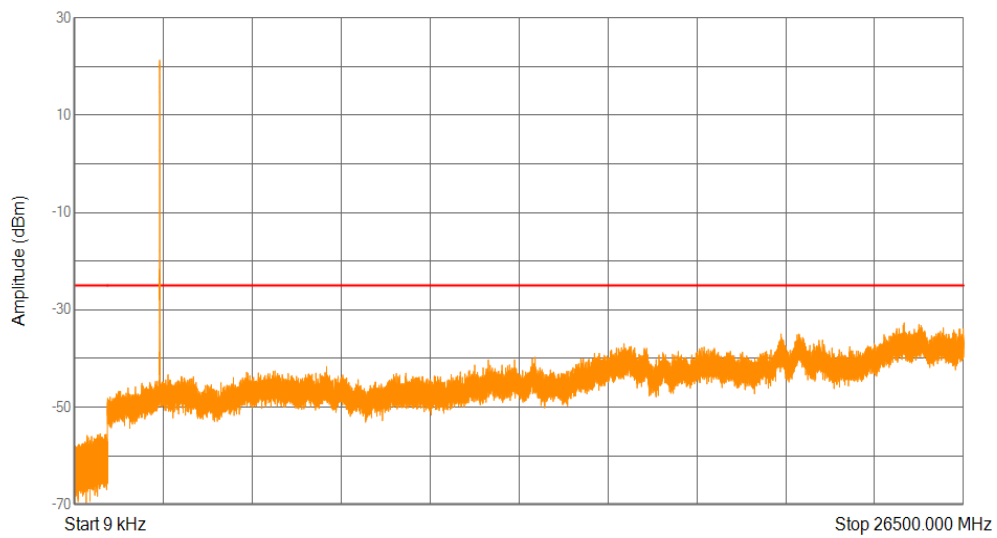


| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09555285      | -47.79           | -25         |
| 2     | 0.15        | 30         | 10        | 0.194775        | -51.7            | -25         |
| 3     | 30          | 1000       | 100       | 783.9325        | -55.5            | -25         |
| 4     | 1000        | 26500      | 1000      | 24729.6625      | -32.68           | -25         |

Band41(2555-2655) 16QAM BW=5MHz Channel=40740 RB Size=25 Position=#0

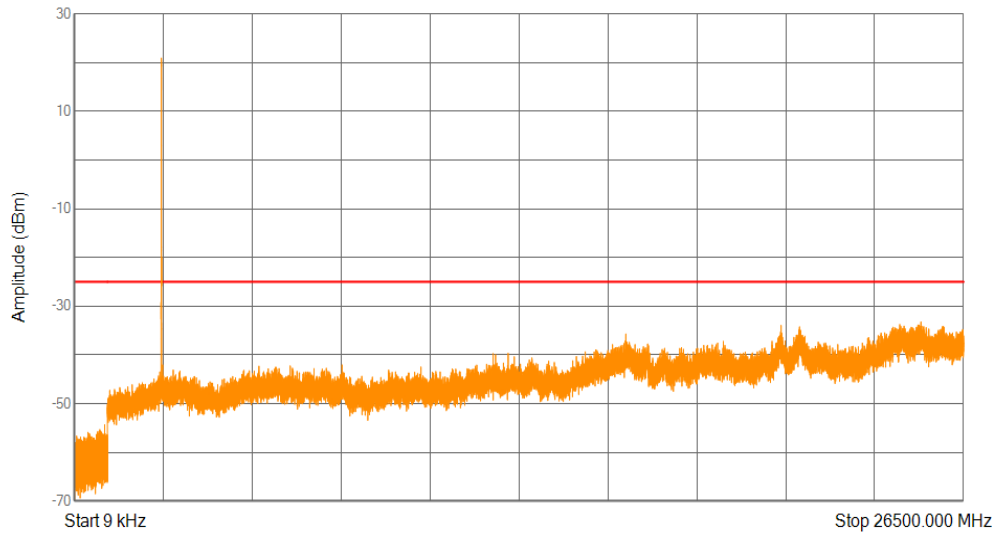

| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.09563745      | -48.05           | -25         |
| 2     | 0.15        | 30         | 10        | 0.188805        | -52.02           | -25         |
| 3     | 30          | 1000       | 100       | 915.8525        | -54.34           | -25         |
| 4     | 1000        | 26500      | 1000      | 25231.375       | -33.22           | -25         |

Band41(2555-2655) 16QAM BW=5MHz Channel=41215 RB Size=25 Position=#0

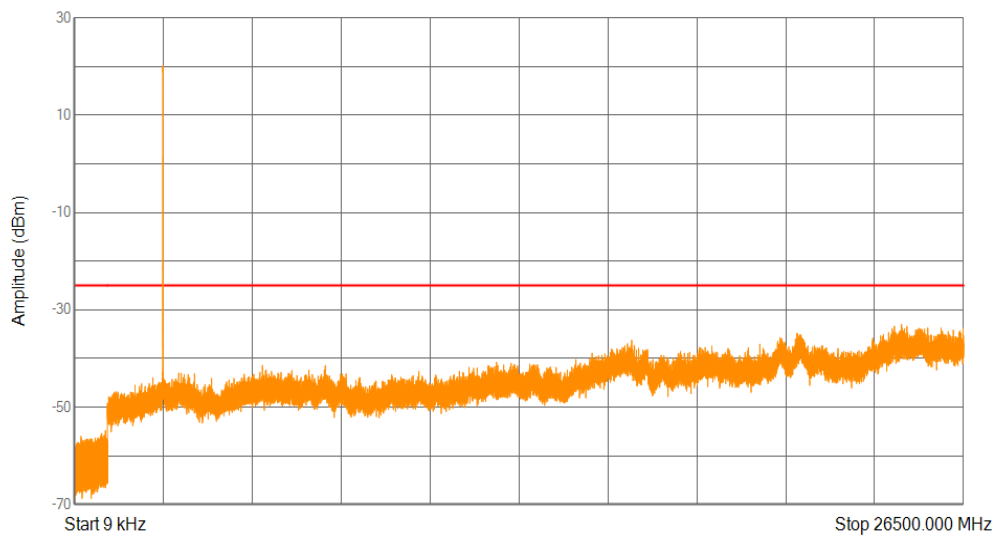

| Range | Start (MHz) | Stop (MHz) | RBW (kHz) | Spur Freq (MHz) | Spur Level (dBm) | Limit (dBm) |
|-------|-------------|------------|-----------|-----------------|------------------|-------------|
| 1     | 0.009       | 0.15       | 1         | 0.095697375     | -47.76           | -25         |
| 2     | 0.15        | 30         | 10        | 0.1902975       | -51.75           | -25         |
| 3     | 30          | 1000       | 100       | 941.2665        | -54.81           | -25         |
| 4     | 1000        | 26500      | 1000      | 24651.8875      | -32.98           | -25         |

Band41(2555-2655) QPSK BW=10MHz Channel=40290 RB Size=50 Position=#0