



RF EXPOSURE EVALUATION

FCC ID:2BCFE-BK55

Applicant: Shenzhen Zhiding Manufacturing Co., Ltd

Address: Room 401, No. 1 Factory Building, Scary Industrial Plant, No.7 Ganli 6th Road, Gankeng Community, Jihua Street, Longgang District, Shenzhen

Manufacturer: Shenzhen Zhiding Manufacturing Co., Ltd

Address: Room 401, No. 1 Factory Building, Scary Industrial Plant, No.7 Ganli 6th Road, Gankeng Community, Jihua Street, Longgang District, Shenzhen

EUT: Car mounted phone holder

Trade Mark: N/A

Model Number: BK55
BK55E, BK55X, BK56, BK56X, BK56E

Date of Receipt: Dec. 31, 2025

Test Date: Dec. 31, 2025 to Jan. 14, 2026

Date of Report: Jan. 14, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: KDB 680106 D01 V04

Test Result: Pass

Prepared (Test Engineer): Dimon Tan

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang





Product Name:	Car mounted phone holder
Trade Mark:	N/A
Model No.:	BK55
Serial No.:	BK55E,BK55X,BK56,BK56X,BK56E
Model Difference:	All models have the same circuit and RF module, but the model name and appearance color are different.
Operation Frequency:	ANT 1&2: 111kHz ~ 205kHz
Modulation Type:	ASK
Antenna Type:	ANT 1&2:Loop Coil Antenna
Antenna Gain:	0dBi
Power Supply:	Input: 5V $\overline{\text{---}}$ 2A,9V $\overline{\text{---}}$ 1.67A Wireless Output :15W/10W/7.5W/5W
Battery capacity:	3.7V 200mAh,0.74Wh



EUT mode of operation before folding:

Power:	Test Modes:	Test Coil	Description:
5W	Mode 1	ANT 1	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 2		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 3		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 1a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 2a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 3a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
7.5W	Mode 4	ANT 1	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 5		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 6		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 4a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 5a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 6a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
10W	Mode 7	ANT 1	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 8		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 9		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 7a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 8a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 9a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
15W	Mode 10	ANT 1	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 11		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 12		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 10a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 11a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 12a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
5W	Mode 13	ANT 2	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 14		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 15		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 13a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 14a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 15a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)



Power:	Test Modes:	Test Coil	Description:
7.5W	Mode 16	ANT 2	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 17		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 18		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 16a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 17a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 18a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
10W	Mode 19	ANT 2	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 20		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 21		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 19a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 20a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 21a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)
Power:	Test Modes:	Test Coil	Description:
15W	Mode 22	ANT 2	AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: <1%)
	Mode 23		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: 50%)
	Mode 24		AC/DC Adapter(9V 1.67A) + EUT + Phone (Battery Status: >98%)
	Mode 22a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: <1%)
	Mode 23a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: 50%)
	Mode 24a		AC/DC Adapter(5V 2A) + EUT + Phone (Battery Status: >98%)



1 Measuring Standard

1.1 According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB 680106 D01 Wireless Power Transfer v04.

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainly
1	H-filed	$\pm 0.93\text{dB}$
2	E-filed	$\pm 0.51\text{dB}$

2.1 Requirements

The EUT does comply with item 5.2 of KDB 680106 D01 V04:

a) The power transfer frequency is below 1 MHz.

Yes. The device operates in the frequency from ANT 111kHz to 205kHz.

b) The output power from each transmitting element (e.g., coil) is less than or equal to 15 watts.

Yes, The maximum output power of the primary coil is 15watts.

c) A client device providing the maximum permitted load is placed in physical contact with the transmitter (i.e., the surfaces of the transmitter and client device enclosures need to be in physical contact).

Yes. Client device is placed directly in contact with the transmitter.

d) Only § 2.1091-Mobile exposure conditions apply (i.e., this provision does not cover § 2.1093-Portable exposure conditions).

Yes, the EUT is a Mobile Wireless Charger.

e) The E-field and H-field strengths, at and beyond 20 cm surrounding the device surface, are demonstrated to be less than 50% of the applicable MPE limit, per KDB 447498, Table 1. These measurements shall be taken along the principal axes of the device, with one axis oriented along the direction of the estimated maximum field strength, and for three points per axis or until a 1/d (inverse distance from the emitter structure) field strength decay is observed. Symmetry considerations may be used for test reduction purposes.

The device shall be operated in documented worst-case compliance scenarios (i.e., the ones that lead to the maximum field components), and while all the radiating structures

Yes. The EUT coil is evaluated at maximum output power and the test results are less than 50% of the limit.

f) For systems with more than one radiating structure, the conditions specified in (e) must be met when the system is fully loaded (i.e., clients absorbing maximum power available), and with all the radiating structures operating at maximum power at the same time, as per design conditions. If the design allows one or more radiating structures to be powered at a higher level while other radiating structures are not powered, then those cases must be tested as well. .

Yes, the EUT has two coil, all test modes met the conditions specified in (e).



2.2 Limits


The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in 1.1307(b)

Limits for Maximum Permissible Exposure (MPE):

Frequency range (MHz)	Electric field strength (V/m)	Magnetic field strength (A/m)	Power density (mW/cm ²)	Averaging time (minutes)
(A) Limits for Occupational/Controlled Exposures				
0.3-3.0	614	1.63	*(100)	6
3.0-30	1842/f	4.89/f	*(900/f ²)	6
30-300	61.4	0.163	1.0	6
300-1500	/	/	f/300	6
1500-100,000	/	/	5	6
(B) Limits for General Population/Uncontrolled Exposure				
0.3-1.34	614	1.63	*(100)	30
1.34-30	824/f	2.19/f	*(180/f ²)	30
30-300	27.5	0.073	0.2	30
300-1500	/	/	f/1500	30
1500-100,000	/	/	1.0	30

F=frequency in MHz
 *=Plane-wave equivalent power density
 RF exposure compliance will need to be determined with respect to 1.1307(c) and (d) of the FCC rules. The emissions should be within the limits at 300kHz in Table 1 of 1.1310(use the 300kHz limits for 150kHz:614V/m,1.63A/m).

2.3 Test Setup

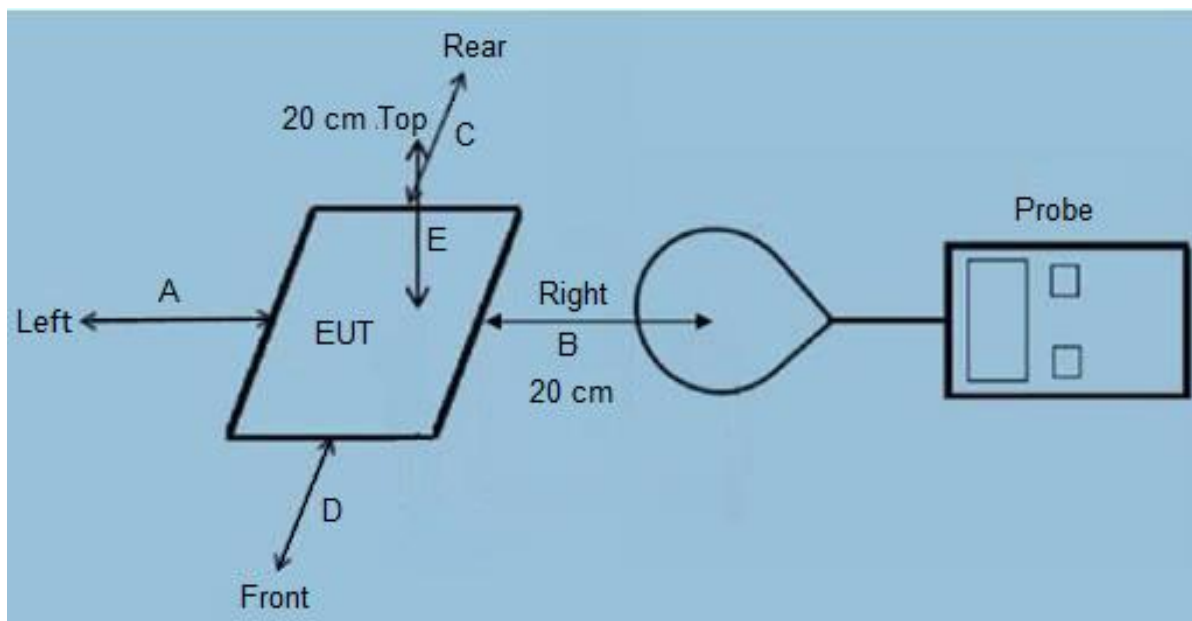



3 Test Procedure

- 1) The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- 2) The measurement probe was placed at test distance (20 cm and above from all sides and Top) which is between the edge of the charger and the geometric centre of probe.
- 3) The turn table was rotated 360d degree to search of highest strength.
- 4) The highest emission level was recorded and compared with limit as soon as measurement of each points were completed.
- 5) The EUT were measured according to the dictates of KDB 680106 D01 V04.

4.1 Test Instruments list

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Exposure Level Tester	Narda	ELT-400	180ZX10220	Sep. 29, 2025	Sep. 28, 2026
Magnetic field probe 100cm ²	Narda	ELT probe 100cm ²	M0675	Sep. 29, 2025	Sep. 28, 2026

4.2 Test*auxiliary equipment.list*

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	Car mounted phone holder	N/A	BK55	N/A	EUT
E-2	AC/DC Adapter	N/A	X569	N/A	Auxiliary
E-3	Phone	Apple	iPhone X	N/A	Auxiliary



5 Test Result

(iPhone Coil 15W)

Test Mode 10~12:H-Filed Strength at 20 cm from the edges surrounding the EUT (uT):

Battery Level:	Frequency Range (MHz)	Test Position Left	Test Position Right	Test Position Rear	Test Position Front	Test Position Top
<1% Battery	0.111-0.205	0.35	0.34	0.33	0.35	0.36
50% Battery	0.111-0.205	0.28	0.28	0.25	0.24	0.28
>98% Battery	0.111-0.205	0.25	0.25	0.22	0.22	0.25

Test Mode 22~24:H-Filed Strength at 20 cm from the edges surrounding the EUT (uT):

Battery Level:	Frequency Range (MHz)	Test Position Left	Test Position Right	Test Position Rear	Test Position Front	Test Position Top
<1% Battery	0.111-0.205	0.25	0.22	0.21	0.23	0.23
50% Battery	0.111-0.205	0.22	0.21	0.22	0.22	0.24
>98% Battery	0.111-0.205	0.20	0.20	0.21	0.16	0.19

The Magnetic field strength (A/m) conversion results are on the next .

Test Mode 10~12:H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Battery Level:	Frequency Range (MHz)	Test Position Left	Test Position Right	Test Position Rear	Test Position Front	Test Position Top	Limits 50% (A/m)	Limits (A/m)
<1% Battery	0.111-0.205	0.28	0.27	0.26	0.28	0.29	0.815	1.63
50% Battery	0.111-0.205	0.22	0.22	0.20	0.19	0.22	0.815	1.63
>98% Battery	0.111-0.205	0.20	0.20	0.18	0.18	0.20	0.815	1.63

Test Mode 22~24:H-Filed Strength at 20 cm from the edges surrounding the EUT (A/m)

Battery Level:	Frequency Range (MHz)	Test Position Left	Test Position Right	Test Position Rear	Test Position Front	Test Position Top	Limits 50% (A/m)	Limits (A/m)
<1% Battery	0.111-0.205	0.20	0.17	0.17	0.18	0.18	0.815	1.63
50% Battery	0.111-0.205	0.18	0.17	0.18	0.18	0.19	0.815	1.63
>98% Battery	0.111-0.205	0.16	0.16	0.17	0.13	0.15	0.815	1.63

Remark: A/m = uT/1.25



6 Test Set-up Photo

Probe	Length	Width	Radius
	11cm	11cm	5.5cm

Reference to the appendix III for details.

***** END OF REPORT *****