

Log in

Enter the backend address and enter the login interface



The image shows a login interface with the following elements:

- Header: 登录/LOGIN
- Username field: 用户名/Username (with a clear button icon)
- Password field: 密码/Password (with a lock icon)
- Login button: 登录/LOGIN
- Footer: Powered By
Version: 2.0.8-815c85c

Configure base station

Connect the base station to the power supply and network cable

Under the Openwrt base station, use your mobile phone to connect to the WIFI hotspot of the base station, such as eslap-xxxx, and the password is 12345678. After connecting, open the browser and enter 192.168.66.1:8080. Configure the server address, store and account information in the options. Please consult the service provider for related information.

[Configuration](#)
[Information](#)
[Upgrade](#)

Host address

Store number

User

Password

After the configuration is completed, click Submit, and the base station will be successfully connected to the price tag system.

Ensure that the base station is online, set the store configuration, and set it to blacklist mode (default model is blacklist mode)

[Navigation](#)
[BHTEST-1001 \[1001\]](#)
[English](#)
[Administrator](#)

[Home](#)
[Branches Setting](#)

Branches Setting

[Option](#)
[SOR](#)
[WiFi](#)
[API](#)

Filter

Blacklist

auto sleep

ON

After turning on this switch, if there is no refresh task within several hours, the price tag will automatically enter deep sleep.

sleep mode

1

If the electronic price tag is not refreshed, it will automatically enter sleep mode after waiting for several hours.

switch time

600

The electronic price tag can switch to another base station in a matter of seconds.

Silent Mode

ON

In the absence of a refresh task, the base station does not send any signal to prevent interference.

PSM

Normal speed

* Waiting Channel

20

* Broadcast Group



32

Number Of Channels


255

Template

Add new template

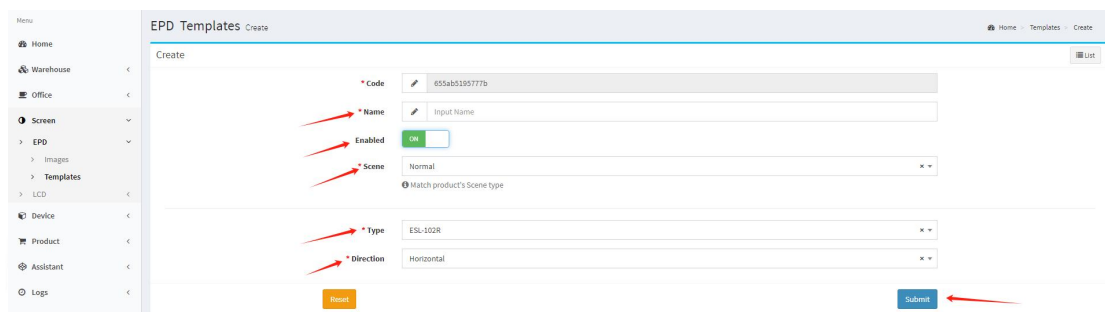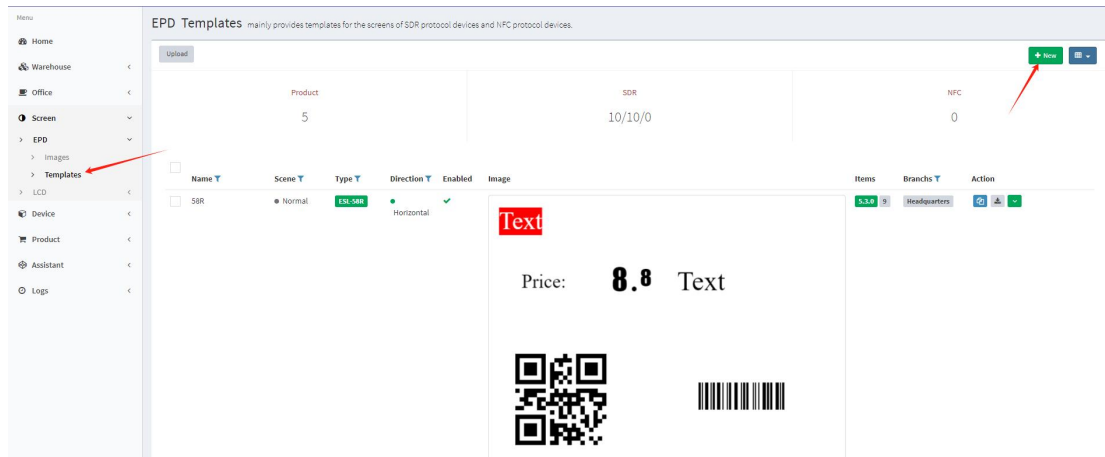

In sequence, editing the template name, price tag specifications, horizontal or vertical directions, category, and click Submit button.



Click the edit button on the right

Edit



Use various editing tools to fill in different variable parameters in the appropriate positions. The variable parameters can refer to the product.

Click submit,



The template is created successfully.

You can also download and upload templates through the download and upload buttons on the right side of the template.

Enabled



Able to use on-off key of the templates template.

to set the default

Add a picture or logo to the template

Upload pictures (only black, white and red colors can be displayed for now)

Click submit

☐	Name ▾	Url(click to copy)	Images	Pixels	Filesize	Branches ▾	Action
☐	Cricket Bat	 		266x300	3.27 MB	0x0x1129x0x2727	  

Copy image address

During template editing, click on the picture, fill in the copied address to the content column on the left, then move it to the position that needs to be set, adjusting the size, and clicking Submit.





Display effect



Commodity

Product These data will be used in the retail and warehousing scenarios.							
Y filter		Upload		+ New		Export	
SOR		NFC		WiFi			
10/10/0		0		0			
☐	Barcode	Product name	Price	Original Price	Scene	Branches	Action
☐	19782	Super Jangji	6.50	1.00	Normal	000011209402777	☐ ☐
☐	1234567890	Regionale Paprika	3.27	0.00	Promotion	000011209402777	☐ ☐
☐	19781078	Broccoli	20.56	0.00	Normal	000011209402777	☐ ☐
☐	19781	Käse	1.10	0.00	Normal	000011209402777	☐ ☐
☐	666666	product_name	6.60	0.00	Normal	000011209402777	☐ ☐
From 1 to 5, a total of 5 items							
Show 20 items 1							

NEW ADDED

Single added

Click on the upper right corner to add

Product Create

Home Product Create

Create

Internal code (Fpi)

Input Internal code (Fpi)

* Barcode (Fpc)

Input Barcode (Fpc)

* Product name (Fpn)

Input Product name (Fpn)

Specification (Fps)

Input Specification (Fps)

Grade (Fpg)

Input Grade (Fpg)

Unit (Fpu)

Input Unit (Fpu)

* Price (Fpp)

0.00

Discount Price (Fdp)

0.00

Original Price (Fopg)

0.00

Origin (Fpo)

Input Origin (Fpo)

MFRS (Fpm)

Input MFRS (Fpm)

Scene

Normal

Match the Scene in the esl template

QR Code Url (Fpqr)

Input QR Code Url (Fpqr)

Stock (Fkc)

Input Stock (Fkc)

Customize1 (F11)

Input Customize1 (F11)

Customize2 (F12)

Input Customize2 (F12)

Customize3 (F13)

Input Customize3 (F13)

Customize4 (F14)

Input Customize4 (F14)

Customize5 (F15)

Input Customize5 (F15)

Customize6 (F16)

Input Customize6 (F16)

Customize7 (F17)

Input Customize7 (F17)

Customize8 (F18)

Input Customize8 (F18)

Customize9 (F19)

Input Customize9 (F19)

Customize10 (F110)

Input Customize10 (F110)

Customize11 (F111)

Input Customize11 (F111)

Customize12 (F112)

Input Customize12 (F112)

Customize13 (F113)

Input Customize13 (F113)

Customize14 (F114)

Input Customize14 (F114)

Customize15 (F115)

Input Customize15 (F115)

Fill in the product information and click Submit

Batch Import

Import products in batches through fixed-format Excel files

Excel files can be obtained by exporting

Product

These datas will be used in the retail and warehousing scenarios.

Filter Upload

New Export

SDR

10/10/0

NFC

0

WiFi

0

All

Current page

Selected rows

	Barcode	Product name	Price	Original Price	Scene	Branches	Action
☐	19782	Super Jangi	6.50	1.00	Normal	004051720462727	CF
☐	1234567890	Regionale Paprika	3.27	0.00	Promotion	004051720462727	CF
☐	19781978	Broccoli	20.56	0.00	Normal	004051720462727	CF
☐	19781	Käse	1.10	0.00	Normal	004051720462727	CF
☐	666666	product_name	6.60	0.00	Normal	004051720462727	CF

From 1 to 5, a total of 5 items

Show 20 items 1

	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
1	Barcode	Internal code	Product name	Specification	Grade	Price	UNIT	Original Price	MFRS	Origin	Image Url	QR Code Url	On Sale	Scene	Stock	Stock Threshold	Discount Price	Customize1	Customize2	Customize3
2	19782	xxxxx	Super Jangi	xxxx	xxxx	6.50	1.00	xxxx	001	China	001	001	1	1	10	1.00		xxx	xxx	xxx
3	1234567890		Regionale Paprika			3.27		0.00					1	1	10	0.00				
4	19781978		Broccoli	Regional Angebot		20.56		0.00					1	1	10	0.00				
5																				
6																				
7																				
8																				
9																				
10																				
11																				
12																				
13																				
14																				
15																				
16																				
17																				

The effect of this Excel upload is

Product

These datas will be used in the retail and warehousing scenarios.

Filter Upload

New Export

SDR

10/10/0

NFC

0

WiFi

0

	Barcode	Product name	Price	Original Price	Scene	Branches	Action
☐	19782	Super Jangi	6.50	1.00	Normal	004051720462727	CF
☐	1234567890	Regionale Paprika	3.27	0.00	Promotion	004051720462727	CF
☐	19781978	Broccoli	20.56	0.00	Normal	004051720462727	CF

Binding price tag

Return to price tag page

When the base station is online

The price tag will be automatically reported

SDR Based on the SDR protocol, devices can be queried for product information using the filter arrow button.

Filter

Sync Status

Upload

Export

SDR	Normal	Error	Waiting	In progress	Product	Templates	Ap	WORK/CURRENT PSM						
19	19	0	0	0	6	8	2	Normal speed/Sleep mode						
☐	Code	Barcode	Scene	Version	Battery	Status	Update From	Online	PID	Ap Area	Template	Preview	Branches	Action
☐	07200117	20231109002	在售商品	2001/2306/0501	100.0%	Normal	Bind	✓	ESL	AP-60F80063A5D1	26BWRY		INITIAL-1001	

Click the binding button to the right of the price tag that needs to be bound

Bind

Code  07200117

Type  ESL-26BWRY

Barcode  20231109002

Templates 26BWRY

Reset Submit

100.0% Normal Bind ✓ ESL AP-60F80063A5D1

Fill in the product barcode that needs to be displayed and specify the template

SDR Based on the SDR protocol, devices can be queried for product information using the filter arrow button.

Filter
Sync Status
Upload
Trigger(1)

SDR	Normal	Error	Waiting	In progress
19	18	0	1	0

585

Click Batch Trigger, and the price tag is refreshed.



Price adjustment

Enter the product

Modify product parameters,

For example, change the price from \$5 to \$6, click Submit

Product Edit

Home Product 129

Edit

ID

129

Internal code (fpi)

Input Internal code (fpi)

Barcode (fpc)

20231109001

Product name (fpp)

Regionale Paprika

Specification (fps)

Input Specification (fps)

Grade (fpg)

Input Grade (fpg)

Unit (fpu)

bottle

Price (fpp)

8.88

8.88 → 88.88

Discount Price (fvp)

68.00

Original Price (fpop)

0.00

Origin (fpo)

nanjing

MFRS (fpm)

Input MFRS (fpm)

Scene

Normal

Match the Scene in the est template

Customize1 (f#1)

Input Customize1 (f#1)

Customize2 (f#2)

Input Customize2 (f#2)

Customize3 (f#3)

Input Customize3 (f#3)

Customize4 (f#4)

Input Customize4 (f#4)

Customize5 (f#5)

Input Customize5 (f#5)

Customize6 (f#6)

Input Customize6 (f#6)

Customize7 (f#7)

Input Customize7 (f#7)

Customize8 (f#8)

Input Customize8 (f#8)

Customize9 (f#9)

Input Customize9 (f#9)

Customize10 (f#10)

Input Customize10 (f#10)

Customize11 (f#11)

Input Customize11 (f#11)

Customize12 (f#12)

Input Customize12 (f#12)

Customize13 (f#13)

Input Customize13 (f#13)

Customize14 (f#14)

Input Customize14 (f#14)

The price tag bound to the product will enter the pending trigger state.
Click to trigger batch
The price tag will be refreshed to complete the price change.



Nanjing Bohang Electronics Co., Ltd.

Technology Department

2023.1.22

FCC Warning:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications to this device not explicitly approved by manufacturer could void your authority to operate this equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 0cm between the radiator and your body.