




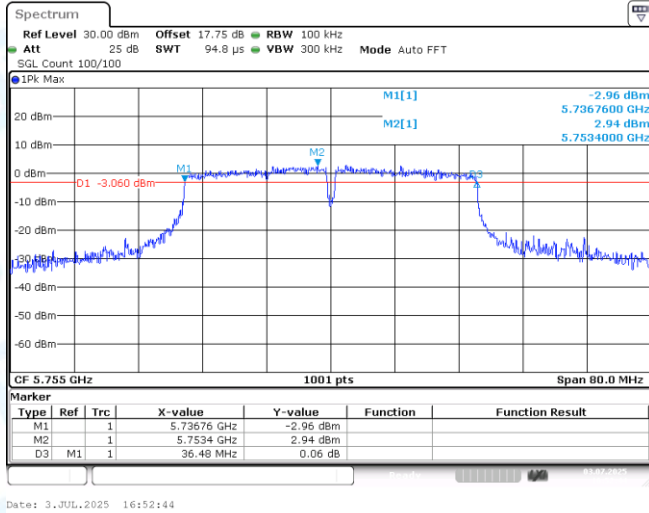


11N40SISO-Ant1-5755-PASS

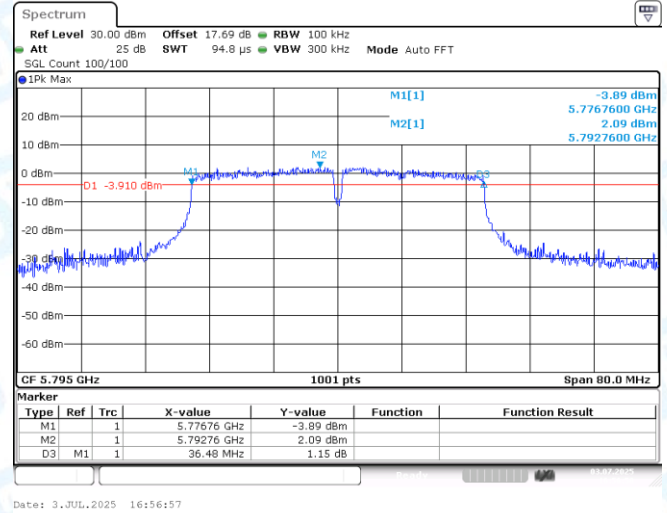


11N40SISO-Ant1-5795-PASS

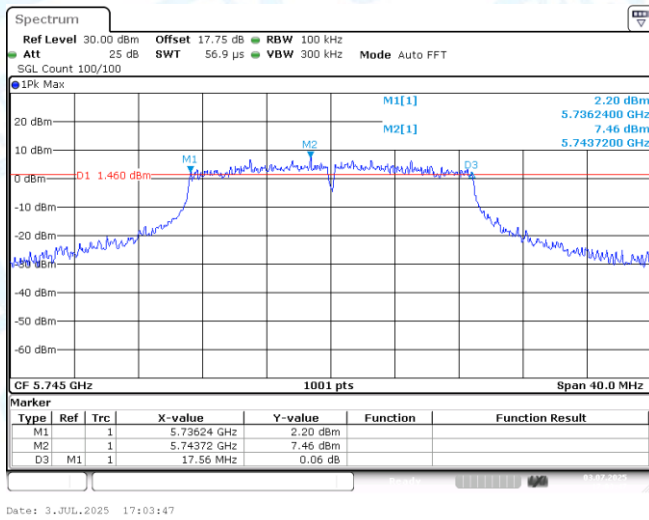


11AC20SISO-Ant1-5745-PASS

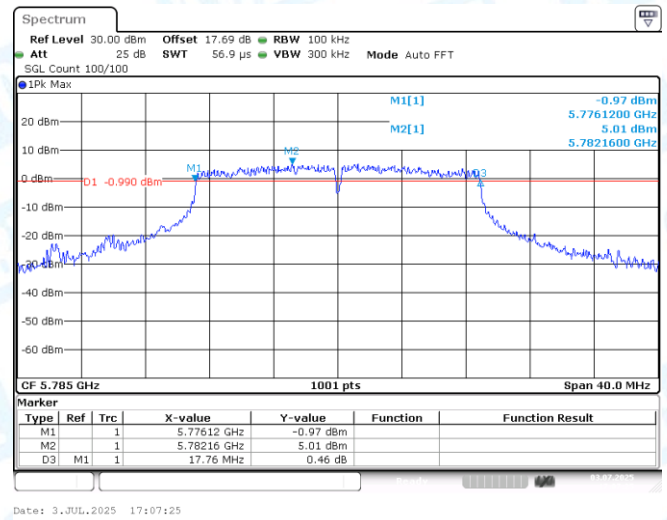


11AC20SISO-Ant1-5785-PASS

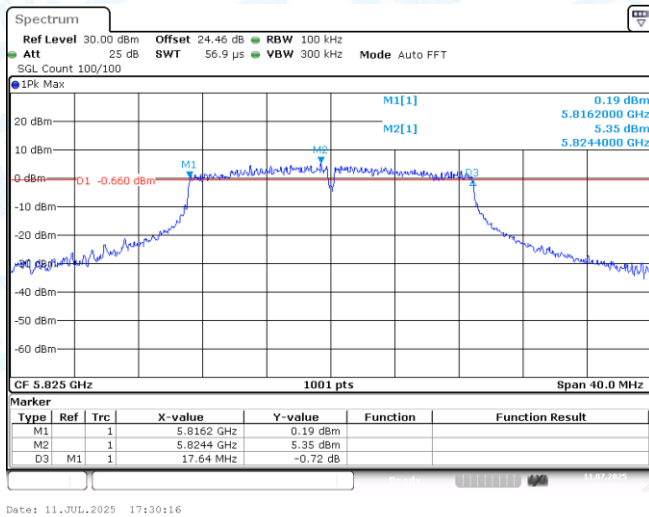


11AC20SISO-Ant1-5825-PASS

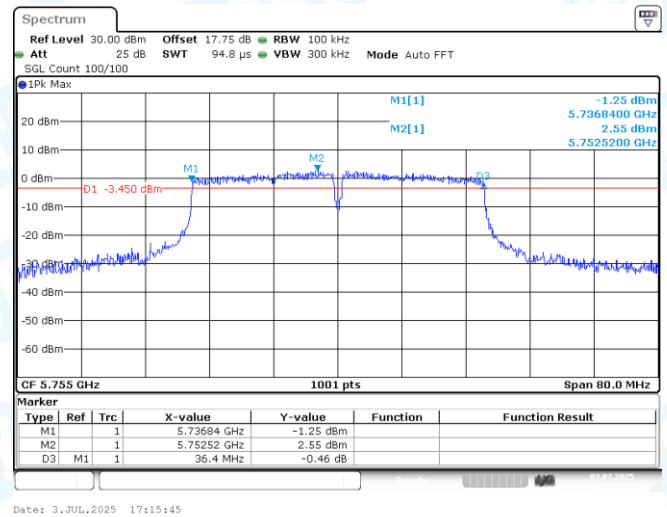


11AC40SISO-Ant1-5755-PASS

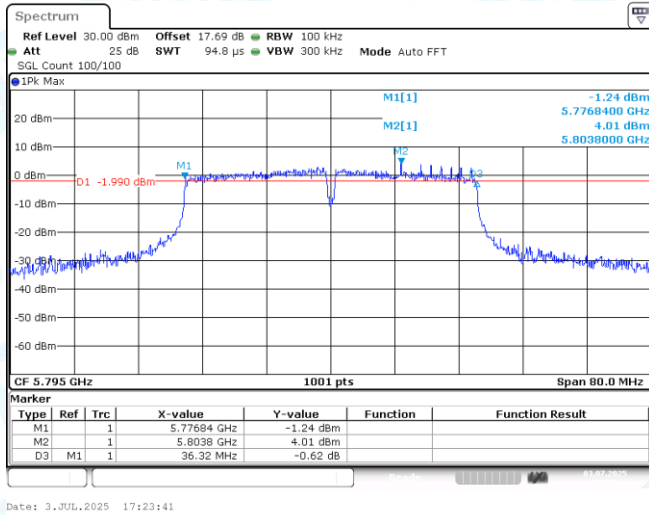


11AC40SISO-Ant1-5795-PASS

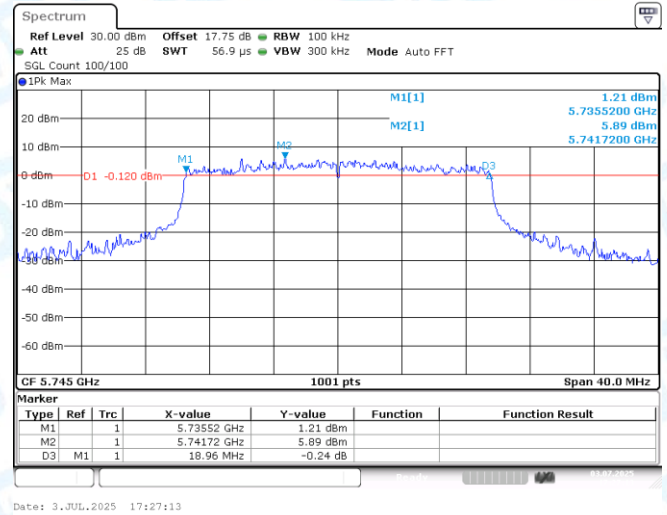


11AX20SISO-Ant1-5745-PASS

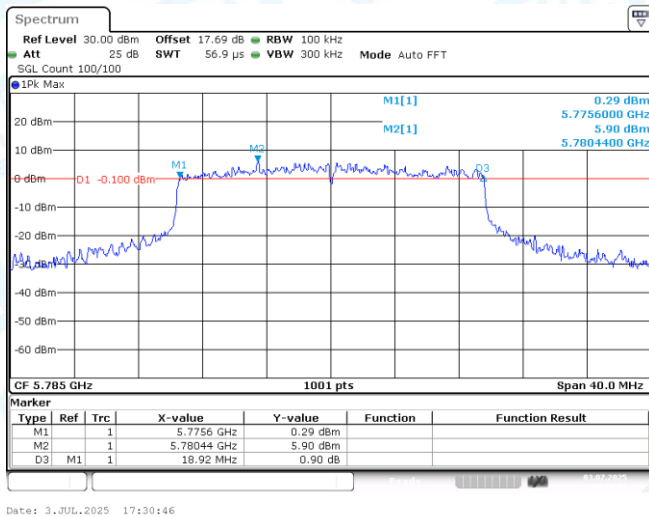


11AX20SISO-Ant1-5785-PASS

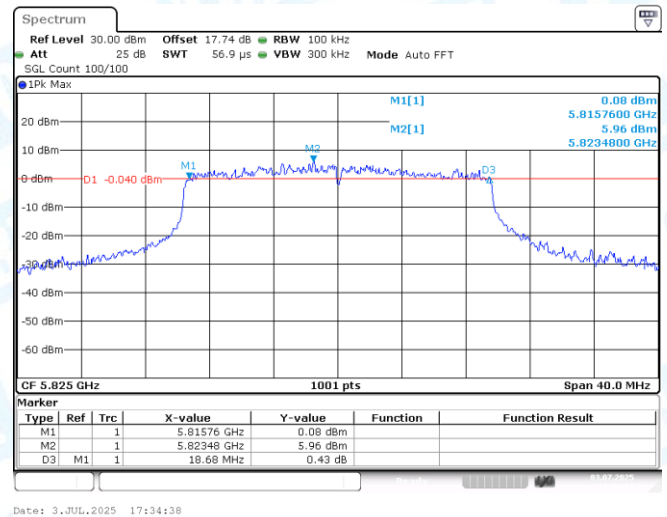

11AX20SISO-Ant1-5825-PASS

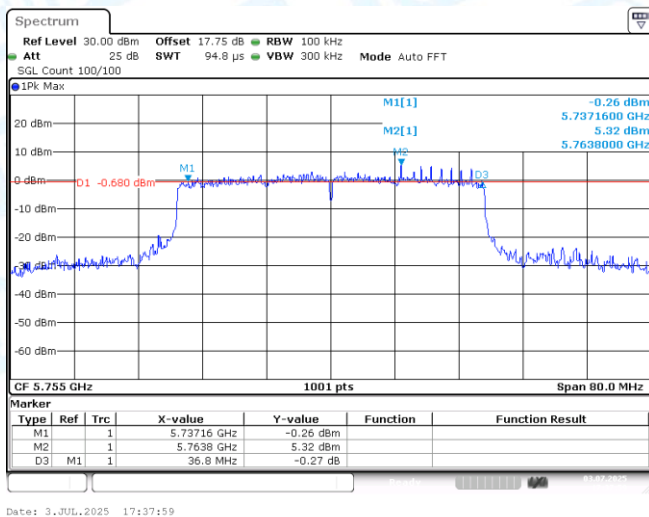

11AX40SISO-Ant1-5755-PASS

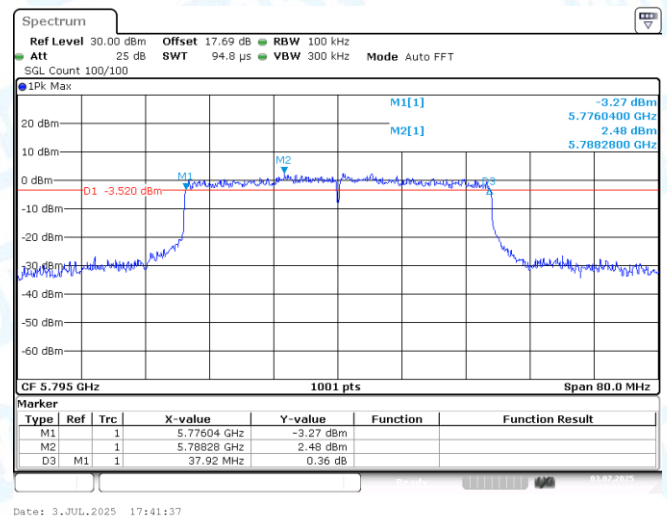

11AX40SISO-Ant1-5795-PASS

4: Duty Cycle

4.1 Test Result

TestMode	Antenna	Frequency [MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	DC Factory	1/T [kHz]
11A	Ant1	5180	1.39	1.47	94.56	0.24	0.72
11A	Ant1	5260	1.40	1.61	86.96	0.61	0.71
11A	Ant1	5500	1.39	1.56	89.10	0.50	0.72
11A	Ant1	5745	1.40	1.63	85.89	0.66	0.71
11N20SISO	Ant1	5180	5.09	5.30	96.04	0.18	0.20
11N20SISO	Ant1	5260	5.09	5.29	96.22	0.17	0.20
11N20SISO	Ant1	5500	5.08	5.25	96.76	0.14	0.20
11N20SISO	Ant1	5745	5.09	5.20	97.88	0.09	0.20
11N40SISO	Ant1	5190	4.90	5.03	97.42	0.11	0.20
11N40SISO	Ant1	5270	4.89	5.02	97.41	0.11	0.20
11N40SISO	Ant1	5510	4.91	5.39	91.09	0.41	0.20
11N40SISO	Ant1	5755	4.91	4.98	98.59	0.06	0.20
11AC20SISO	Ant1	5180	5.11	5.18	98.65	0.06	0.20
11AC20SISO	Ant1	5260	5.10	5.34	95.51	0.20	0.20
11AC20SISO	Ant1	5500	5.09	5.28	96.40	0.16	0.20
11AC20SISO	Ant1	5745	5.10	5.21	97.89	0.09	0.20
11AC40SISO	Ant1	5190	4.91	5.02	97.81	0.10	0.20
11AC40SISO	Ant1	5270	4.91	5.13	95.71	0.19	0.20
11AC40SISO	Ant1	5510	4.91	5.05	97.23	0.12	0.20
11AC40SISO	Ant1	5755	4.90	5.09	96.27	0.17	0.20
11AX20SISO	Ant1	5180	3.88	3.96	97.98	0.09	0.26
11AX20SISO	Ant1	5260	3.88	4.07	95.33	0.21	0.26
11AX20SISO	Ant1	5500	3.88	4.10	94.63	0.24	0.26
11AX20SISO	Ant1	5745	3.88	3.99	97.24	0.12	0.26
11AX40SISO	Ant1	5190	3.88	3.98	97.49	0.11	0.26
11AX40SISO	Ant1	5270	3.88	4.24	91.51	0.39	0.26
11AX40SISO	Ant1	5510	3.88	4.27	90.87	0.42	0.26
11AX40SISO	Ant1	5755	3.88	3.96	97.98	0.09	0.26


Note: 1, Duty Cycle= Transmission Duration/ Transmission Period



2, DC Factory=10*Log₁₀(1/Duty Cycle)

3, 1/T=1/ Transmission Duration

RF Conducted test Offset= cable loss+ Attenuator(10dB).



4.2 Test Graphs

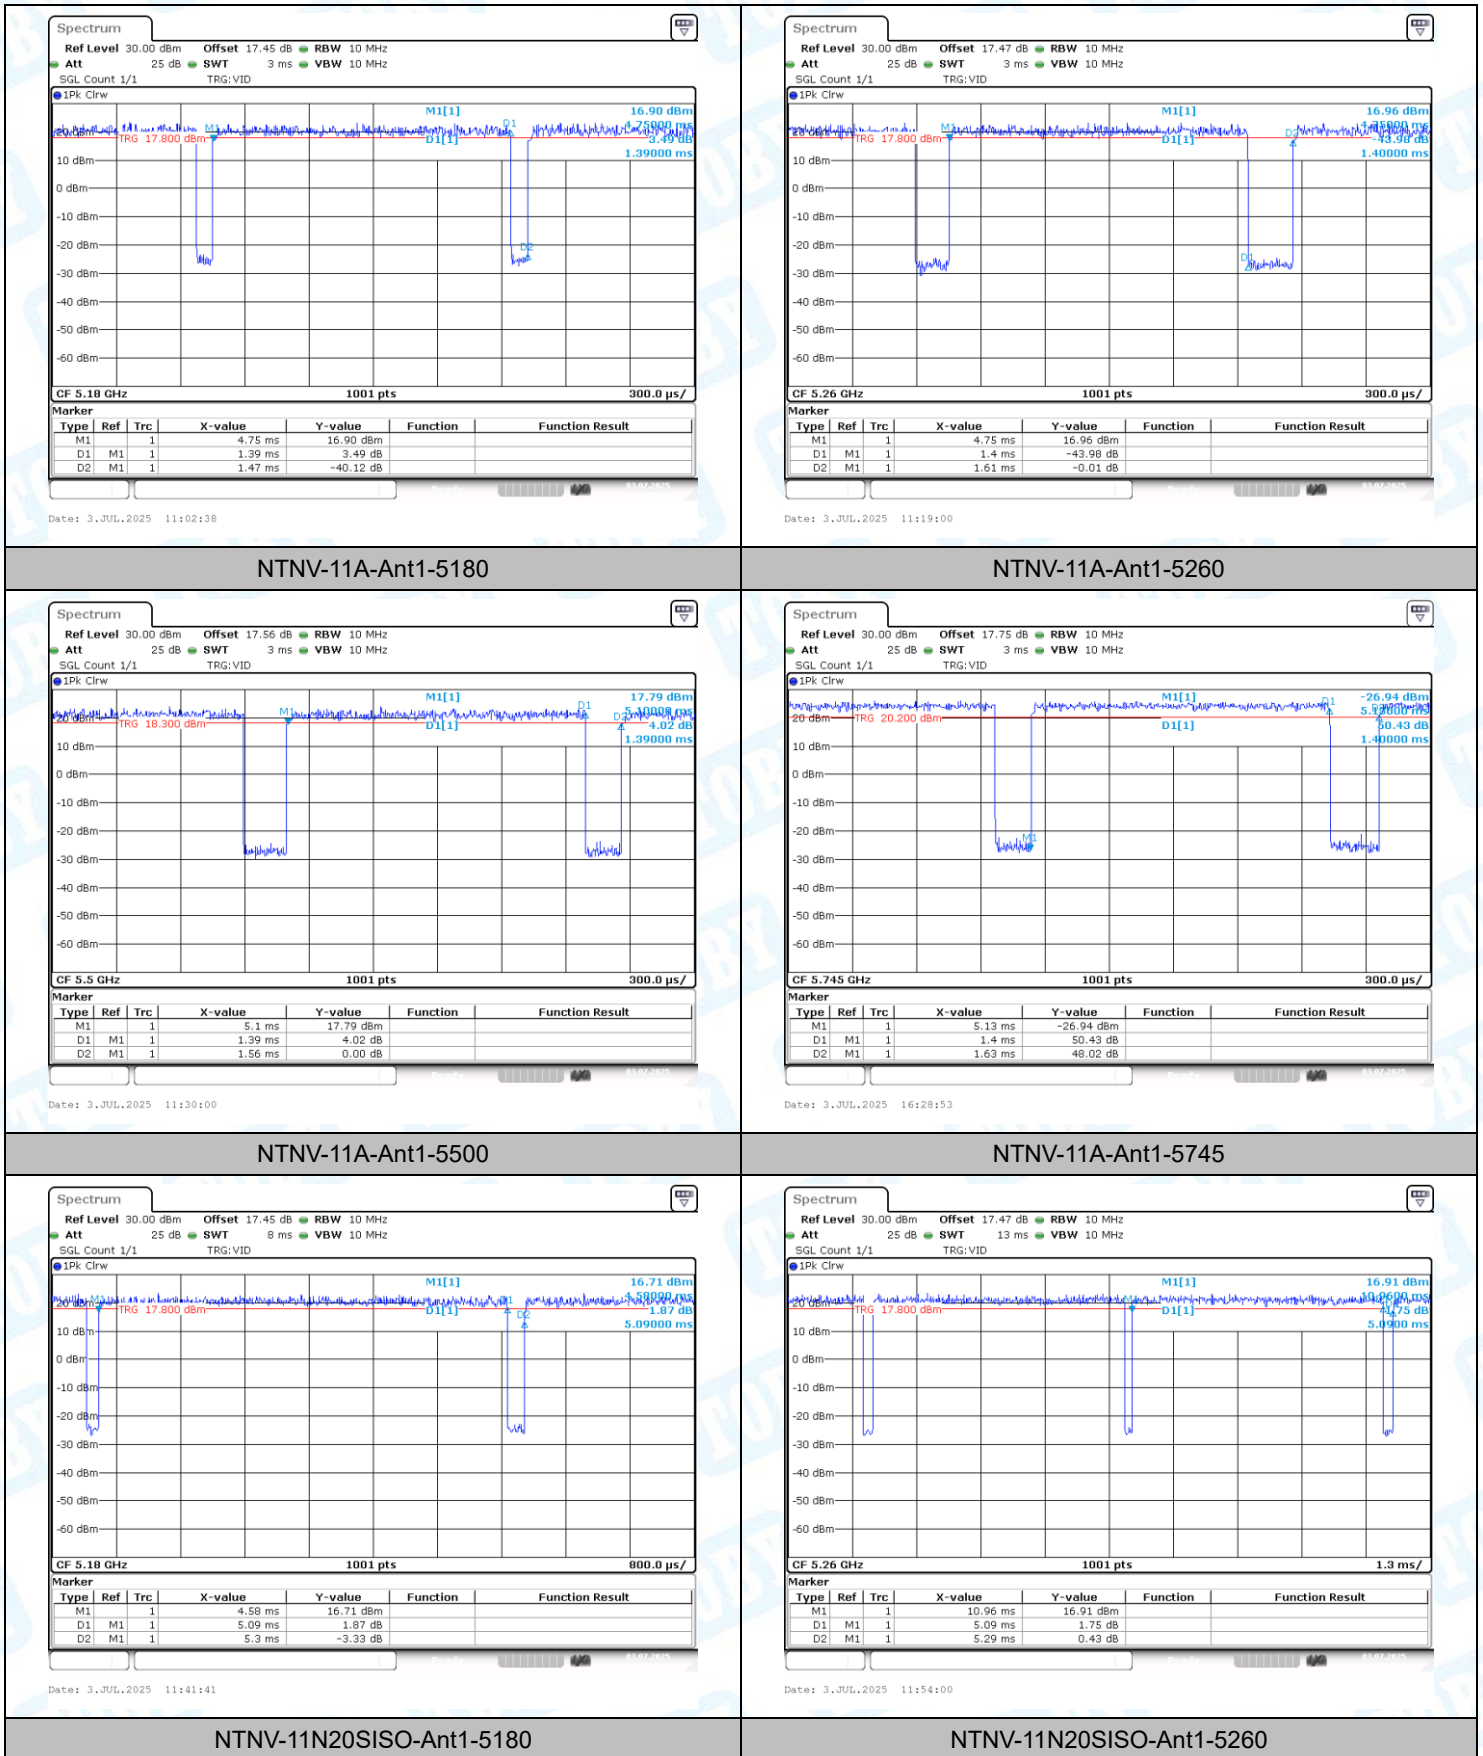

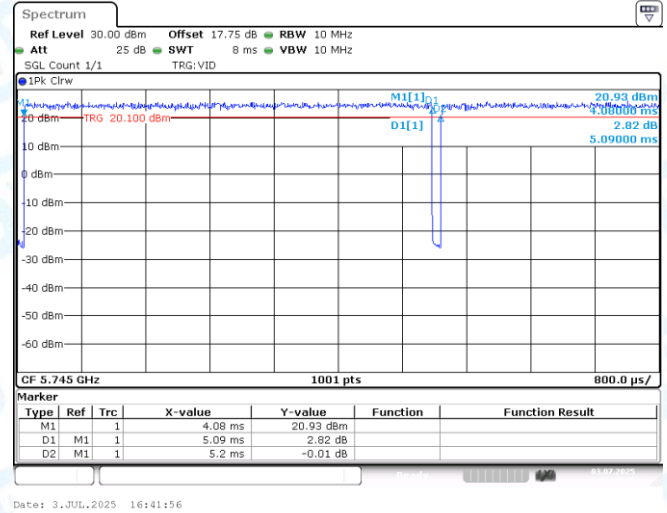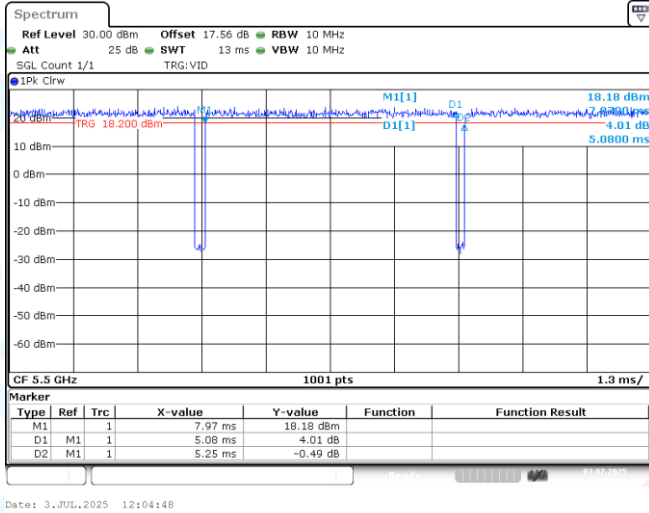



NTNV-11N20SISO-Ant1-5500

NTNV-11N20SISO-Ant1-5745

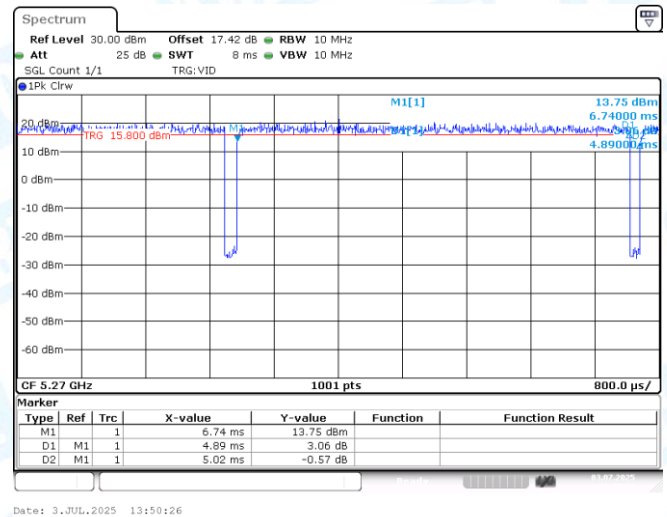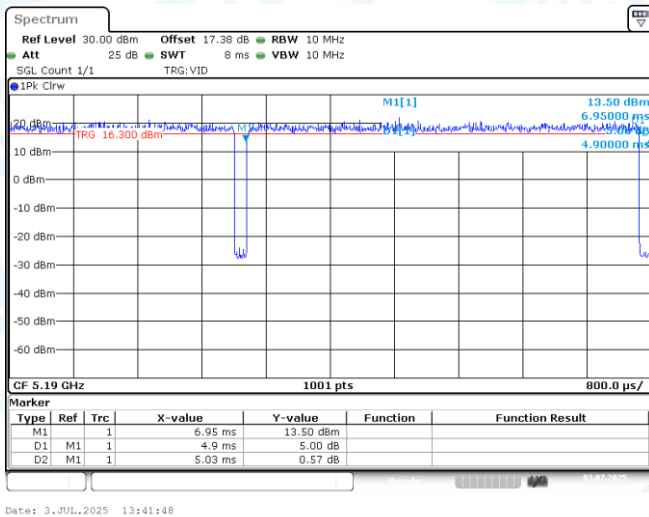


NTNV-11N40SISO-Ant1-5190

NTNV-11N40SISO-Ant1-5270

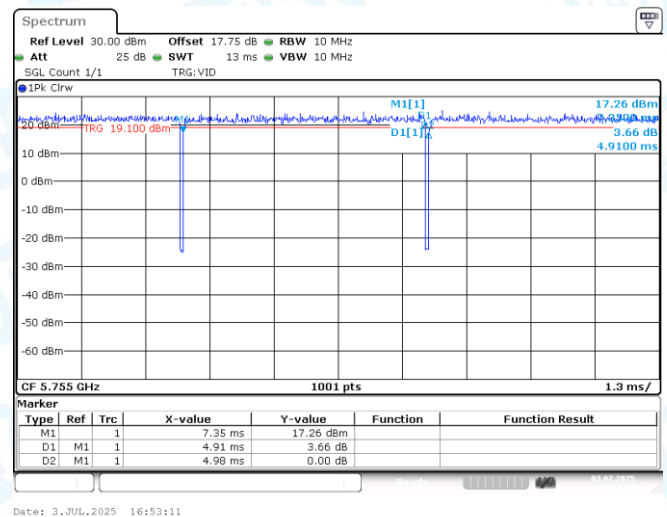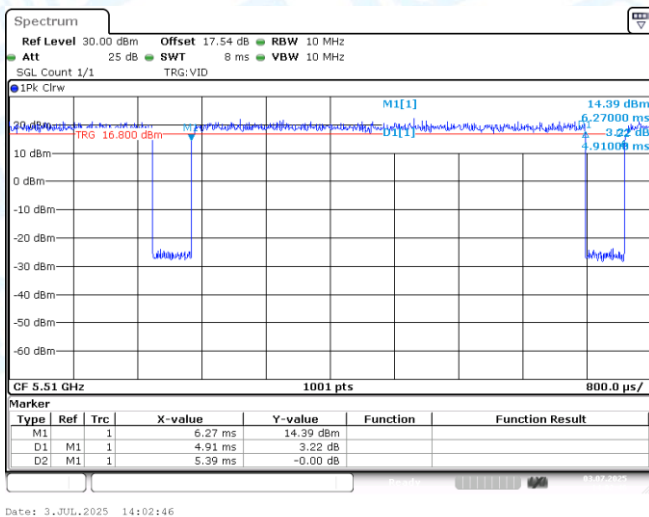


NTNV-11N40SISO-Ant1-5510

NTNV-11N40SISO-Ant1-5755

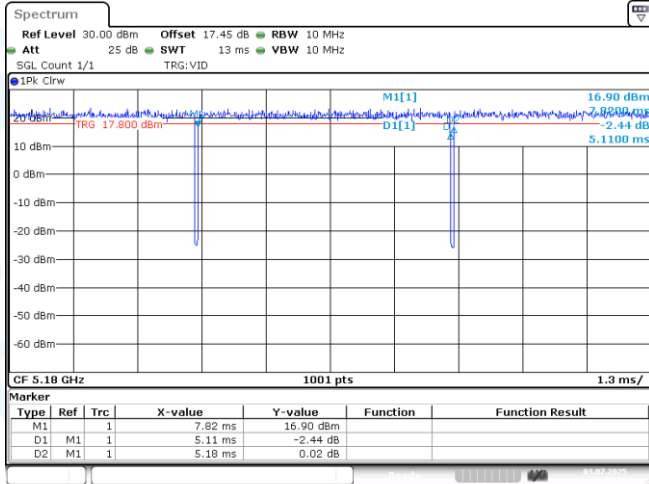


Date: 3.JUL.2025 14:15:07

NTNV-11AC20SISO-Ant1-5180

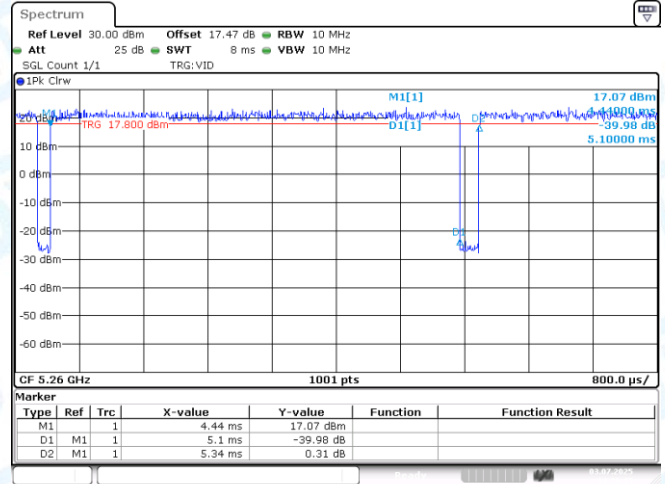


Date: 3.JUL.2025 14:26:15

NTNV-11AC20SISO-Ant1-5260

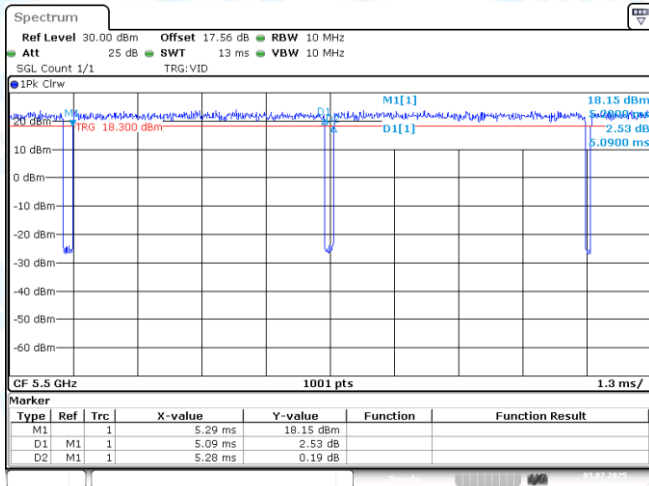


Date: 3.JUL.2025 14:38:04

NTNV-11AC20SISO-Ant1-5500

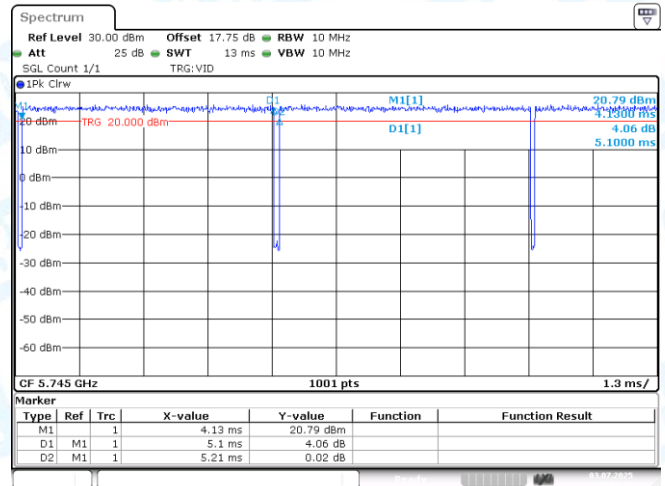


Date: 3.JUL.2025 17:04:12

NTNV-11AC20SISO-Ant1-5745

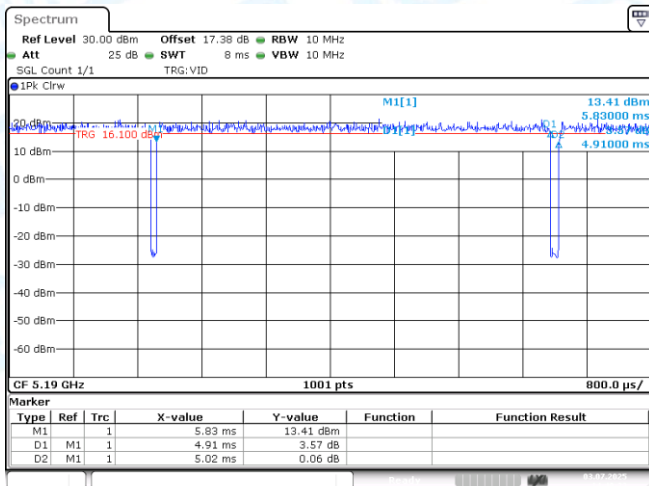



Date: 3.JUL.2025 14:49:23

NTNV-11AC40SISO-Ant1-5190

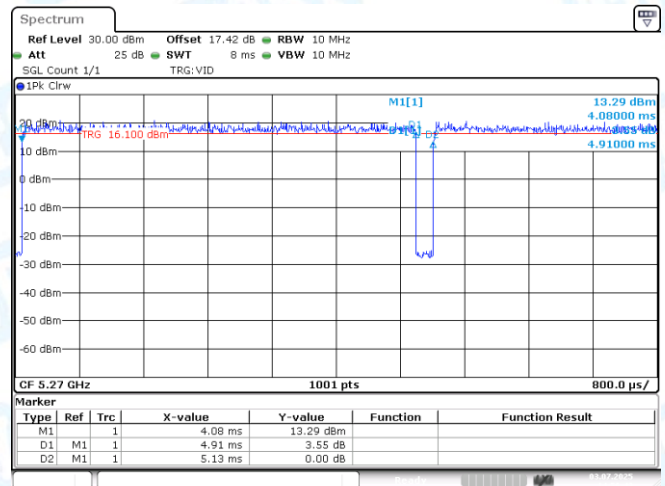



Date: 3.JUL.2025 14:56:43

NTNV-11AC40SISO-Ant1-5270

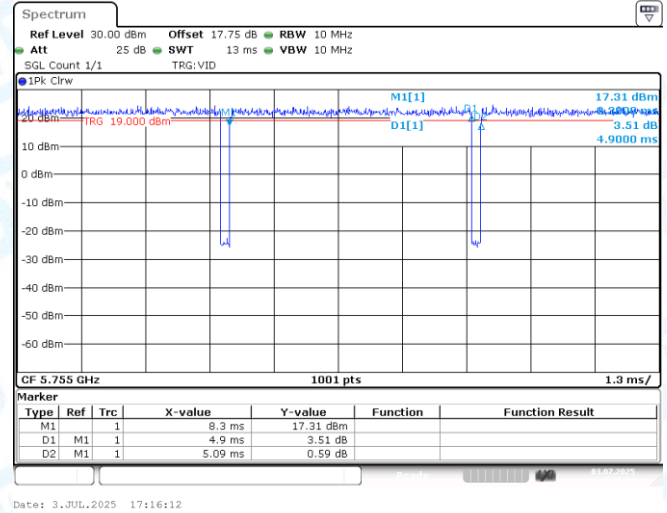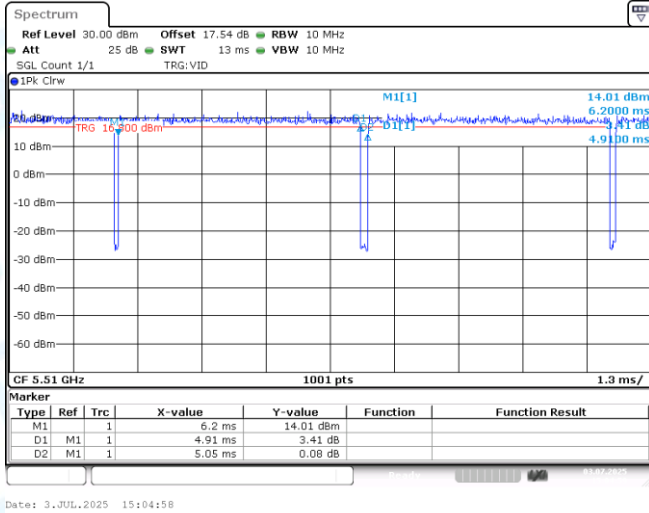



NTNV-11AC40SISO-Ant1-5510

NTNV-11AC40SISO-Ant1-5755

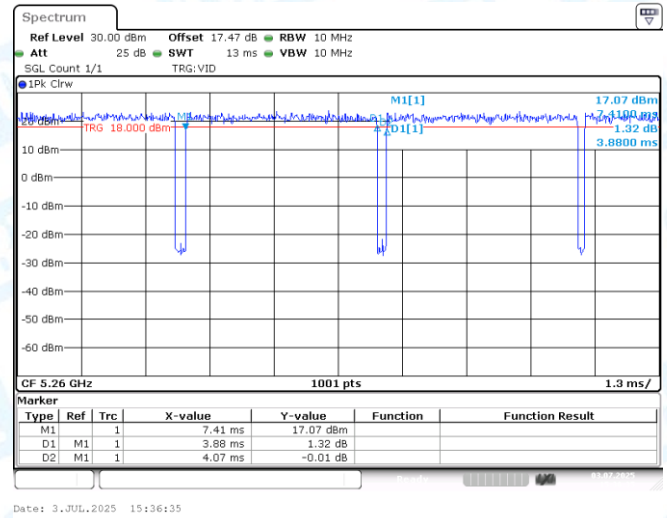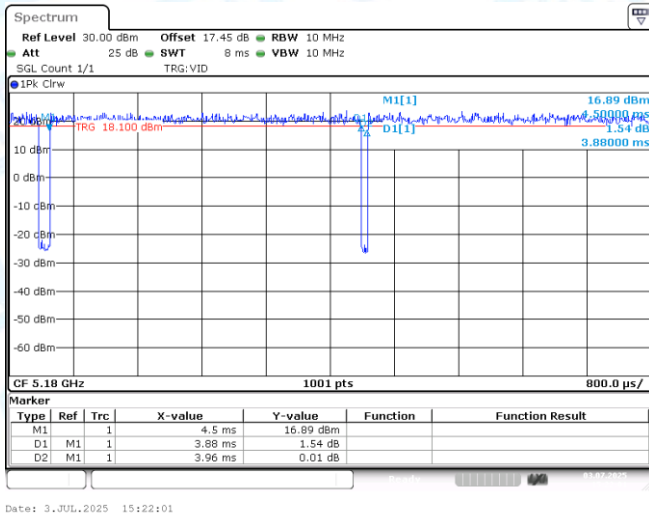


NTNV-11AX20SISO-Ant1-5180

NTNV-11AX20SISO-Ant1-5260

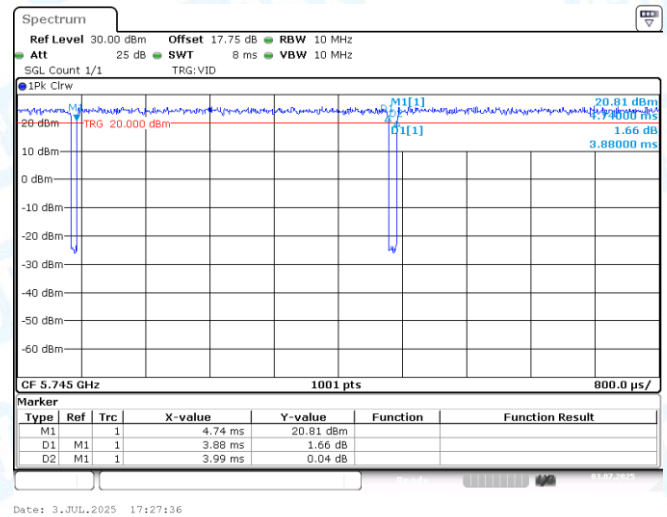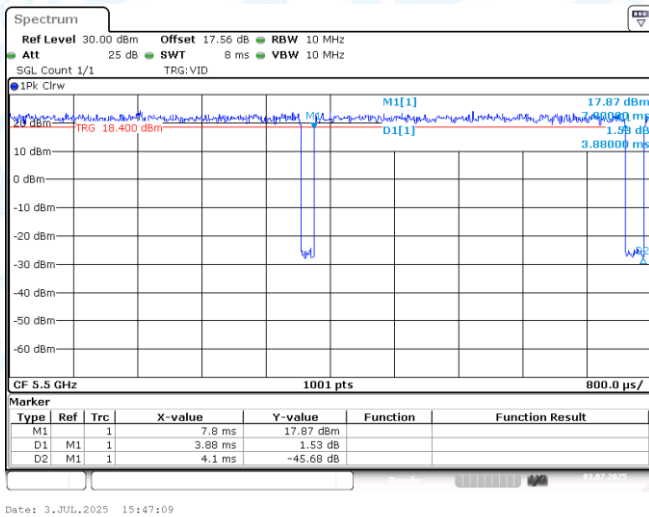


NTNV-11AX20SISO-Ant1-5500


NTNV-11AX20SISO-Ant1-5745

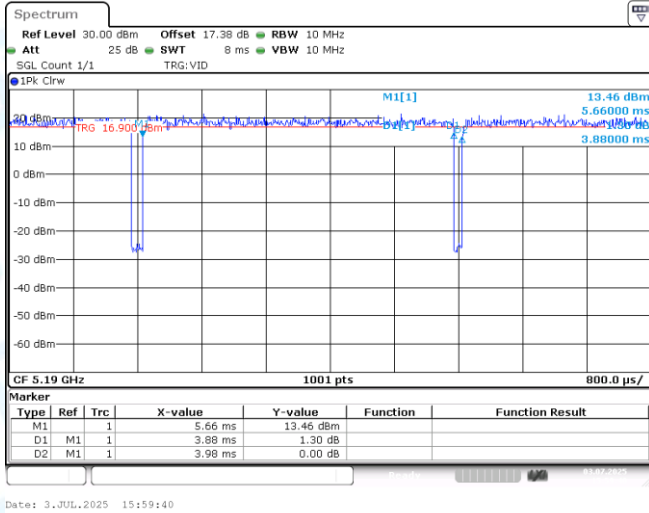


NTNV-11AX40SISO-Ant1-5190

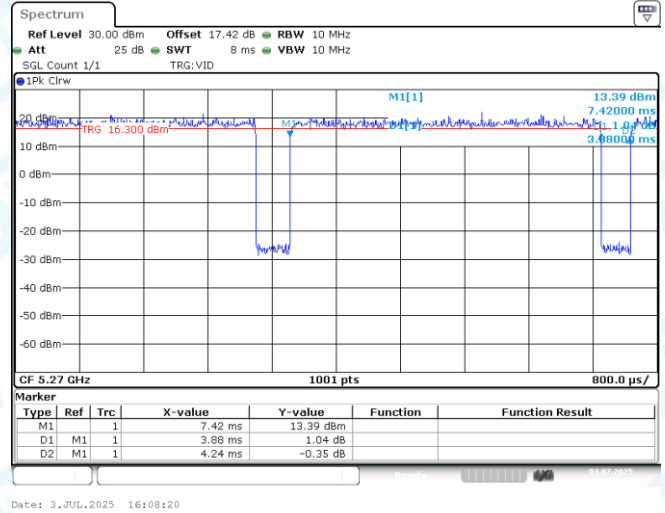

NTNV-11AX40SISO-Ant1-5270

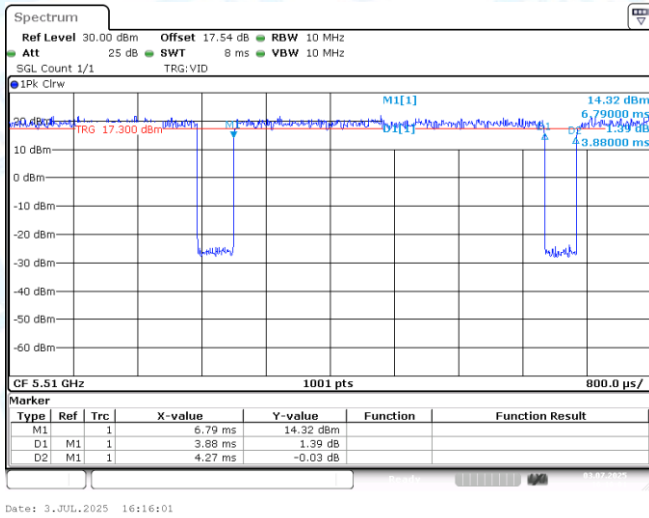

NTNV-11AX40SISO-Ant1-5510

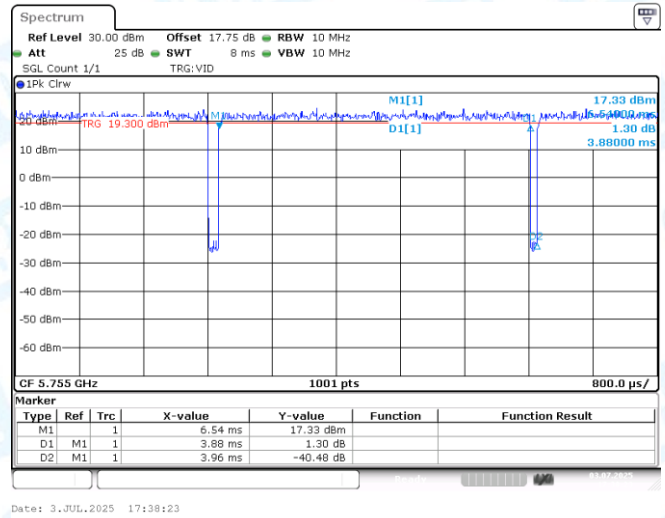

NTNV-11AX40SISO-Ant1-5755

5: Maximum conducted output power

5.1 Test Result

TestMode	Antenna	Frequency [MHz]	Raw Power [dBm]	DC Factor	Result [dBm]	Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5180	15.38	0.24	15.62	≤23.98	2.73	18.35	≤22.36	PASS
11A	Ant1	5200	15.07	0.24	15.31	≤23.98	2.73	18.04	≤22.36	PASS
11A	Ant1	5240	15.23	0.24	15.47	≤23.98	2.73	18.20	≤22.36	PASS
11A	Ant1	5260	15.13	0.61	15.74	≤23.98	2.73	18.47	≤29.60	PASS
11A	Ant1	5280	14.83	0.61	15.44	≤23.98	2.73	18.17	≤29.60	PASS
11A	Ant1	5320	14.58	0.61	15.19	≤23.98	2.73	17.92	≤29.60	PASS
11A	Ant1	5500	16.23	0.50	16.73	≤23.98	2.73	19.46	≤29.46	PASS
11A	Ant1	5580	14.93	0.50	15.43	≤23.98	2.73	18.16	≤29.46	PASS
11A	Ant1	5700	15.59	0.50	16.09	≤23.98	2.73	18.82	≤29.46	PASS
11A	Ant1	5745	18.89	0.66	19.55	≤30.00	2.73	22.28	≤30.00	PASS
11A	Ant1	5785	18.75	0.66	19.41	≤30.00	2.73	22.14	≤30.00	PASS
11A	Ant1	5825	18.31	0.66	18.97	≤30.00	2.73	21.70	≤30.00	PASS
11N20SISO	Ant1	5180	15.08	0.18	15.26	≤23.98	2.73	17.99	≤22.63	PASS
11N20SISO	Ant1	5200	14.52	0.18	14.70	≤23.98	2.73	17.43	≤22.63	PASS
11N20SISO	Ant1	5240	14.63	0.18	14.81	≤23.98	2.73	17.54	≤22.63	PASS
11N20SISO	Ant1	5260	15.15	0.17	15.32	≤23.98	2.73	18.05	≤29.60	PASS
11N20SISO	Ant1	5280	14.43	0.17	14.60	≤23.98	2.73	17.33	≤29.60	PASS
11N20SISO	Ant1	5320	13.92	0.17	14.09	≤23.98	2.73	16.82	≤29.60	PASS
11N20SISO	Ant1	5500	16.21	0.14	16.35	≤23.98	2.73	19.08	≤29.71	PASS
11N20SISO	Ant1	5580	14.44	0.14	14.58	≤23.98	2.73	17.31	≤29.71	PASS
11N20SISO	Ant1	5700	15.17	0.14	15.31	≤23.98	2.73	18.04	≤29.71	PASS
11N20SISO	Ant1	5745	18.90	0.09	18.99	≤30.00	2.73	21.72	≤30.00	PASS
11N20SISO	Ant1	5785	18.80	0.09	18.89	≤30.00	2.73	21.62	≤30.00	PASS
11N20SISO	Ant1	5825	17.95	0.09	18.04	≤30.00	2.73	20.77	≤30.00	PASS
11N40SISO	Ant1	5190	14.37	0.11	14.48	≤23.98	2.73	17.21	≤23.00	PASS
11N40SISO	Ant1	5230	14.95	0.11	15.06	≤23.98	2.73	17.79	≤23.00	PASS
11N40SISO	Ant1	5270	14.27	0.11	14.38	≤23.98	2.73	17.11	≤30.00	PASS
11N40SISO	Ant1	5310	13.96	0.11	14.07	≤23.98	2.73	16.80	≤30.00	PASS
11N40SISO	Ant1	5510	16.17	0.41	16.58	≤23.98	2.73	19.31	≤30.00	PASS
11N40SISO	Ant1	5550	15.99	0.41	16.40	≤23.98	2.73	19.13	≤30.00	PASS
11N40SISO	Ant1	5670	15.77	0.41	16.18	≤23.98	2.73	18.91	≤30.00	PASS
11N40SISO	Ant1	5755	18.02	0.06	18.08	≤30.00	2.73	20.81	≤30.00	PASS
11N40SISO	Ant1	5795	18.43	0.06	18.49	≤30.00	2.73	21.22	≤30.00	PASS
11AC20SISO	Ant1	5180	14.65	0.06	14.71	≤23.98	2.73	17.44	≤22.67	PASS
11AC20SISO	Ant1	5200	14.58	0.06	14.64	≤23.98	2.73	17.37	≤22.67	PASS
11AC20SISO	Ant1	5240	15.19	0.06	15.25	≤23.98	2.73	17.98	≤22.67	PASS
11AC20SISO	Ant1	5260	14.72	0.20	14.92	≤23.98	2.73	17.65	≤29.73	PASS
11AC20SISO	Ant1	5280	15.01	0.20	15.21	≤23.98	2.73	17.94	≤29.73	PASS
11AC20SISO	Ant1	5320	14.11	0.20	14.31	≤23.98	2.73	17.04	≤29.73	PASS
11AC20SISO	Ant1	5500	15.78	0.16	15.94	≤23.98	2.73	18.67	≤29.72	PASS
11AC20SISO	Ant1	5580	14.96	0.16	15.12	≤23.98	2.73	17.85	≤29.72	PASS
11AC20SISO	Ant1	5700	15.66	0.16	15.82	≤23.98	2.73	18.55	≤29.72	PASS
11AC20SISO	Ant1	5745	18.33	0.09	18.42	≤30.00	2.73	21.15	≤30.00	PASS
11AC20SISO	Ant1	5785	18.23	0.09	18.32	≤30.00	2.73	21.05	≤30.00	PASS
11AC20SISO	Ant1	5825	17.91	0.09	18.00	≤30.00	2.73	20.73	≤30.00	PASS
11AC40SISO	Ant1	5190	14.43	0.10	14.53	≤23.98	2.73	17.26	≤23.00	PASS
11AC40SISO	Ant1	5230	14.45	0.10	14.55	≤23.98	2.73	17.28	≤23.00	PASS
11AC40SISO	Ant1	5270	14.83	0.19	15.02	≤23.98	2.73	17.75	≤30.00	PASS
11AC40SISO	Ant1	5310	14.40	0.19	14.59	≤23.98	2.73	17.32	≤30.00	PASS
11AC40SISO	Ant1	5510	15.92	0.12	16.04	≤23.98	2.73	18.77	≤30.00	PASS
11AC40SISO	Ant1	5550	15.93	0.12	16.05	≤23.98	2.73	18.78	≤30.00	PASS

11AC40SISO	Ant1	5670	15.77	0.12	15.89	≤23.98	2.73	18.62	≤30.00	PASS
11AC40SISO	Ant1	5755	17.96	0.17	18.13	≤30.00	2.73	20.86	≤30.00	PASS
11AC40SISO	Ant1	5795	18.43	0.17	18.60	≤30.00	2.73	21.33	≤30.00	PASS
11AX20SISO	Ant1	5180	15.21	0.09	15.30	≤23.98	2.73	18.03	≤22.85	PASS
11AX20SISO	Ant1	5200	14.95	0.09	15.04	≤23.98	2.73	17.77	≤22.85	PASS
11AX20SISO	Ant1	5240	15.18	0.09	15.27	≤23.98	2.73	18.00	≤22.85	PASS
11AX20SISO	Ant1	5260	14.72	0.21	14.93	≤23.98	2.73	17.66	≤29.84	PASS
11AX20SISO	Ant1	5280	14.69	0.21	14.90	≤23.98	2.73	17.63	≤29.84	PASS
11AX20SISO	Ant1	5320	14.56	0.21	14.77	≤23.98	2.73	17.50	≤29.84	PASS
11AX20SISO	Ant1	5500	15.86	0.24	16.10	≤23.98	2.73	18.83	≤29.89	PASS
11AX20SISO	Ant1	5580	14.57	0.24	14.81	≤23.98	2.73	17.54	≤29.89	PASS
11AX20SISO	Ant1	5700	15.26	0.24	15.50	≤23.98	2.73	18.23	≤29.89	PASS
11AX20SISO	Ant1	5745	18.41	0.12	18.53	≤30.00	2.73	21.26	≤30.00	PASS
11AX20SISO	Ant1	5785	18.35	0.12	18.47	≤30.00	2.73	21.20	≤30.00	PASS
11AX20SISO	Ant1	5825	18.03	0.12	18.15	≤30.00	2.73	20.88	≤30.00	PASS
11AX40SISO	Ant1	5190	14.77	0.11	14.88	≤23.98	2.73	17.61	≤23.00	PASS
11AX40SISO	Ant1	5230	14.81	0.11	14.92	≤23.98	2.73	17.65	≤23.00	PASS
11AX40SISO	Ant1	5270	14.69	0.39	15.08	≤23.98	2.73	17.81	≤30.00	PASS
11AX40SISO	Ant1	5310	14.63	0.39	15.02	≤23.98	2.73	17.75	≤30.00	PASS
11AX40SISO	Ant1	5510	15.93	0.42	16.35	≤23.98	2.73	19.08	≤30.00	PASS
11AX40SISO	Ant1	5550	15.40	0.42	15.82	≤23.98	2.73	18.55	≤30.00	PASS
11AX40SISO	Ant1	5670	15.96	0.42	16.38	≤23.98	2.73	19.11	≤30.00	PASS
11AX40SISO	Ant1	5755	18.72	0.09	18.81	≤30.00	2.73	21.54	≤30.00	PASS
11AX40SISO	Ant1	5795	18.24	0.09	18.33	≤30.00	2.73	21.06	≤30.00	PASS

U-NII-1

E.I.R.P Plimit is 23dBm or 10dBm+ 10 log B, whichever is lower (B=99%OBW).

For 802.11a: $10 + 10 \log_{10} B = 10 + 10 \log(17.223 \text{ MHz}) = 22.36$, So the E.I.R.P Plimit=22.36dBm

For 802.11n(HT20): $10 + 10 \log_{10} B = 10 + 10 \log(18.342 \text{ MHz}) = 22.63$ dBm, So the E.I.R.P Plimit =22.63dBm

For 802.11 ac(VHT20): $10 + 10 \log_{10} B = 10 + 10 \log(18.501 \text{ MHz}) = 22.67$ dBm, So the E.I.R.P Plimit=22.67dBm

For 802.11 ax(HE20): $10 + 10 \log_{10} B = 10 + 10 \log(19.261 \text{ MHz}) = 22.85$ dBm, So the E.I.R.P Plimit =22.85dBm

For 802.11 n(HT40)&ac(HT40)& ax(HE40): $10 + 10 \log_{10} B > 23$ dBm, So the Plimit=23dBm

The B is 99% OBW please refer to the Attachment 2.

U-NII-2A

E.I.R.P Plimit is 30dBm or 17dBm+ 10 log B, whichever is lower (B=99%OBW).

For 802.11a: $17 + 10 \log_{10} B = 17 + 10 \log(18.182 \text{ MHz}) = 29.60$, So the E.I.R.P Plimit =29.60dBm

For 802.11n(HT20): $17 + 10 \log_{10} B = 17 + 10 \log(19.540 \text{ MHz}) = 29.91$ dBm, So the E.I.R.P Plimit =29.91dBm

For 802.11 ac(VHT20): $17 + 10 \log_{10} B = 17 + 10 \log(18.741 \text{ MHz}) = 29.73$ dBm, So the E.I.R.P Plimit =29.73dBm

For 802.11 ax(HE20): $17 + 10 \log_{10} B = 17 + 10 \log(19.221 \text{ MHz}) = 29.84$ dBm, So the E.I.R.P Plimit =29.84dBm

For 802.11 n(HT40)&ac(HT40)& ax(HE40): $17 + 10 \log_{10} B > 30$ dBm, So the Plimit=30dBm

The B is 99% OBW please refer to the Attachment 2.

U-NII-2C

E.I.R.P Plimit is 30dBm or 17dBm+ 10 log B, whichever is lower (B=99%OBW).

For 802.11a: $17 + 10 \log_{10} B = 17 + 10 \log(17.622 \text{ MHz}) = 29.46$, So the E.I.R.P Plimit =29.46dBm

For 802.11n(HT20): $17 + 10 \log_{10} B = 17 + 10 \log(18.661 \text{ MHz}) = 29.71$ dBm, So the E.I.R.P Plimit =29.71dBm

For 802.11 ac(VHT20): $17 + 10 \log_{10} B = 17 + 10 \log(18.701 \text{ MHz}) = 29.72$ dBm, So the E.I.R.P Plimit =29.72dBm

For 802.11 ax(HE20): $17 + 10 \log_{10} B = 17 + 10 \log(19.461 \text{ MHz}) = 29.89$ dBm, So the E.I.R.P Plimit =29.89dBm

For 802.11 n(HT40)&ac(HT40)& ax(HE40): $17 + 10 \log_{10} B > 30$ dBm, So the Plimit=30dBm

The B is 99% OBW please refer to the Attachment 2.

Note: RF Conducted test Offset= cable loss+ Attenuator(10dB).

6: Maximum power spectral density

6.1 Test Result


Test Mode	Ant.	Frequency [MHz]	RawData [dBm/3kHz]	DC Factory	Result [dBm/MHz] [dBm/500kHz]	Gain [dBi]	EIRP PSD [dBm/MHz]	Limit[dBm/MHz] Limit[dBm/500kHz]	EIRP Limit [dBm/MHz]	Verdict
11A	Ant1	5180	4.61	0.24	4.85	2.73	7.58	≤11.00	≤10.00	PASS
11A	Ant1	5200	4.42	0.24	4.66	2.73	7.39	≤11.00	≤10.00	PASS
11A	Ant1	5240	4.64	0.24	4.88	2.73	7.61	≤11.00	≤10.00	PASS
11A	Ant1	5260	4.59	0.61	5.2	2.73	7.93	≤11.00	---	PASS
11A	Ant1	5280	4.03	0.61	4.64	2.73	7.37	≤11.00	---	PASS
11A	Ant1	5320	4.04	0.61	4.65	2.73	7.38	≤11.00	---	PASS
11A	Ant1	5500	5.53	0.50	6.03	2.73	8.76	≤11.00	---	PASS
11A	Ant1	5580	4.49	0.50	4.99	2.73	7.72	≤11.00	---	PASS
11A	Ant1	5700	5.29	0.50	5.79	2.73	8.52	≤11.00	---	PASS
11A	Ant1	5745	5.89	0.66	6.55	2.73	9.28	≤30.00	---	PASS
11A	Ant1	5785	5.48	0.66	6.14	2.73	8.87	≤30.00	---	PASS
11A	Ant1	5825	5.37	0.66	6.03	2.73	8.76	≤30.00	---	PASS
11N20SISO	Ant1	5180	4.22	0.18	4.4	2.73	7.13	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5200	4.28	0.18	4.46	2.73	7.19	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5240	4.46	0.18	4.64	2.73	7.37	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5260	4.45	0.17	4.62	2.73	7.35	≤11.00	---	PASS
11N20SISO	Ant1	5280	3.85	0.17	4.02	2.73	6.75	≤11.00	---	PASS
11N20SISO	Ant1	5320	3.75	0.17	3.92	2.73	6.65	≤11.00	---	PASS
11N20SISO	Ant1	5500	5.51	0.14	5.65	2.73	8.38	≤11.00	---	PASS
11N20SISO	Ant1	5580	4.44	0.14	4.58	2.73	7.31	≤11.00	---	PASS
11N20SISO	Ant1	5700	5.47	0.14	5.61	2.73	8.34	≤11.00	---	PASS
11N20SISO	Ant1	5745	5.64	0.09	5.73	2.73	8.46	≤30.00	---	PASS
11N20SISO	Ant1	5785	5.23	0.09	5.32	2.73	8.05	≤30.00	---	PASS
11N20SISO	Ant1	5825	5.09	0.09	5.18	2.73	7.91	≤30.00	---	PASS
11N40SISO	Ant1	5190	1.72	0.11	1.83	2.73	4.56	≤11.00	≤10.00	PASS
11N40SISO	Ant1	5230	1.7	0.11	1.81	2.73	4.54	≤11.00	≤10.00	PASS
11N40SISO	Ant1	5270	1.02	0.11	1.13	2.73	3.86	≤11.00	---	PASS
11N40SISO	Ant1	5310	0.81	0.11	0.92	2.73	3.65	≤11.00	---	PASS
11N40SISO	Ant1	5510	2.76	0.41	3.17	2.73	5.9	≤11.00	---	PASS
11N40SISO	Ant1	5550	2.75	0.41	3.16	2.73	5.89	≤11.00	---	PASS
11N40SISO	Ant1	5670	2.64	0.41	3.05	2.73	5.78	≤11.00	---	PASS
11N40SISO	Ant1	5755	2.4	0.06	2.46	2.73	5.19	≤30.00	---	PASS
11N40SISO	Ant1	5795	2.08	0.06	2.14	2.73	4.87	≤30.00	---	PASS
11AC20SISO	Ant1	5180	4.32	0.06	4.38	2.73	7.11	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5200	4.64	0.06	4.7	2.73	7.43	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5240	4.47	0.06	4.53	2.73	7.26	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5260	4.56	0.20	4.76	2.73	7.49	≤11.00	---	PASS
11AC20SISO	Ant1	5280	4.07	0.20	4.27	2.73	7	≤11.00	---	PASS
11AC20SISO	Ant1	5320	3.92	0.20	4.12	2.73	6.85	≤11.00	---	PASS

11AC20SISO	Ant1	5500	5.63	0.16	5.79	2.73	8.52	≤11.00	---	PASS
11AC20SISO	Ant1	5580	4.49	0.16	4.65	2.73	7.38	≤11.00	---	PASS
11AC20SISO	Ant1	5700	5.37	0.16	5.53	2.73	8.26	≤11.00	---	PASS
11AC20SISO	Ant1	5745	5.57	0.09	5.66	2.73	8.39	≤30.00	---	PASS
11AC20SISO	Ant1	5785	5.23	0.09	5.32	2.73	8.05	≤30.00	---	PASS
11AC20SISO	Ant1	5825	4.89	0.09	4.98	2.73	7.71	≤30.00	---	PASS
11AC40SISO	Ant1	5190	1.58	0.10	1.68	2.73	4.41	≤11.00	≤10.00	PASS
11AC40SISO	Ant1	5230	1.56	0.10	1.66	2.73	4.39	≤11.00	≤10.00	PASS
11AC40SISO	Ant1	5270	1.29	0.19	1.48	2.73	4.21	≤11.00	---	PASS
11AC40SISO	Ant1	5310	0.97	0.19	1.16	2.73	3.89	≤11.00	---	PASS
11AC40SISO	Ant1	5510	2.55	0.12	2.67	2.73	5.4	≤11.00	---	PASS
11AC40SISO	Ant1	5550	2.69	0.12	2.81	2.73	5.54	≤11.00	---	PASS
11AC40SISO	Ant1	5670	2.6	0.12	2.72	2.73	5.45	≤11.00	---	PASS
11AC40SISO	Ant1	5755	2.33	0.17	2.5	2.73	5.23	≤30.00	---	PASS
11AC40SISO	Ant1	5795	2.04	0.17	2.21	2.73	4.94	≤30.00	---	PASS
11AX20SISO	Ant1	5180	4.52	0.09	4.61	2.73	7.34	≤11.00	≤10.00	PASS
11AX20SISO	Ant1	5200	4.42	0.09	4.51	2.73	7.24	≤11.00	≤10.00	PASS
11AX20SISO	Ant1	5240	4.27	0.09	4.36	2.73	7.09	≤11.00	≤10.00	PASS
11AX20SISO	Ant1	5260	4.35	0.21	4.56	2.73	7.29	≤11.00	---	PASS
11AX20SISO	Ant1	5280	3.78	0.21	3.99	2.73	6.72	≤11.00	---	PASS
11AX20SISO	Ant1	5320	3.74	0.21	3.95	2.73	6.68	≤11.00	---	PASS
11AX20SISO	Ant1	5500	5.36	0.24	5.6	2.73	8.33	≤11.00	---	PASS
11AX20SISO	Ant1	5580	4.23	0.24	4.47	2.73	7.2	≤11.00	---	PASS
11AX20SISO	Ant1	5700	5.15	0.24	5.39	2.73	8.12	≤11.00	---	PASS
11AX20SISO	Ant1	5745	5.34	0.12	5.46	2.73	8.19	≤30.00	---	PASS
11AX20SISO	Ant1	5785	5.2	0.12	5.32	2.73	8.05	≤30.00	---	PASS
11AX20SISO	Ant1	5825	4.82	0.12	4.94	2.73	7.67	≤30.00	---	PASS
11AX40SISO	Ant1	5190	1.55	0.11	1.66	2.73	4.39	≤11.00	≤10.00	PASS
11AX40SISO	Ant1	5230	1.46	0.11	1.57	2.73	4.3	≤11.00	≤10.00	PASS
11AX40SISO	Ant1	5270	0.98	0.39	1.37	2.73	4.1	≤11.00	---	PASS
11AX40SISO	Ant1	5310	0.69	0.39	1.08	2.73	3.81	≤11.00	---	PASS
11AX40SISO	Ant1	5510	2.47	0.42	2.89	2.73	5.62	≤11.00	---	PASS
11AX40SISO	Ant1	5550	2.61	0.42	3.03	2.73	5.76	≤11.00	---	PASS
11AX40SISO	Ant1	5670	2.69	0.42	3.11	2.73	5.84	≤11.00	---	PASS
11AX40SISO	Ant1	5755	2.28	0.09	2.37	2.73	5.1	≤30.00	---	PASS
11AX40SISO	Ant1	5795	1.83	0.09	1.92	2.73	4.65	≤30.00	---	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.

RF Conducted test Offset= cable loss+ Attenuator(10dB).


6.2 Test Graphs

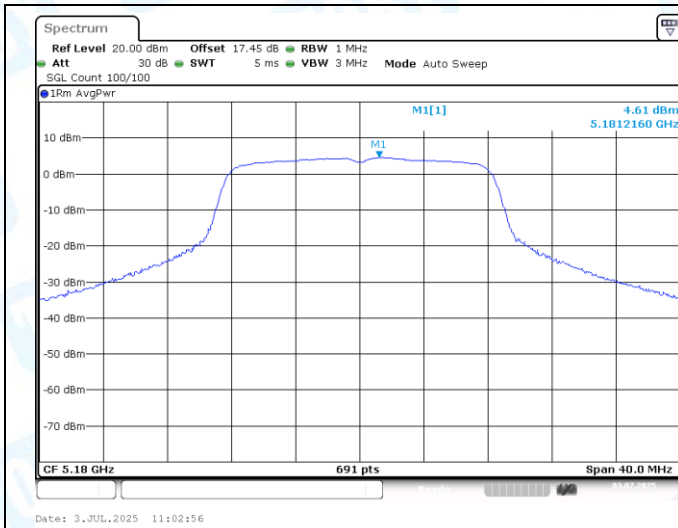


11A-Ant1-5180-PASS

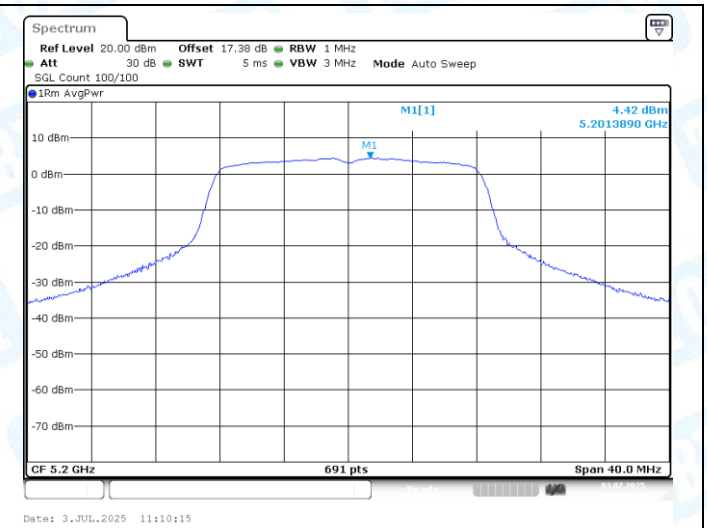


11A-Ant1-5200-PASS

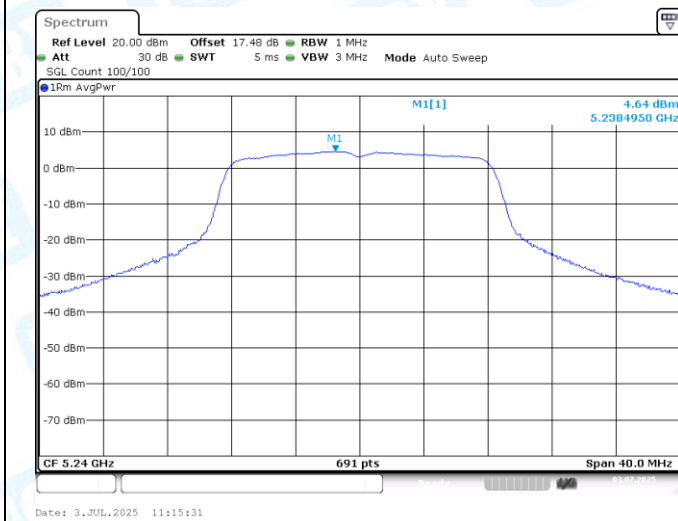


11A-Ant1-5240-PASS

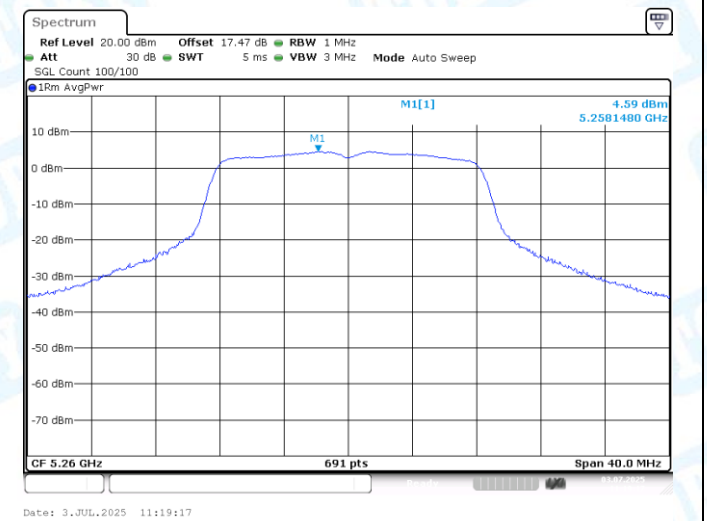


11A-Ant1-5260-PASS

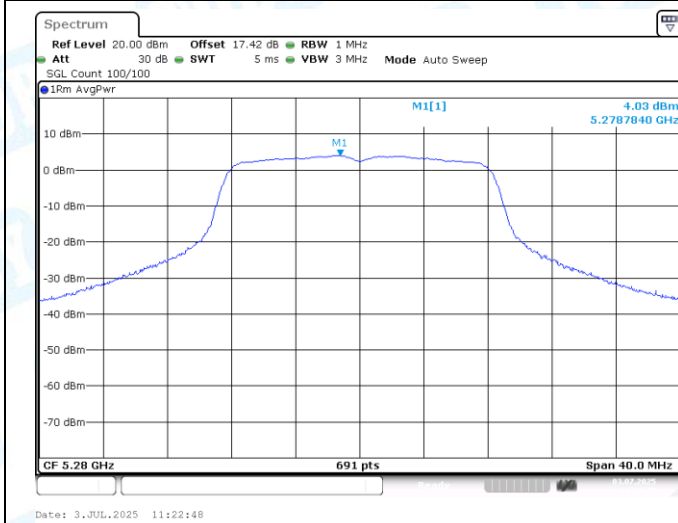


11A-Ant1-5280-PASS

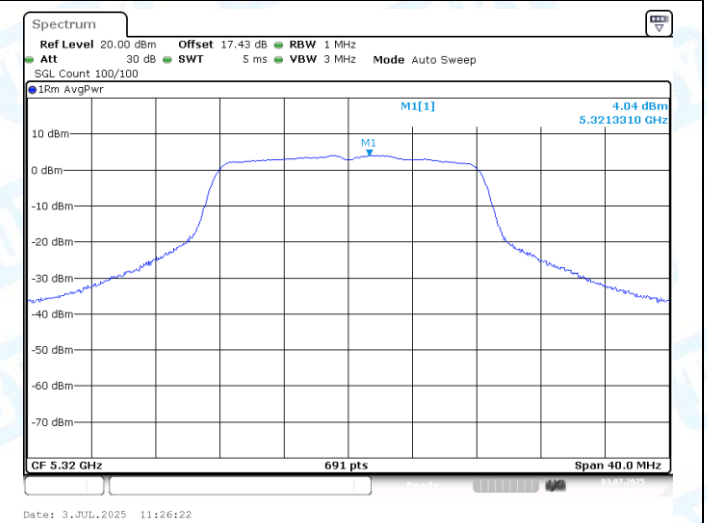


11A-Ant1-5320-PASS

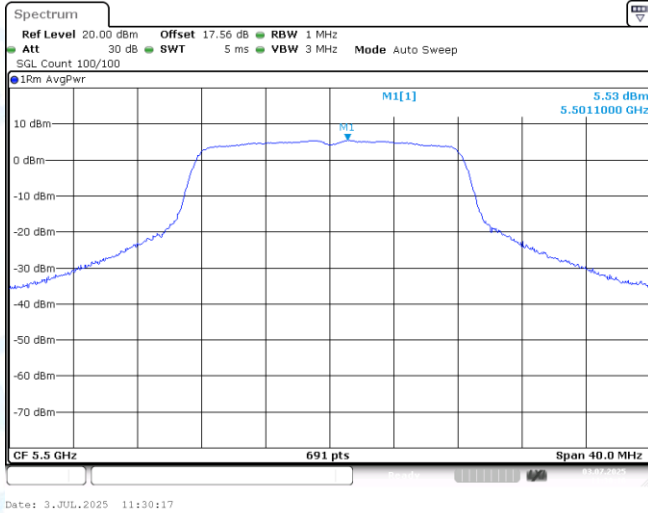


11A-Ant1-5500-PASS

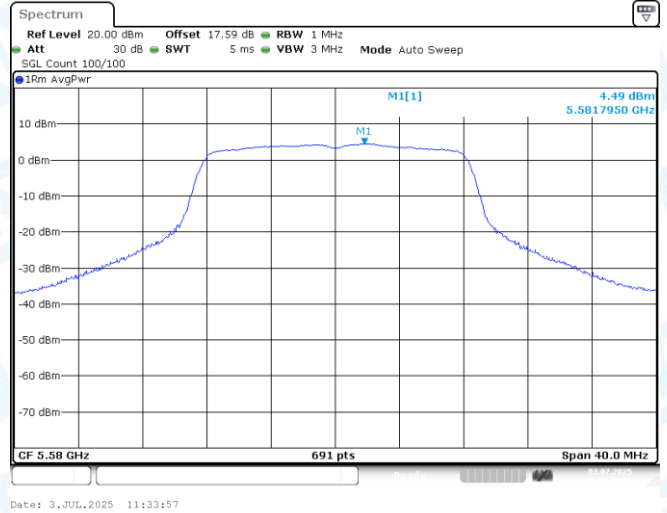


11A-Ant1-5580-PASS

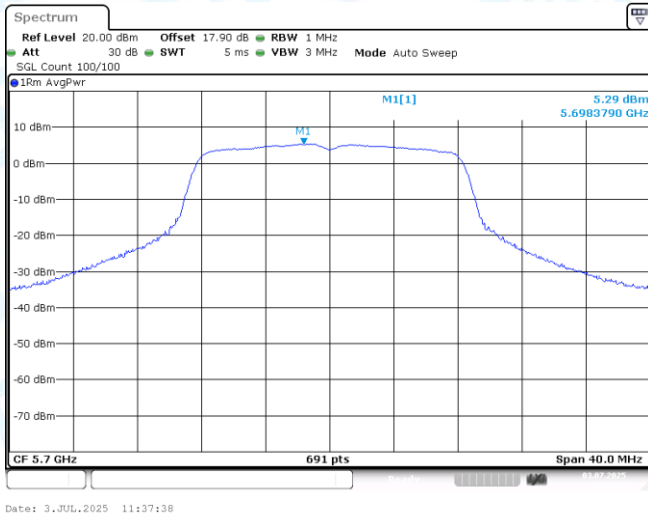


11A-Ant1-5700-PASS

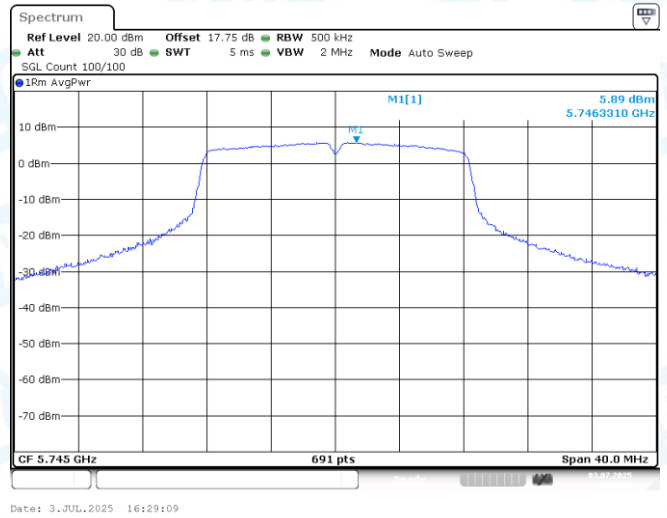


11A-Ant1-5745-PASS

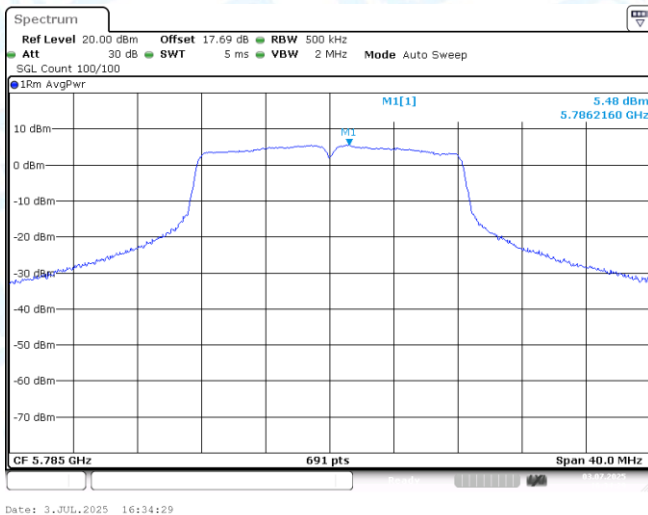


11A-Ant1-5785-PASS

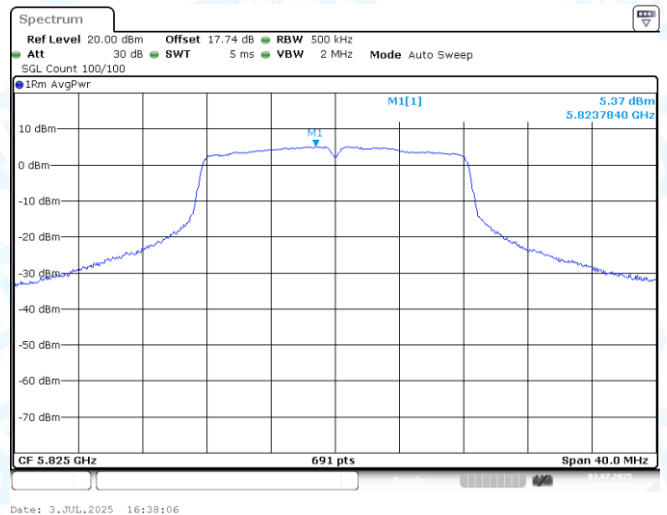


11A-Ant1-5825-PASS

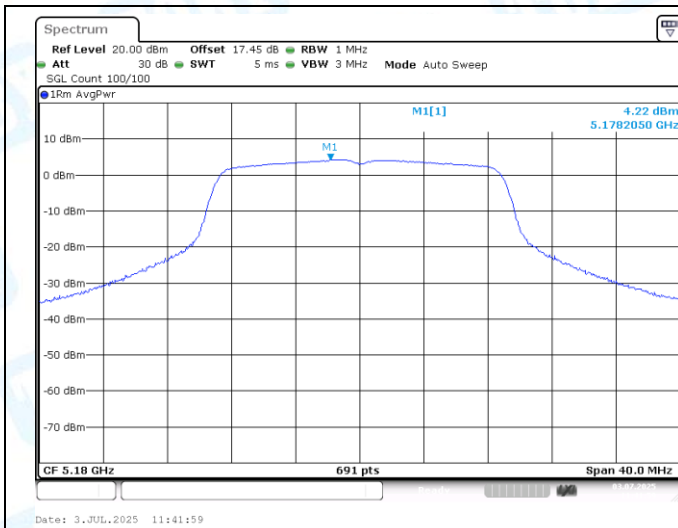


11N20SISO-Ant1-5180-PASS

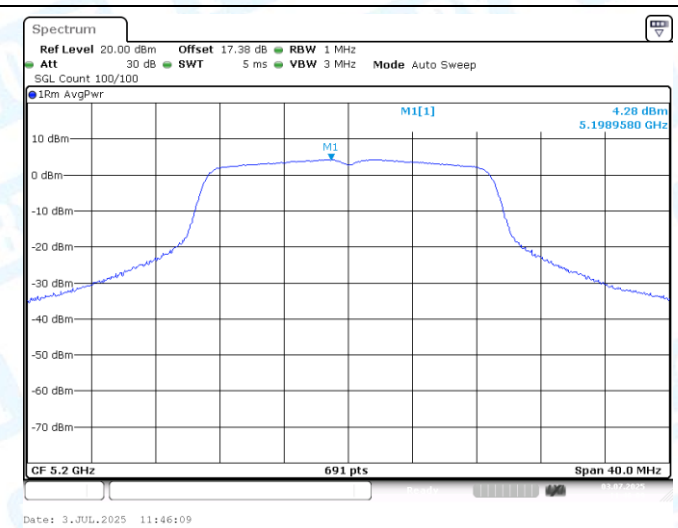


11N20SISO-Ant1-5200-PASS

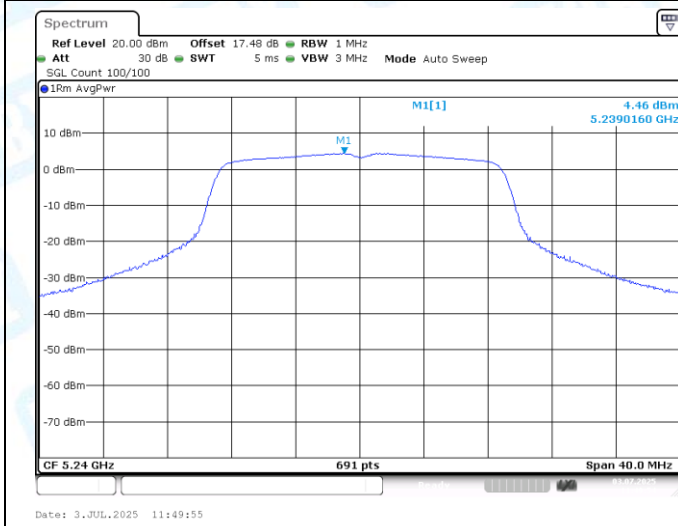


11N20SISO-Ant1-5240-PASS

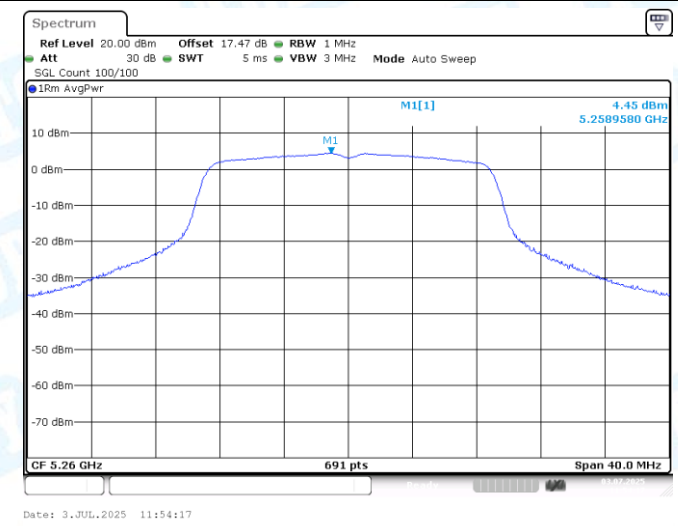


11N20SISO-Ant1-5260-PASS

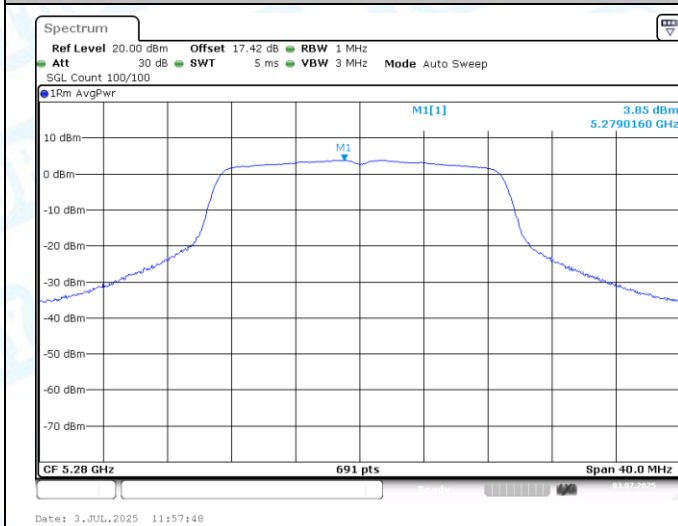


11N20SISO-Ant1-5280-PASS

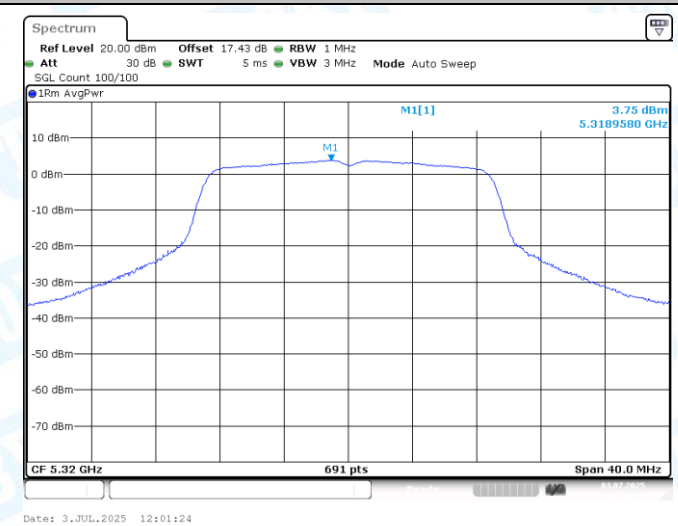


11N20SISO-Ant1-5320-PASS

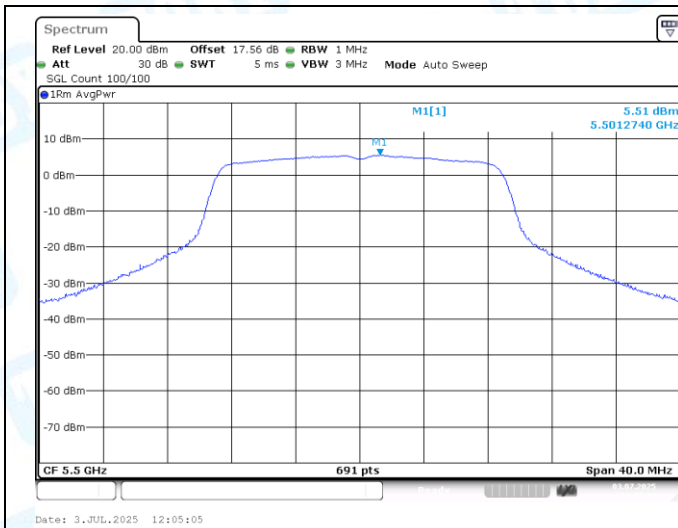


11N20SISO-Ant1-5500-PASS

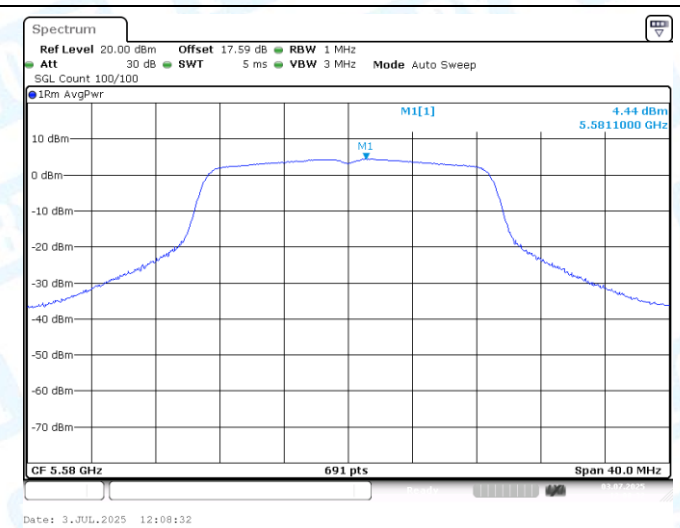


11N20SISO-Ant1-5580-PASS

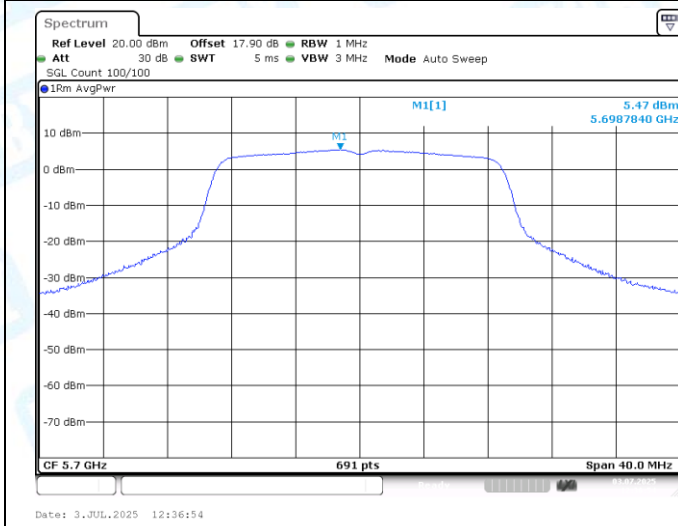


11N20SISO-Ant1-5700-PASS

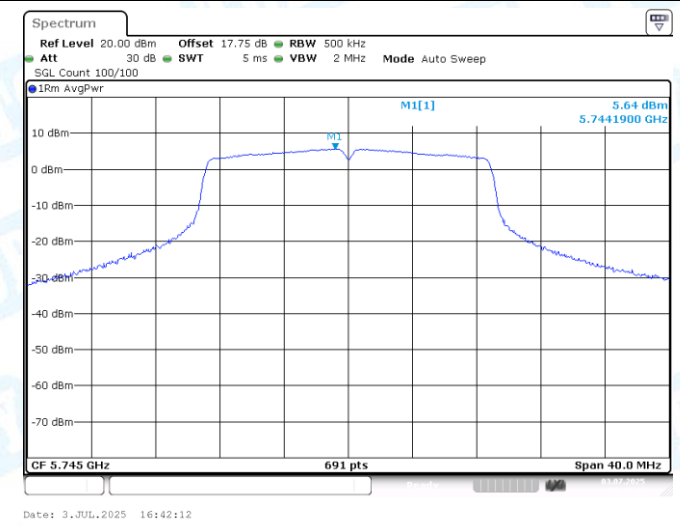


11N20SISO-Ant1-5745-PASS

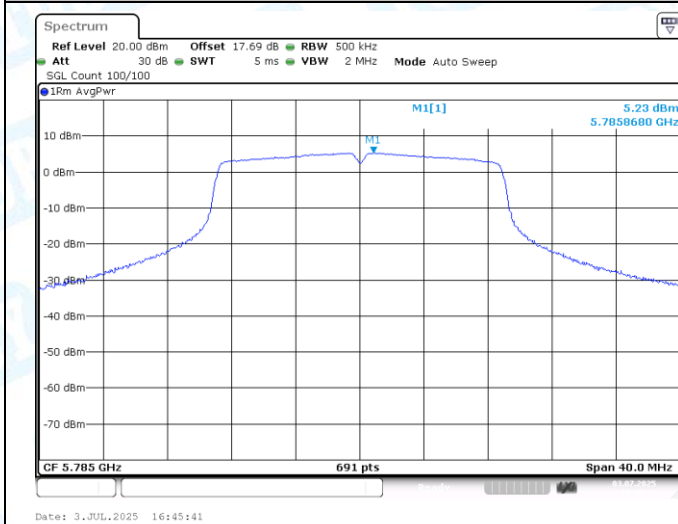


11N20SISO-Ant1-5785-PASS

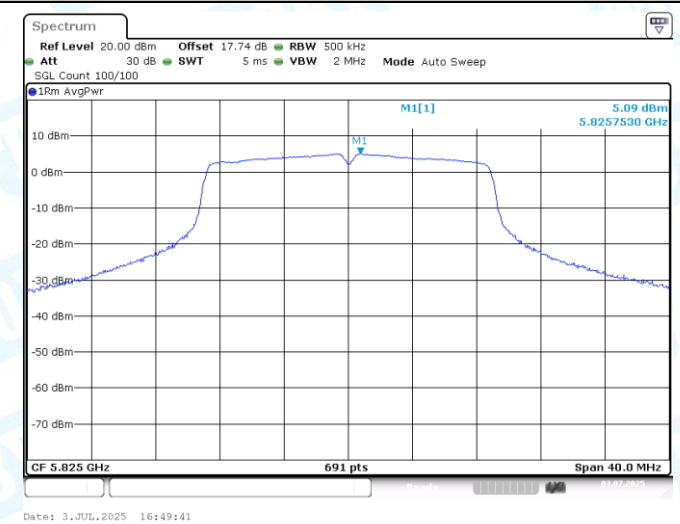


11N20SISO-Ant1-5825-PASS

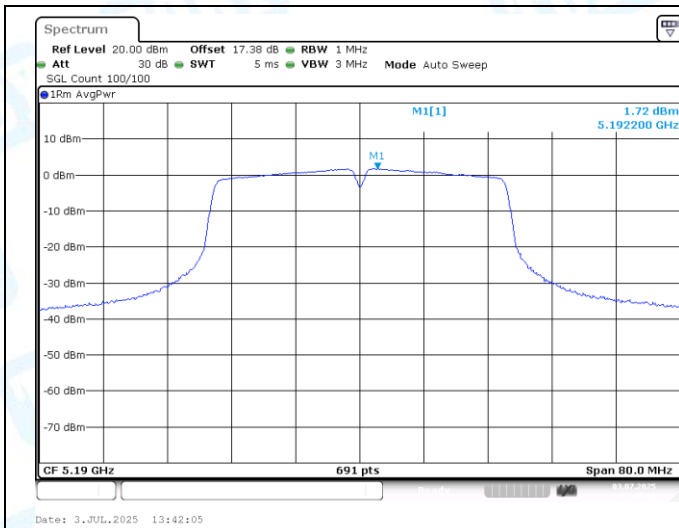


11N40SISO-Ant1-5190-PASS

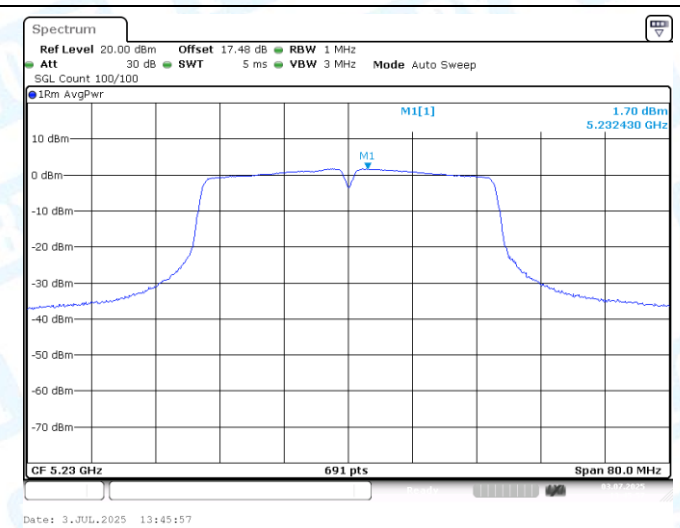


11N40SISO-Ant1-5230-PASS

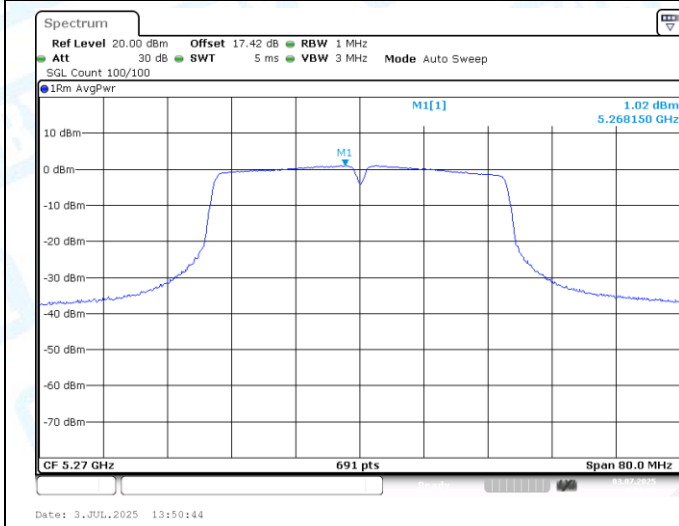


11N40SISO-Ant1-5270-PASS

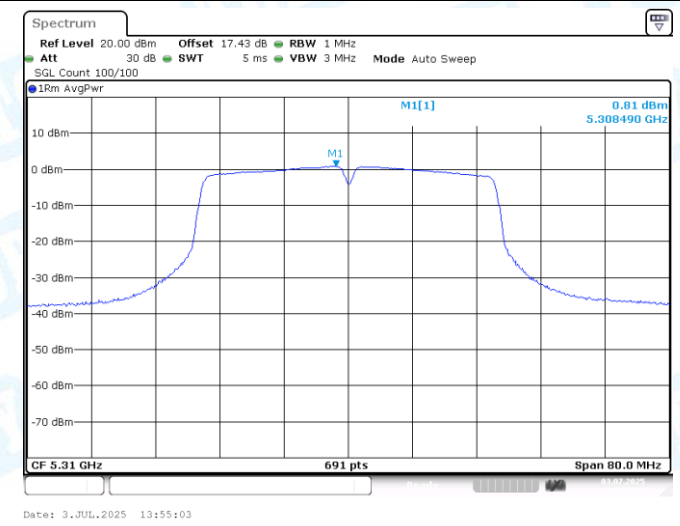


11N40SISO-Ant1-5310-PASS

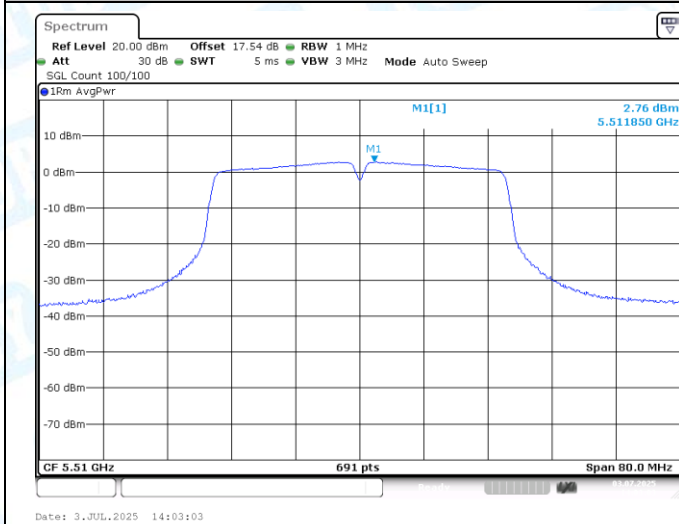


11N40SISO-Ant1-5510-PASS

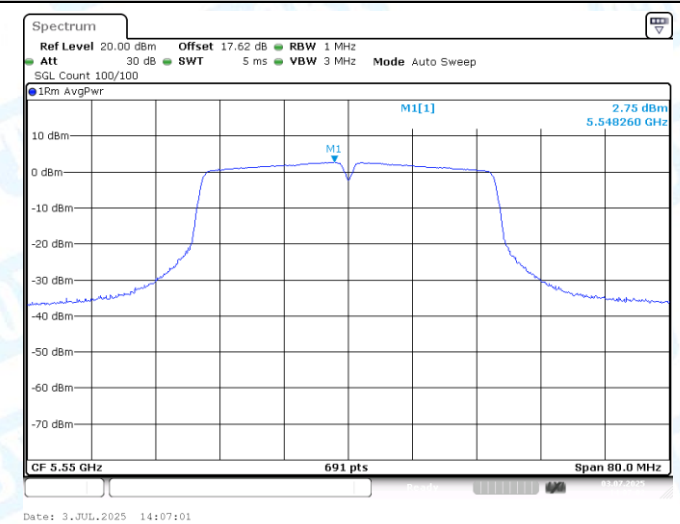


11N40SISO-Ant1-5550-PASS

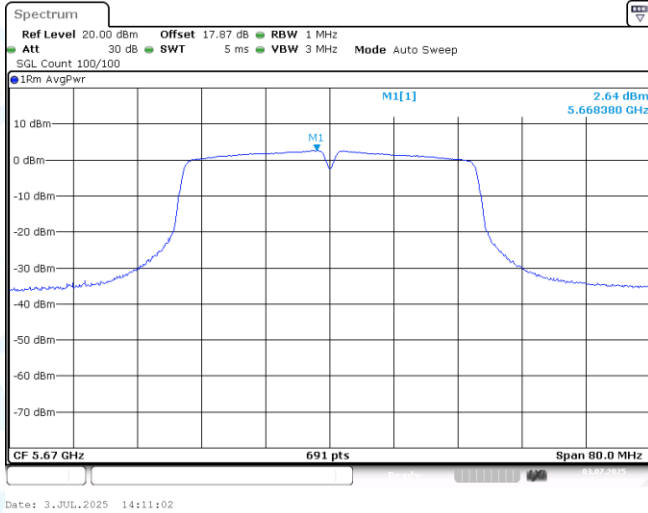


11N40SISO-Ant1-5670-PASS

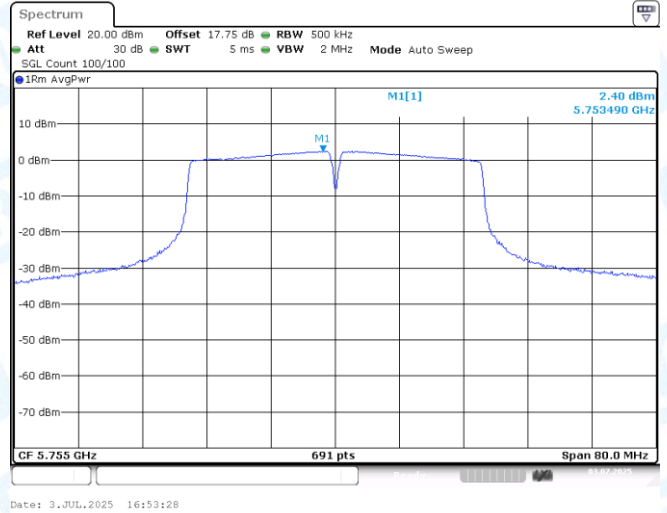


11N40SISO-Ant1-5755-PASS

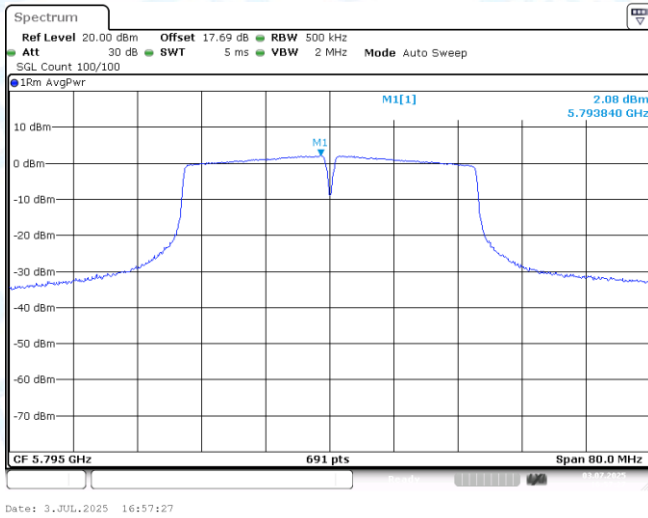


11N40SISO-Ant1-5795-PASS

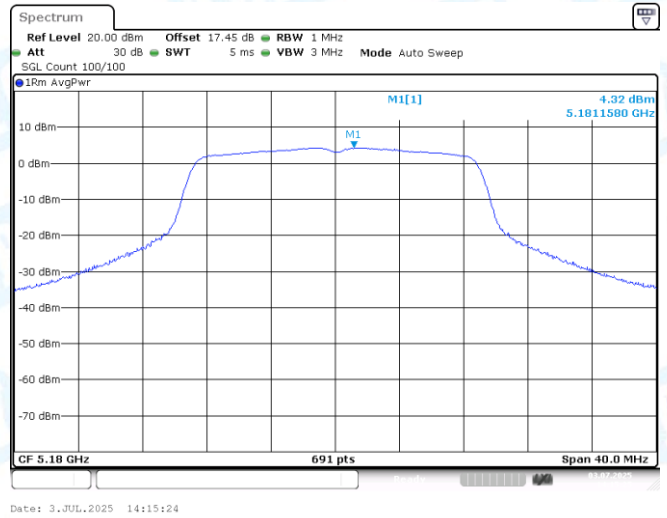


11AC20SISO-Ant1-5180-PASS

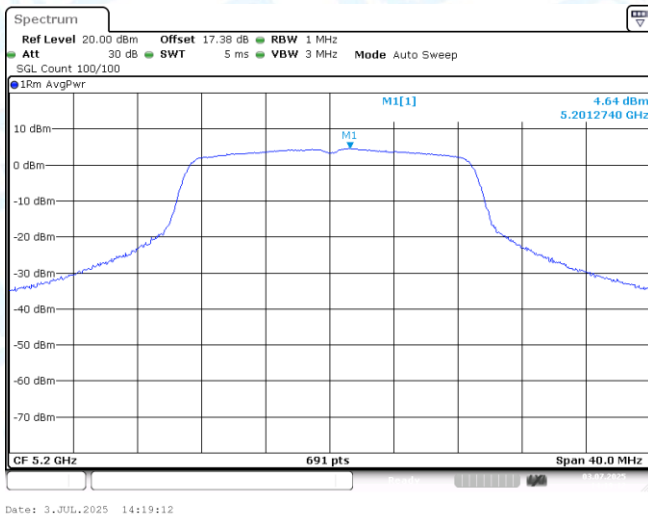

11AC20SISO-Ant1-5200-PASS

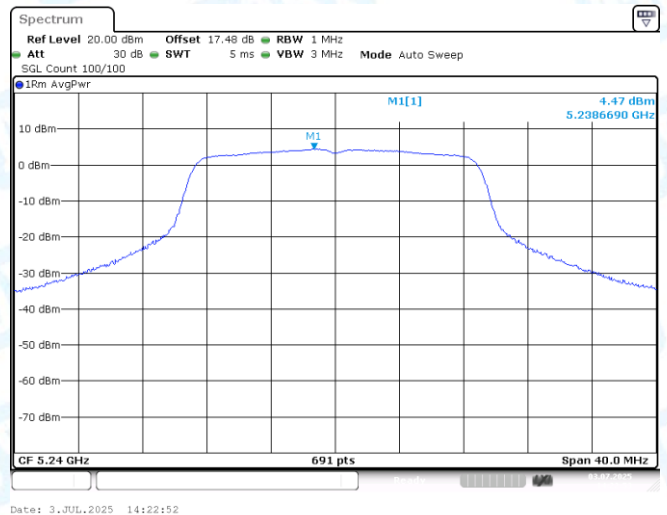


11AC20SISO-Ant1-5240-PASS

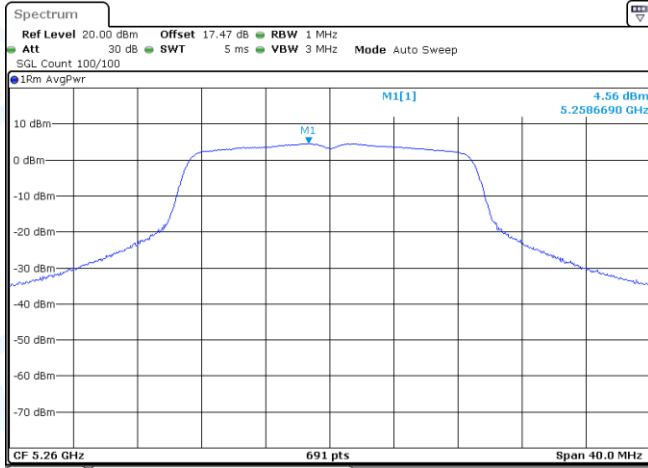


Date: 3.JUL.2025 14:26:32

11AC20SISO-Ant1-5260-PASS

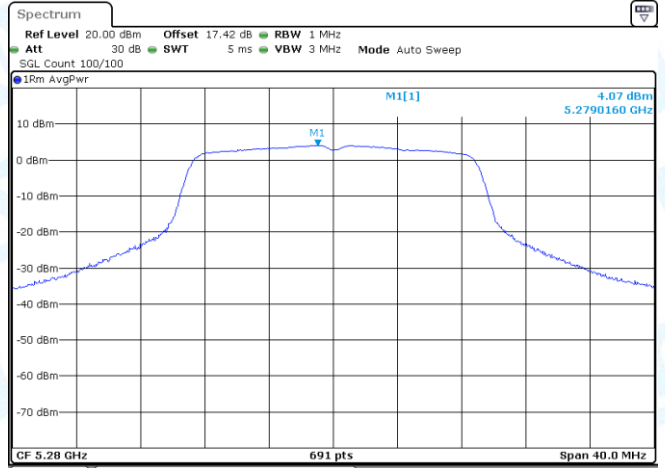


Date: 3.JUL.2025 14:30:03

11AC20SISO-Ant1-5280-PASS

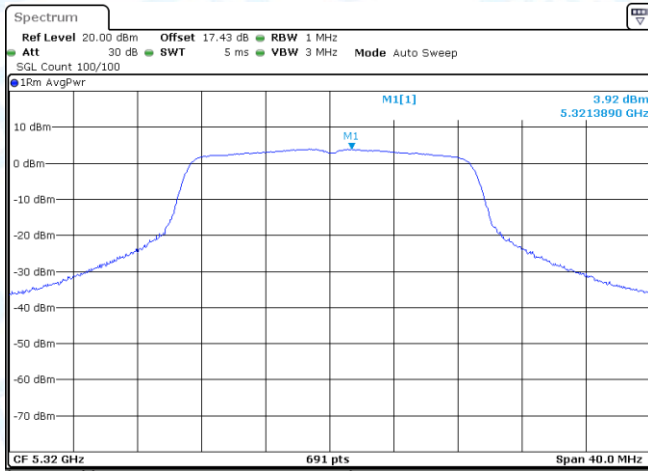


Date: 3.JUL.2025 14:33:44

11AC20SISO-Ant1-5320-PASS

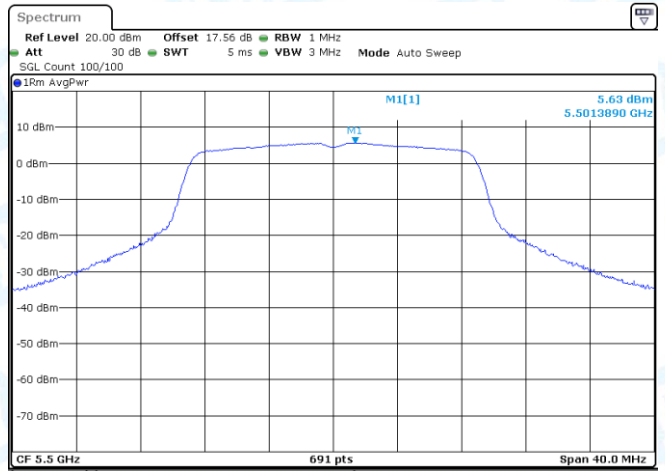


Date: 3.JUL.2025 14:38:21

11AC20SISO-Ant1-5500-PASS

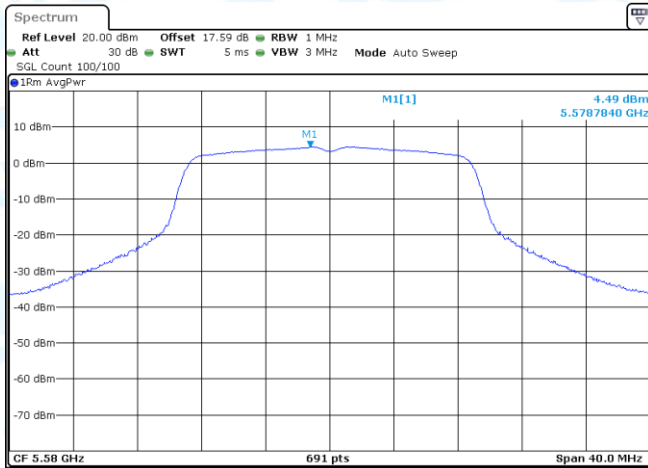

Date: 3.JUL.2025 14:41:48

11AC20SISO-Ant1-5580-PASS

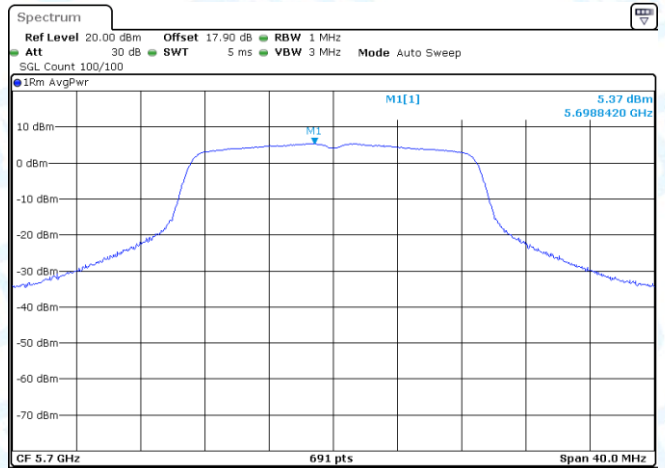

Date: 3.JUL.2025 14:45:42

11AC20SISO-Ant1-5700-PASS