


Ambient Condition: 20℃,18%RH,101.325hpa,
Case No. : CTA26072501101
Test Date: 2026.07.25-2026.08.01 Test Engineer: Lushan Kong

AppendixA.1: Frequency Error


Test Result

TestCondition	TestMode	Antenna	Frequency[MHz]	CenterFreq [MHz]	Result[ppm]	Limit[ppm]	Verdict
NTNV	Carrier	Ant1	2412	2411.998	-0.82919	±50	PASS
NTNV	Carrier	Ant1	2422	2421.998	-0.82576	±50	PASS
NTNV	Carrier	Ant1	2442	2441.998	-0.81900	±50	PASS
NTNV	Carrier	Ant1	2462	2461.998	-0.81235	±50	PASS
NTNV	Carrier	Ant1	2472	2471.998	-0.80906	±50	PASS


Test Graphs

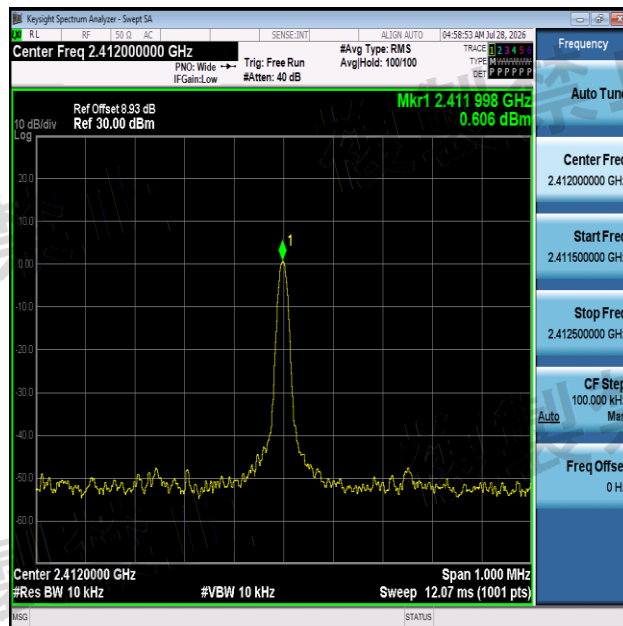


NTNV-Carrier-Ant1-2412-PASS

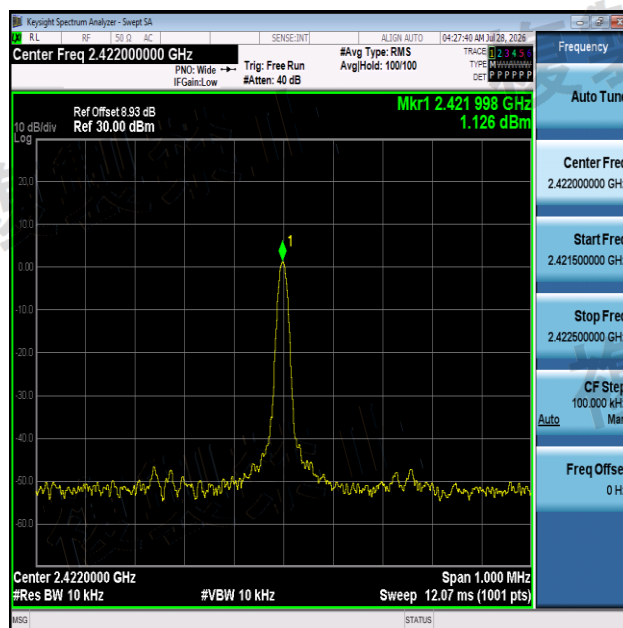


NTNV-Carrier-Ant1-2422-PASS

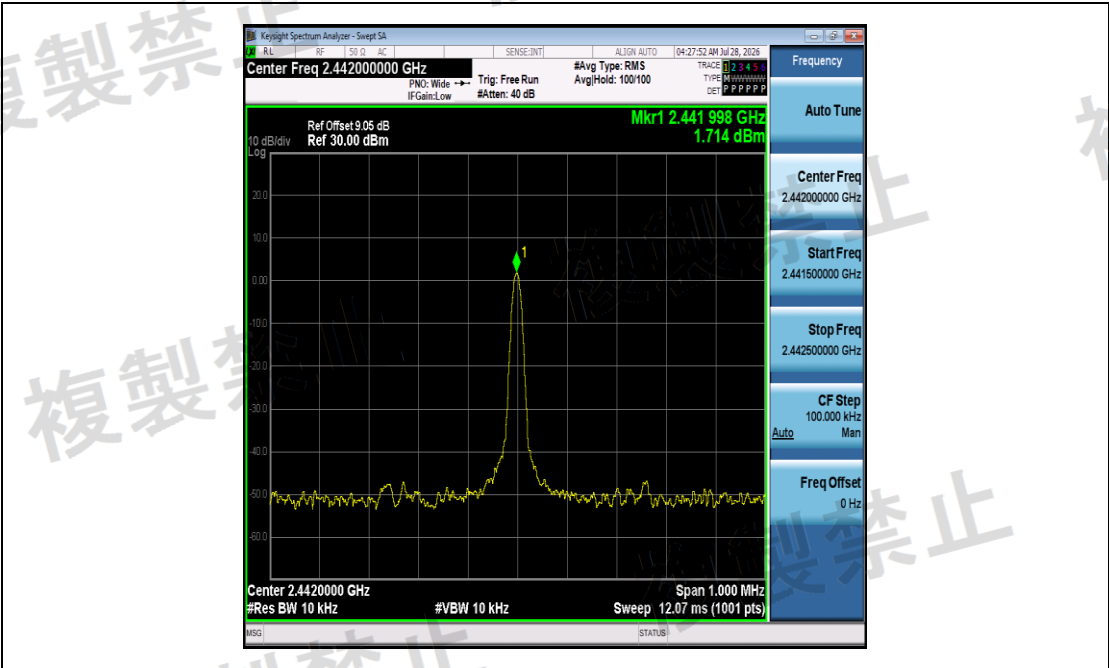

NTNV-Carrier-Ant1-2442-PASS

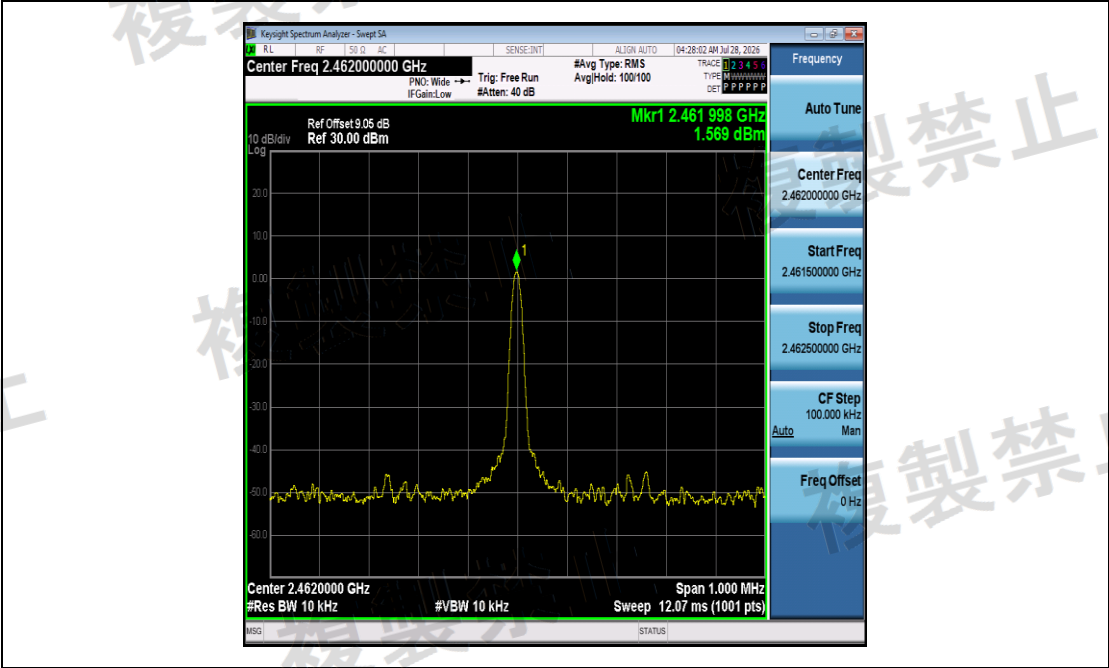

NTNV-Carrier-Ant1-2462-PASS

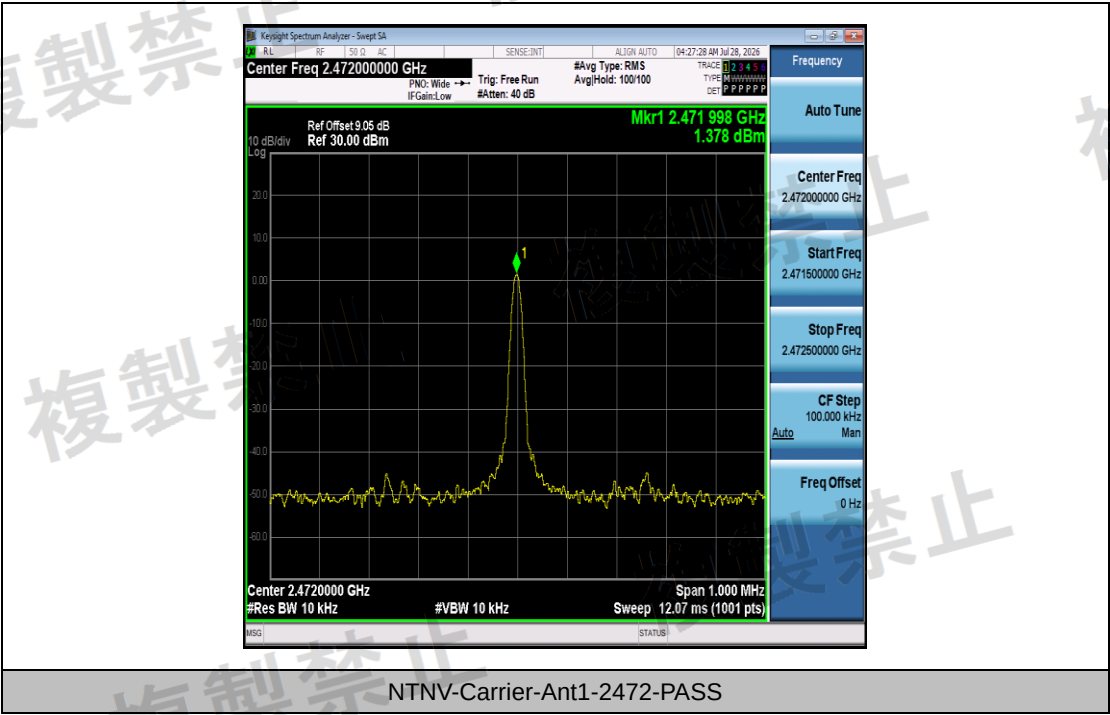

Appendix A.2: Antenna Power

Test Result Average


Test Condition	Test Mode	Antenna	Frequency [MHz]	Result (dBm/MHz)	Result (mW/MHz)	Limit (mW/MHz)	Verdict
NTNV	11B	Ant1	2412	1.16	1.3062	≤10	PASS
NTNV	11B	Ant1	2442	3.09	2.0370	≤10	PASS
NTNV	11B	Ant1	2472	3.75	2.3714	≤10	PASS
NTNV	11G	Ant1	2412	1.18	1.3122	≤10	PASS
NTNV	11G	Ant1	2442	2.42	1.7458	≤10	PASS
NTNV	11G	Ant1	2472	3.15	2.0654	≤10	PASS
NTNV	11N20SISO	Ant1	2412	1.44	1.3932	≤10	PASS
NTNV	11N20SISO	Ant1	2442	1.84	1.5276	≤10	PASS
NTNV	11N20SISO	Ant1	2472	2.02	1.5922	≤10	PASS
NTNV	11N40SISO	Ant1	2422	-3.17	0.4819	≤5	PASS
NTNV	11N40SISO	Ant1	2442	-2.42	0.5728	≤5	PASS
NTNV	11N40SISO	Ant1	2462	-2.16	0.6081	≤5	PASS
NTNV	11AX20SISO	Ant1	2412	0.27	1.0641	≤10	PASS
NTNV	11AX20SISO	Ant1	2442	1.49	1.4093	≤10	PASS
NTNV	11AX20SISO	Ant1	2472	1.62	1.4521	≤10	PASS

Test Result PSD


Test Condition	Test Mode	Antenna	Frequency [MHz]	Power (mW/M Hz)	RatedPower (mW/MHz)	Result (%)	Limit (%)	Verdict
NTNV	11B	Ant1	2412	1.3062	3	-56.46	≤+20	PASS
NTNV	11B	Ant1	2442	2.0370	3	-32.10	≤+20	PASS
NTNV	11B	Ant1	2472	2.3714	3	-20.95	≤+20	PASS
NTNV	11G	Ant1	2412	1.3122	3	-56.26	≤+20	PASS
NTNV	11G	Ant1	2442	1.7458	3	-41.81	≤+20	PASS
NTNV	11G	Ant1	2472	2.0654	3	-31.15	≤+20	PASS
NTNV	11N20SIS O	Ant1	2412	1.3932	2	-30.34	≤+20	PASS
NTNV	11N20SIS O	Ant1	2442	1.5276	2	-23.62	≤+20	PASS
NTNV	11N20SIS O	Ant1	2472	1.5922	2	-20.39	≤+20	PASS
NTNV	11N40SIS O	Ant1	2422	0.4819	1	-51.81	≤+20	PASS
NTNV	11N40SIS O	Ant1	2442	0.5728	1	-42.72	≤+20	PASS
NTNV	11N40SIS O	Ant1	2462	0.6081	1	-39.19	≤+20	PASS
NTNV	11AX20SIS O	Ant1	2412	1.0641	2	-46.80	≤+20	PASS
NTNV	11AX20SIS O	Ant1	2442	1.4093	2	-29.54	≤+20	PASS
NTNV	11AX20SIS O	Ant1	2472	1.4521	2	-27.40	≤+20	PASS



EIRP								
Test Condition	TestMode	Antenna	Frequency [MHz]	Result (dBm/M Hz)	Antenna Gain(dBi)	EIRP (dBm/M Hz)	Limit(dBm/M Hz)	Verdict
NTNV	11B	Ant1	2412	1.16	0.68	1.84	≤12.14	PASS
NTNV	11B	Ant1	2442	3.09	0.68	3.77	≤12.14	PASS
NTNV	11B	Ant1	2472	3.75	0.68	4.43	≤12.14	PASS
NTNV	11G	Ant1	2412	1.18	0.68	1.86	≤12.14	PASS
NTNV	11G	Ant1	2442	2.42	0.68	3.10	≤12.14	PASS
NTNV	11G	Ant1	2472	3.15	0.68	3.83	≤12.14	PASS
NTNV	11N20SISO	Ant1	2412	1.44	0.68	2.12	≤12.14	PASS
NTNV	11N20SISO	Ant1	2442	1.84	0.68	2.52	≤12.14	PASS
NTNV	11N20SISO	Ant1	2472	2.02	0.68	2.70	≤12.14	PASS
NTNV	11N40SISO	Ant1	2422	-3.17	0.68	-2.49	≤9.13	PASS
NTNV	11N40SISO	Ant1	2442	-2.42	0.68	-1.74	≤9.13	PASS
NTNV	11N40SISO	Ant1	2462	-2.16	0.68	-1.48	≤9.13	PASS
NTNV	11AX20SISO	Ant1	2412	0.27	0.68	0.95	≤12.14	PASS
NTNV	11AX20SISO	Ant1	2442	1.49	0.68	2.17	≤12.14	PASS
NTNV	11AX20SISO	Ant1	2472	1.62	0.68	2.30	≤12.14	PASS


Test Graphs

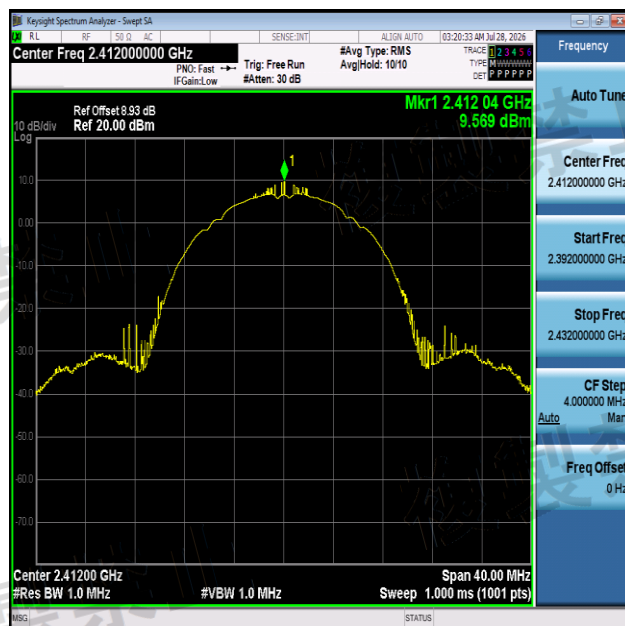


NTNV-11B-Ant1-2412-PASS

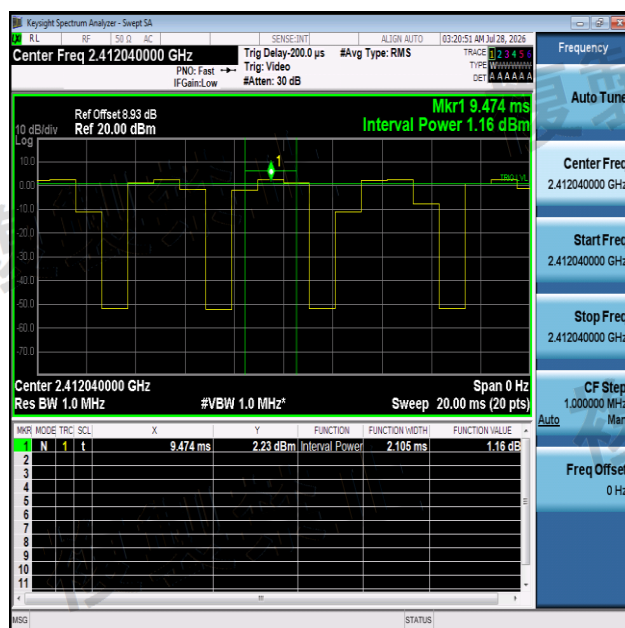


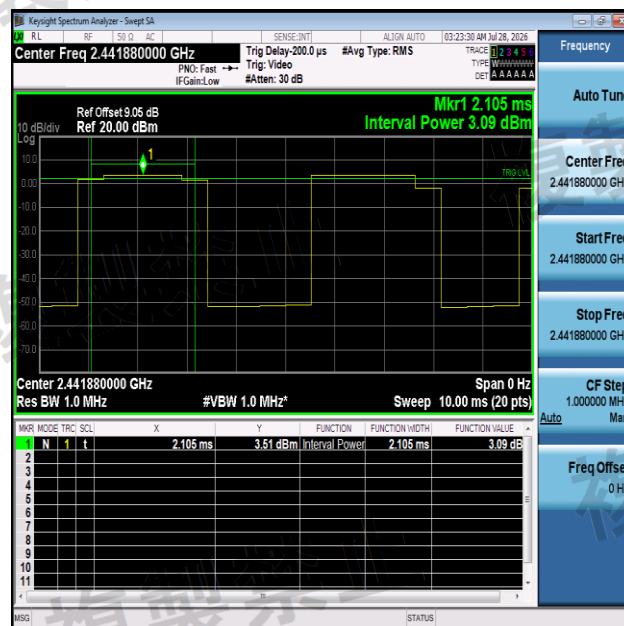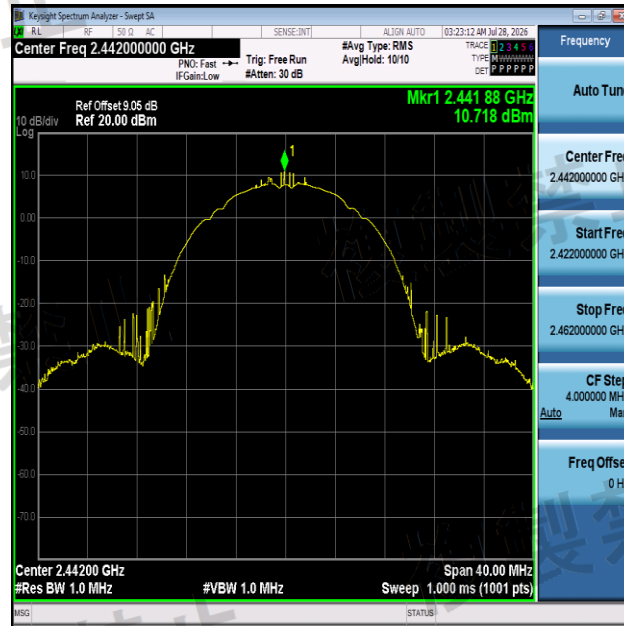

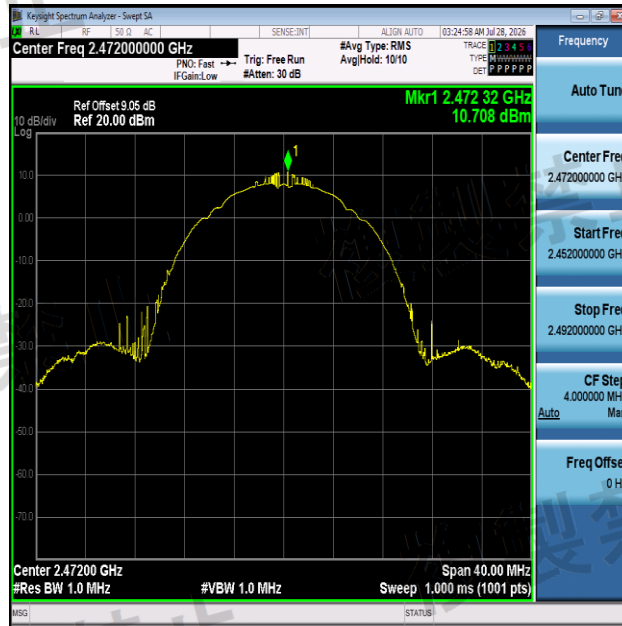



NTNV-11B-Ant1-2472-PASS

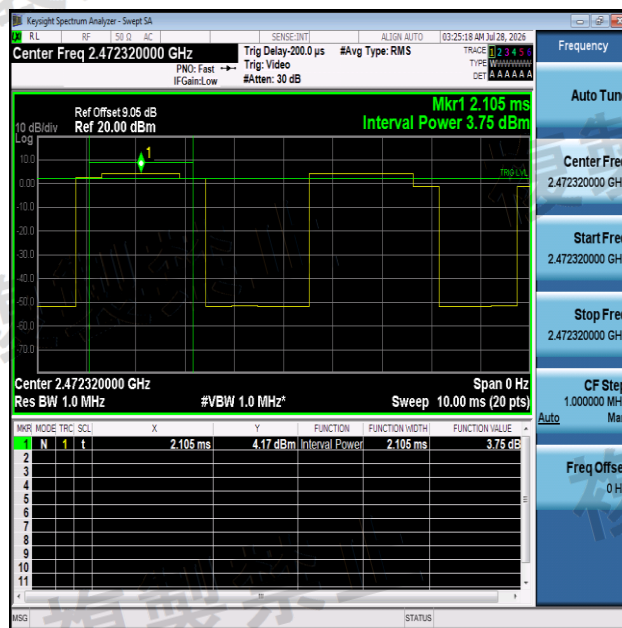

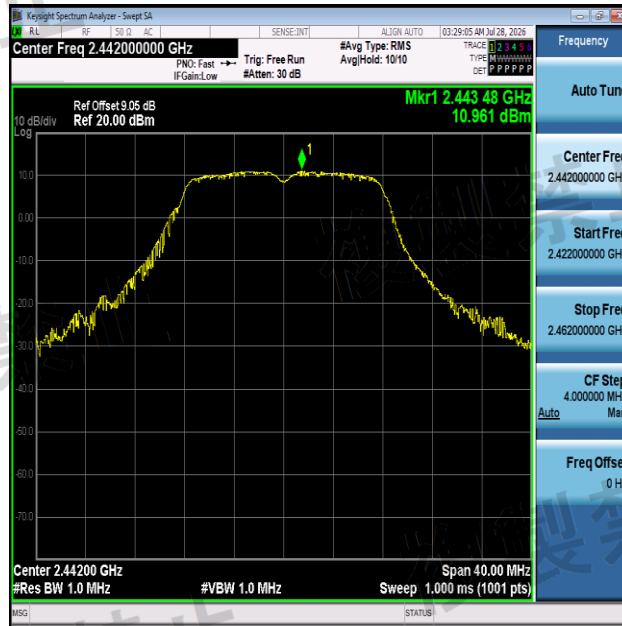



NTNV-11G-Ant1-2442-PASS

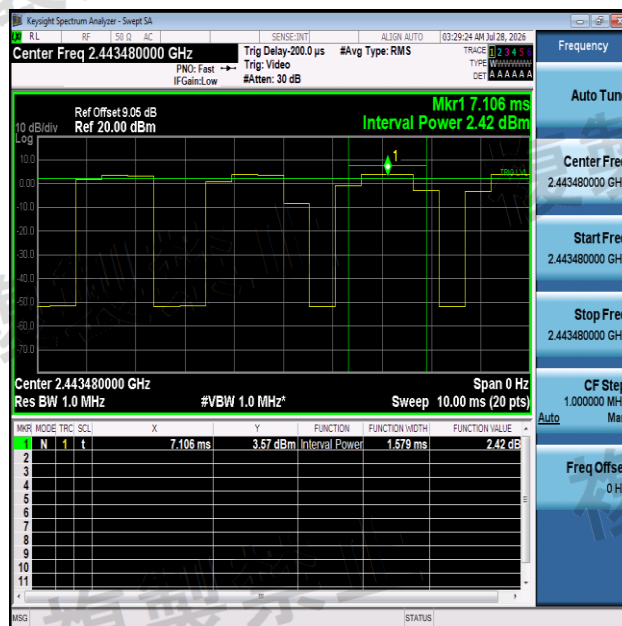

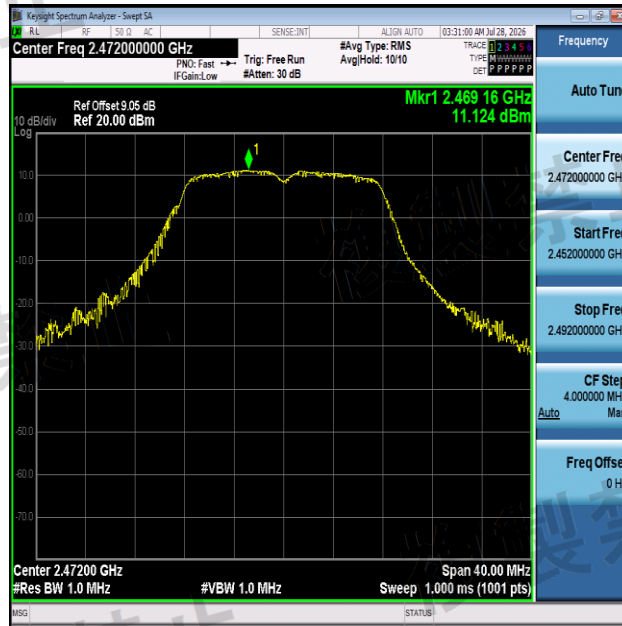



NTNV-11G-Ant1-2472-PASS

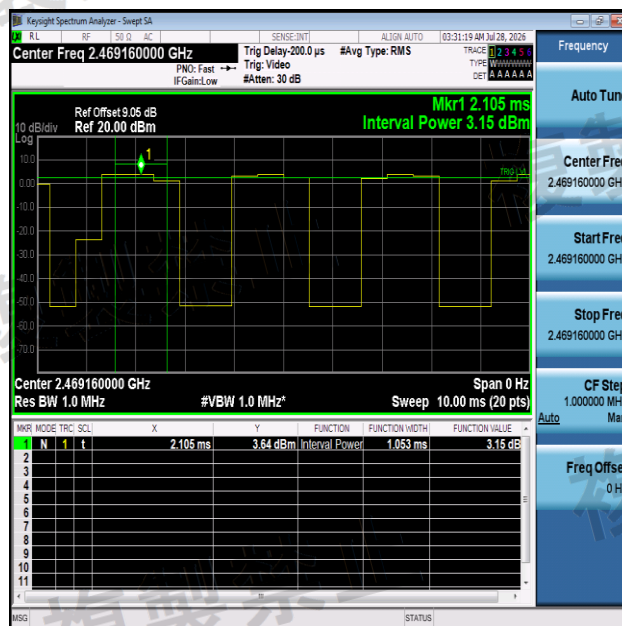

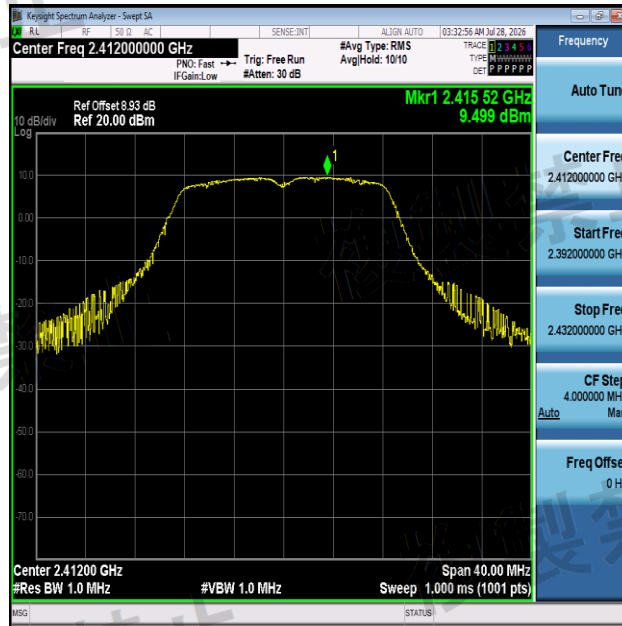




NTNV-11N20SISO-Ant1-2412-PASS

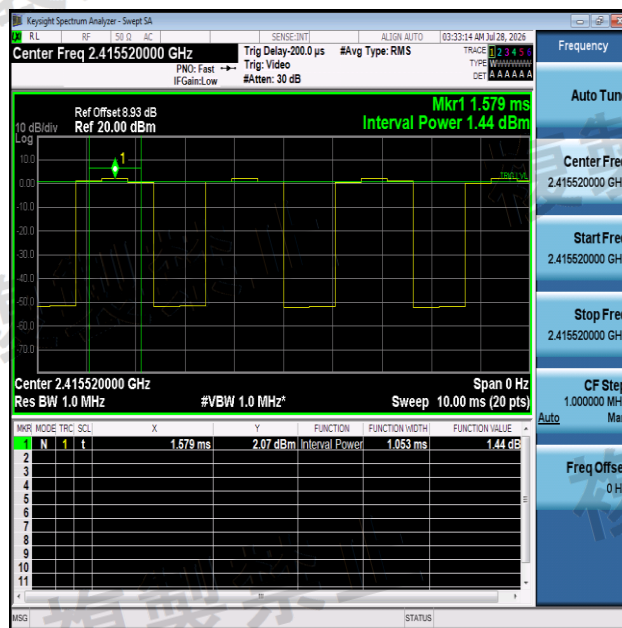


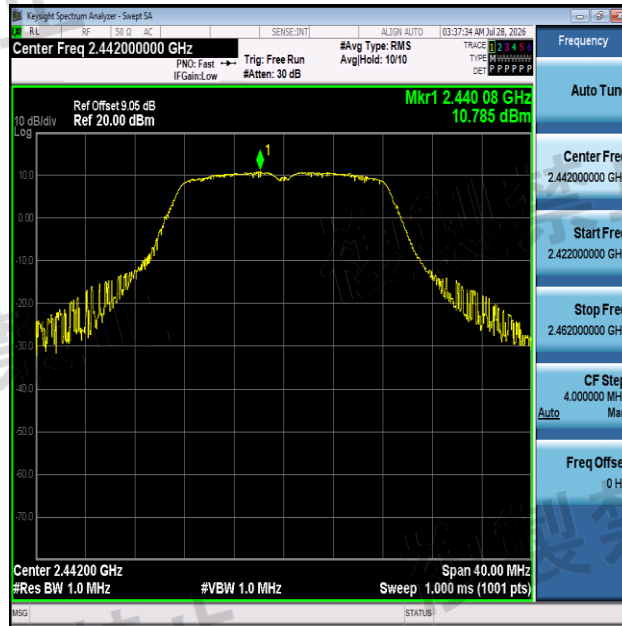


NTNV-11N20SISO-Ant1-2442-PASS

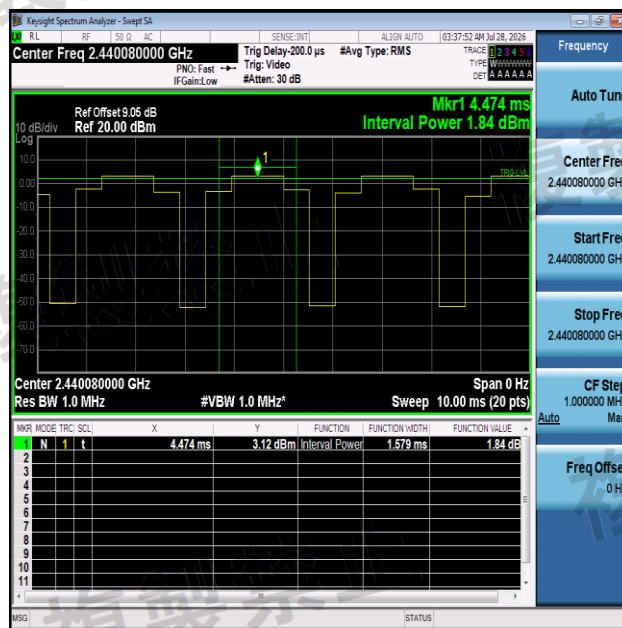


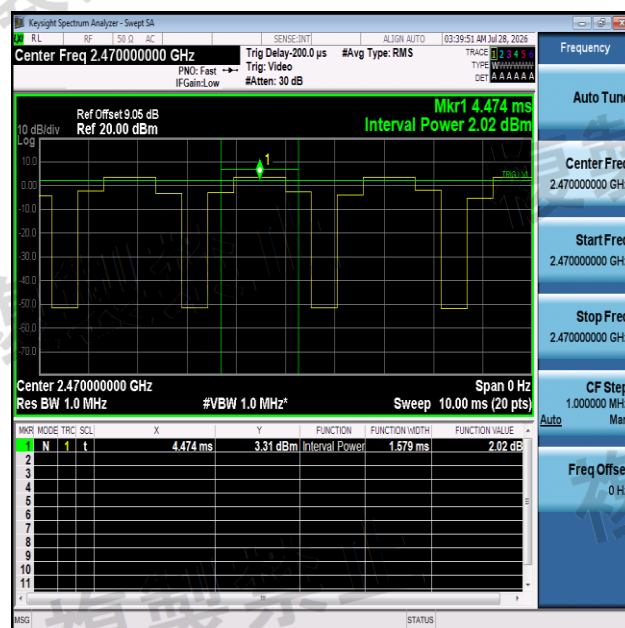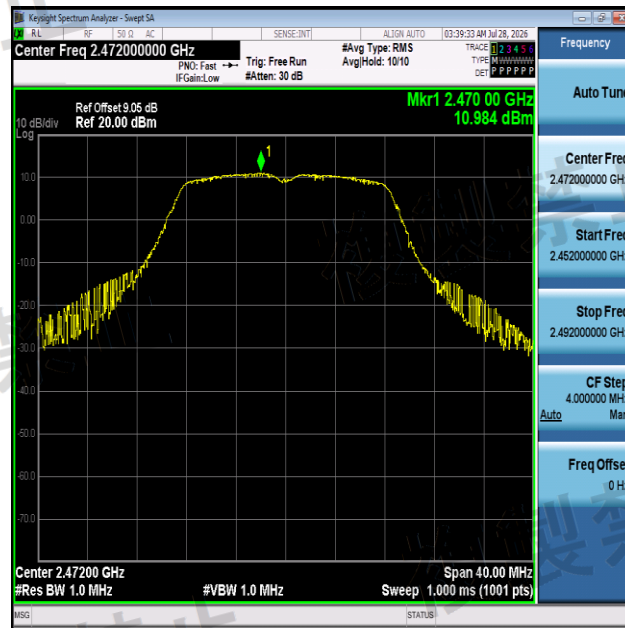

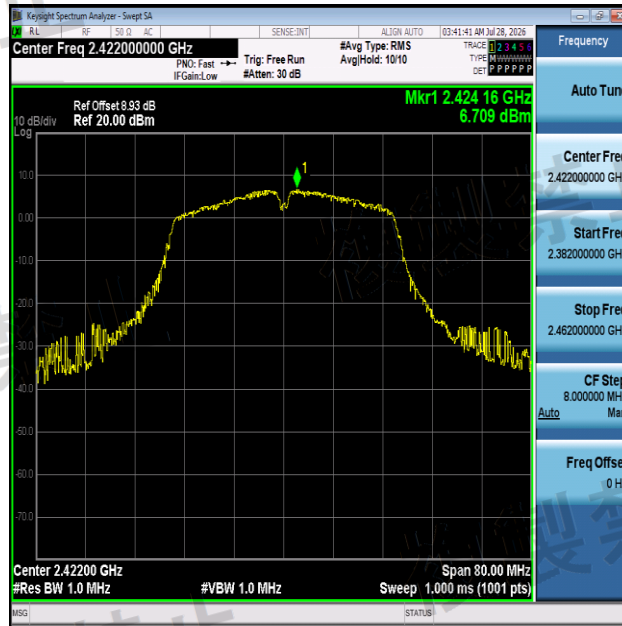



NTNV-11N40SISO-Ant1-2422-PASS

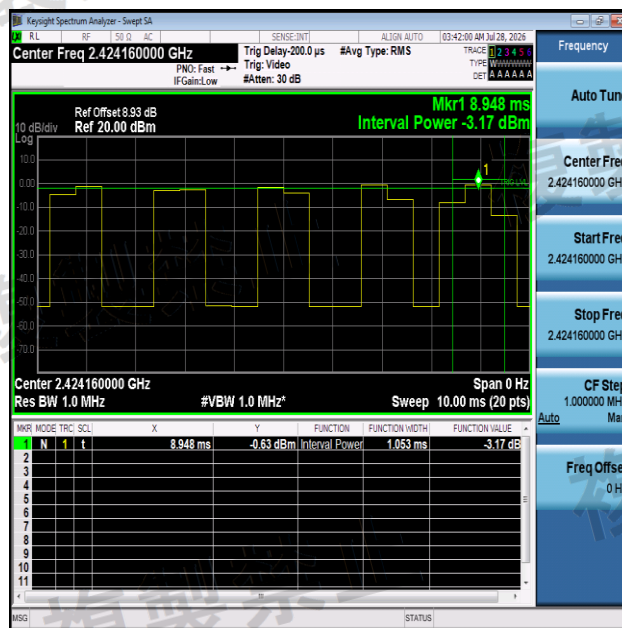

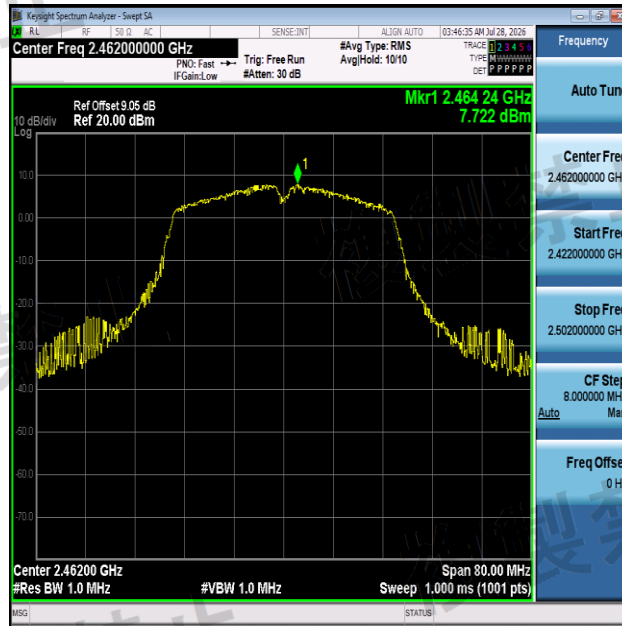



NTNV-11N40SISO-Ant1-2462-PASS

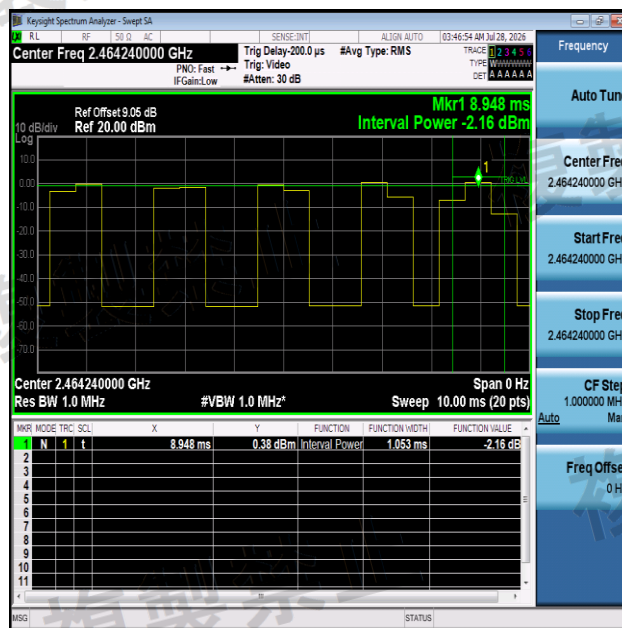

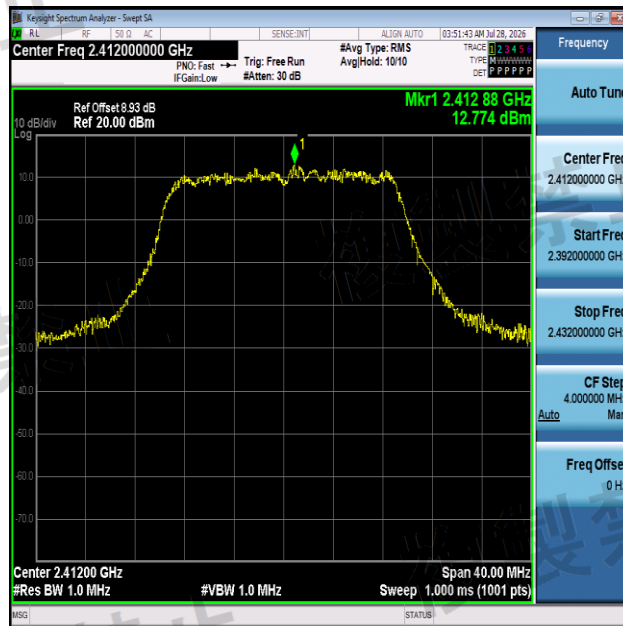



NTNV-11AX20SISO-Ant1-2412-PASS

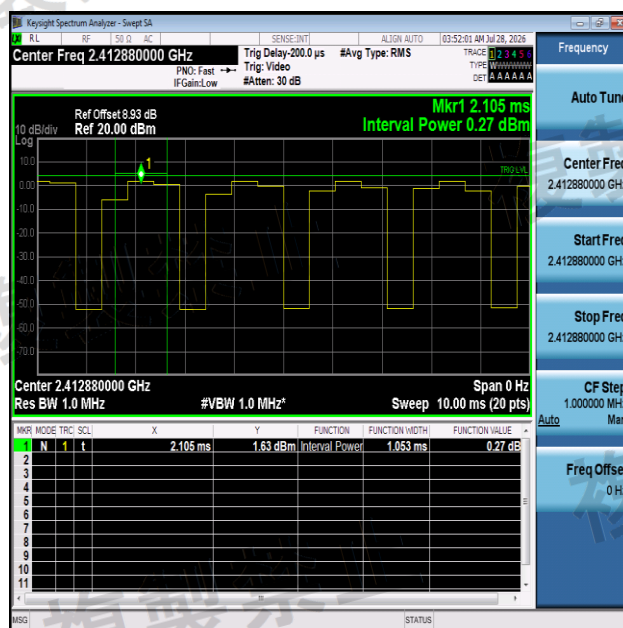

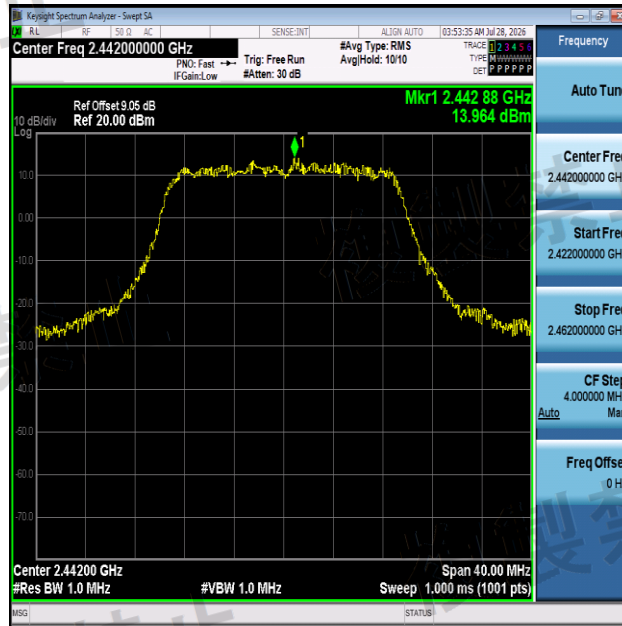


NTNV-11AX20SISO-Ant1-2442-PASS

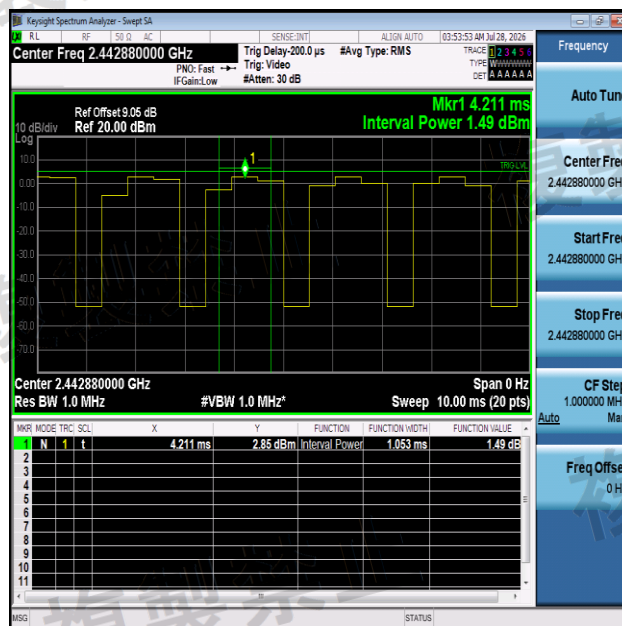

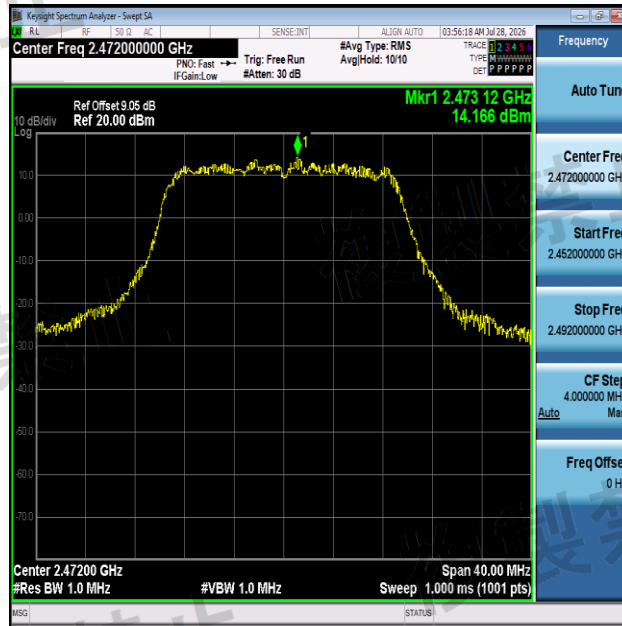

NTNV-11AX20SISO-Ant1-2472-PASS

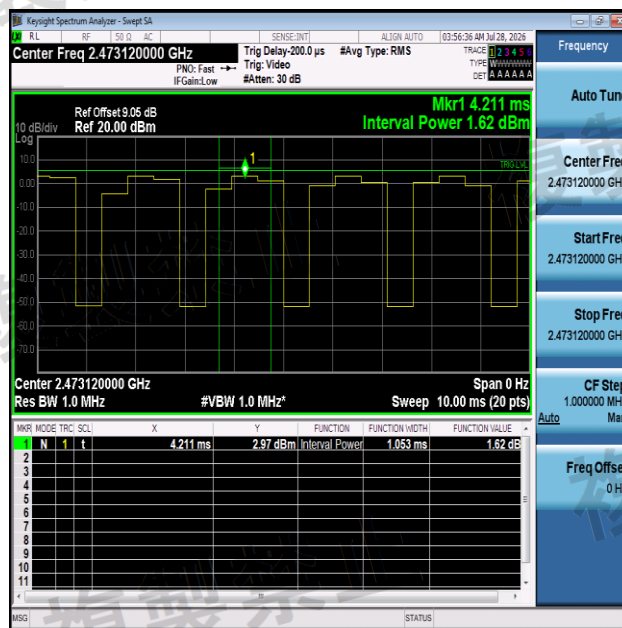


AppendixA.3: Occupied Bandwidth


Test Result

TestCondition	TestMode	Antenna	Frequency[MHz]	Result [MHz]	Limit [MHz]	Verdict
NTNV	11B	Ant1	2412	15.475	≤26	PASS
NTNV	11B	Ant1	2442	15.410	≤26	PASS
NTNV	11B	Ant1	2472	15.368	≤26	PASS
NTNV	11G	Ant1	2412	16.572	≤26	PASS
NTNV	11G	Ant1	2442	16.568	≤26	PASS
NTNV	11G	Ant1	2472	16.658	≤26	PASS
NTNV	11N20SI SO	Ant1	2412	17.773	≤26	PASS
NTNV	11N20SI SO	Ant1	2442	17.772	≤26	PASS
NTNV	11N20SI SO	Ant1	2472	17.762	≤26	PASS
NTNV	11N40SI SO	Ant1	2422	36.095	26-40	PASS
NTNV	11N40SI SO	Ant1	2442	36.101	26-40	PASS
NTNV	11N40SI SO	Ant1	2462	36.097	26-40	PASS
NTNV	11AX20S ISO	Ant1	2412	18.928	≤26	PASS
NTNV	11AX20S ISO	Ant1	2442	18.931	≤26	PASS
NTNV	11AX20S ISO	Ant1	2472	18.926	≤26	PASS


Test Graphs

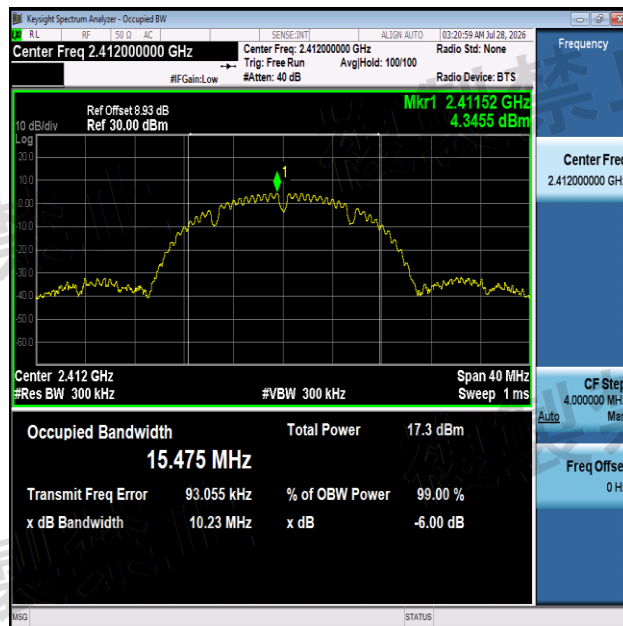


NTNV-11B-Ant1-2412-PASS

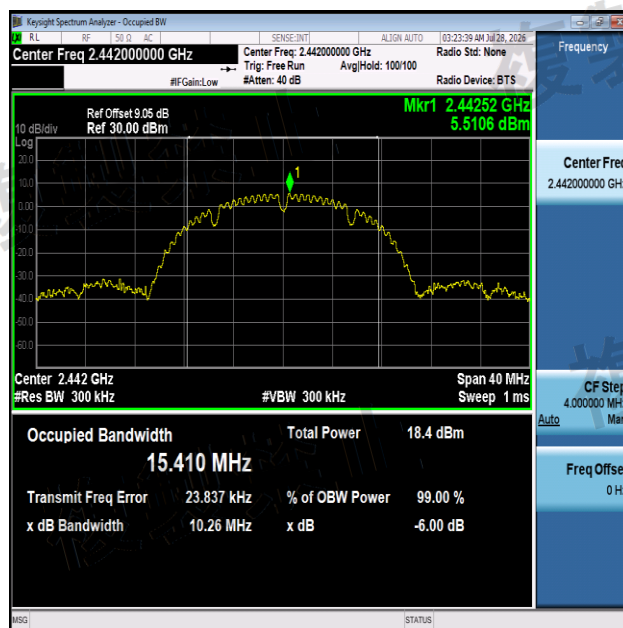


NTNV-11B-Ant1-2442-PASS

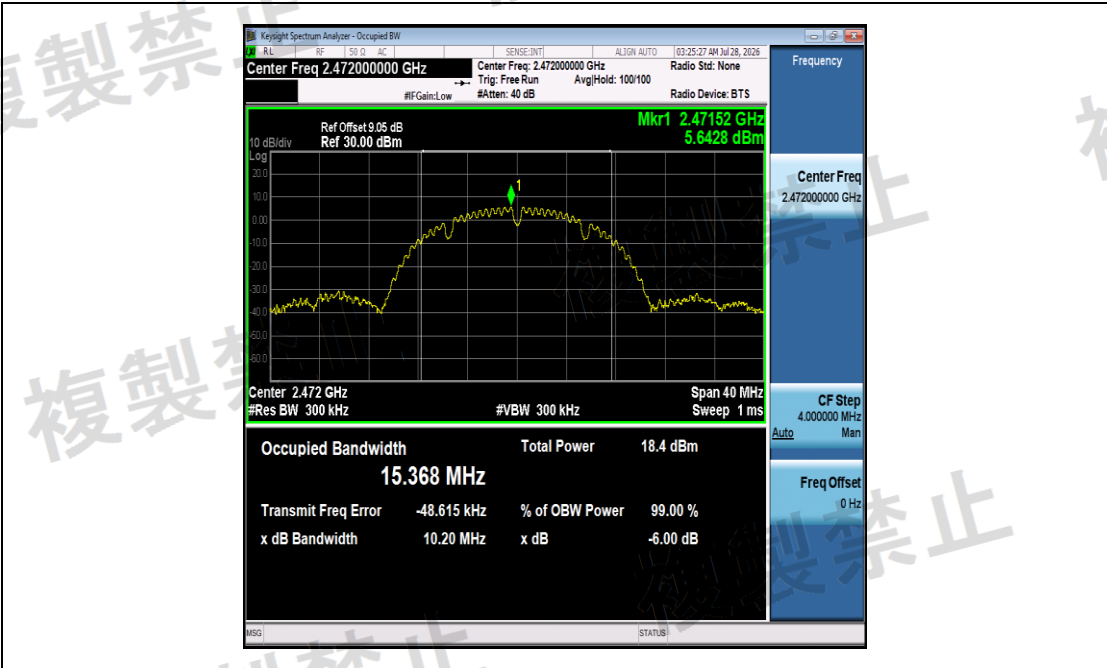


NTNV-11B-Ant1-2472-PASS

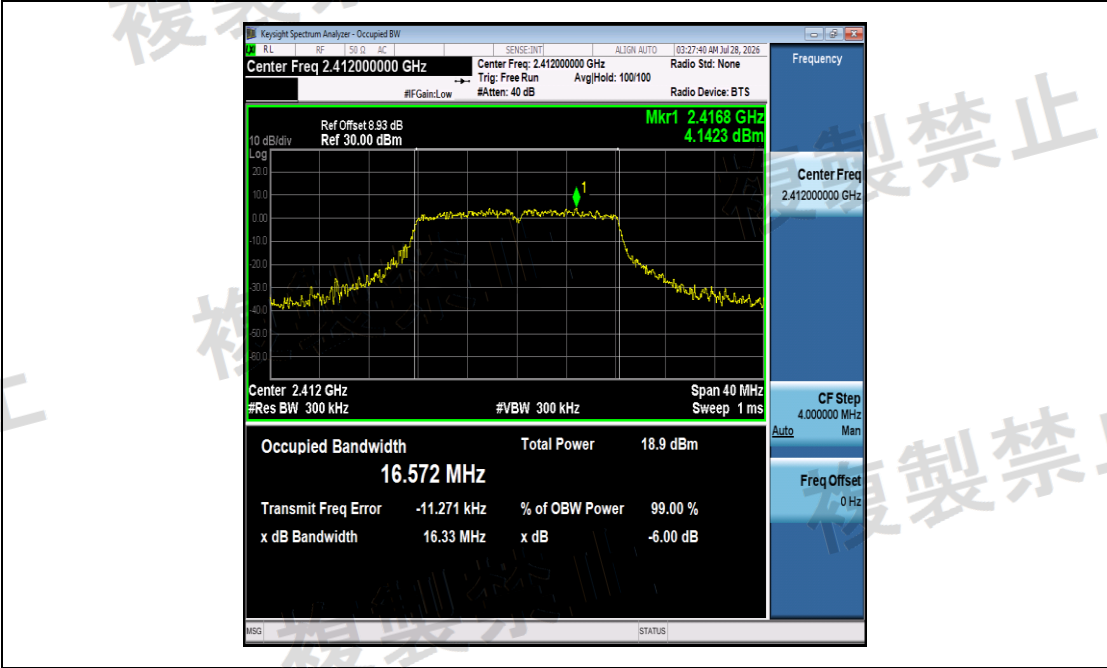


NTNV-11G-Ant1-2412-PASS

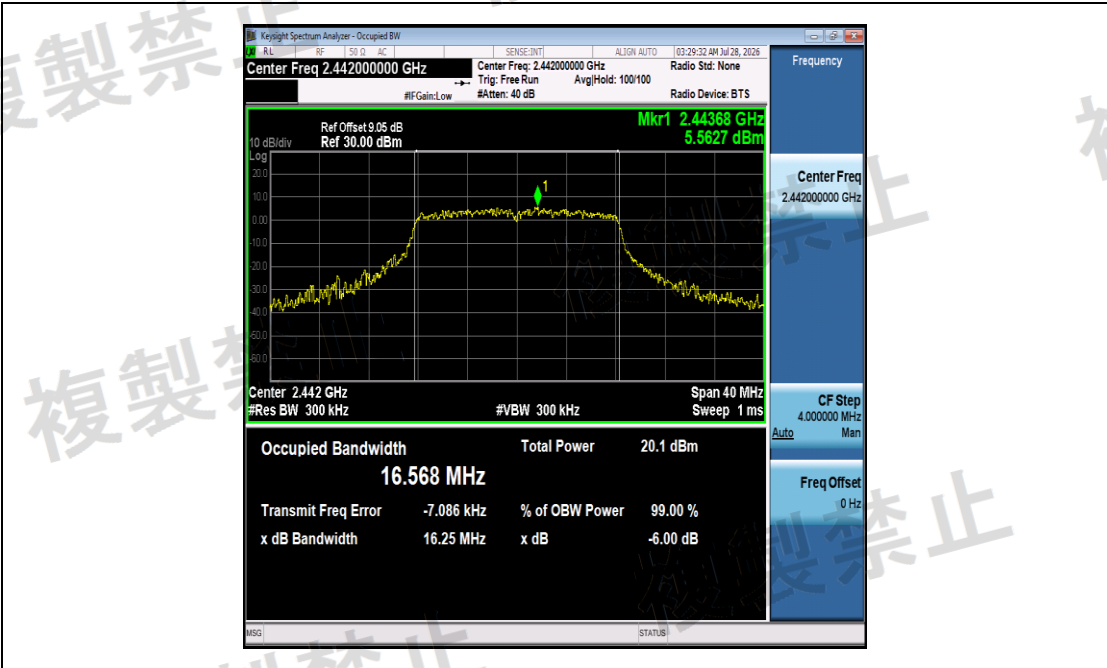


NTNV-11G-Ant1-2442-PASS

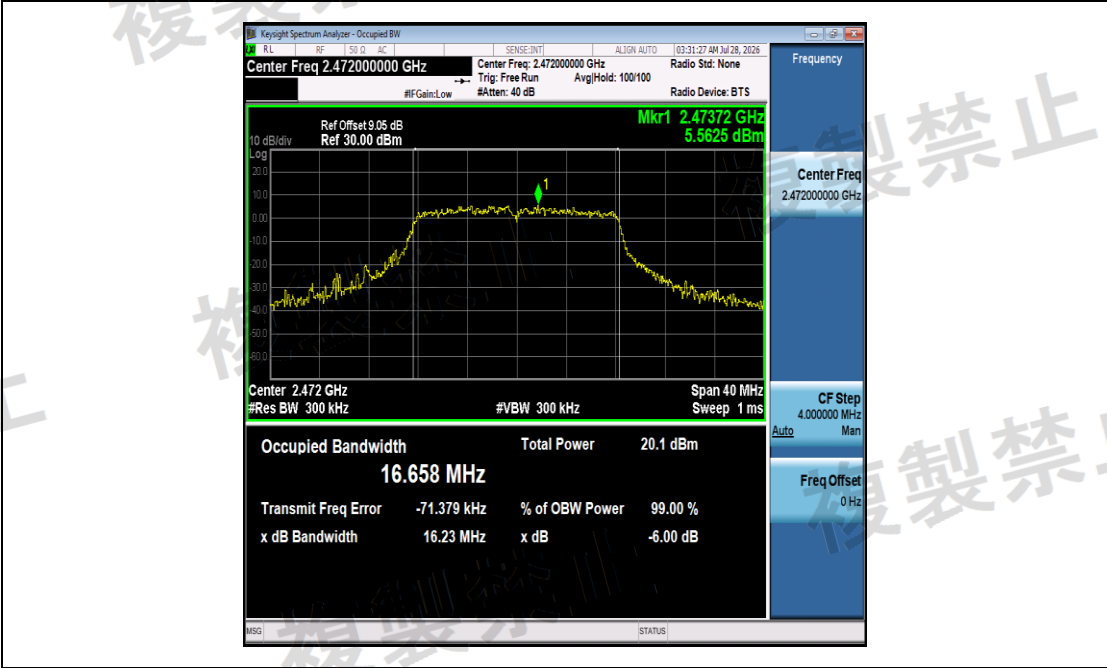


NTNV-11G-Ant1-2472-PASS

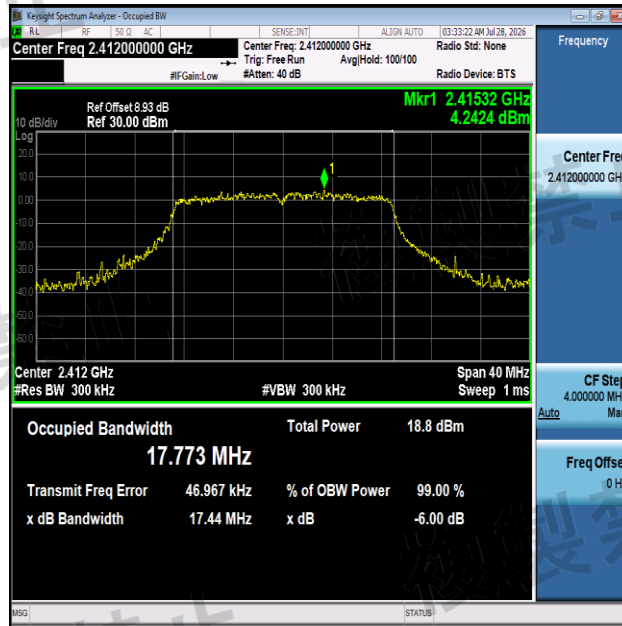


NTNV-11N20SISO-Ant1-2412-PASS

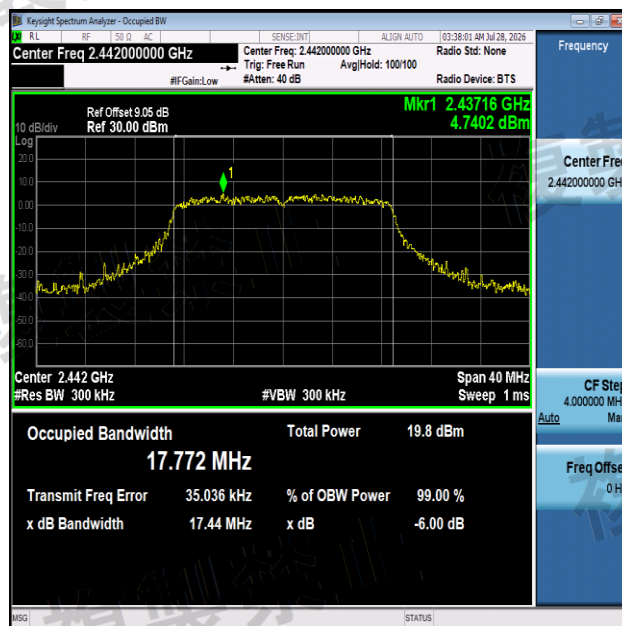


NTNV-11N20SISO-Ant1-2442-PASS

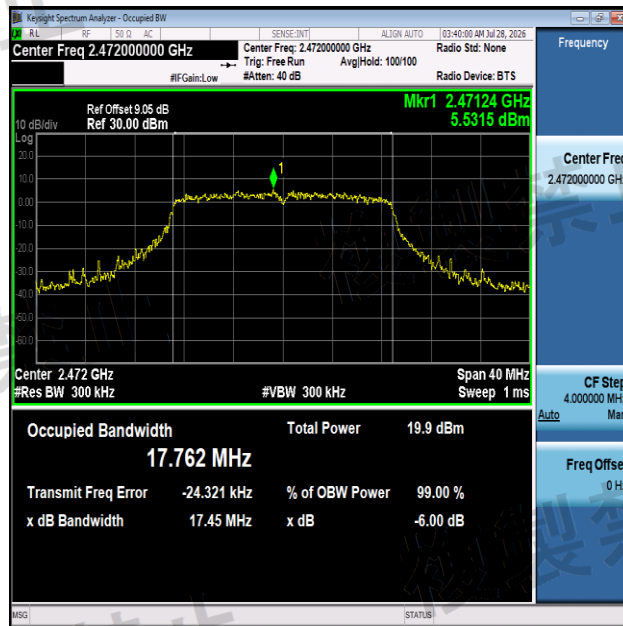


NTNV-11N20SISO-Ant1-2472-PASS

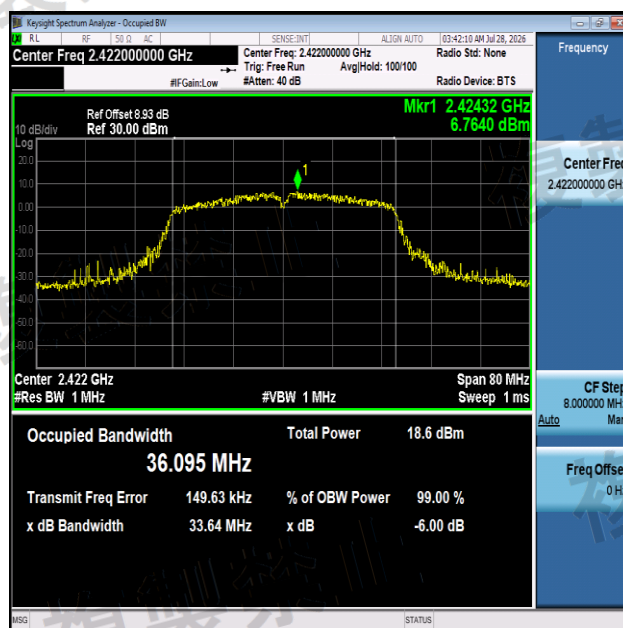


NTNV-11N40SISO-Ant1-2422-PASS

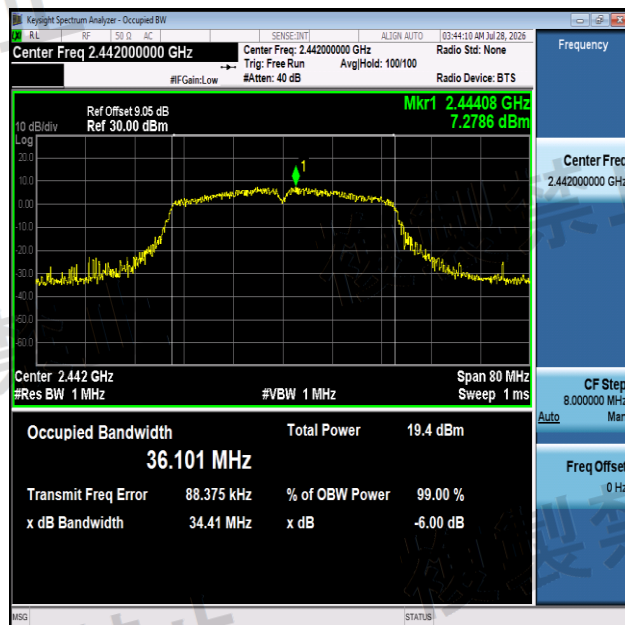


NTNV-11N40SISO-Ant1-2442-PASS

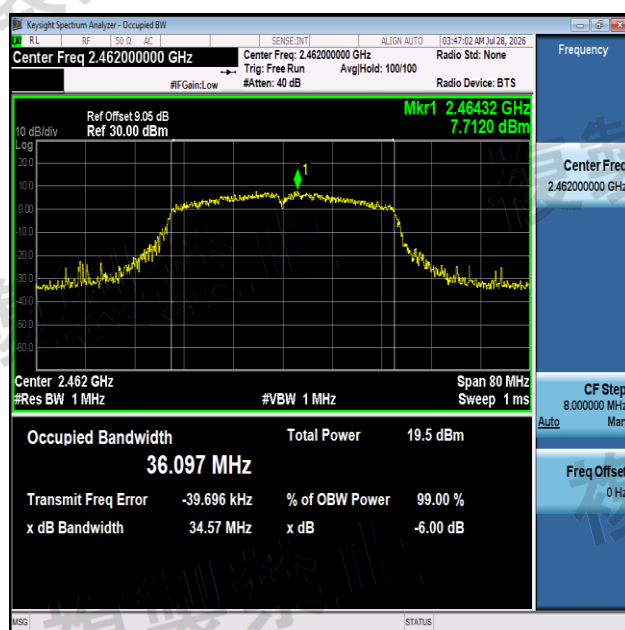


NTNV-11N40SISO-Ant1-2462-PASS

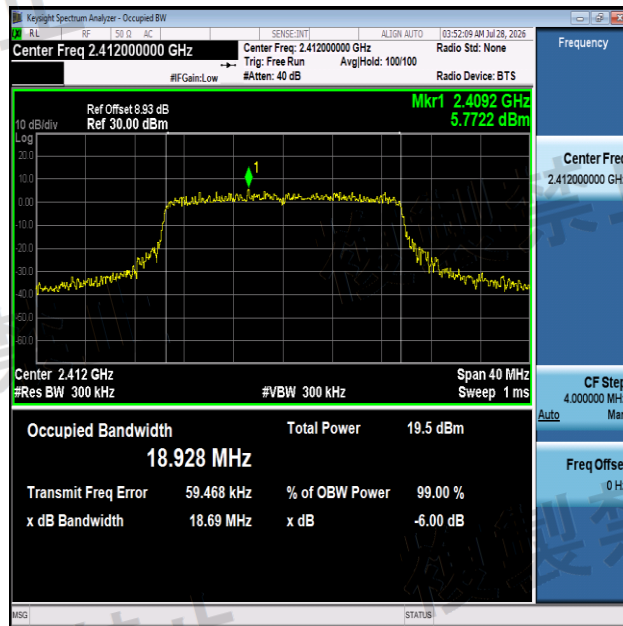

NTNV-11AX20SISO-Ant1-2412-PASS

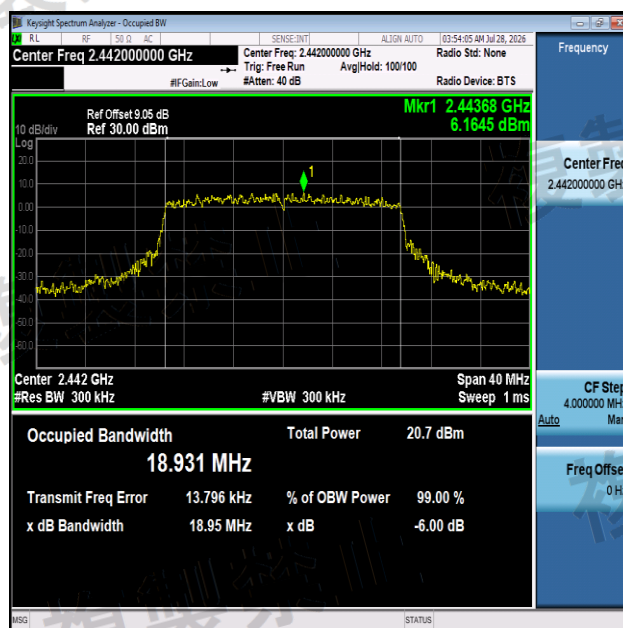

NTNV-11AX20SISO-Ant1-2442-PASS

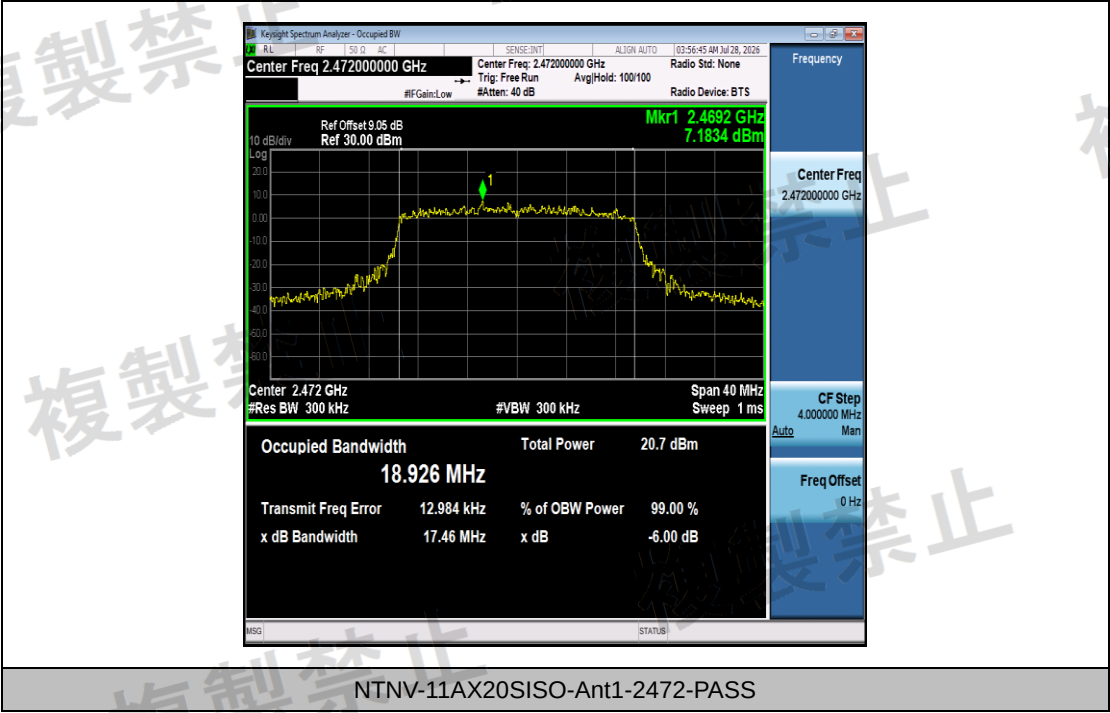

AppendixA.4: Spread Bandwidth


Test Result

TestCondition	TestMode	Antenna	Frequency[MHz]	Result [MHz]	Limit [MHz]	SpreadFactor	Verdict
NTNV	11B	Ant1	2412	10.078	≥0.5	7.329	PASS
NTNV	11B	Ant1	2442	10.048	≥0.5	7.308	PASS
NTNV	11B	Ant1	2472	10.028	≥0.5	7.293	PASS
NTNV	11G	Ant1	2412	14.298	≥0.5	---	PASS
NTNV	11G	Ant1	2442	14.441	≥0.5	---	PASS
NTNV	11G	Ant1	2472	14.276	≥0.5	---	PASS
NTNV	11N20SISO	Ant1	2412	15.442	≥0.5	---	PASS
NTNV	11N20SISO	Ant1	2442	15.137	≥0.5	---	PASS
NTNV	11N20SISO	Ant1	2472	15.295	≥0.5	---	PASS
NTNV	11N40SISO	Ant1	2422	29.521	≥0.5	---	PASS
NTNV	11N40SISO	Ant1	2442	29.258	≥0.5	---	PASS
NTNV	11N40SISO	Ant1	2462	29.270	≥0.5	---	PASS
NTNV	11AX20SISO	Ant1	2412	16.440	≥0.5	---	PASS
NTNV	11AX20SISO	Ant1	2442	16.372	≥0.5	---	PASS
NTNV	11AX20SISO	Ant1	2472	16.276	≥0.5	---	PASS


Test Graphs




NTNV-11B-Ant1-2412-PASS

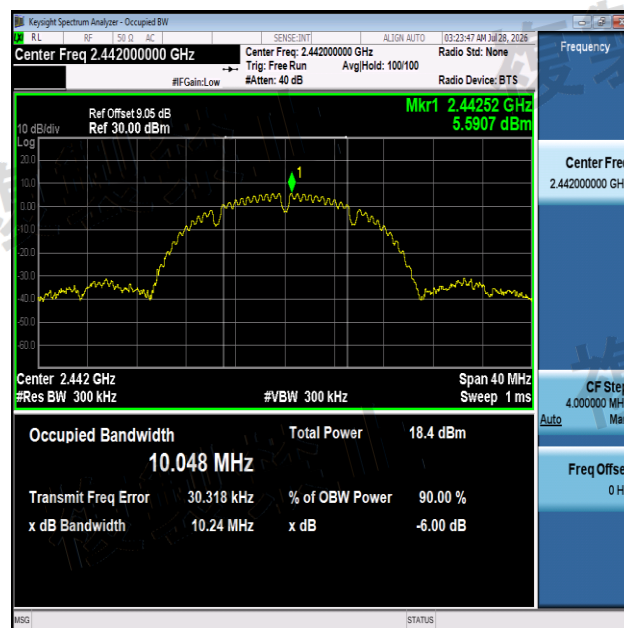


NTNV-11B-Ant1-2442-PASS

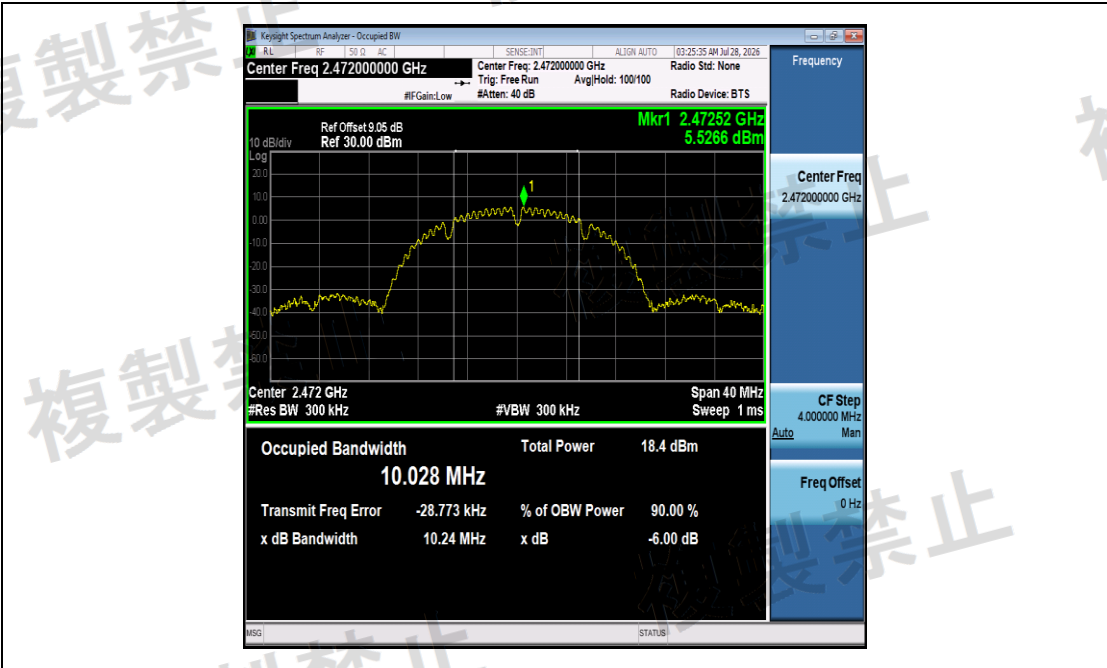


NTNV-11B-Ant1-2472-PASS

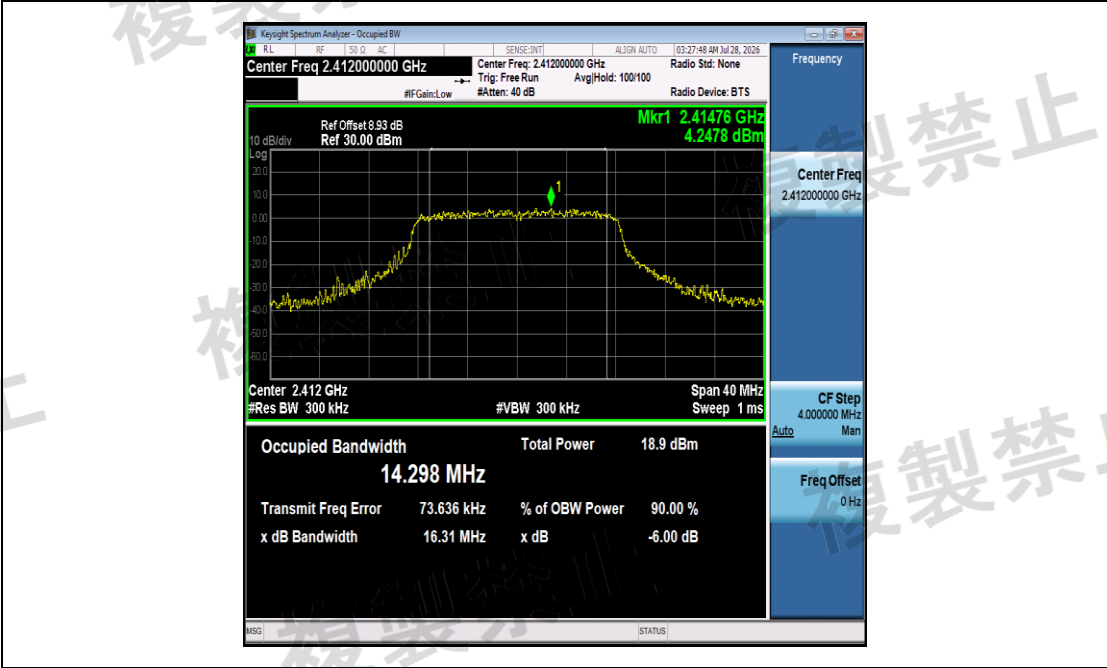


NTNV-11G-Ant1-2412-PASS

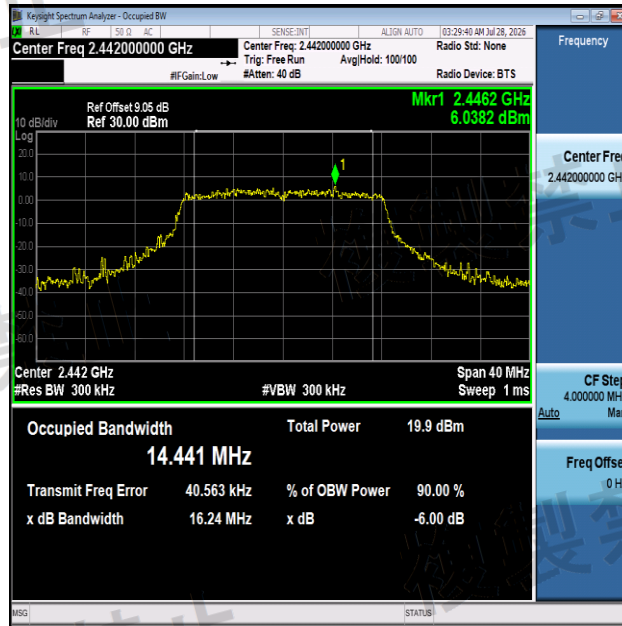


NTNV-11G-Ant1-2442-PASS

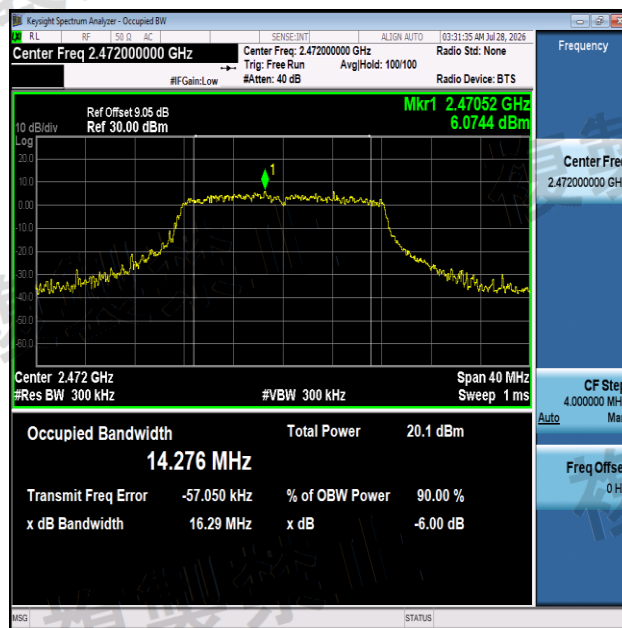


NTNV-11G-Ant1-2472-PASS

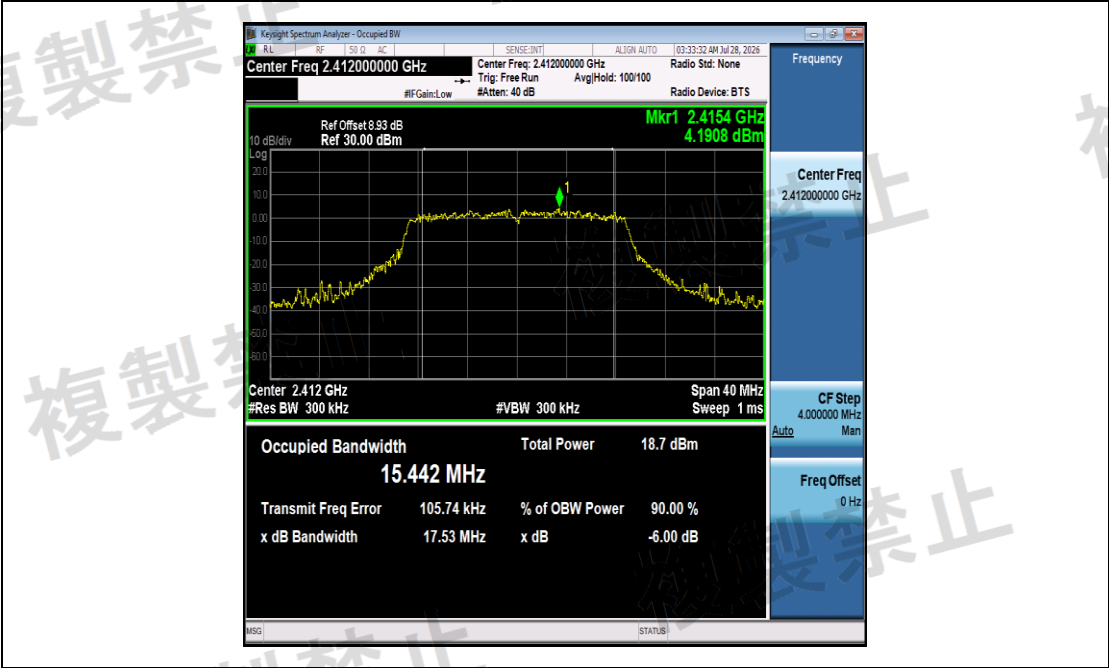


NTNV-11N20SISO-Ant1-2412-PASS

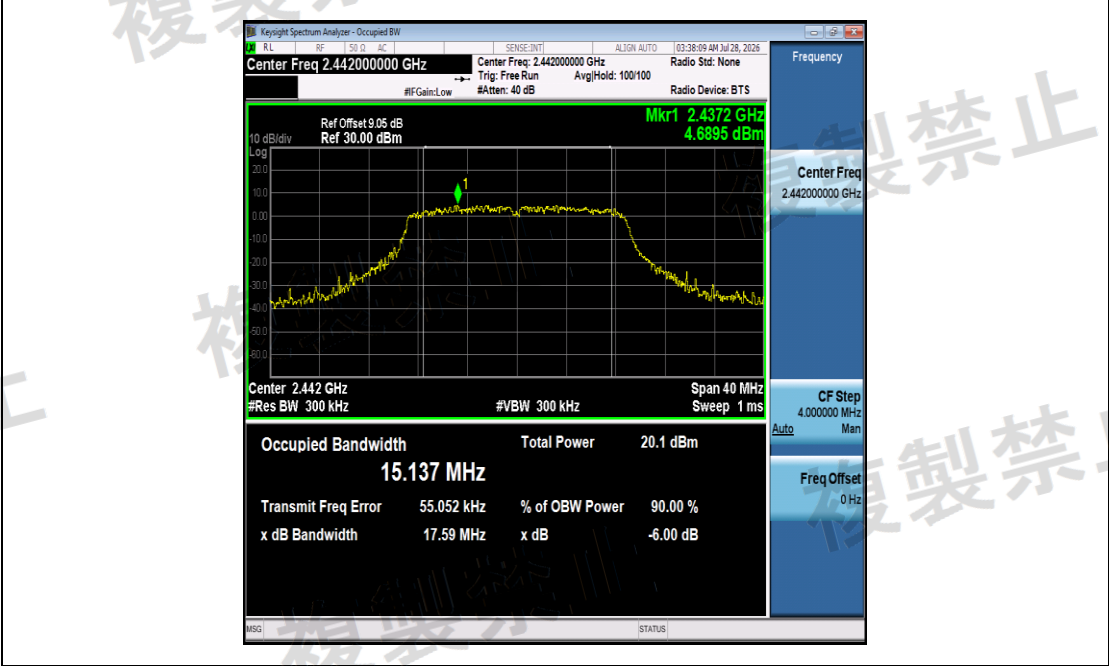


NTNV-11N20SISO-Ant1-2442-PASS

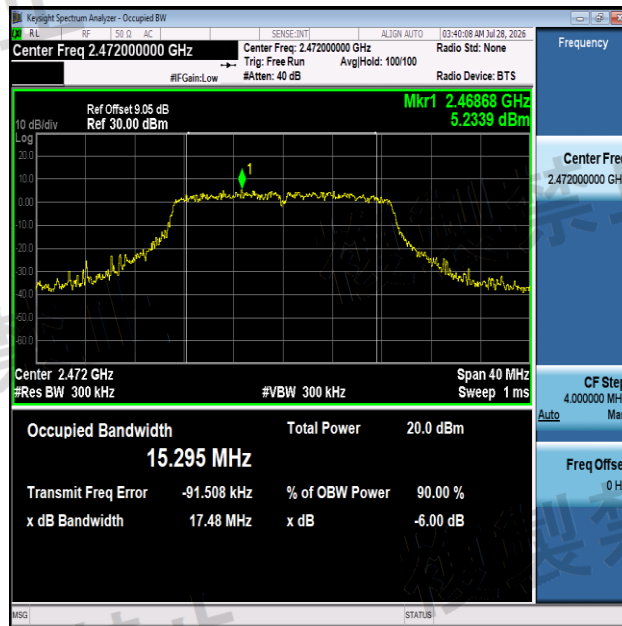


NTNV-11N20SISO-Ant1-2472-PASS

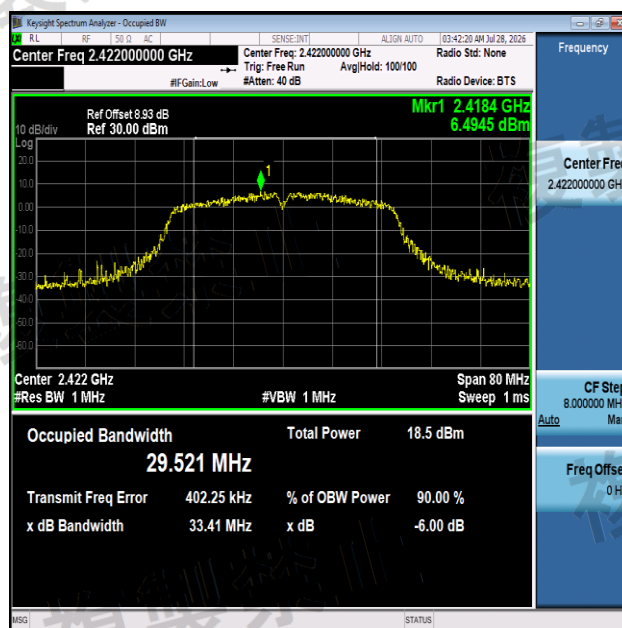


NTNV-11N40SISO-Ant1-2422-PASS

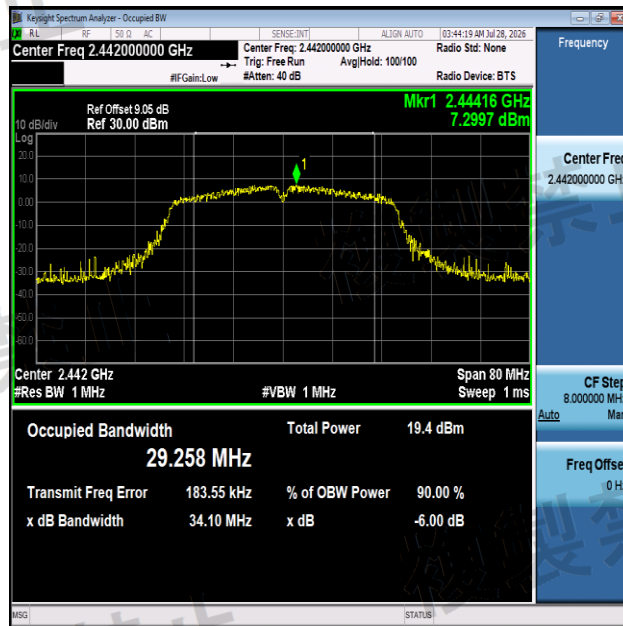


NTNV-11N40SISO-Ant1-2442-PASS

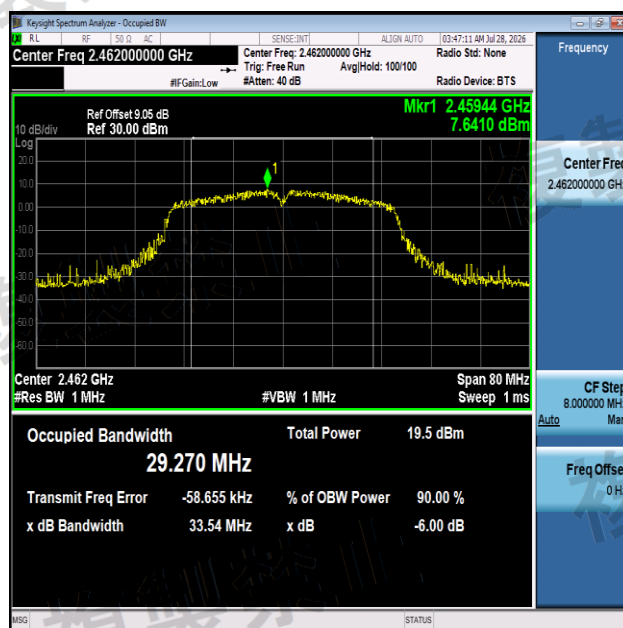


NTNV-11N40SISO-Ant1-2462-PASS

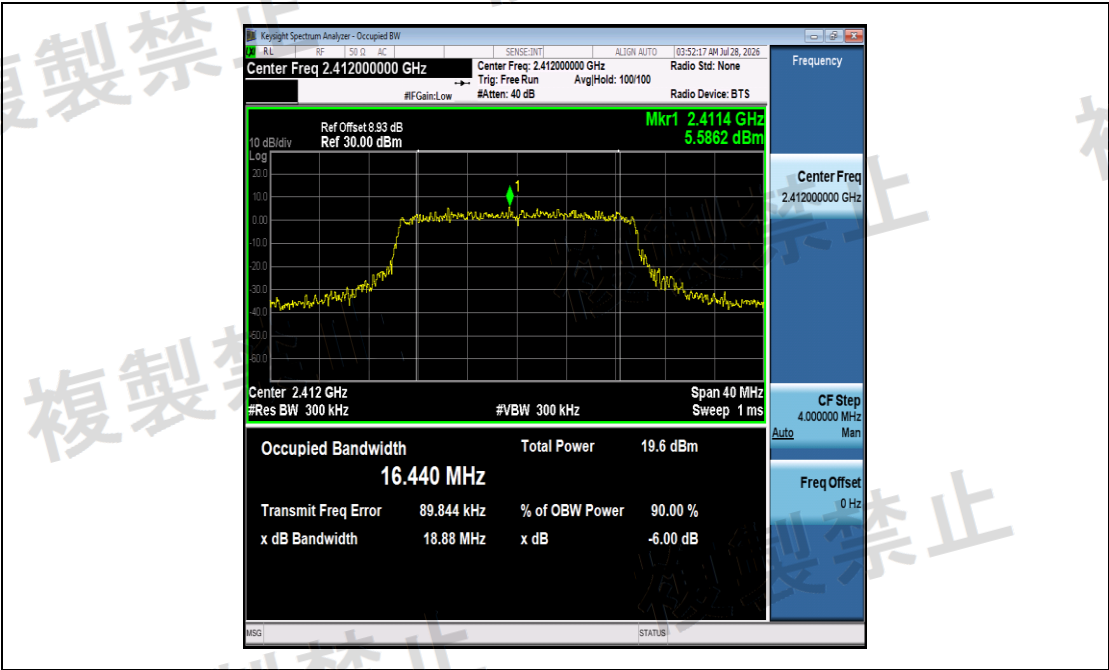

NTNV-11AX20SISO-Ant1-2412-PASS

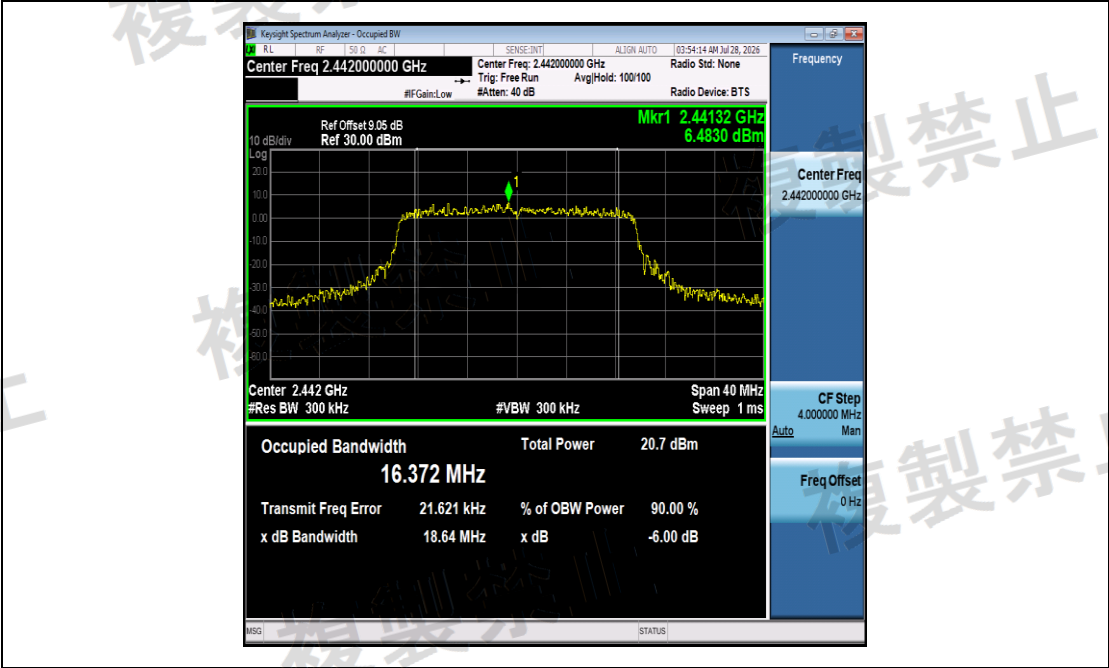

NTNV-11AX20SISO-Ant1-2442-PASS

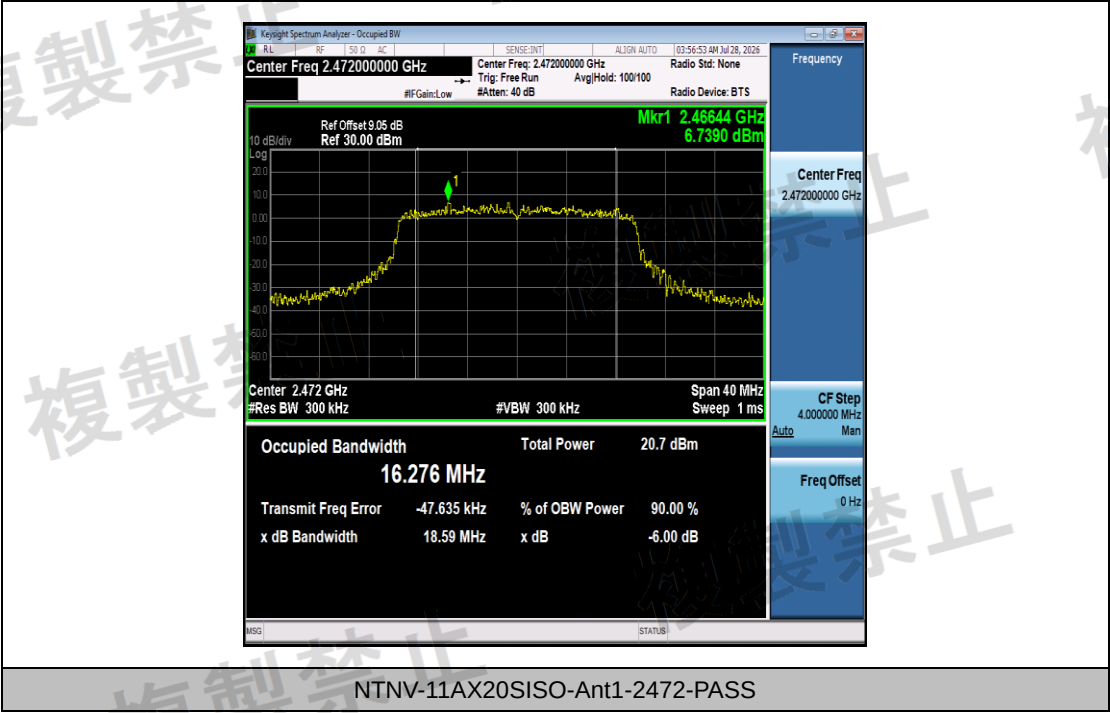

Appendix A.5: Spurious Emission of TX

Test Result


TestCondition	TestMode	Antenna	Frequency[MHz]	Freq.Range [MHz]	Result [dBm/MHz]	Limit [dBm/MHz]	Result [μW/MHz]	Limit [μW/MHz]	Verdict
NTNV	11B	Ant1	2412	30~1000	-46.94	≤-26	0.02023	≤2.5	PASS
NTNV	11B	Ant1	2412	1000~2387	-41.42	≤-26	0.07211	≤2.5	PASS
NTNV	11B	Ant1	2412	2387~2400	-31.40	≤-16	0.72444	≤25	PASS
NTNV	11B	Ant1	2412	2483.5~2496.5	-48.20	≤-16	0.01514	≤25	PASS
NTNV	11B	Ant1	2412	2496.5~13000	-44.39	≤-26	0.03639	≤2.5	PASS
NTNV	11B	Ant1	2442	30~1000	-48.62	≤-26	0.01374	≤2.5	PASS
NTNV	11B	Ant1	2442	1000~2387	-40.48	≤-26	0.08954	≤2.5	PASS
NTNV	11B	Ant1	2442	2387~2400	-46.54	≤-16	0.02218	≤25	PASS
NTNV	11B	Ant1	2442	2483.5~2496.5	-45.78	≤-16	0.02642	≤25	PASS
NTNV	11B	Ant1	2442	2496.5~13000	-44.34	≤-26	0.03681	≤2.5	PASS
NTNV	11B	Ant1	2472	30~1000	-47.48	≤-26	0.01786	≤2.5	PASS
NTNV	11B	Ant1	2472	1000~2387	-40.28	≤-26	0.09376	≤2.5	PASS
NTNV	11B	Ant1	2472	2387~2400	-48.21	≤-16	0.01510	≤25	PASS
NTNV	11B	Ant1	2472	2483.5~2496.5	-24.05	≤-16	3.93550	≤25	PASS
NTNV	11B	Ant1	2472	2496.5~13000	-45.64	≤-26	0.02729	≤2.5	PASS
NTNV	11G	Ant1	2412	30~1000	-50.51	≤-26	0.00889	≤2.5	PASS
NTNV	11G	Ant1	2412	1000~2387	-48.17	≤-26	0.01524	≤2.5	PASS
NTNV	11G	Ant1	2412	2387~2400	-28.23	≤-16	1.50314	≤25	PASS
NTNV	11G	Ant1	2412	2483.5~2496.5	-50.94	≤-16	0.00805	≤25	PASS
NTNV	11G	Ant1	2412	2496.5~13000	-48.16	≤-26	0.01528	≤2.5	PASS
NTNV	11G	Ant1	2442	30~1000	-48.28	≤-26	0.01486	≤2.5	PASS
NTNV	11G	Ant1	2442	1000~2387	-39.77	≤-26	0.10544	≤2.5	PASS
NTNV	11G	Ant1	2442	2387~2400	-44.72	≤-16	0.03373	≤25	PASS
NTNV	11G	Ant1	2442	2483.5~2496.5	-43.49	≤-16	0.04477	≤25	PASS

				6.5					
NTNV	11G	Ant1	2442	2496.5~13000	-45.09	≤-26	0.03097	≤2.5	PASS
NTNV	11G	Ant1	2472	30~1000	-49.89	≤-26	0.01026	≤2.5	PASS
NTNV	11G	Ant1	2472	1000~2387	-40.13	≤-26	0.09705	≤2.5	PASS
NTNV	11G	Ant1	2472	2387~2400	-51.54	≤-16	0.00701	≤25	PASS
NTNV	11G	Ant1	2472	2483.5~2496.5	-28.24	≤-16	1.49968	≤25	PASS
NTNV	11G	Ant1	2472	2496.5~13000	-49.61	≤-26	0.01094	≤2.5	PASS
NTNV	11N20SISO	Ant1	2412	30~1000	-50.86	≤-26	0.00820	≤2.5	PASS
NTNV	11N20SISO	Ant1	2412	1000~2387	-44.10	≤-26	0.03890	≤2.5	PASS
NTNV	11N20SISO	Ant1	2412	2387~2400	-26.66	≤-16	2.15774	≤25	PASS
NTNV	11N20SISO	Ant1	2412	2483.5~2496.5	-51.51	≤-16	0.00706	≤25	PASS
NTNV	11N20SISO	Ant1	2412	2496.5~13000	-49.02	≤-26	0.01253	≤2.5	PASS
NTNV	11N20SISO	Ant1	2442	30~1000	-48.41	≤-26	0.01442	≤2.5	PASS
NTNV	11N20SISO	Ant1	2442	1000~2387	-39.53	≤-26	0.11143	≤2.5	PASS
NTNV	11N20SISO	Ant1	2442	2387~2400	-41.37	≤-16	0.07295	≤25	PASS
NTNV	11N20SISO	Ant1	2442	2483.5~2496.5	-41.35	≤-16	0.07328	≤25	PASS
NTNV	11N20SISO	Ant1	2442	2496.5~13000	-45.01	≤-26	0.03155	≤2.5	PASS
NTNV	11N20SISO	Ant1	2472	30~1000	-51.75	≤-26	0.00668	≤2.5	PASS
NTNV	11N20SISO	Ant1	2472	1000~2387	-48.45	≤-26	0.01429	≤2.5	PASS
NTNV	11N20SISO	Ant1	2472	2387~2400	-51.19	≤-16	0.00760	≤25	PASS
NTNV	11N20SISO	Ant1	2472	2483.5~2496.5	-24.10	≤-16	3.89045	≤25	PASS
NTNV	11N20SISO	Ant1	2472	2496.5~13000	-48.48	≤-26	0.01419	≤2.5	PASS
NTNV	11N40SISO	Ant1	2422	30~1000	-51.73	≤-26	0.00671	≤2.5	PASS
NTNV	11N40SISO	Ant1	2422	1000~2387	-46.98	≤-26	0.02004	≤2.5	PASS


	O								
NTNV	11N40SIS O	Ant1	2422	2387~2400	-30.24	≤-16	0.94624	≤25	PASS
NTNV	11N40SIS O	Ant1	2422	2483.5~249 6.5	-51.60	≤-16	0.00692	≤25	PASS
NTNV	11N40SIS O	Ant1	2422	2496.5~130 00	-49.57	≤-26	0.01104	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2442	30~1000	-50.75	≤-26	0.00841	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2442	1000~2387	-44.43	≤-26	0.03606	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2442	2387~2400	-38.30	≤-16	0.14791	≤25	PASS
NTNV	11N40SIS O	Ant1	2442	2483.5~249 6.5	-34.13	≤-16	0.38637	≤25	PASS
NTNV	11N40SIS O	Ant1	2442	2496.5~130 00	-42.40	≤-26	0.05754	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2462	30~1000	-50.75	≤-26	0.00841	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2462	1000~2387	-50.61	≤-26	0.00869	≤2.5	PASS
NTNV	11N40SIS O	Ant1	2462	2387~2400	-51.63	≤-16	0.00687	≤25	PASS
NTNV	11N40SIS O	Ant1	2462	2483.5~249 6.5	-31.21	≤-16	0.75683	≤25	PASS
NTNV	11N40SIS O	Ant1	2462	2496.5~130 00	-47.51	≤-26	0.01774	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2412	30~1000	-52.04	≤-26	0.00625	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2412	1000~2387	-44.25	≤-26	0.03758	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2412	2387~2400	-28.59	≤-16	1.38357	≤25	PASS
NTNV	11AX20SI SO	Ant1	2412	2483.5~249 6.5	-51.26	≤-16	0.00748	≤25	PASS
NTNV	11AX20SI SO	Ant1	2412	2496.5~130 00	-49.41	≤-26	0.01146	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2442	30~1000	-47.34	≤-26	0.01845	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2442	1000~2387	-37.48	≤-26	0.17865	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2442	2387~2400	-41.36	≤-16	0.07311	≤25	PASS

NTNV	11AX20SI SO	Ant1	2442	2483.5~249 6.5	-41.97	≤-16	0.06353	≤25	PASS
NTNV	11AX20SI SO	Ant1	2442	2496.5~130 00	-43.22	≤-26	0.04764	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2472	30~1000	-50.98	≤-26	0.00798	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2472	1000~2387	-44.44	≤-26	0.03597	≤2.5	PASS
NTNV	11AX20SI SO	Ant1	2472	2387~2400	-51.62	≤-16	0.00689	≤25	PASS
NTNV	11AX20SI SO	Ant1	2472	2483.5~249 6.5	-24.62	≤-16	3.45144	≤25	PASS
NTNV	11AX20SI SO	Ant1	2472	2496.5~130 00	-49.10	≤-26	0.01230	≤2.5	PASS


Test Graphs

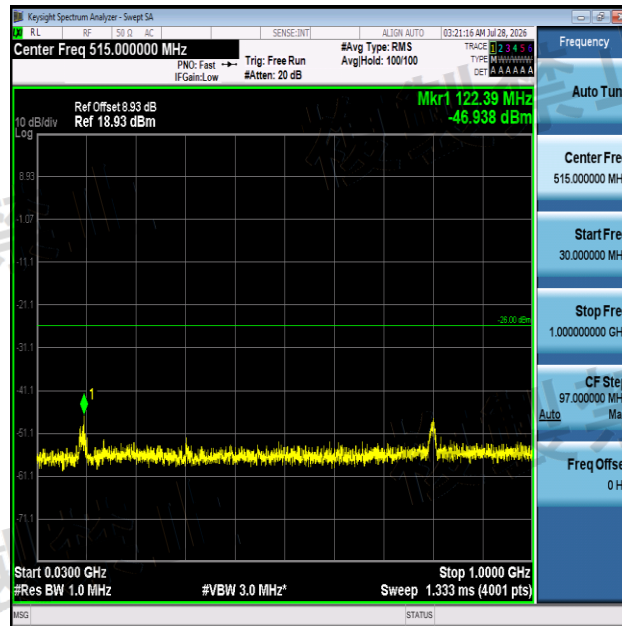


NTNV-11B-Ant1-2412-30~1000-PASS

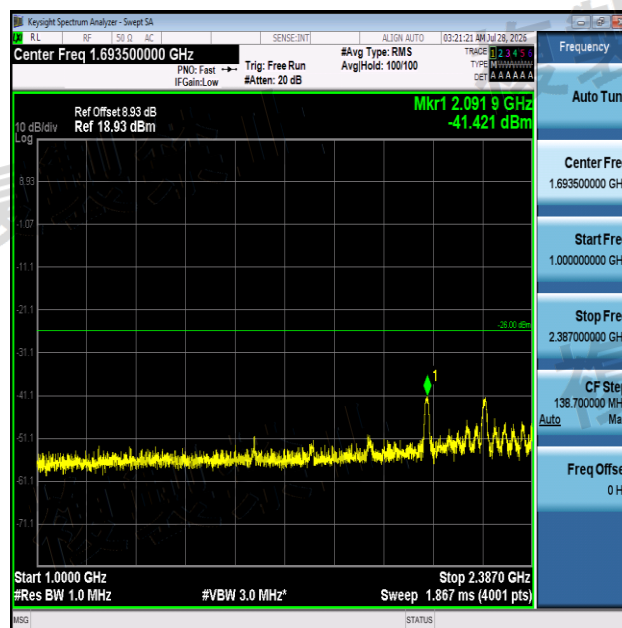


NTNV-11B-Ant1-2412-1000~2387-PASS

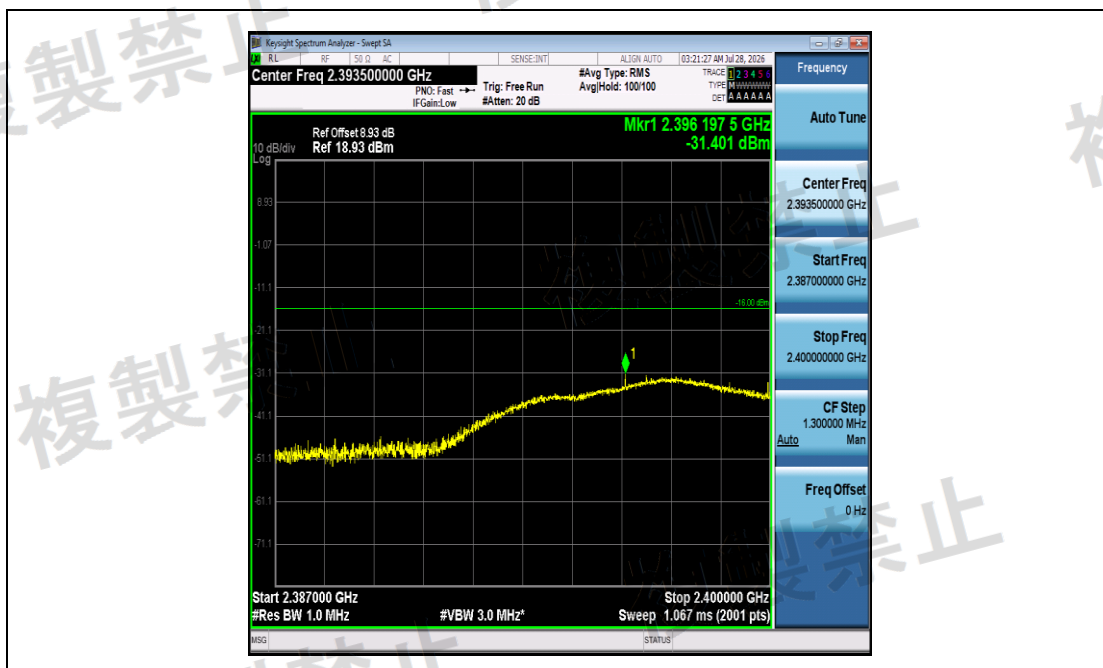


NTNV-11B-Ant1-2412-2387~2400-PASS

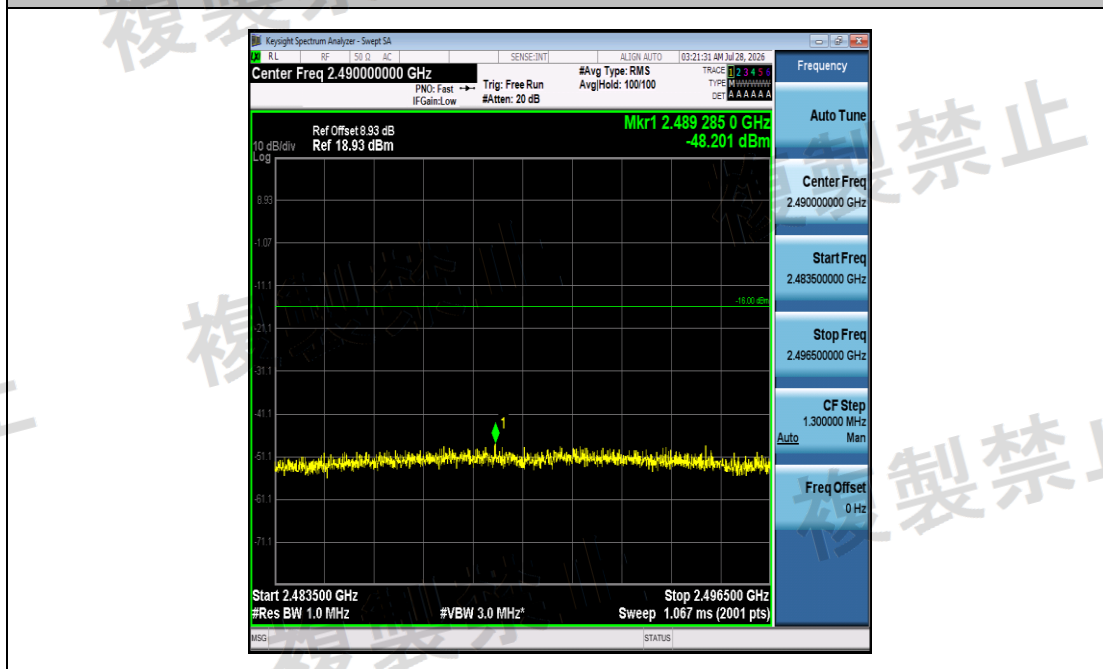


NTNV-11B-Ant1-2412-2483.5~2496.5-PASS

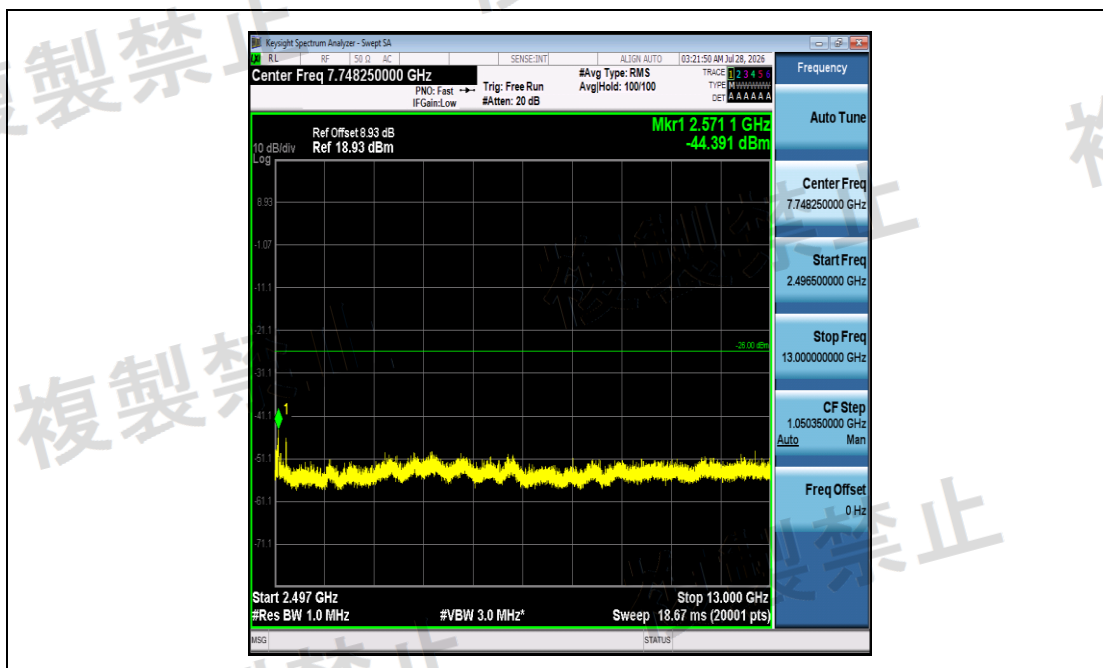


NTNV-11B-Ant1-2412-2496.5~13000-PASS

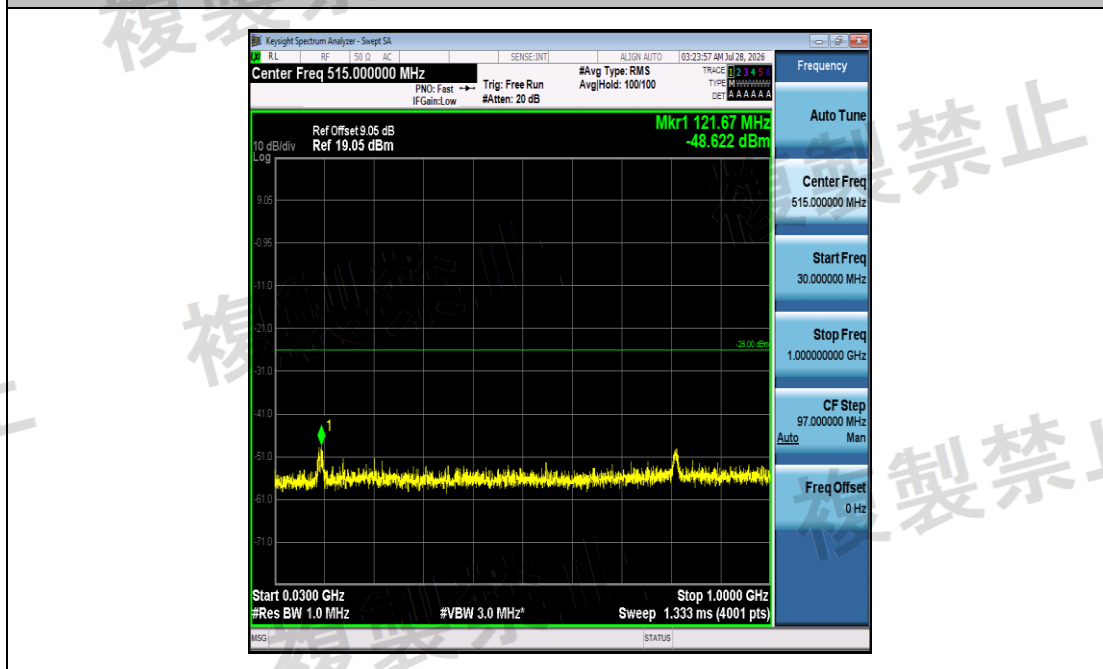


NTNV-11B-Ant1-2442-30~1000-PASS

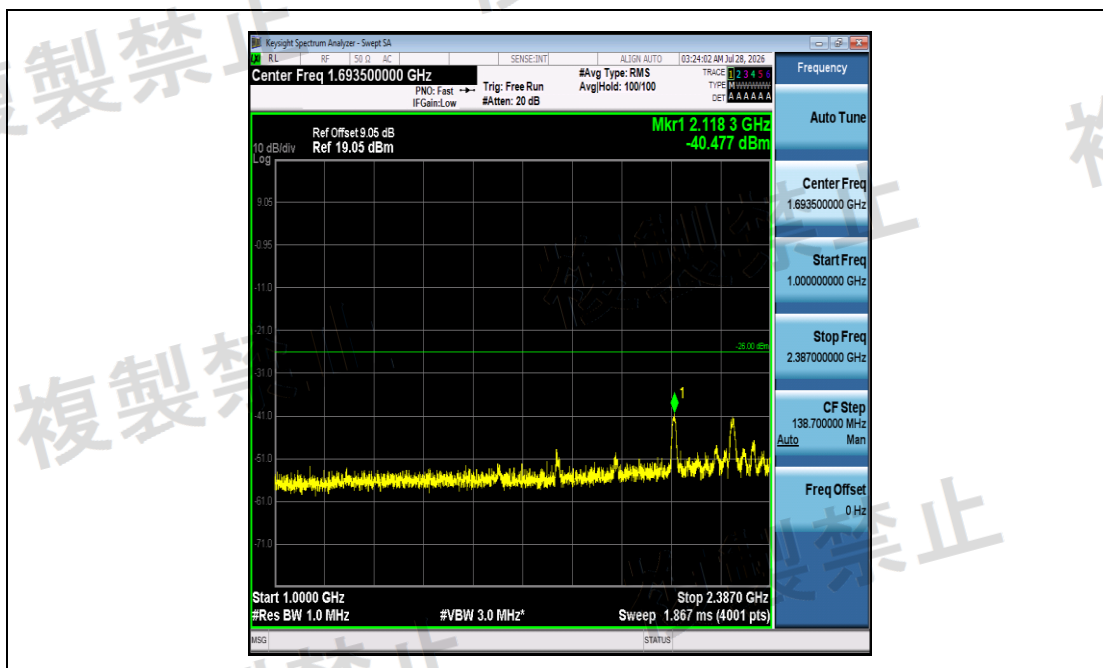


NTNV-11B-Ant1-2442-1000~2387-PASS

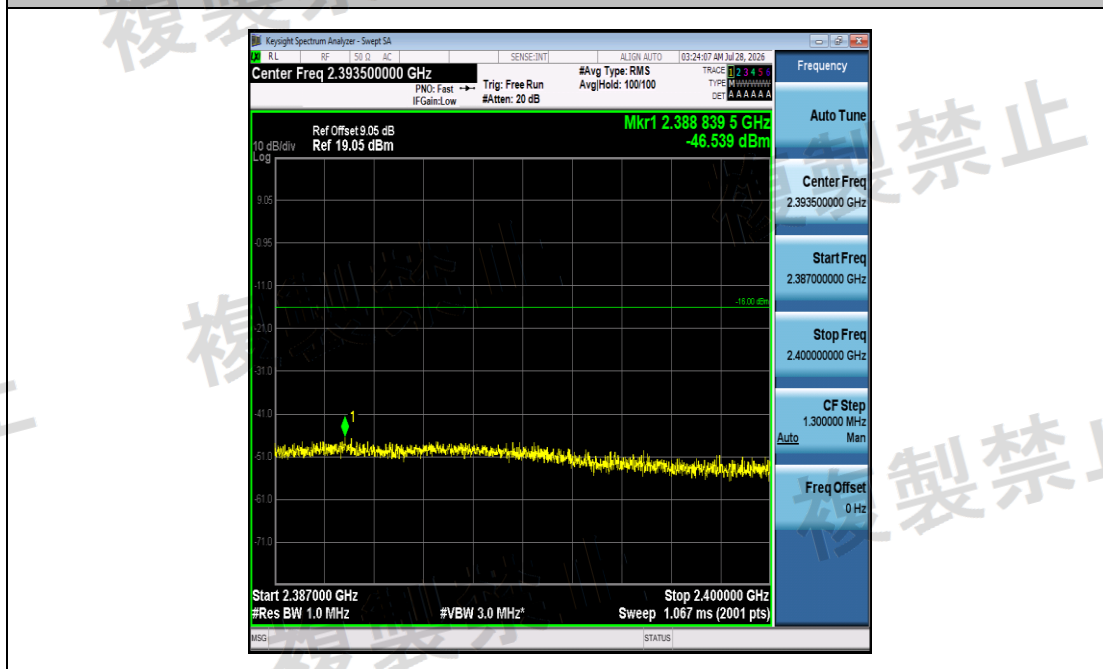


NTNV-11B-Ant1-2442-2387~2400-PASS

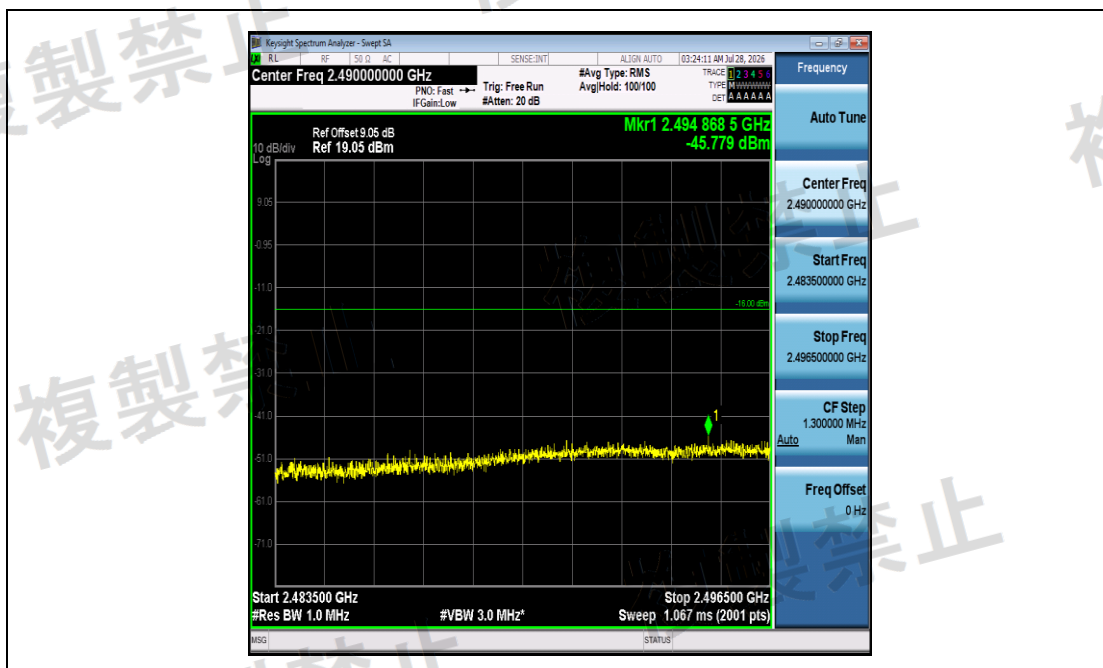


NTNV-11B-Ant1-2442-2483.5~2496.5-PASS

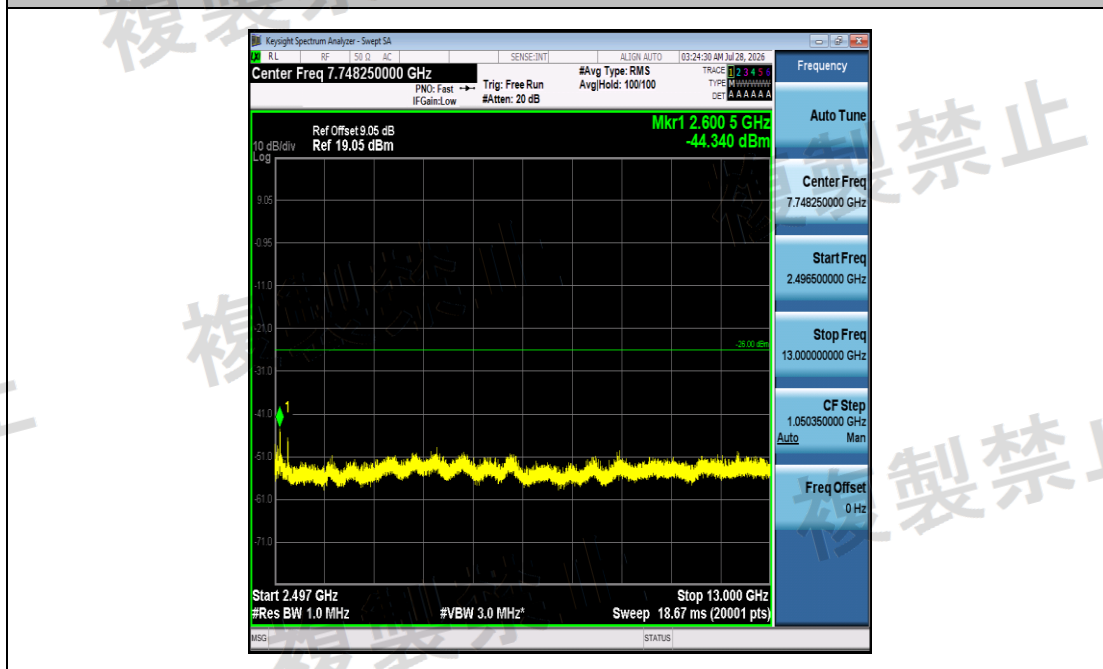


NTNV-11B-Ant1-2442-2496.5~13000-PASS

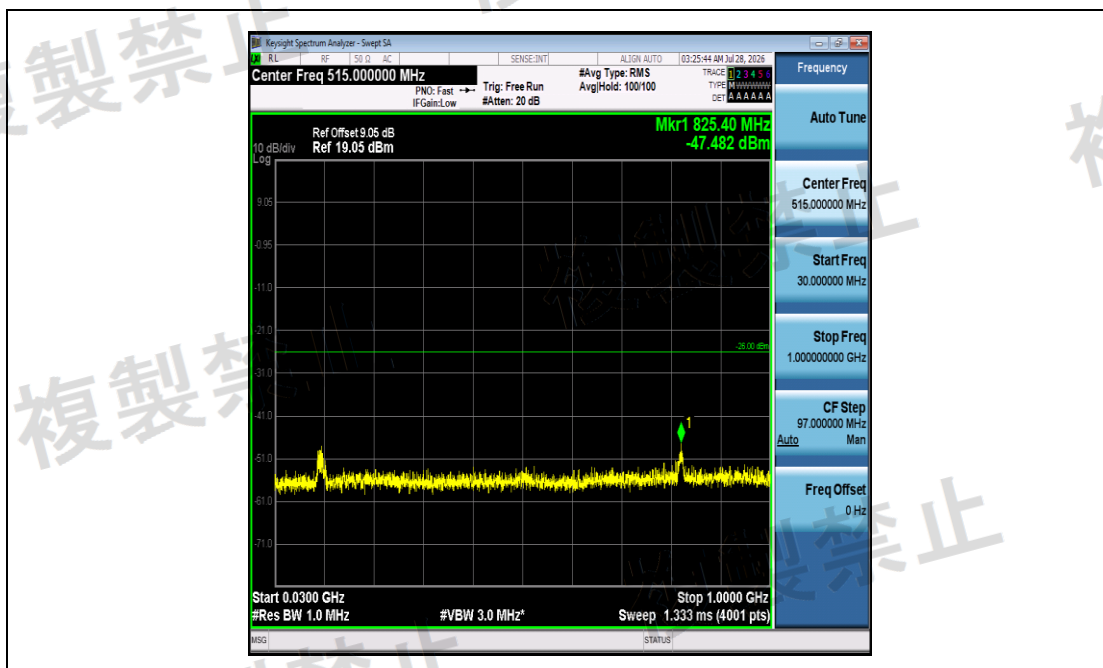


NTNV-11B-Ant1-2472-30~1000-PASS

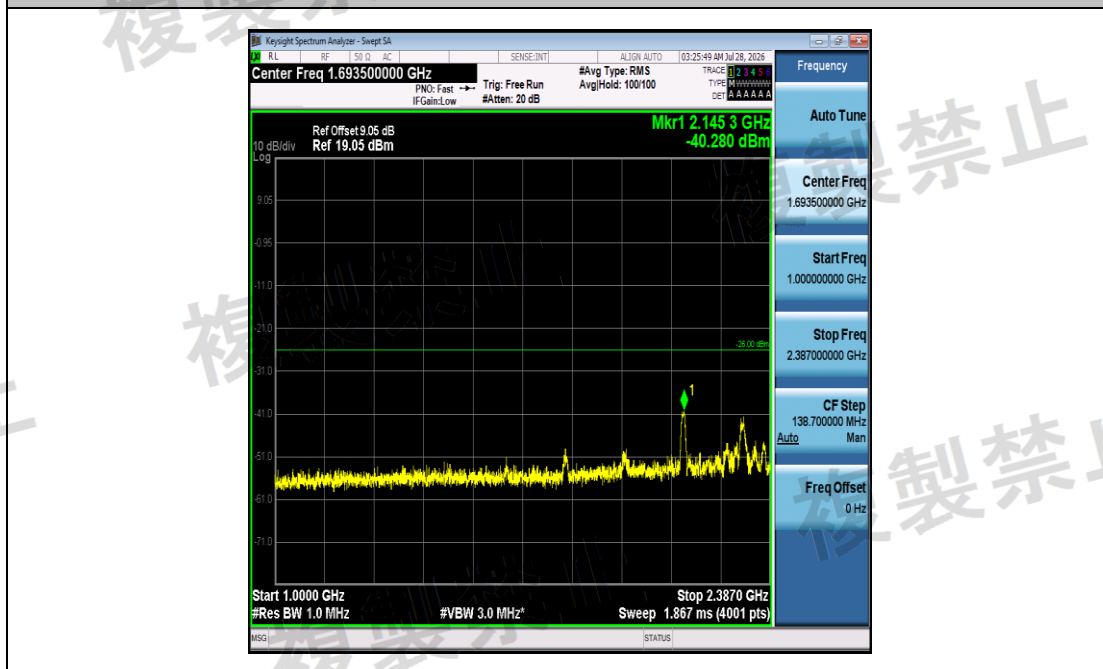


NTNV-11B-Ant1-2472-1000~2387-PASS

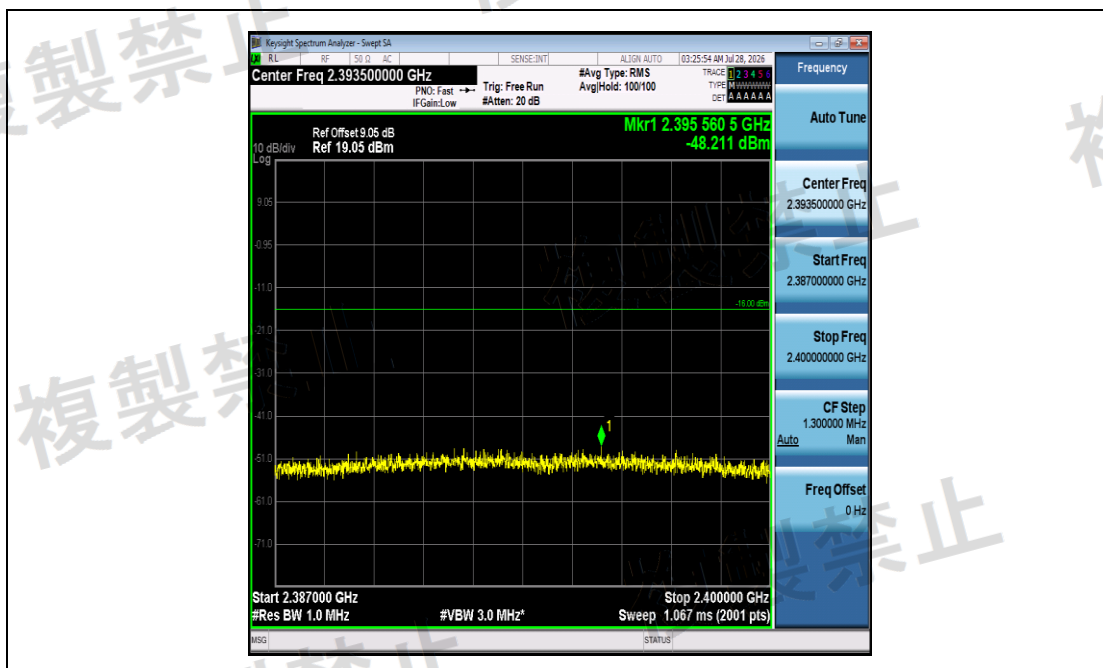


NTNV-11B-Ant1-2472-2387~2400-PASS

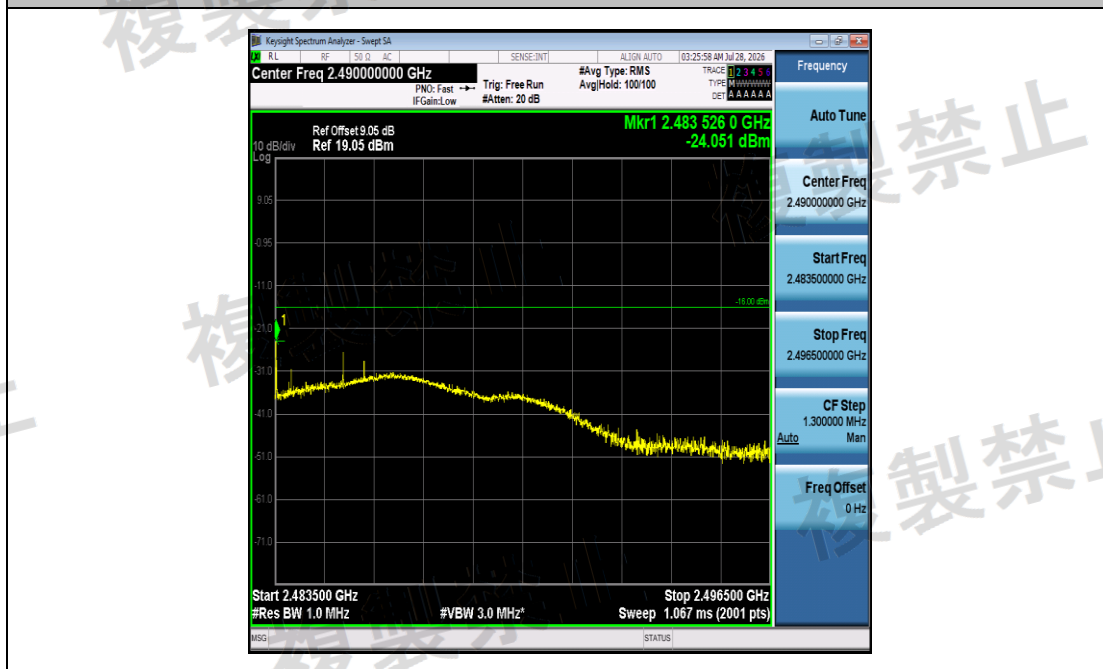


NTNV-11B-Ant1-2472-2483.5~2496.5-PASS

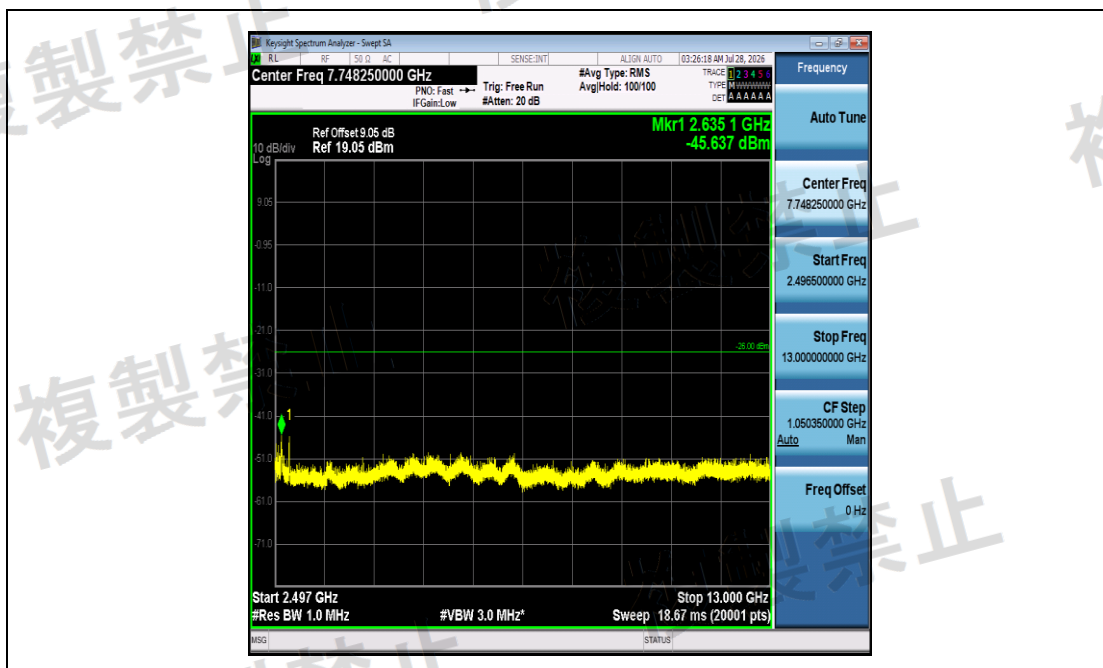


NTNV-11B-Ant1-2472-2496.5~13000-PASS

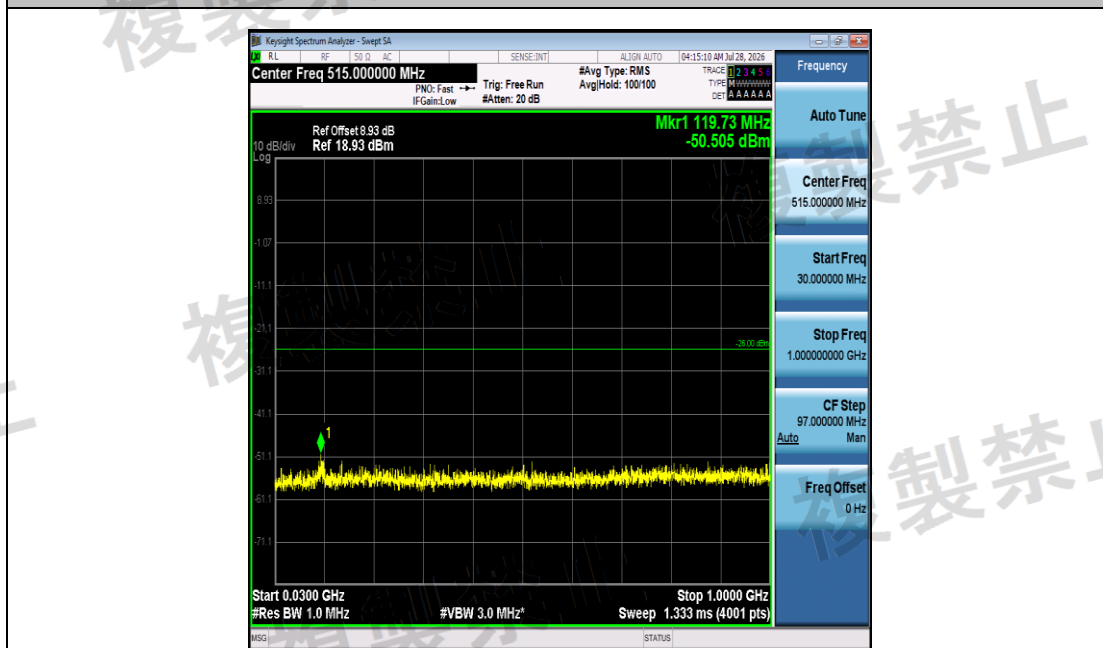


NTNV-11G-Ant1-2412-30~1000-PASS

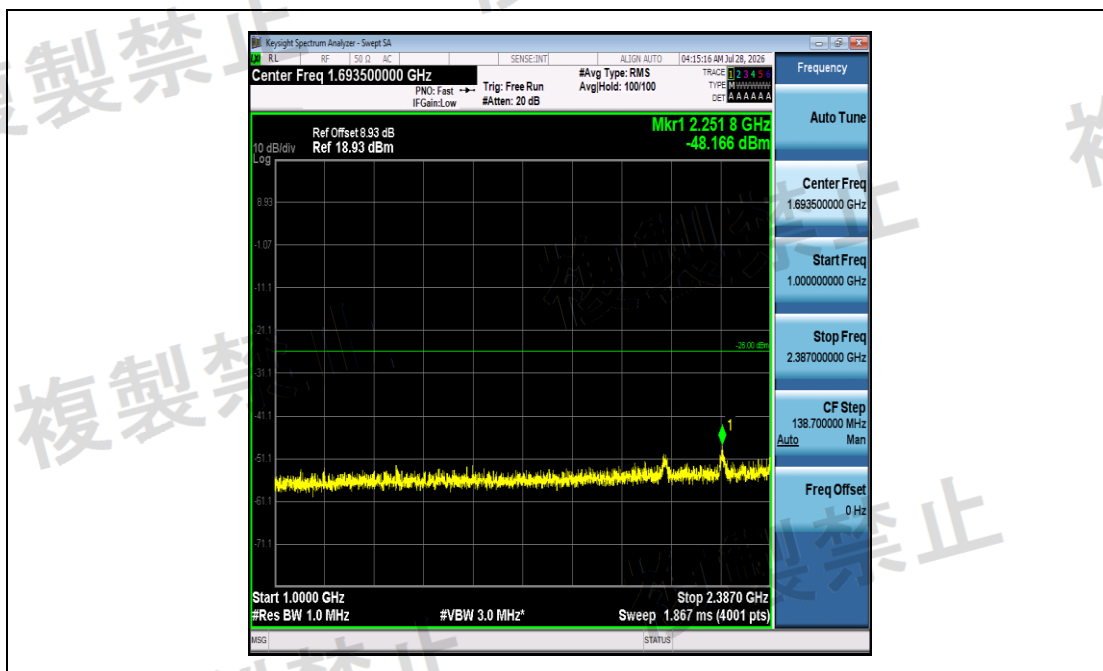


NTNV-11G-Ant1-2412-1000~2387-PASS

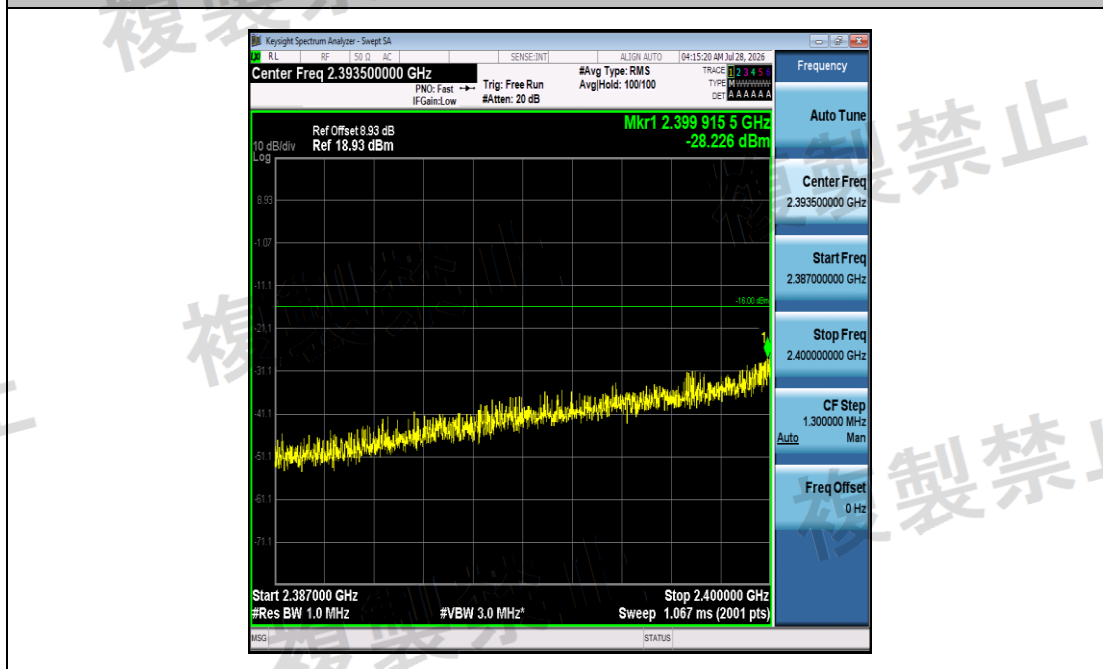


NTNV-11G-Ant1-2412-2387~2400-PASS

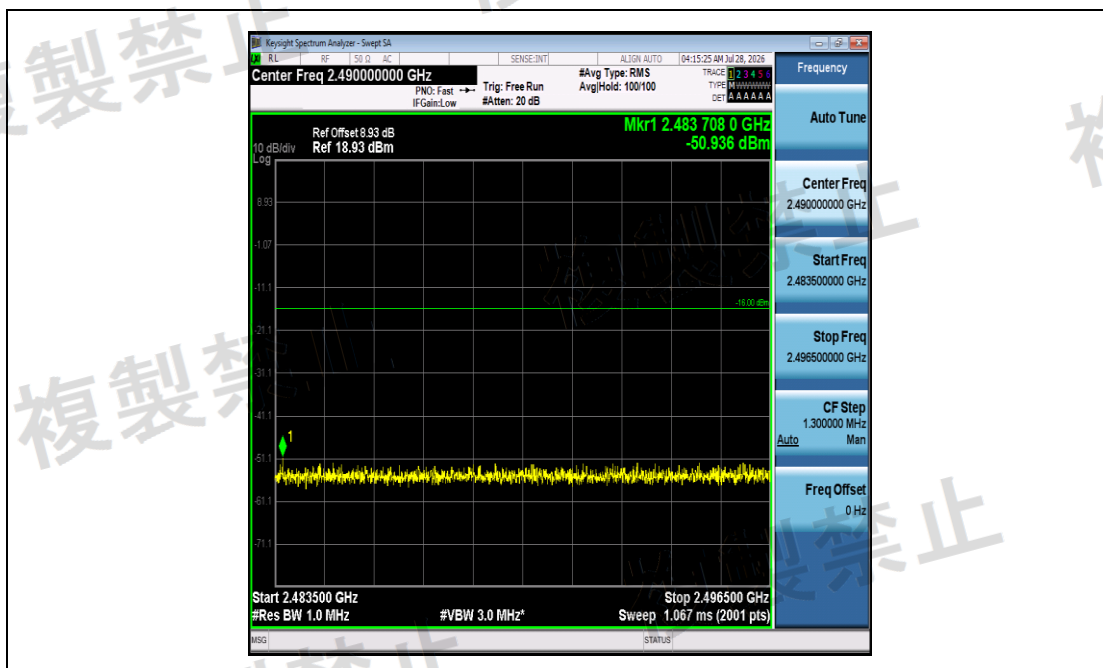


NTNV-11G-Ant1-2412-2483.5~2496.5-PASS

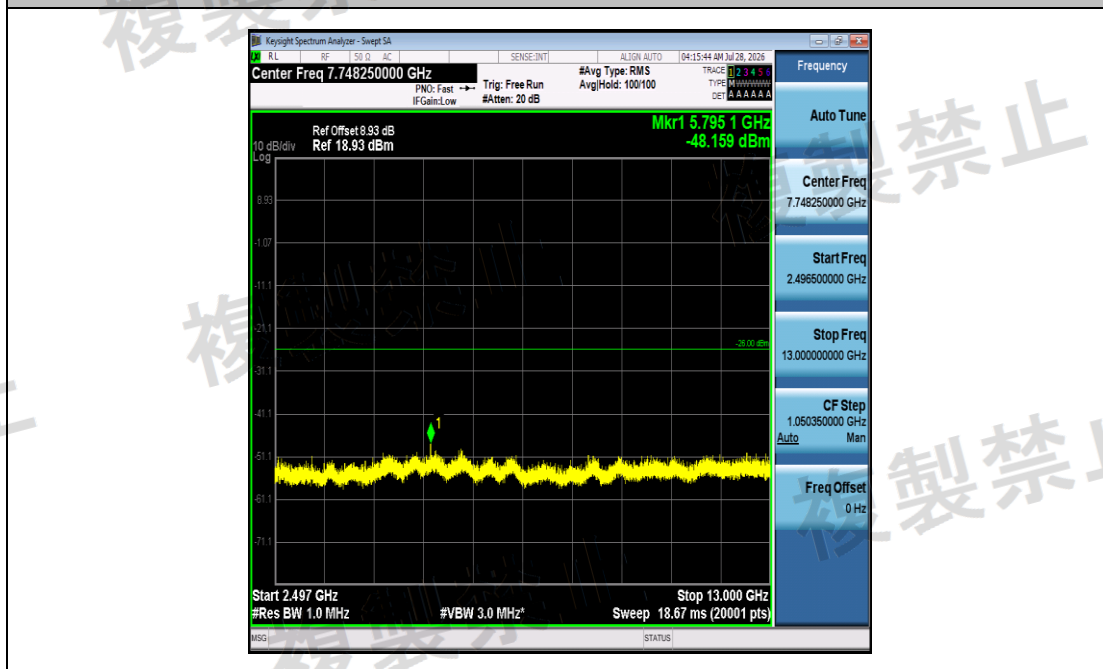


NTNV-11G-Ant1-2412-2496.5~13000-PASS

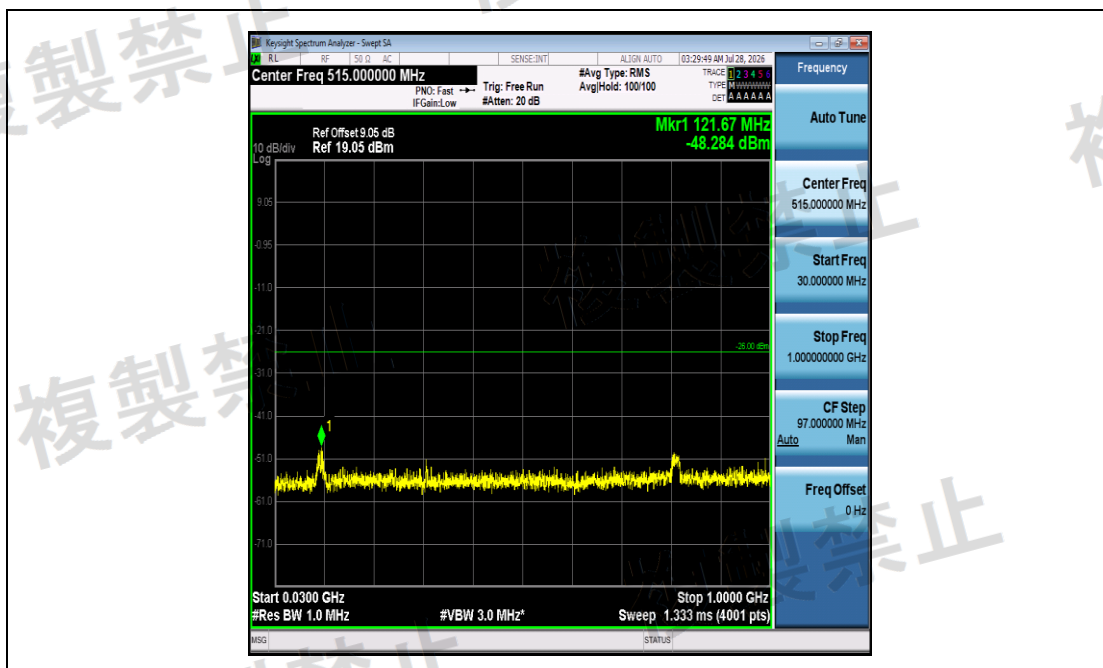


NTNV-11G-Ant1-2442-30~1000-PASS

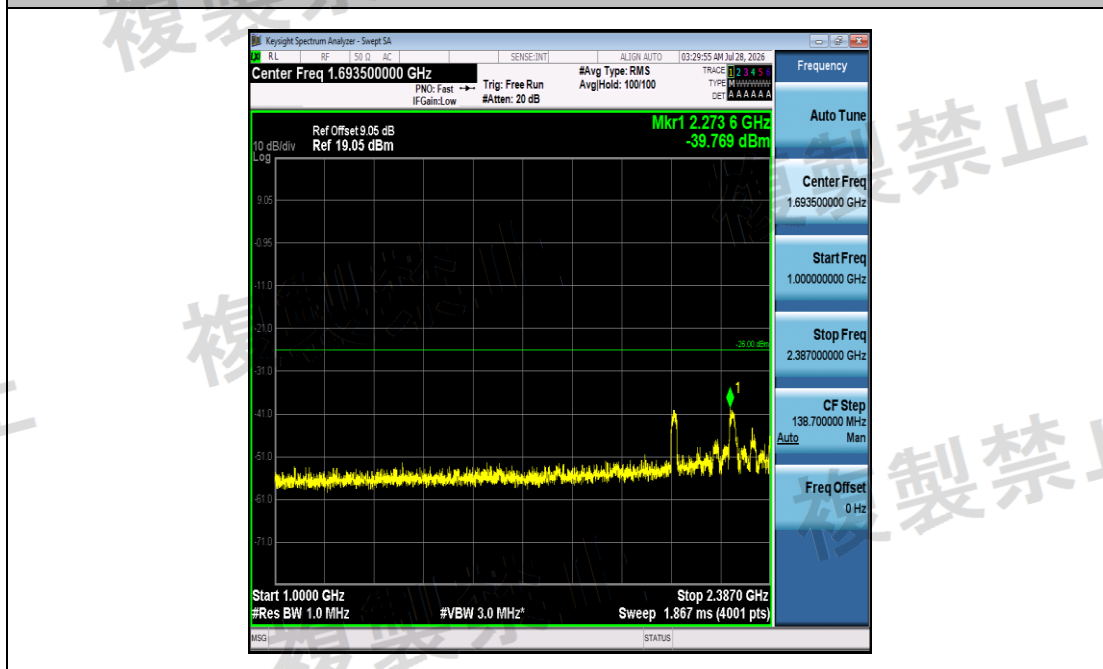


NTNV-11G-Ant1-2442-1000~2387-PASS

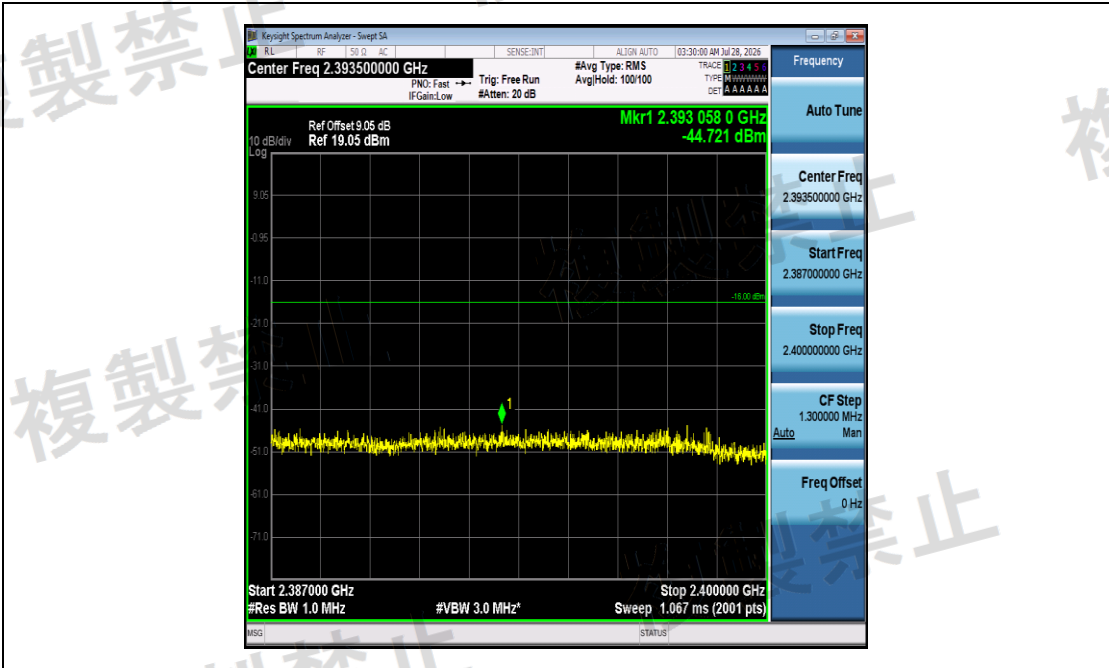


NTNV-11G-Ant1-2442-2387~2400-PASS

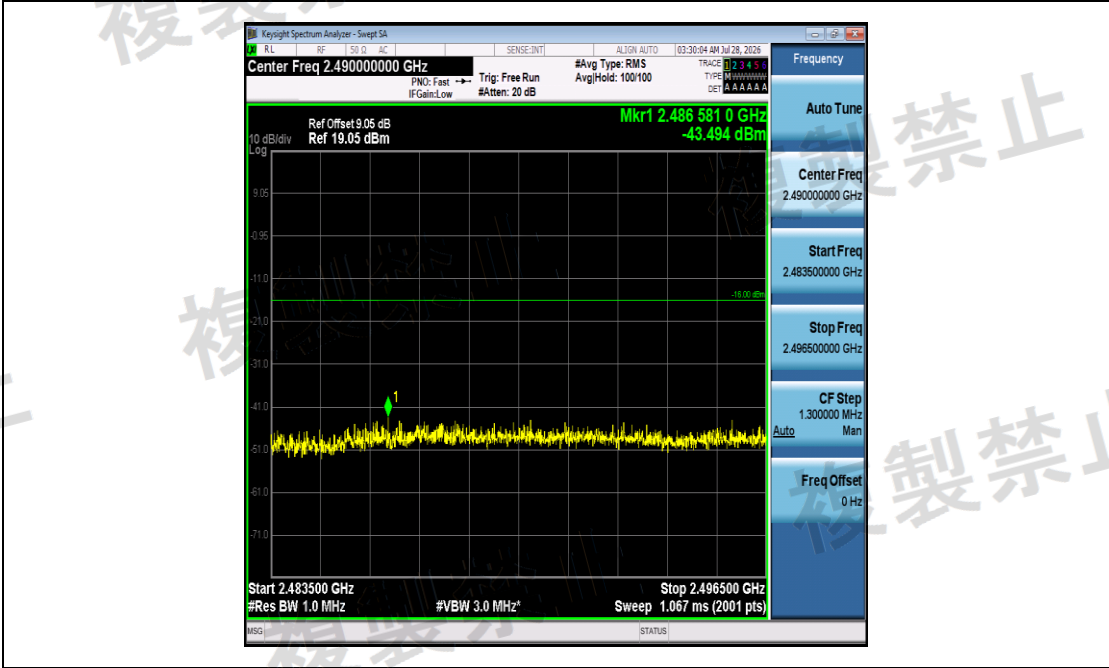


NTNV-11G-Ant1-2442-2483.5~2496.5-PASS

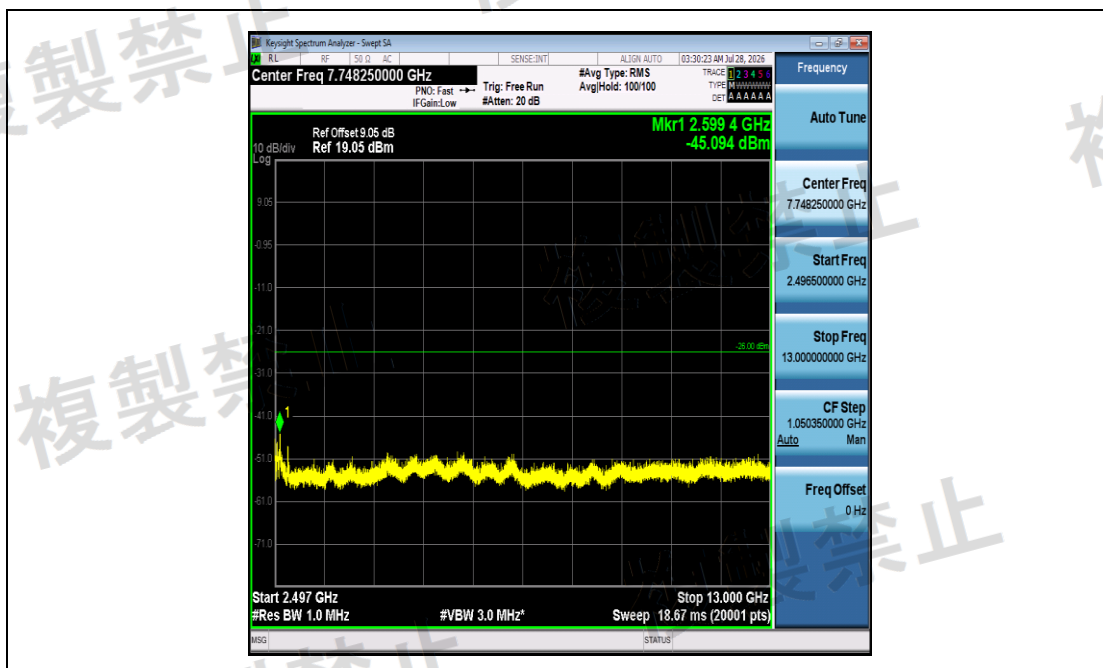


NTNV-11G-Ant1-2442-2496.5~13000-PASS

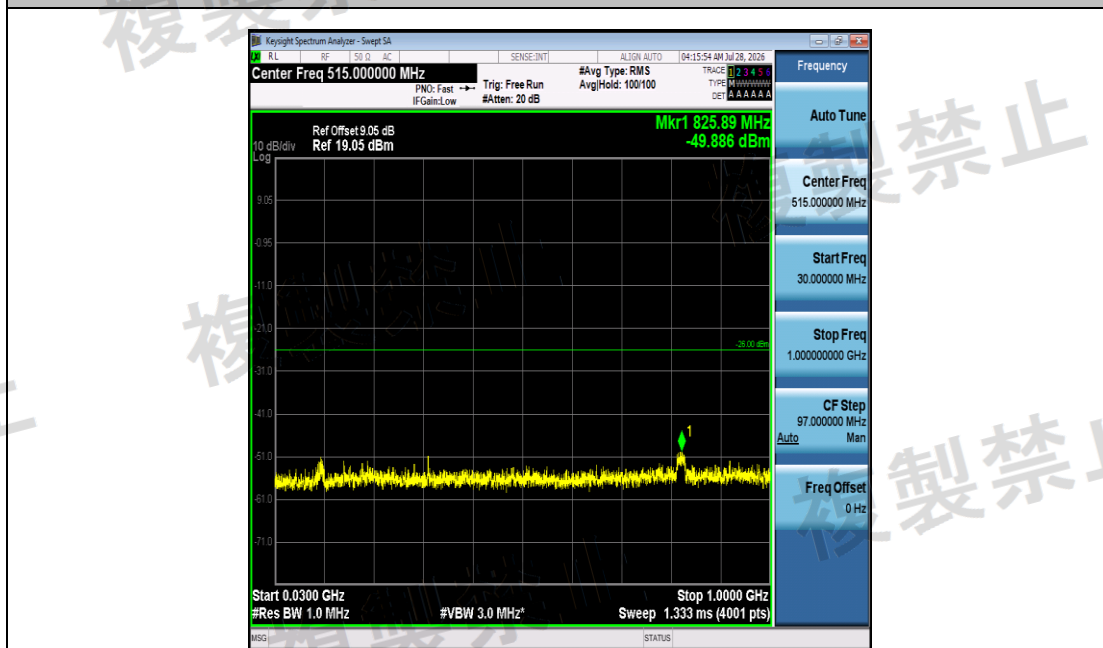


NTNV-11G-Ant1-2472-30~1000-PASS

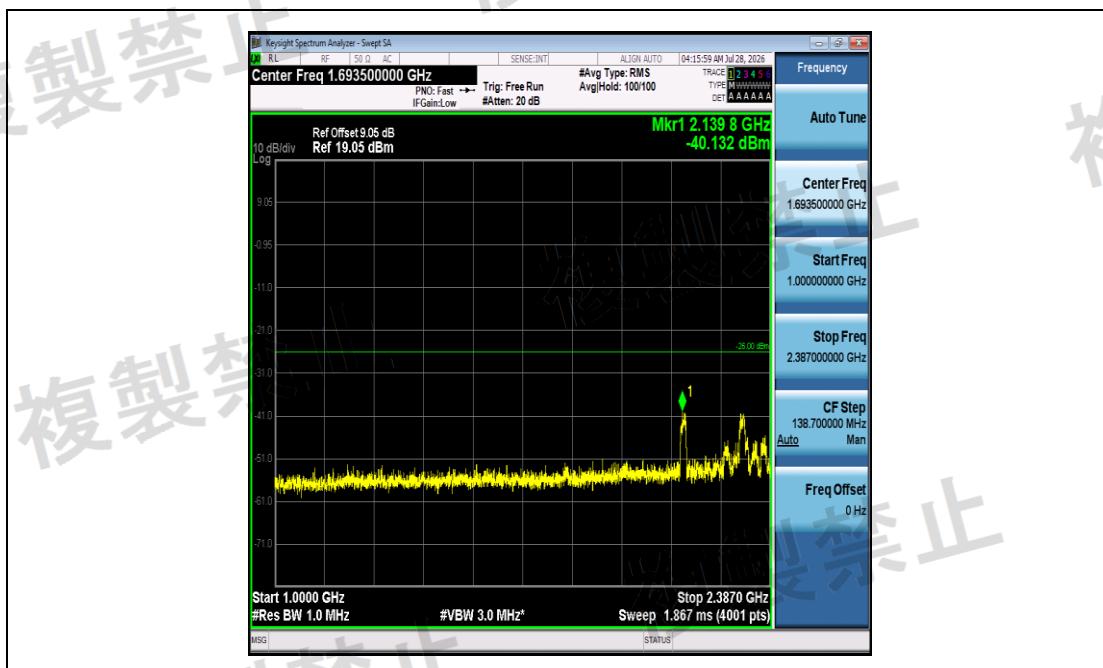


NTNV-11G-Ant1-2472-1000~2387-PASS

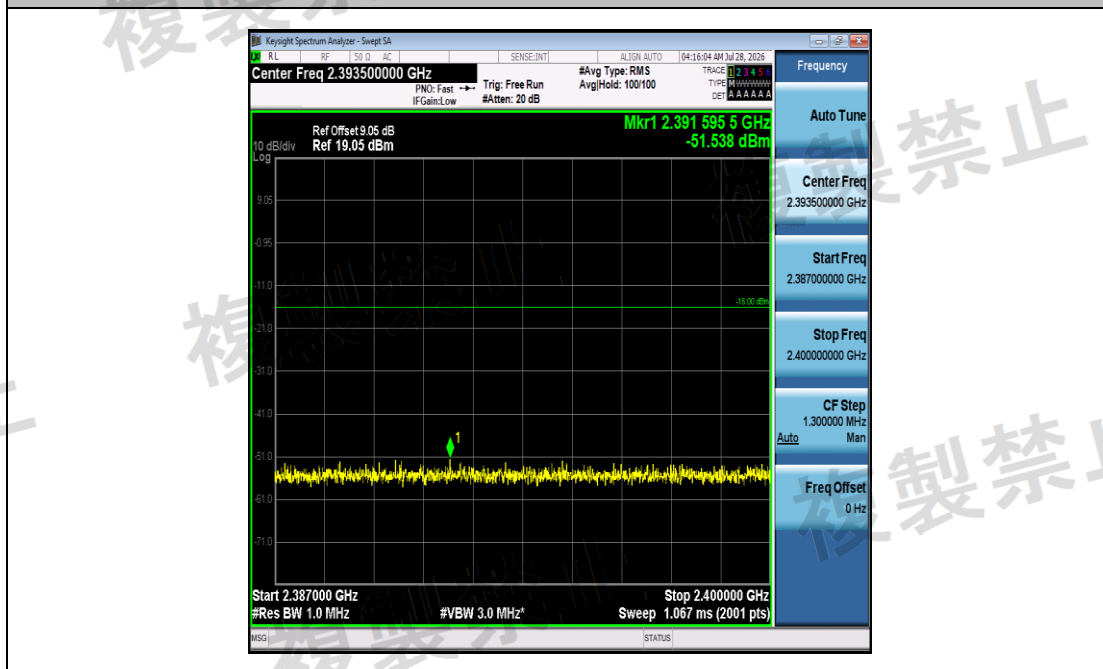


NTNV-11G-Ant1-2472-2387~2400-PASS

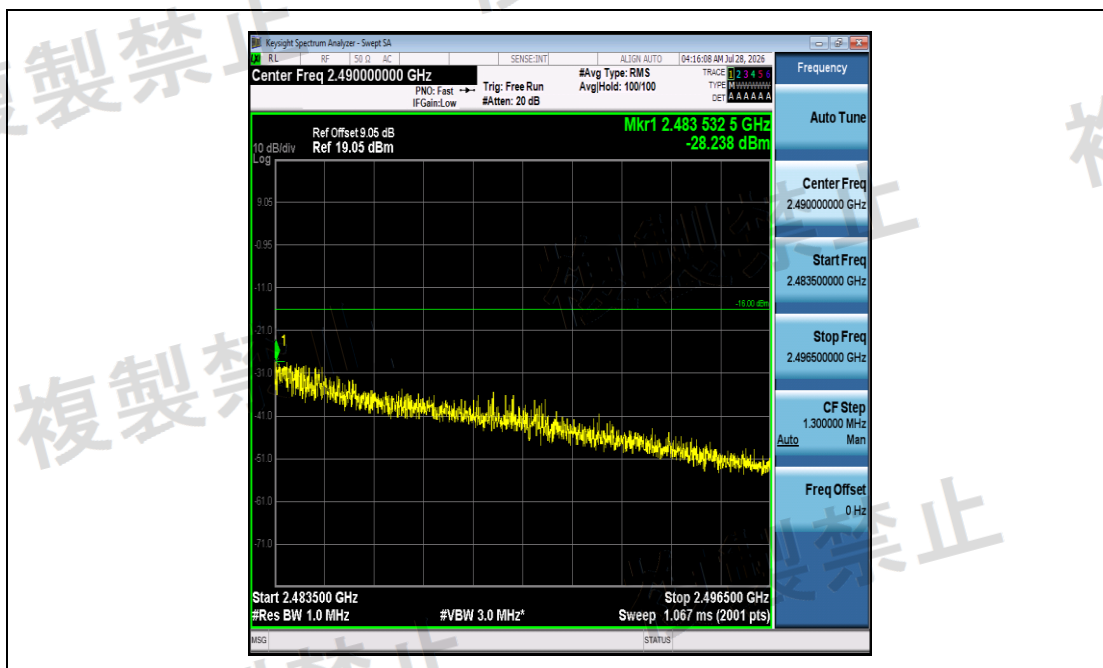


NTNV-11G-Ant1-2472-2483.5~2496.5-PASS

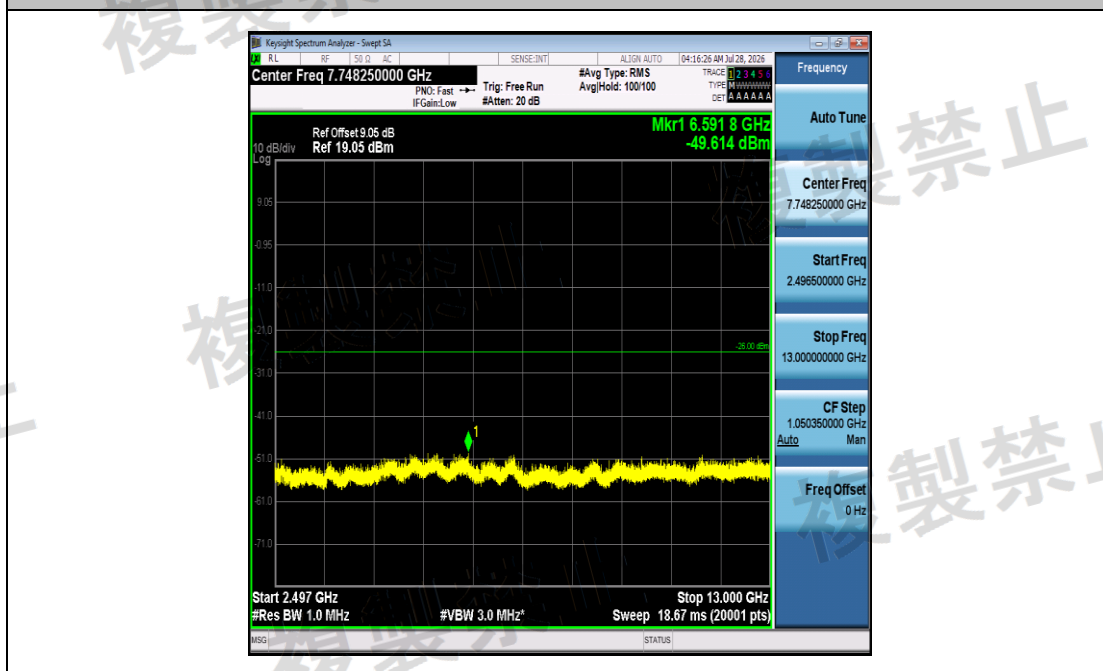


NTNV-11G-Ant1-2472-2496.5~13000-PASS

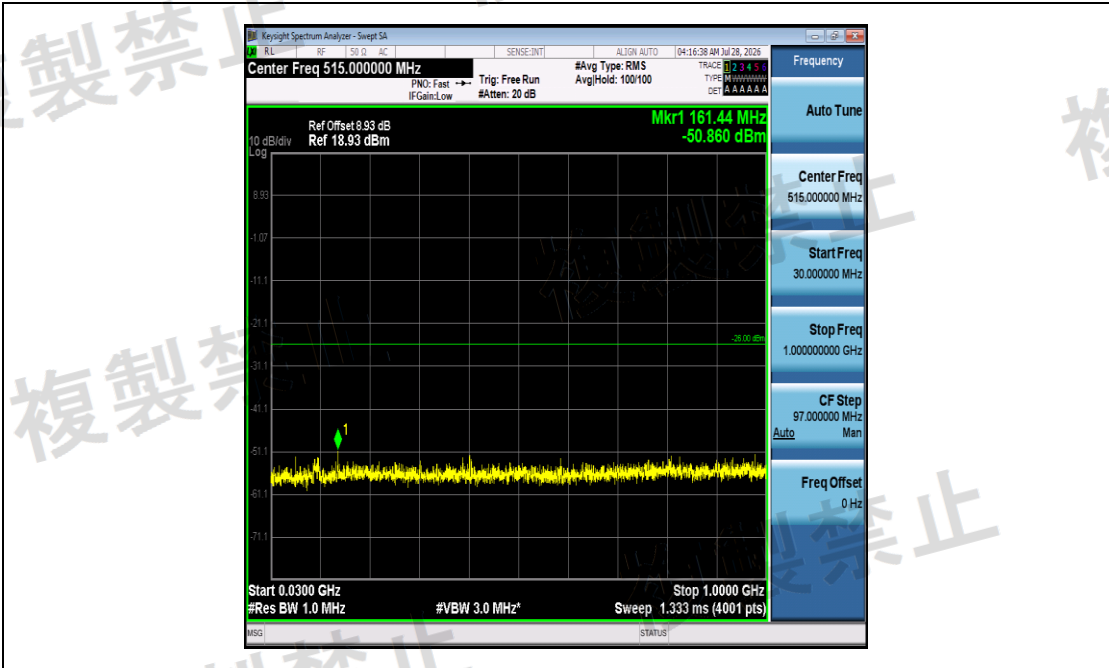


NTNV-11N20SISO-Ant1-2412-30~1000-PASS

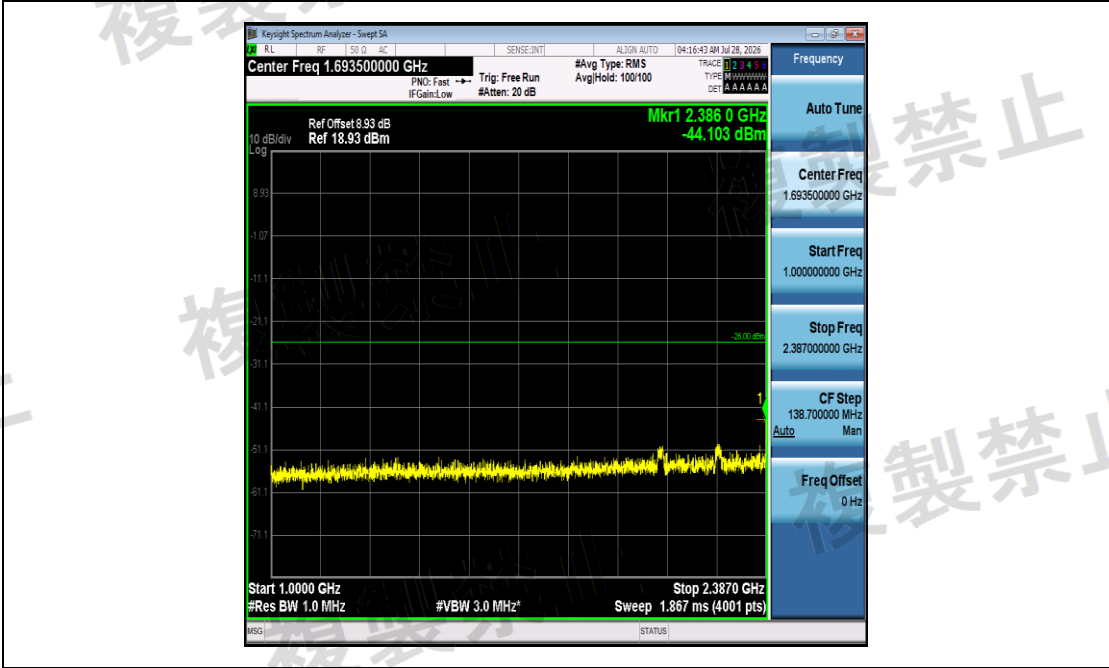


NTNV-11N20SISO-Ant1-2412-1000~2387-PASS

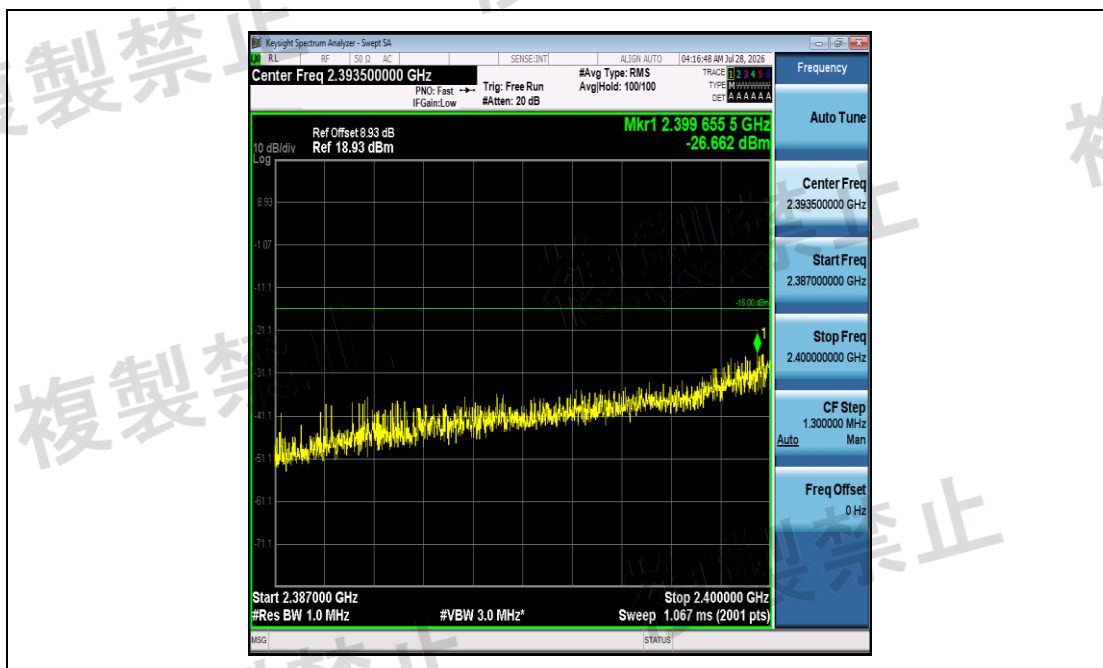


NTNV-11N20SISO-Ant1-2412-2387~2400-PASS

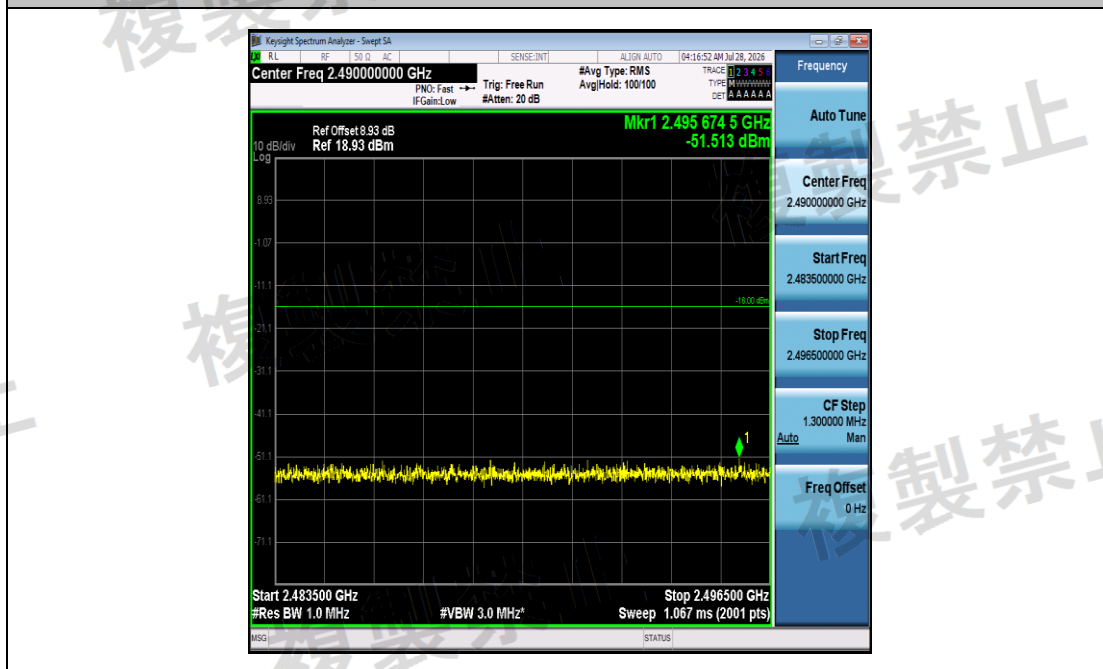


NTNV-11N20SISO-Ant1-2412-2483.5~2496.5-PASS

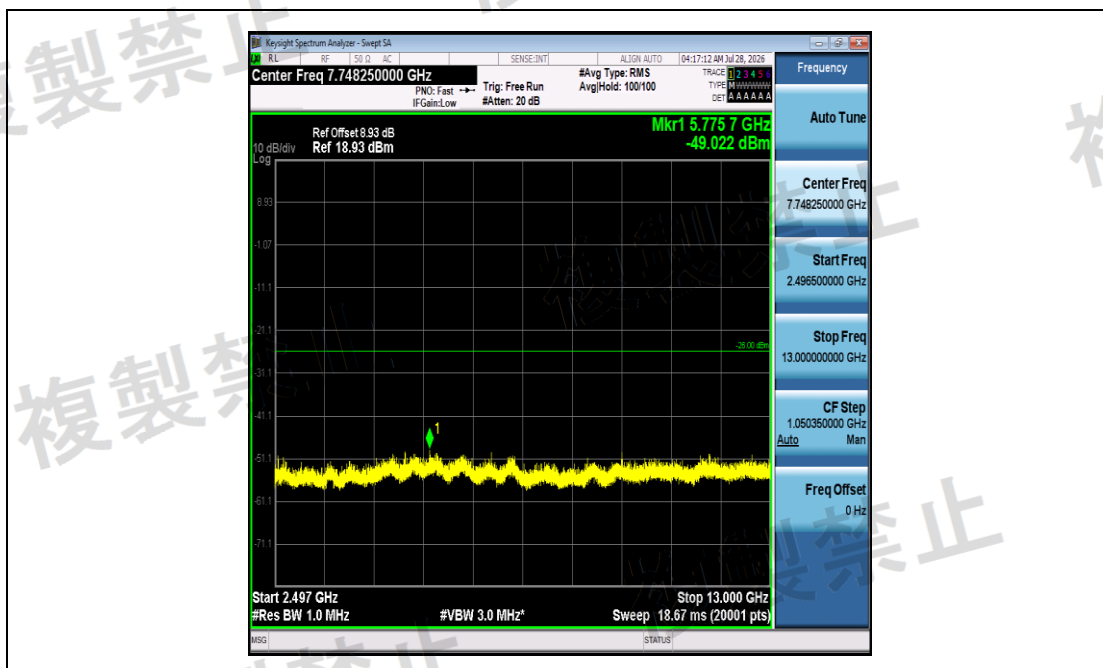


NTNV-11N20SISO-Ant1-2412-2496.5~13000-PASS

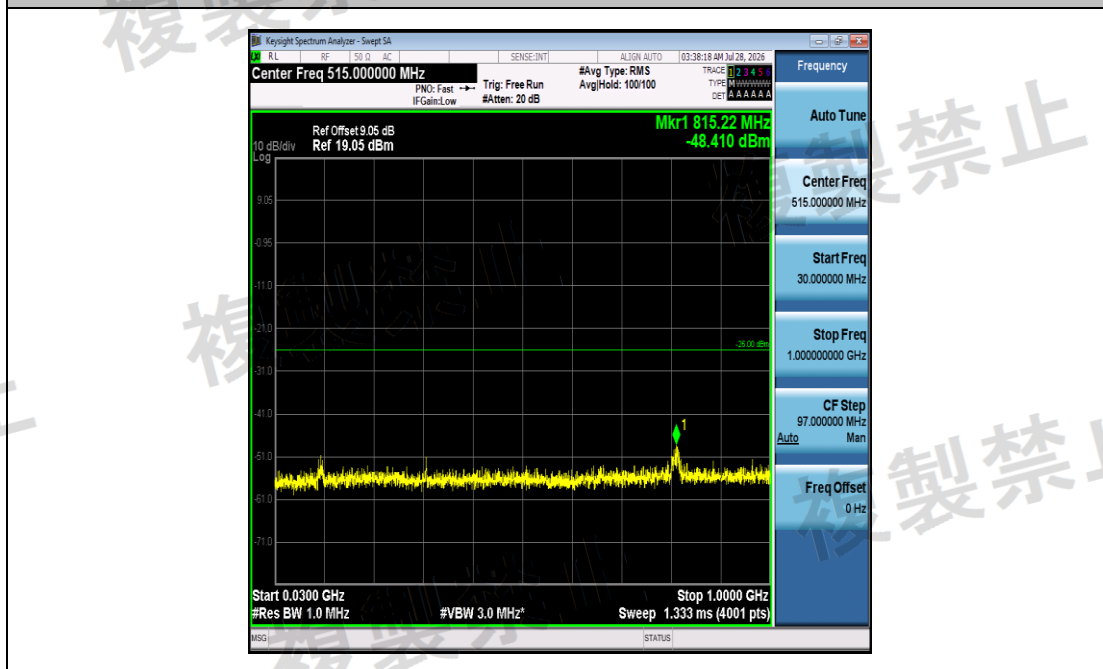


NTNV-11N20SISO-Ant1-2442-30~1000-PASS

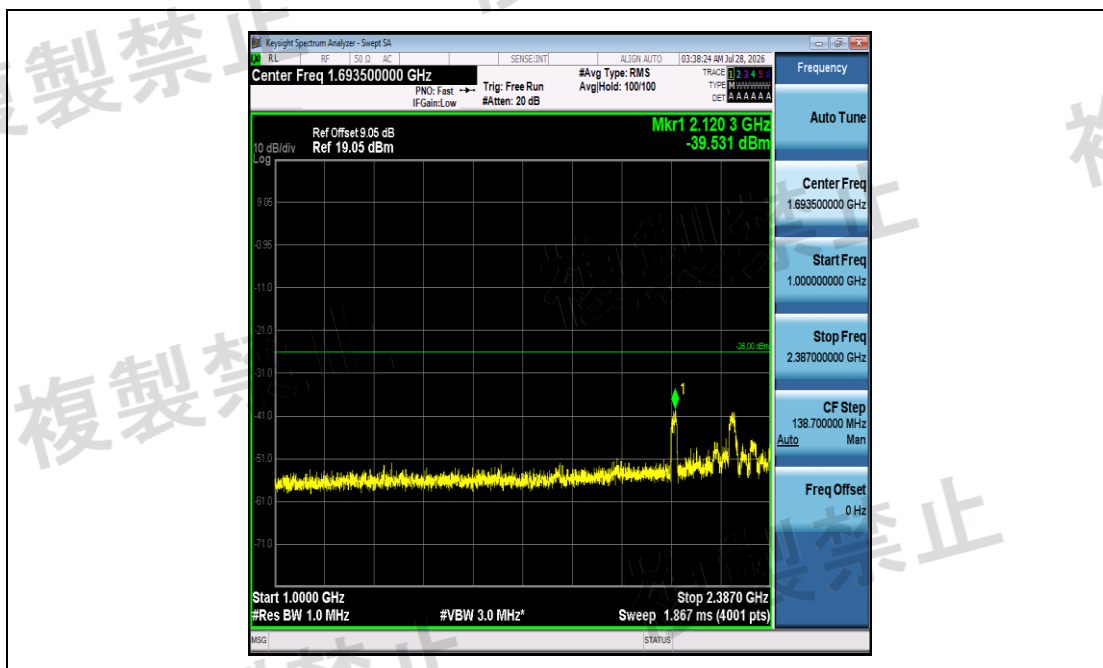


NTNV-11N20SISO-Ant1-2442-1000~2387-PASS

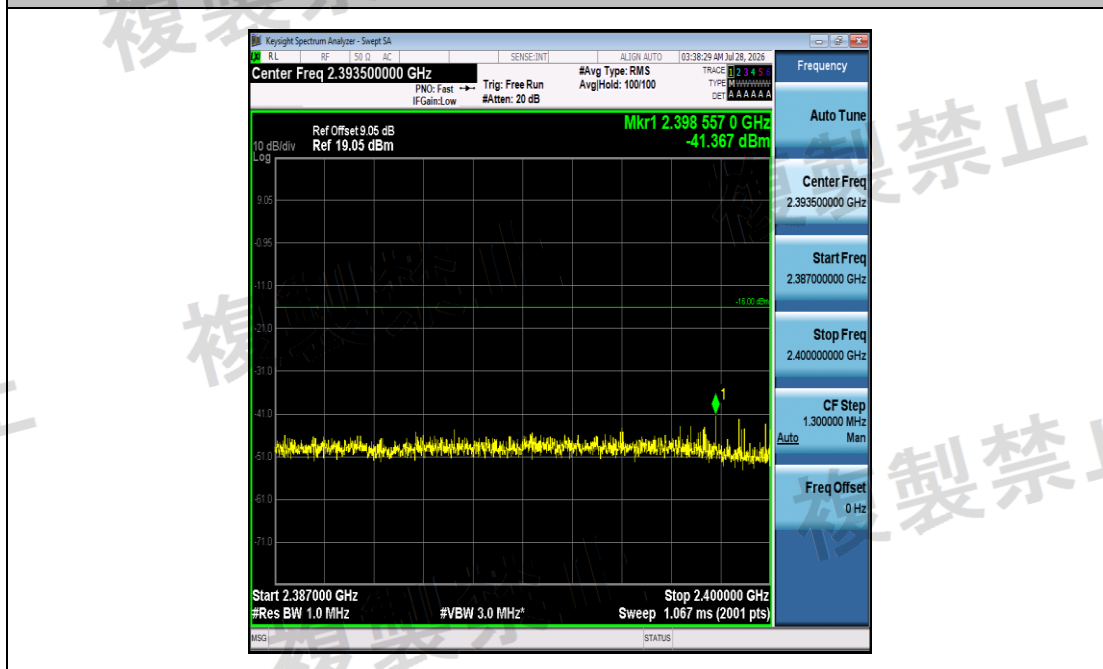


NTNV-11N20SISO-Ant1-2442-2387~2400-PASS

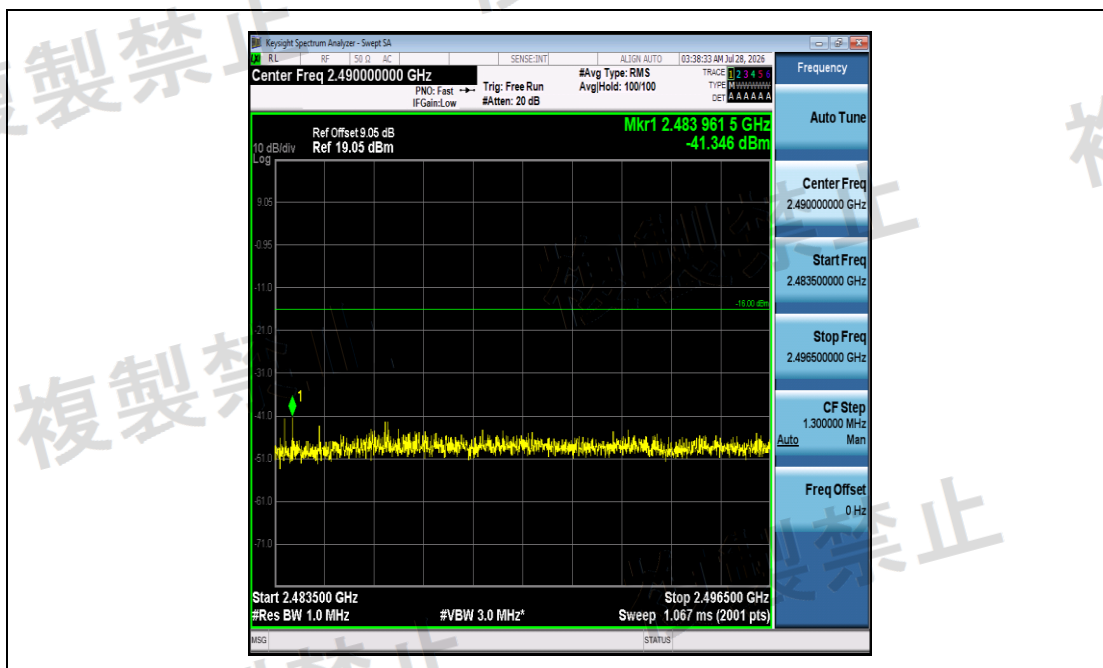


NTNV-11N20SISO-Ant1-2442-2483.5~2496.5-PASS

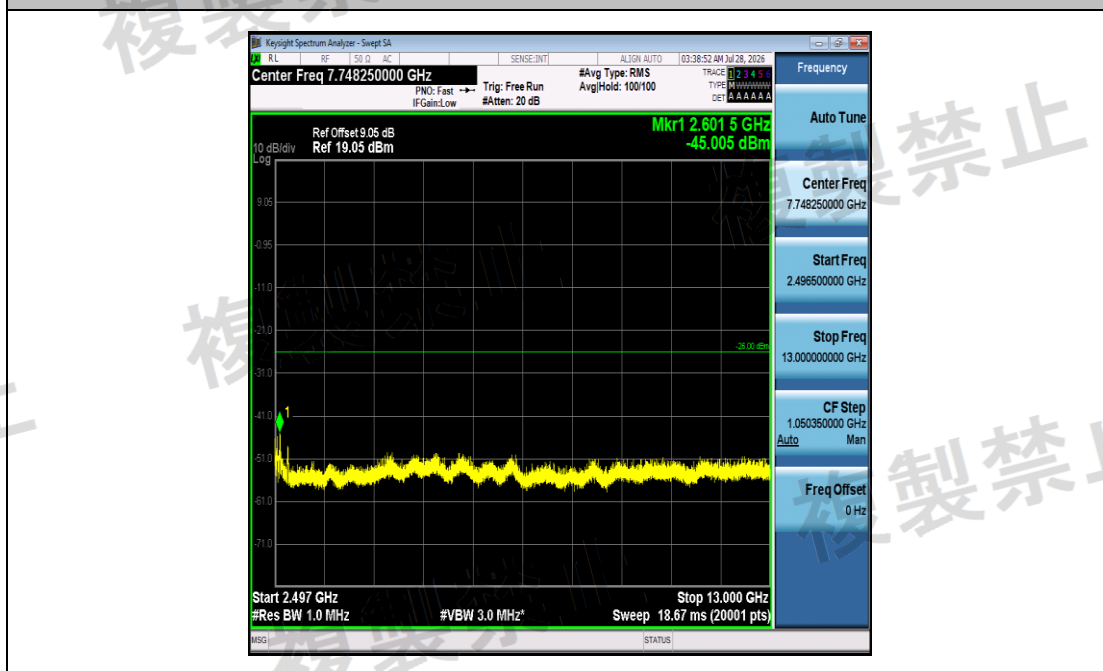


NTNV-11N20SISO-Ant1-2442-2496.5~13000-PASS

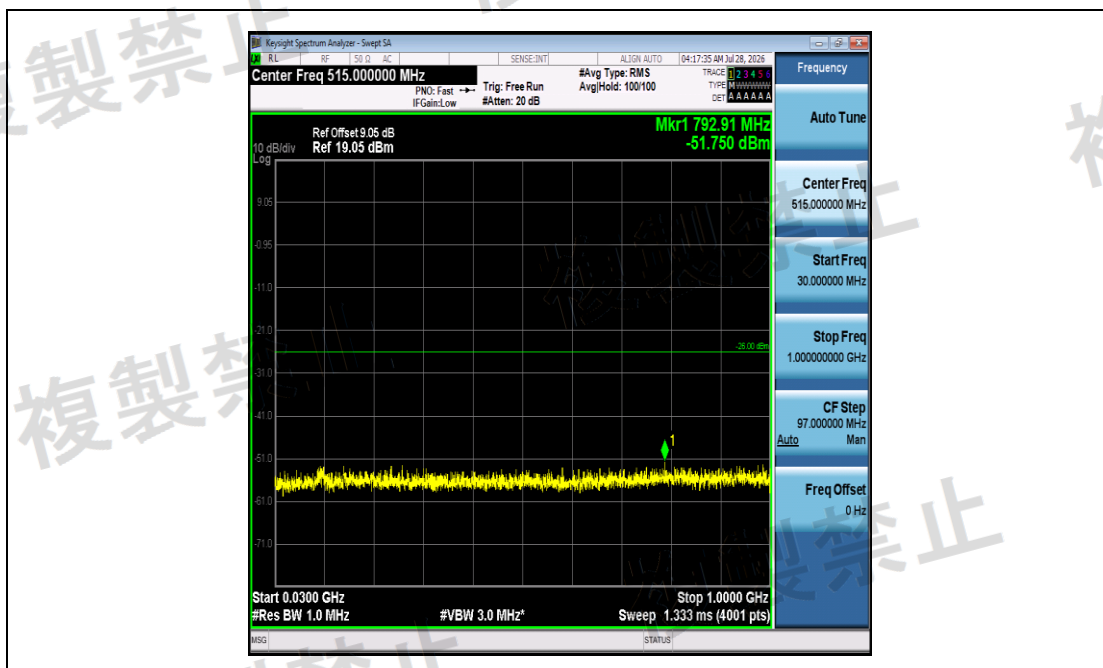


NTNV-11N20SISO-Ant1-2472-30~1000-PASS

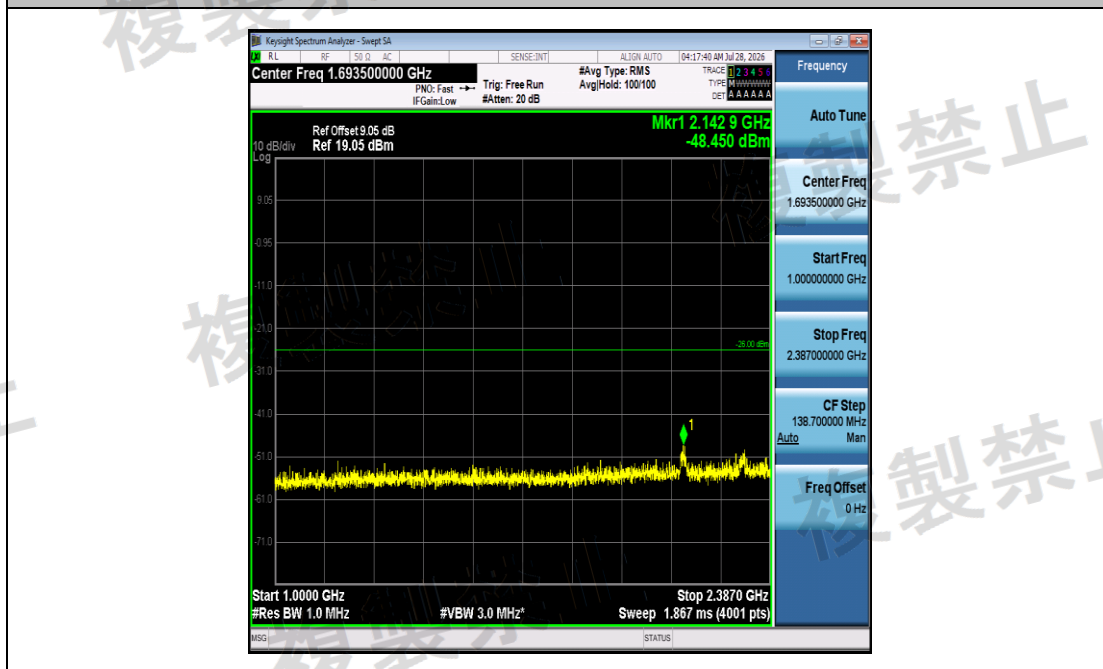


NTNV-11N20SISO-Ant1-2472-1000~2387-PASS

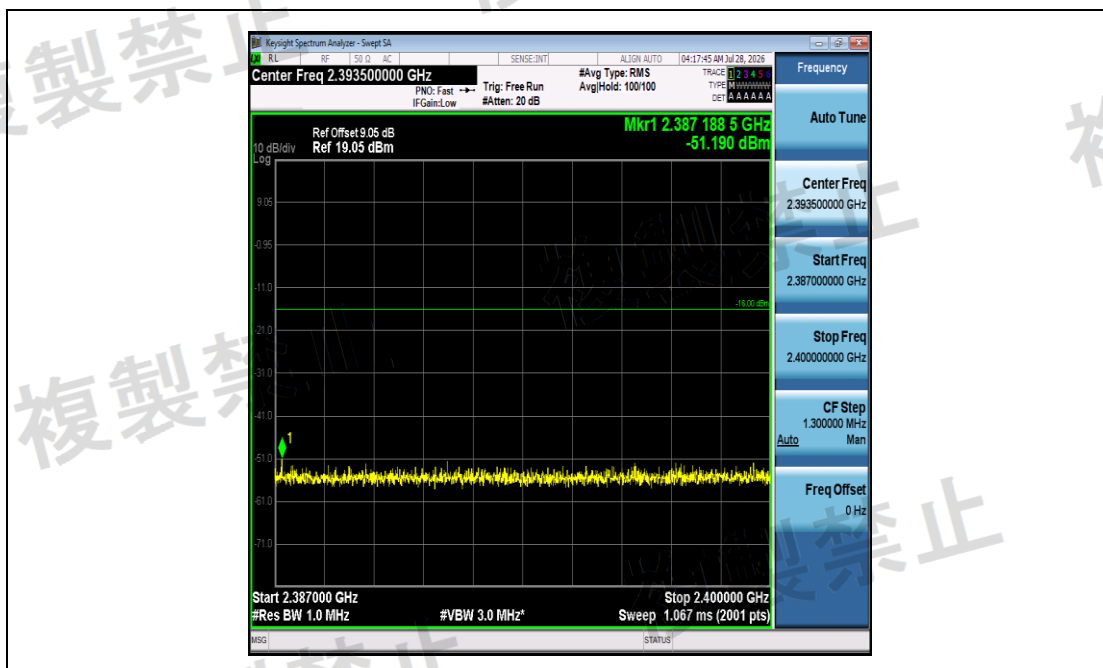


NTNV-11N20SISO-Ant1-2472-2387~2400-PASS

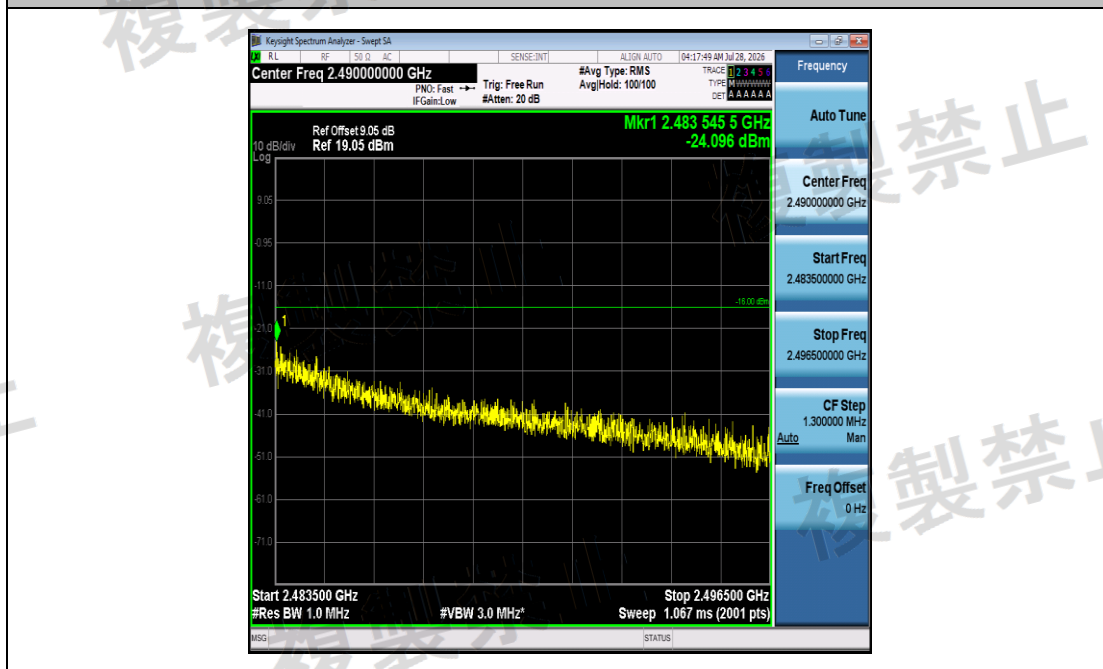


NTNV-11N20SISO-Ant1-2472-2483.5~2496.5-PASS

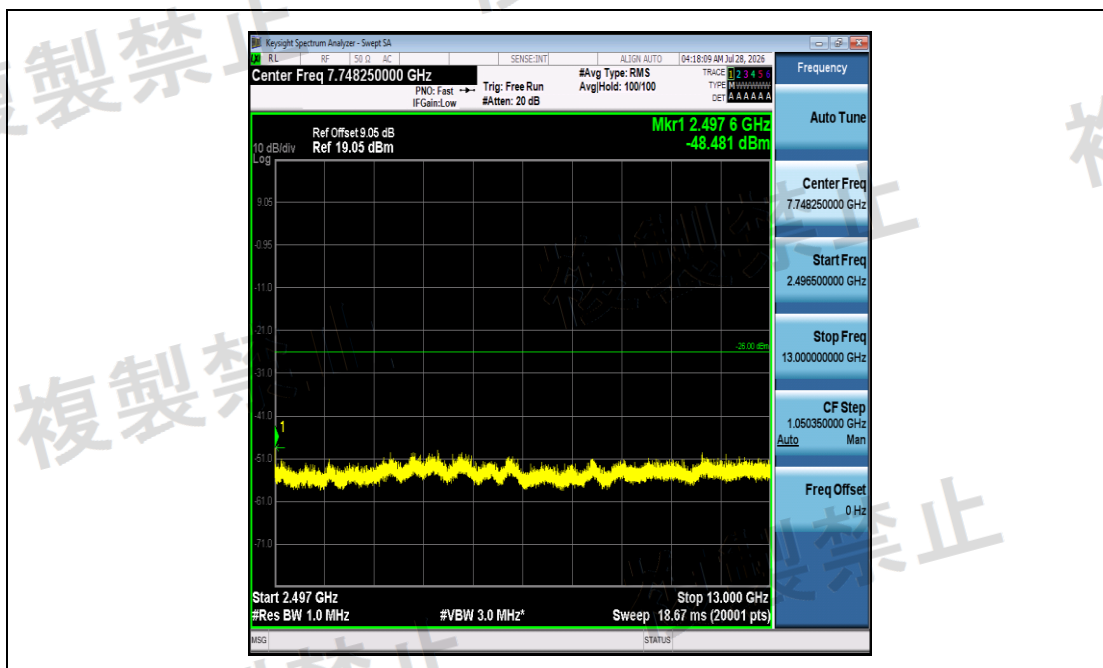


NTNV-11N20SISO-Ant1-2472-2496.5~13000-PASS

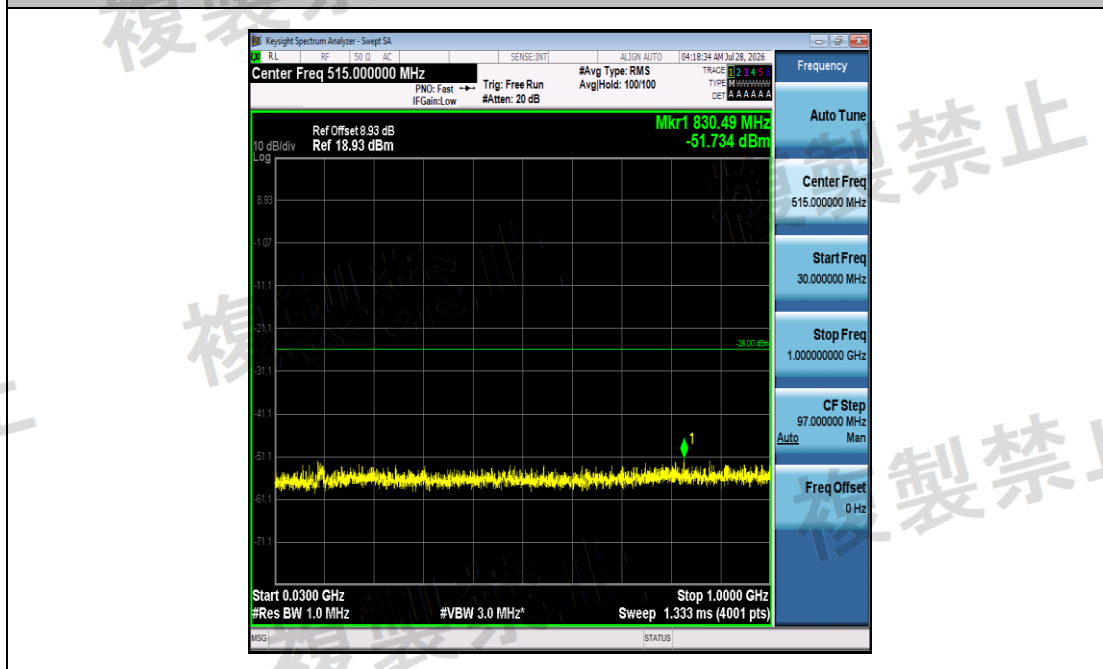


NTNV-11N40SISO-Ant1-2422-30~1000-PASS

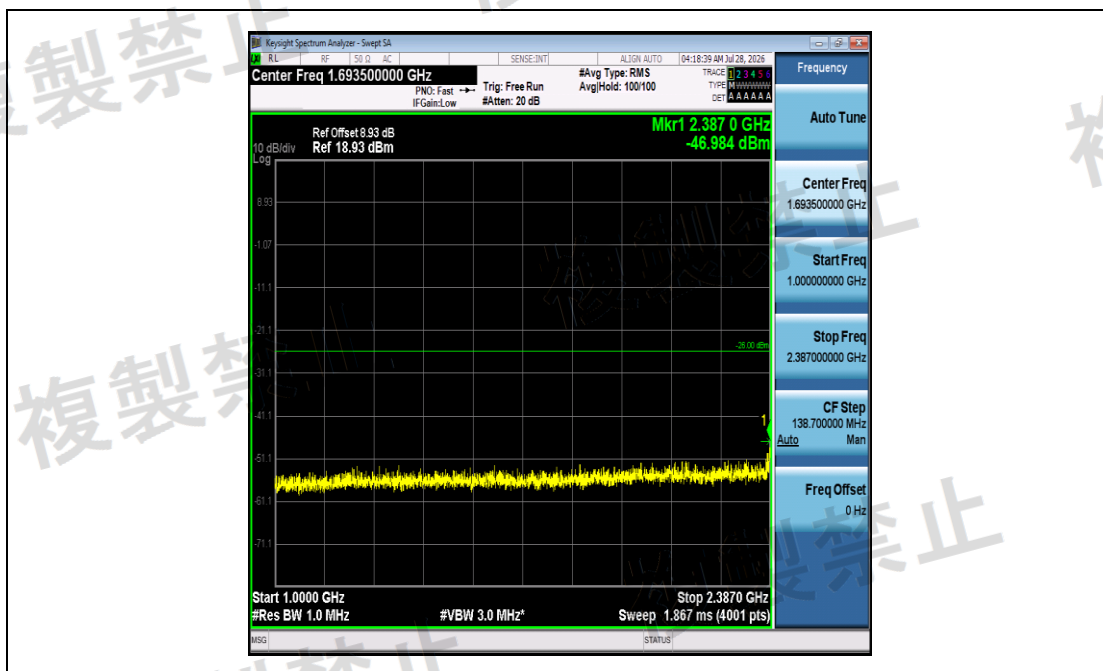


NTNV-11N40SISO-Ant1-2422-1000~2387-PASS

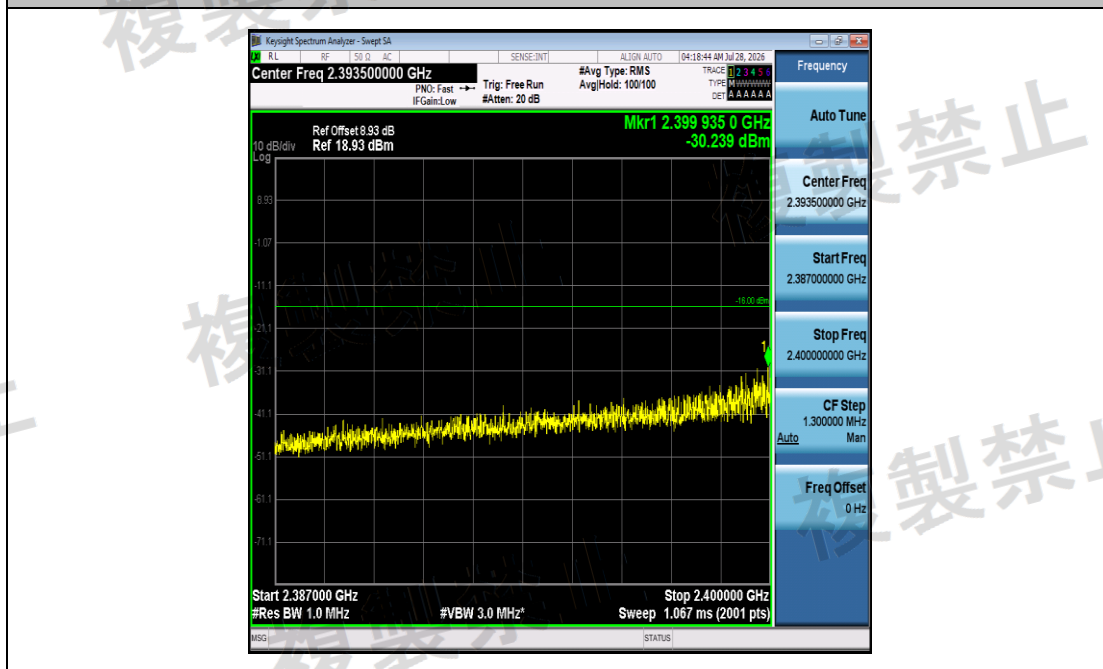


NTNV-11N40SISO-Ant1-2422-2387~2400-PASS

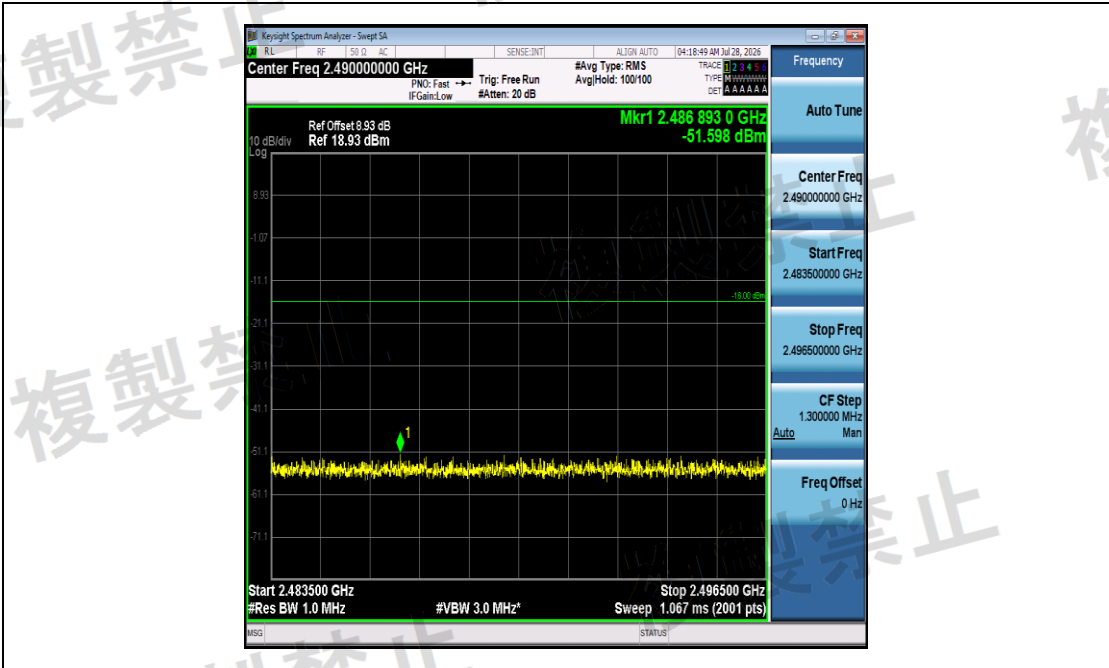


NTNV-11N40SISO-Ant1-2422-2483.5~2496.5-PASS

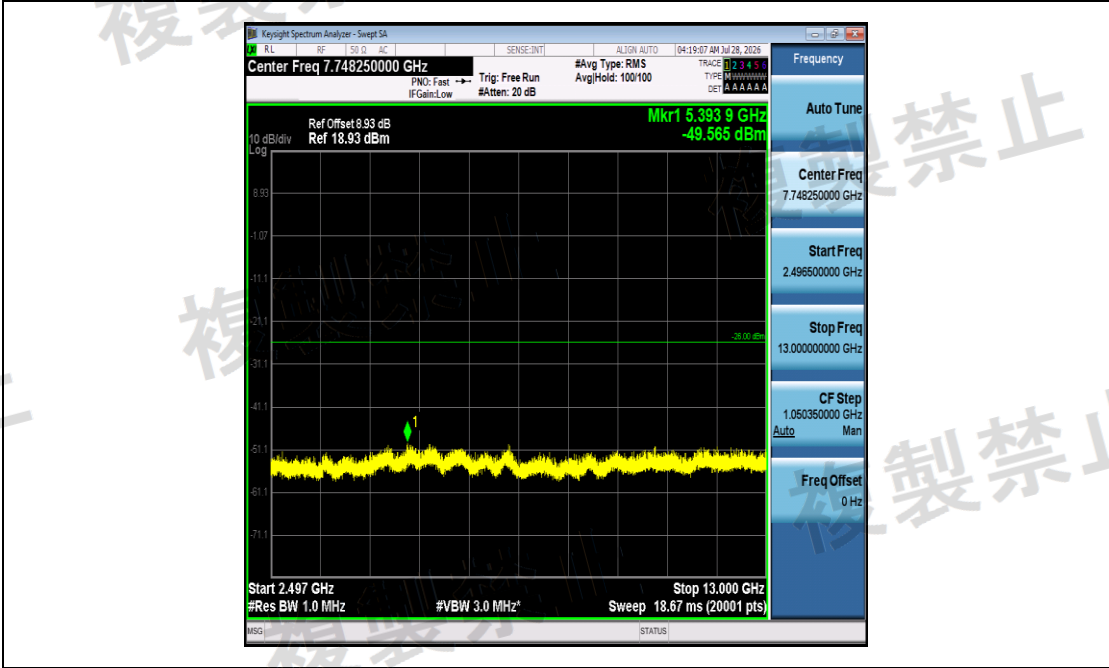


NTNV-11N40SISO-Ant1-2422-2496.5~13000-PASS

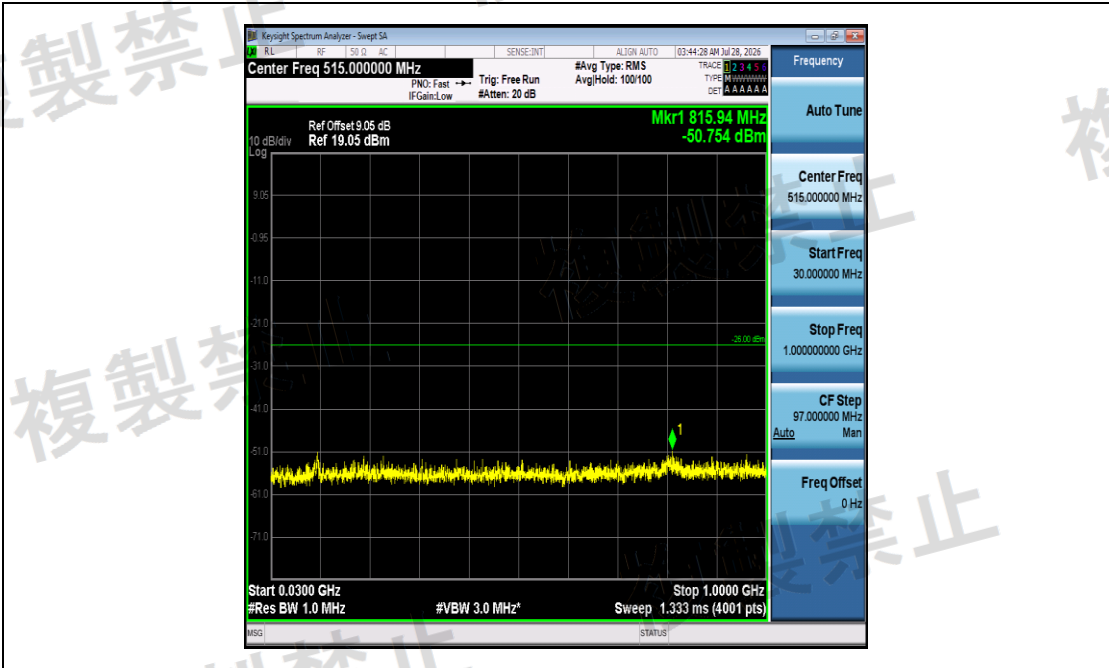


NTNV-11N40SISO-Ant1-2442-30~1000-PASS

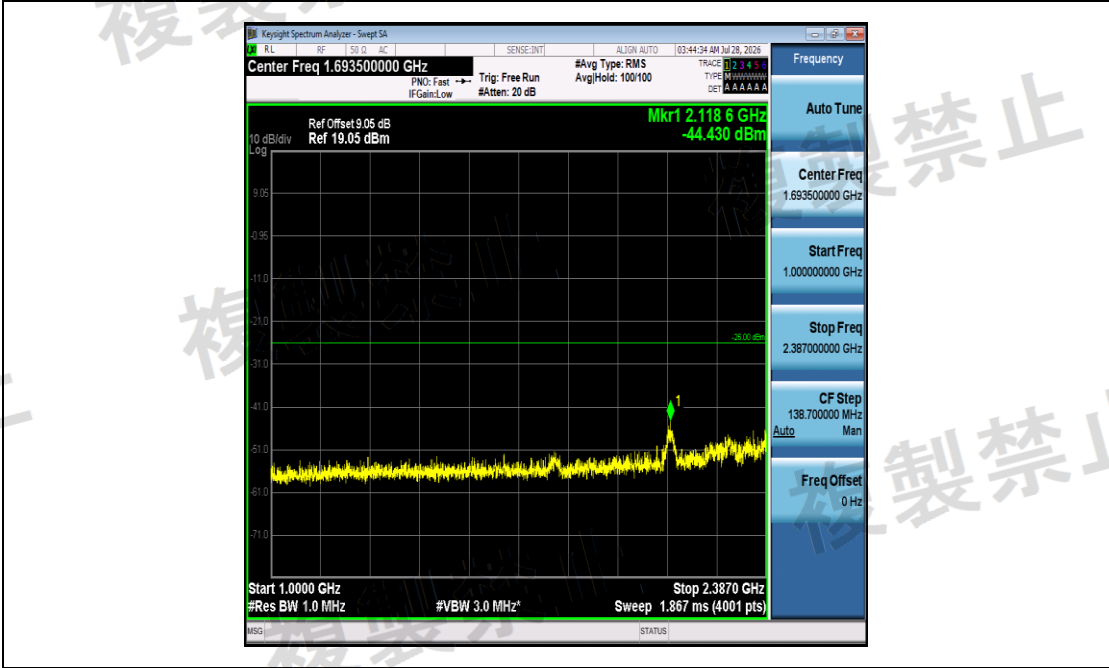


NTNV-11N40SISO-Ant1-2442-1000~2387-PASS

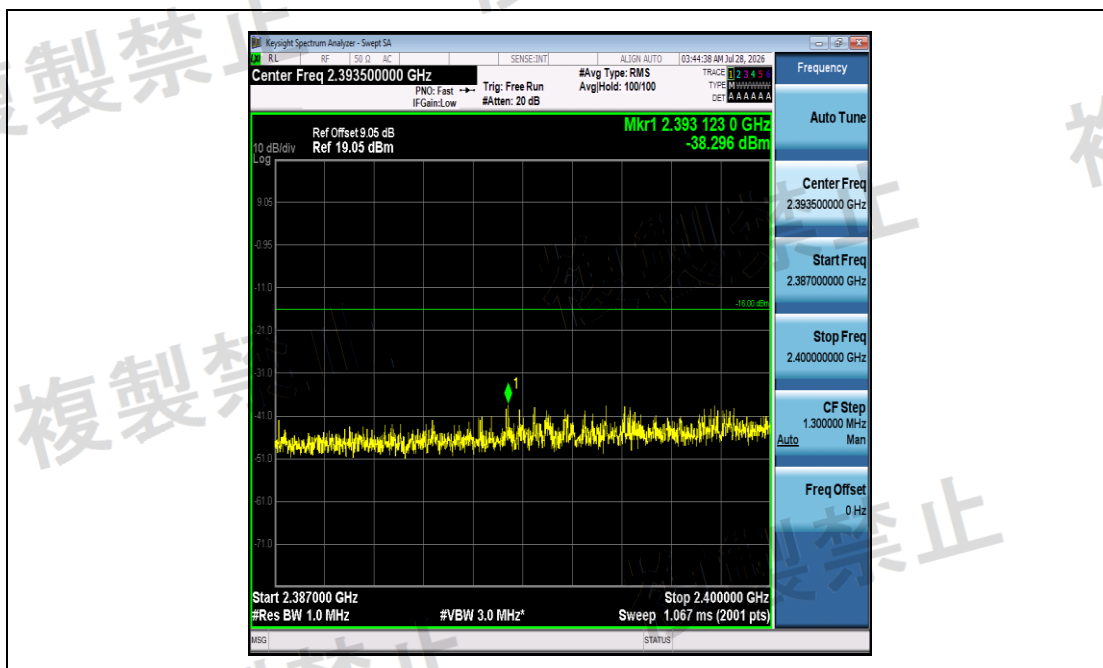


NTNV-11N40SISO-Ant1-2442-2387~2400-PASS

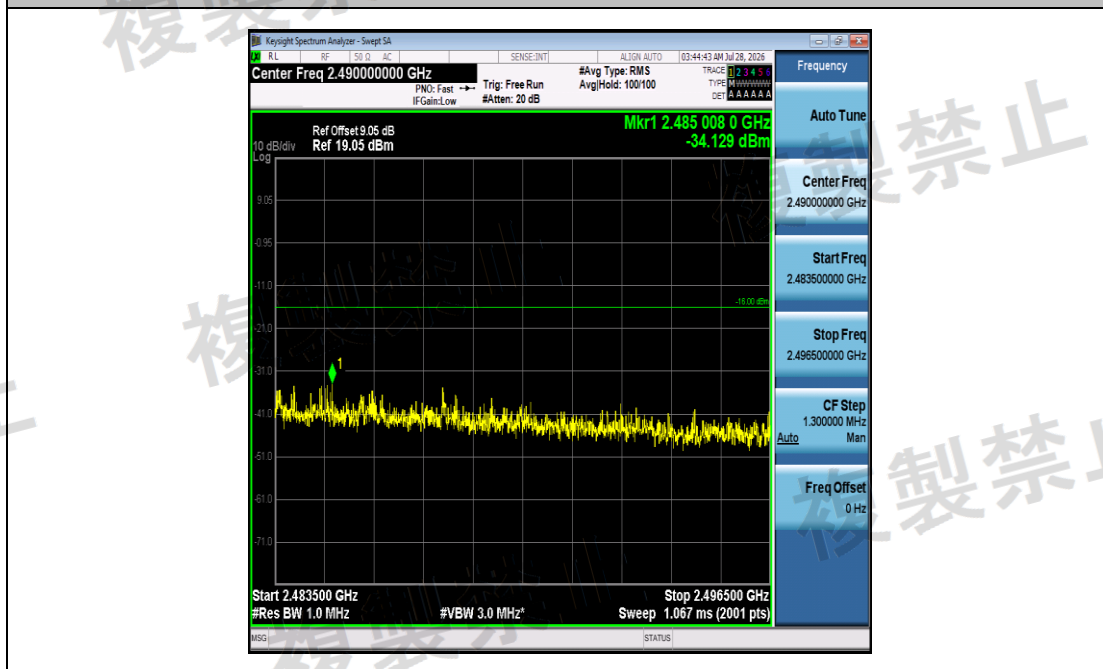


NTNV-11N40SISO-Ant1-2442-2483.5~2496.5-PASS

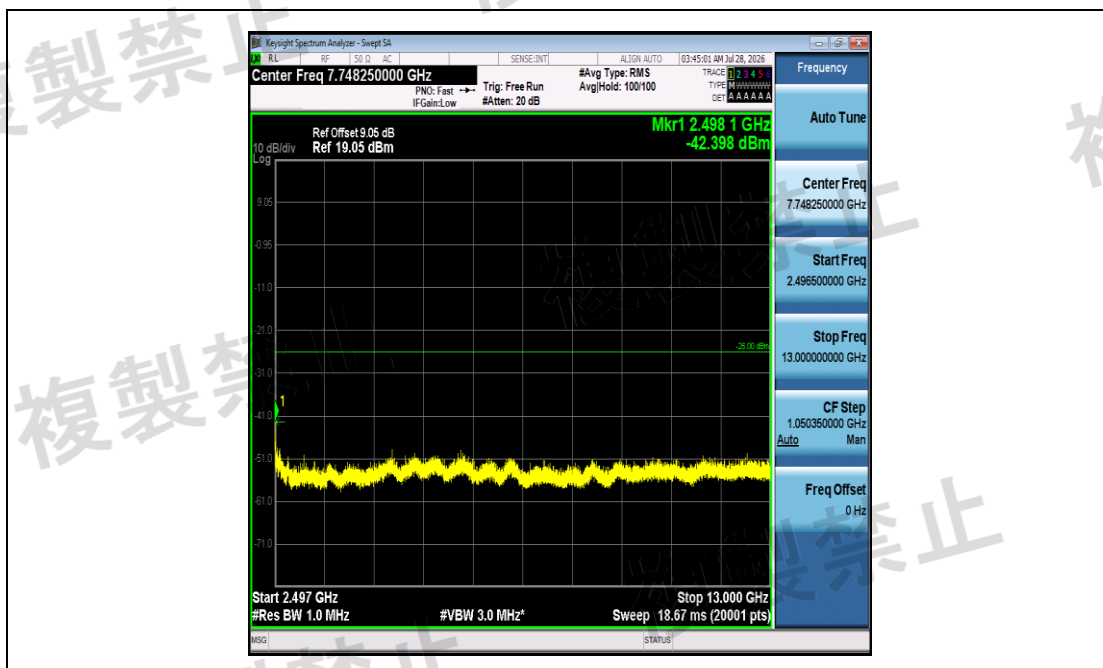


NTNV-11N40SISO-Ant1-2442-2496.5~13000-PASS

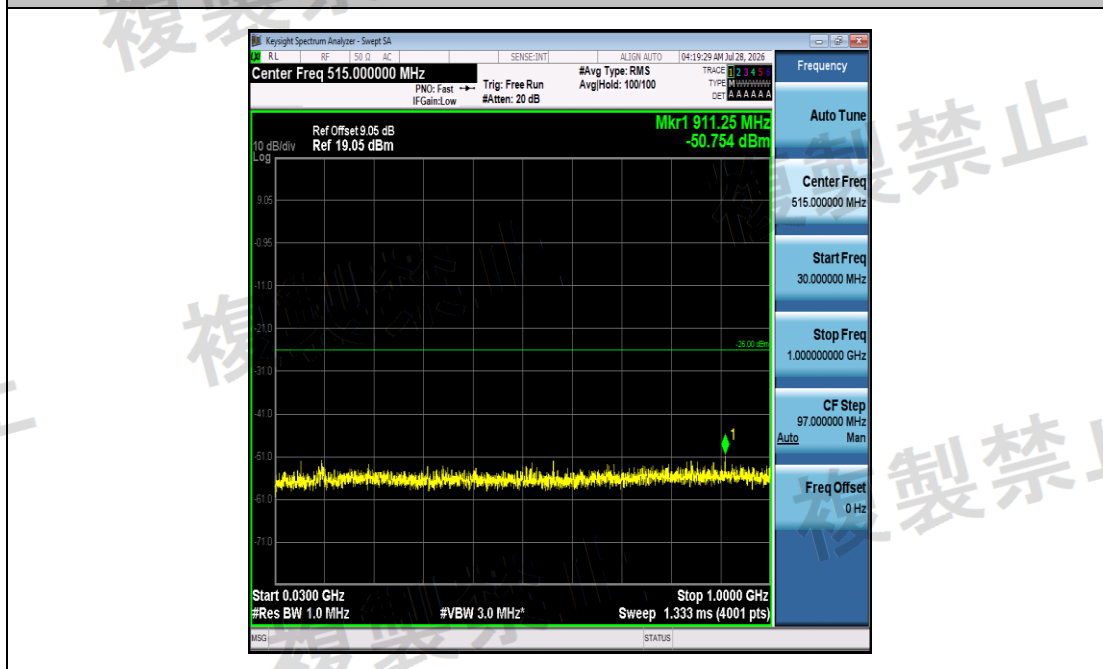


NTNV-11N40SISO-Ant1-2462-30~1000-PASS

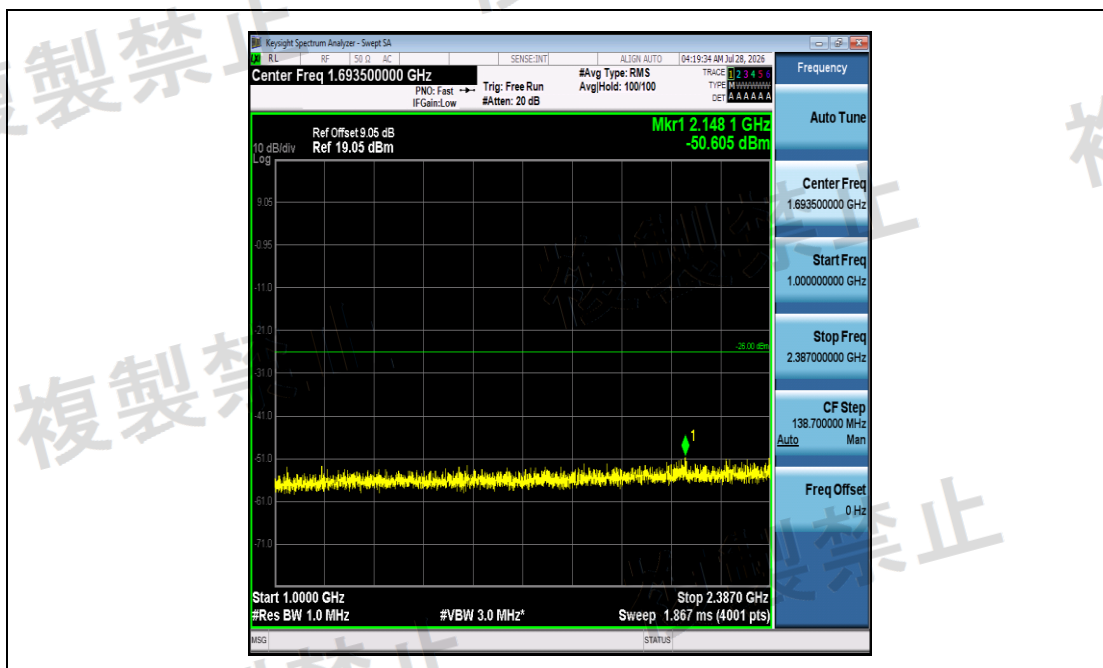


NTNV-11N40SISO-Ant1-2462-1000~2387-PASS

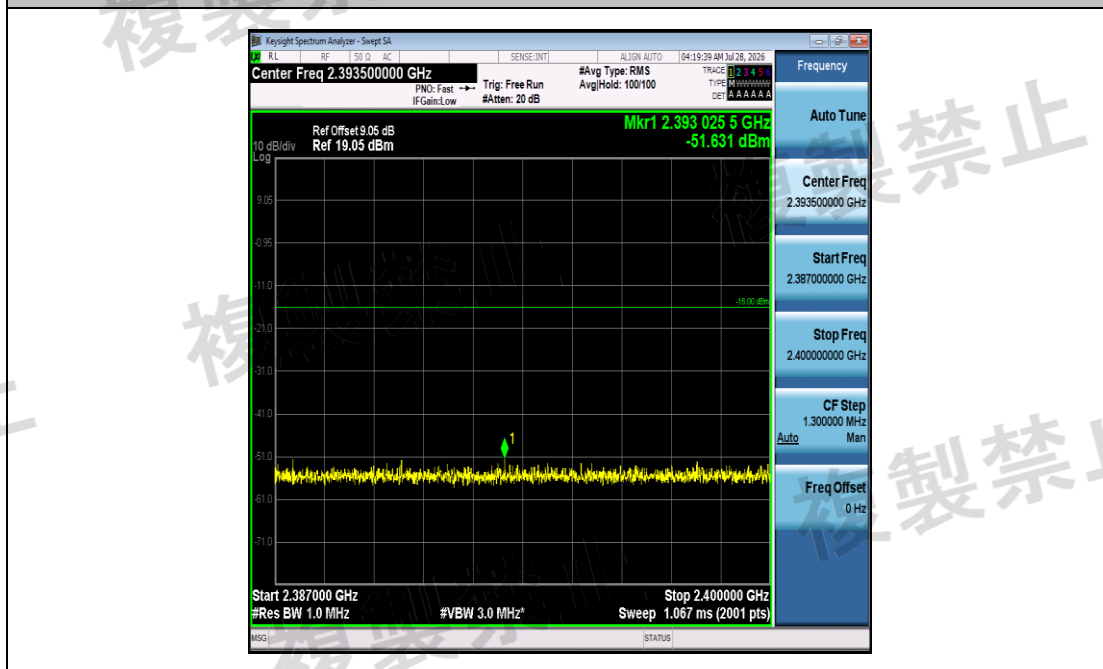


NTNV-11N40SISO-Ant1-2462-2387~2400-PASS

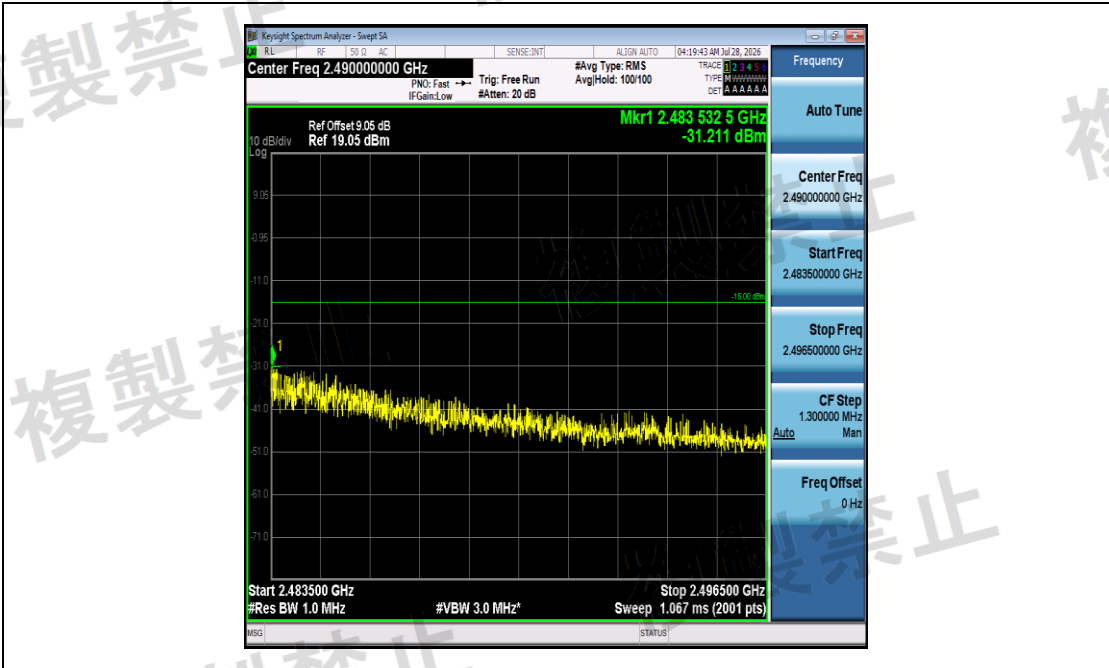


NTNV-11N40SISO-Ant1-2462-2483.5~2496.5-PASS

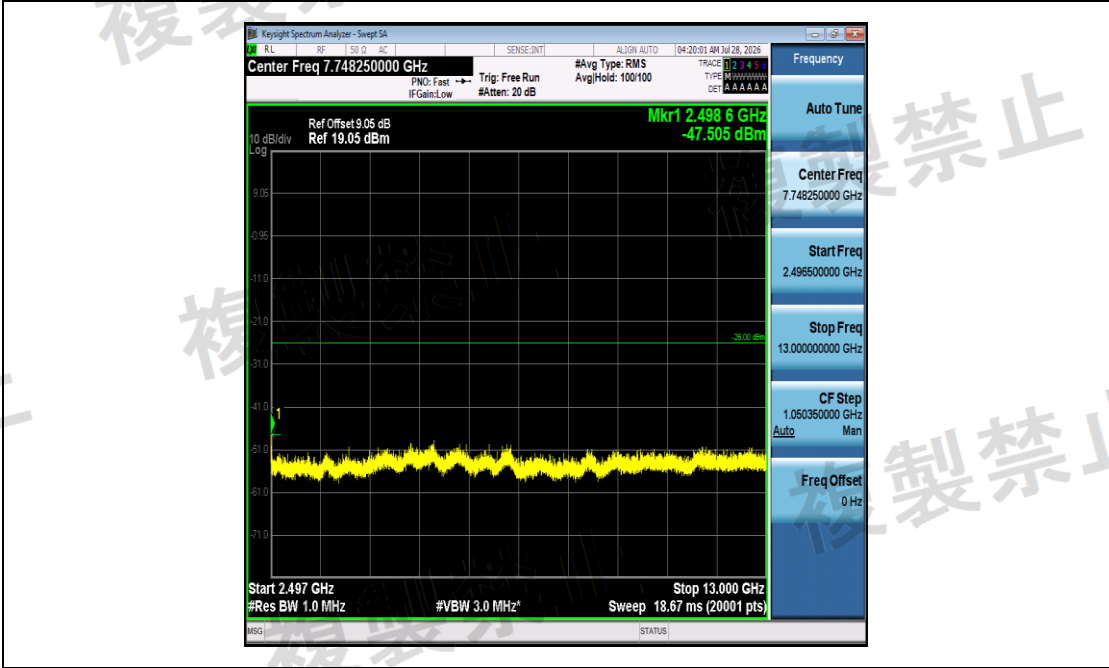


NTNV-11N40SISO-Ant1-2462-2496.5~13000-PASS

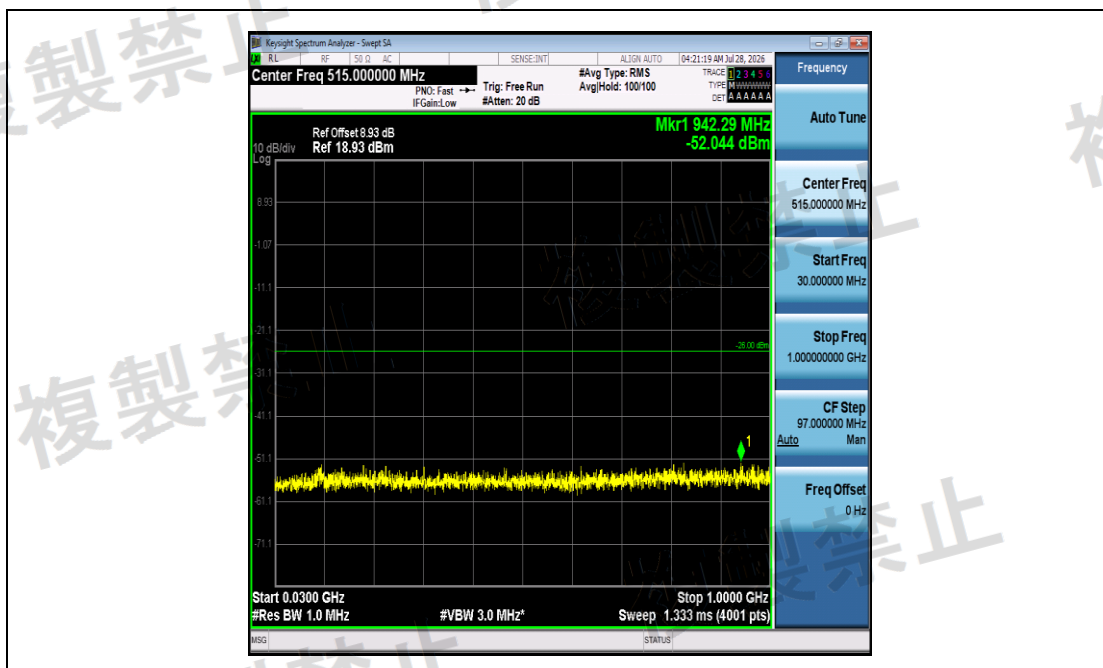


NTNV-11AX20SISO-Ant1-2412-30~1000-PASS

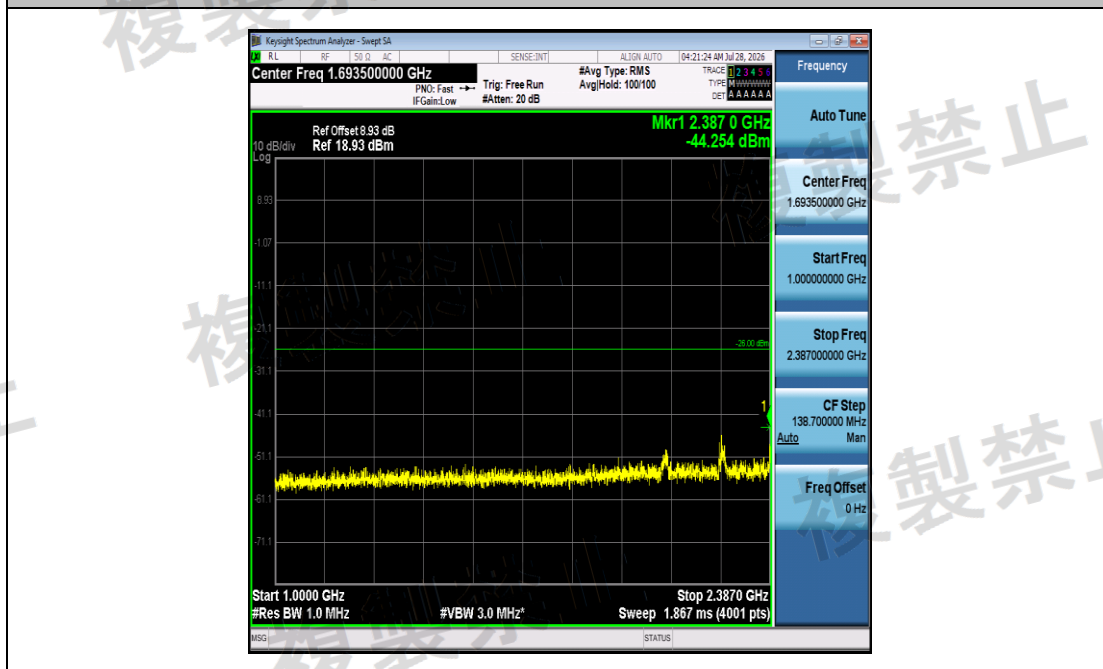


NTNV-11AX20SISO-Ant1-2412-1000~2387-PASS

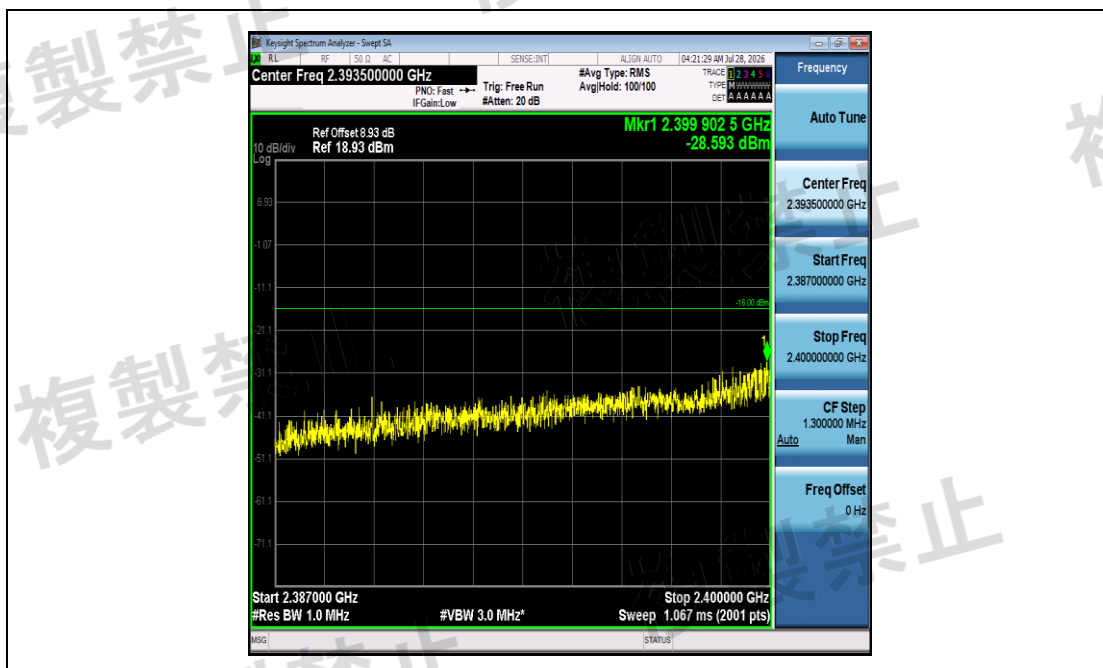


NTNV-11AX20SISO-Ant1-2412-2387~2400-PASS

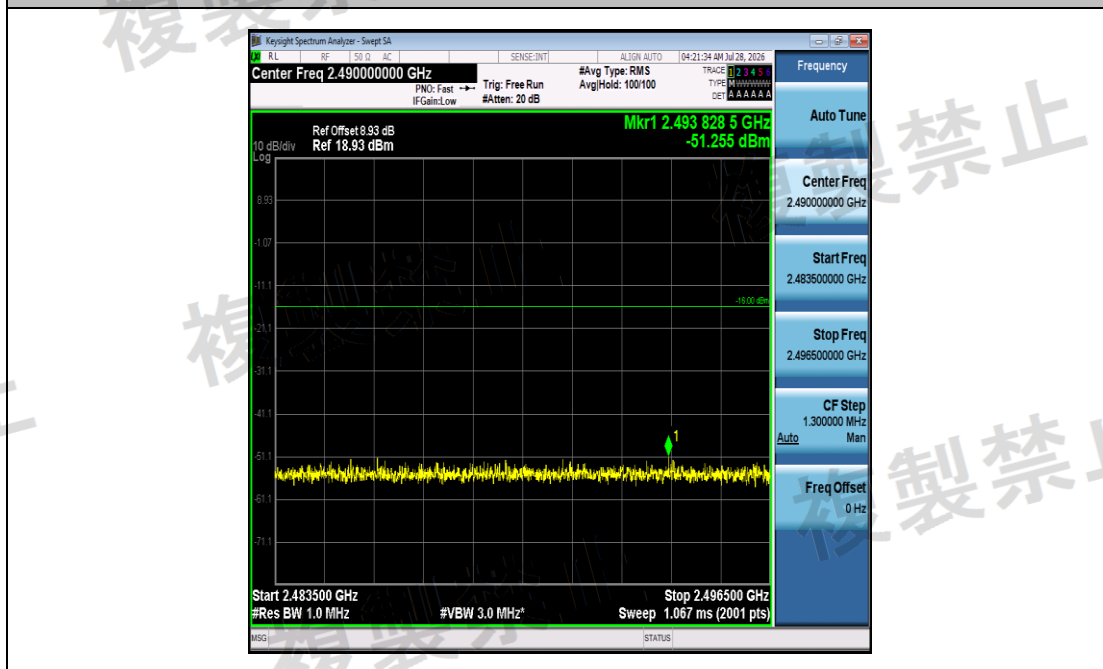


NTNV-11AX20SISO-Ant1-2412-2483.5~2496.5-PASS

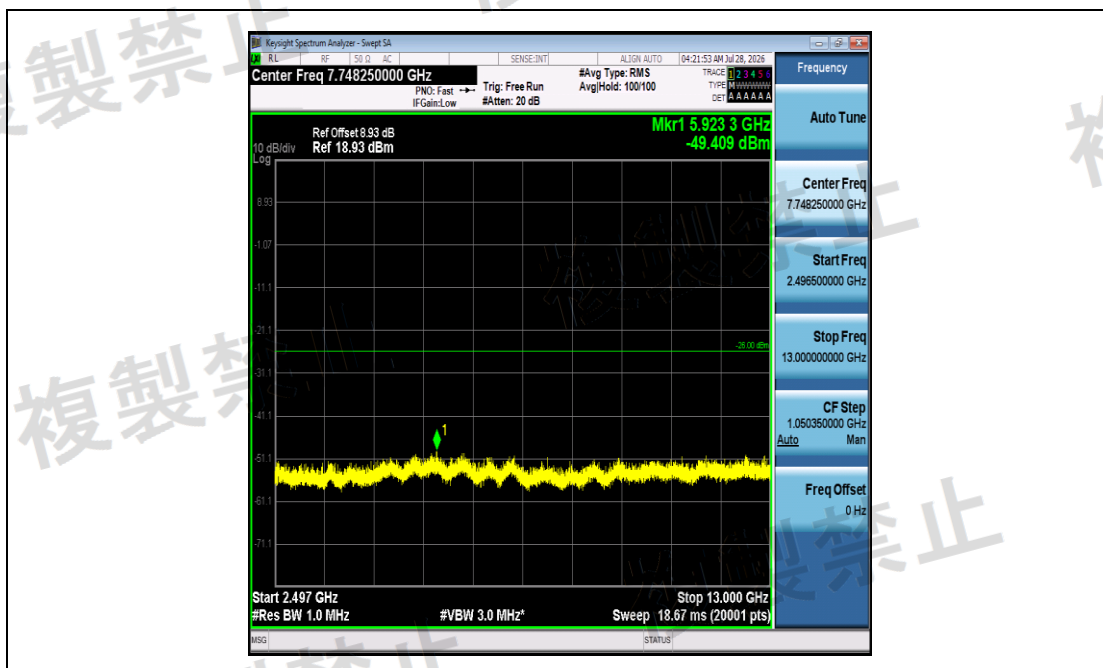


NTNV-11AX20SISO-Ant1-2412-2496.5~13000-PASS

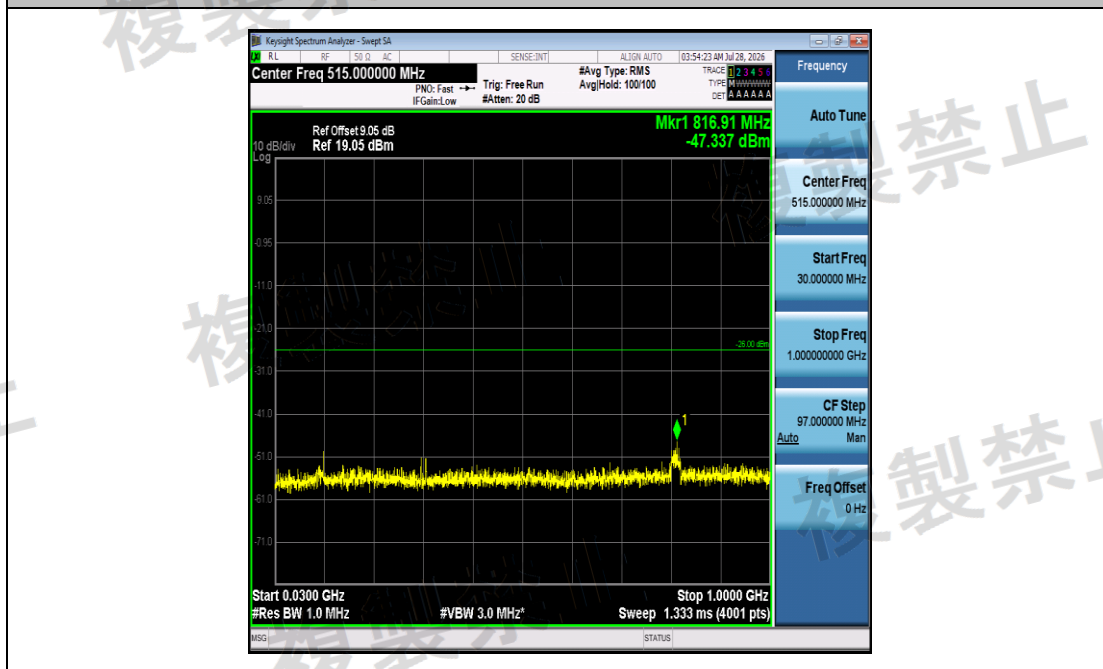


NTNV-11AX20SISO-Ant1-2442-30~1000-PASS

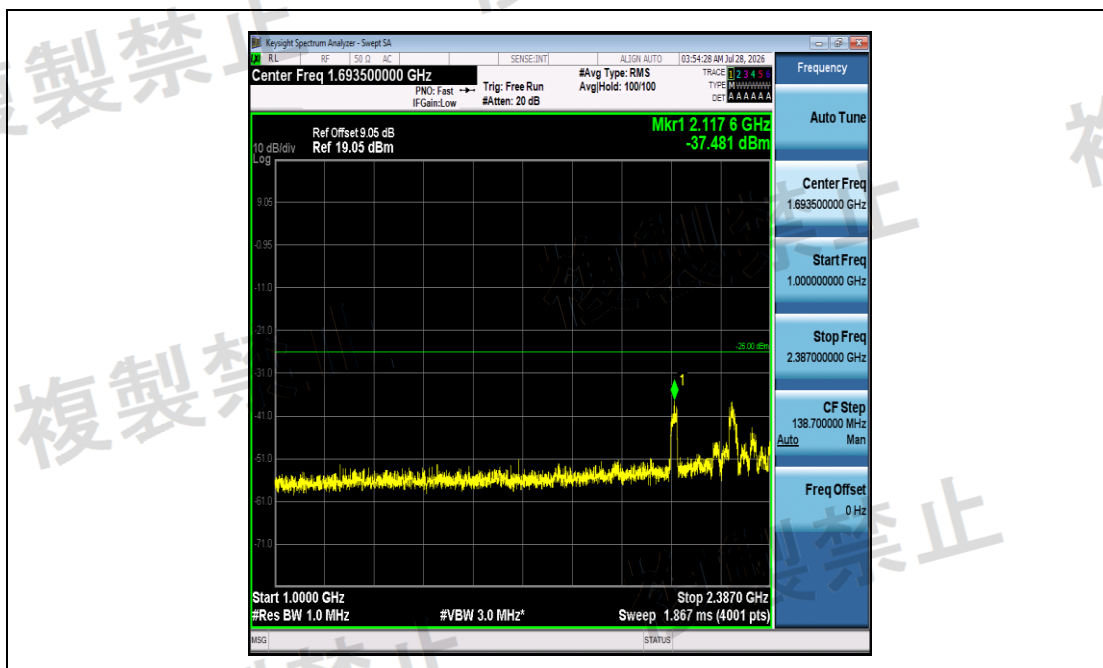


NTNV-11AX20SISO-Ant1-2442-1000~2387-PASS

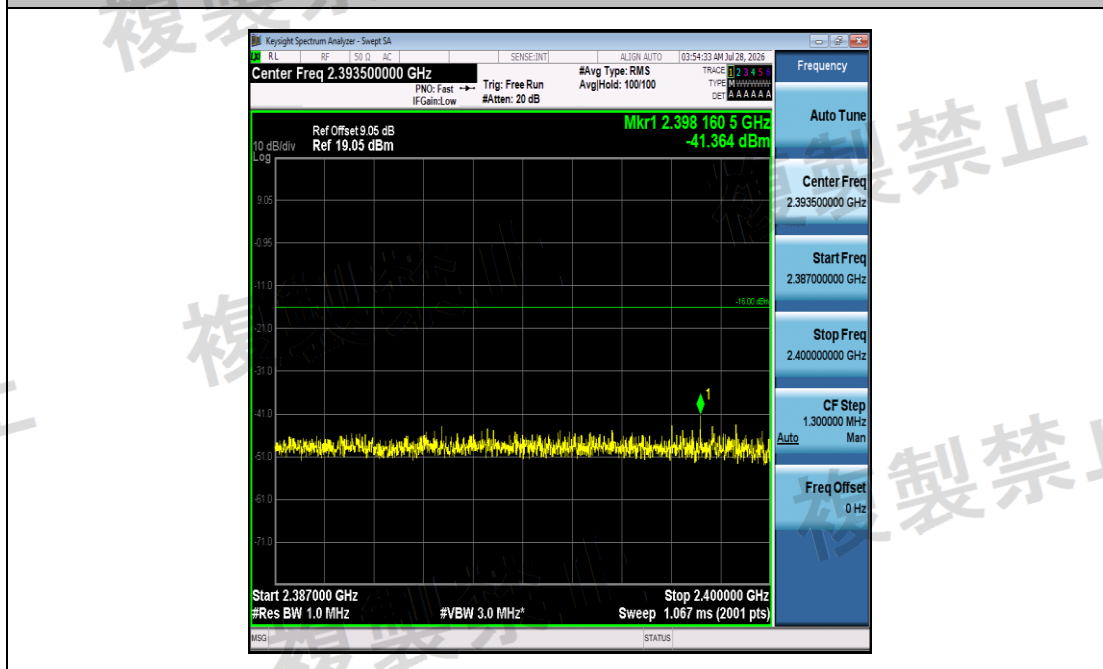


NTNV-11AX20SISO-Ant1-2442-2387~2400-PASS

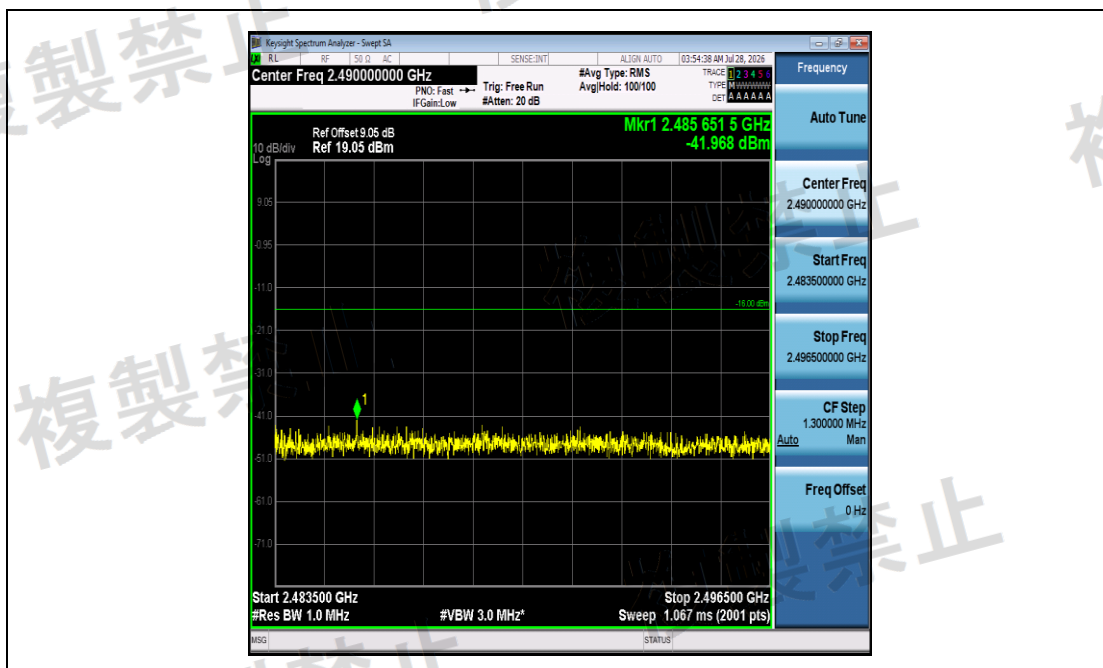


NTNV-11AX20SISO-Ant1-2442-2483.5~2496.5-PASS

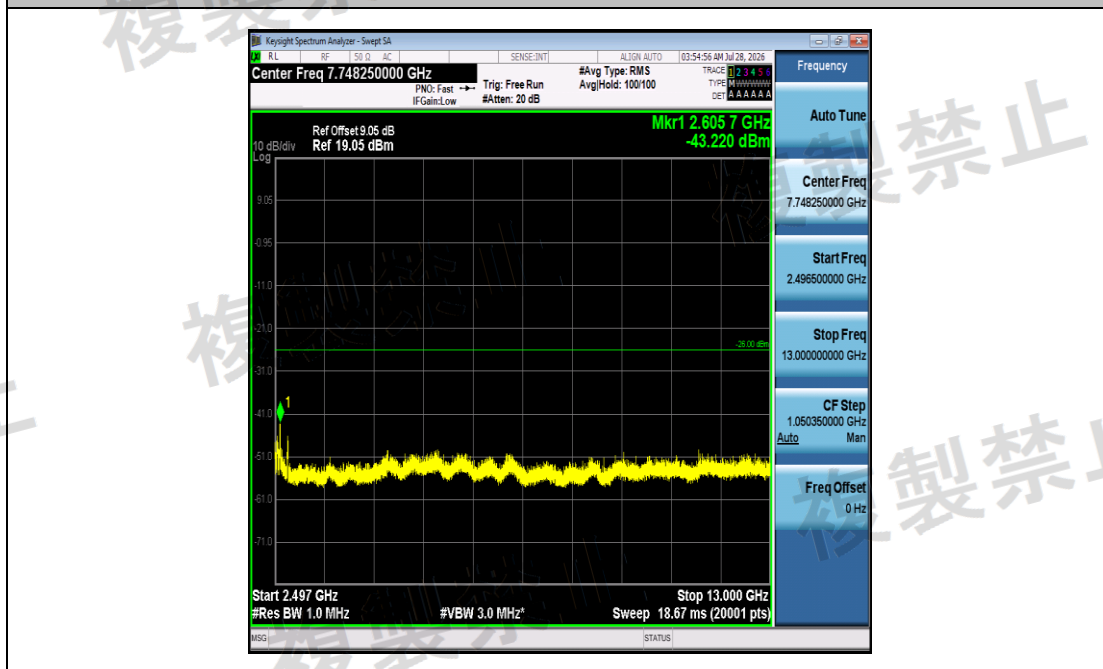


NTNV-11AX20SISO-Ant1-2442-2496.5~13000-PASS

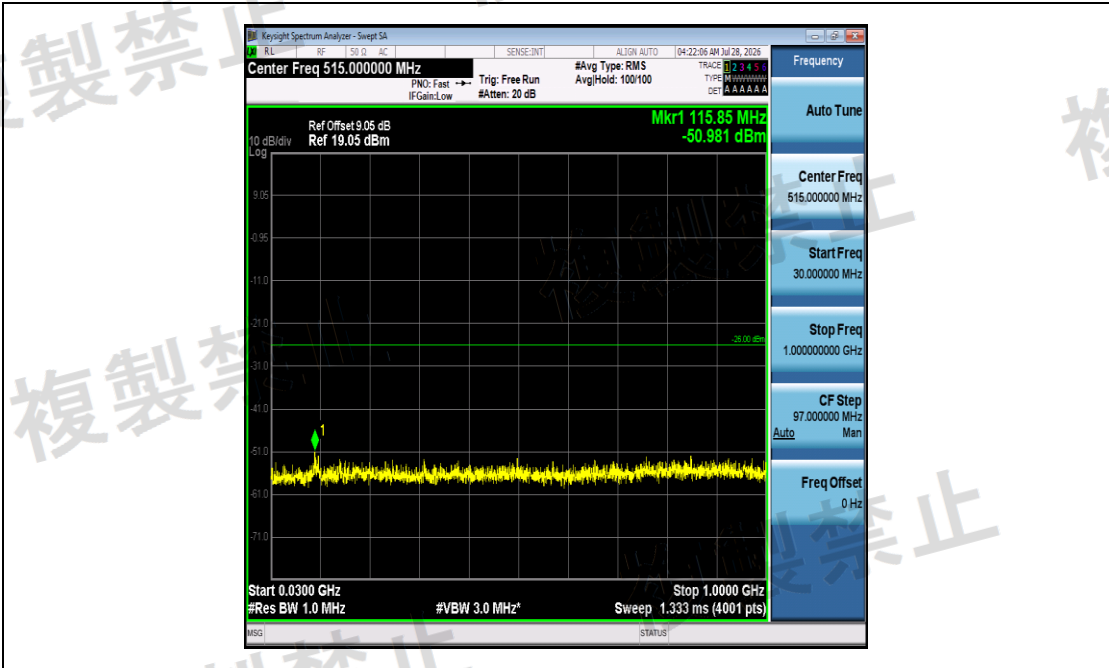


NTNV-11AX20SISO-Ant1-2472-30~1000-PASS

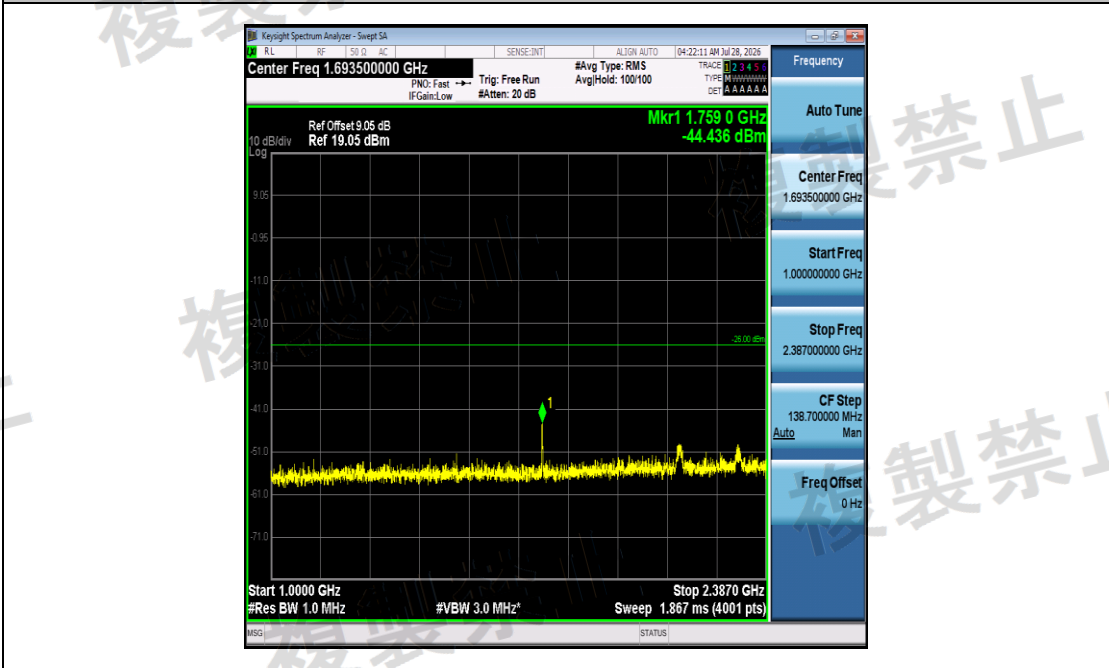


NTNV-11AX20SISO-Ant1-2472-1000~2387-PASS

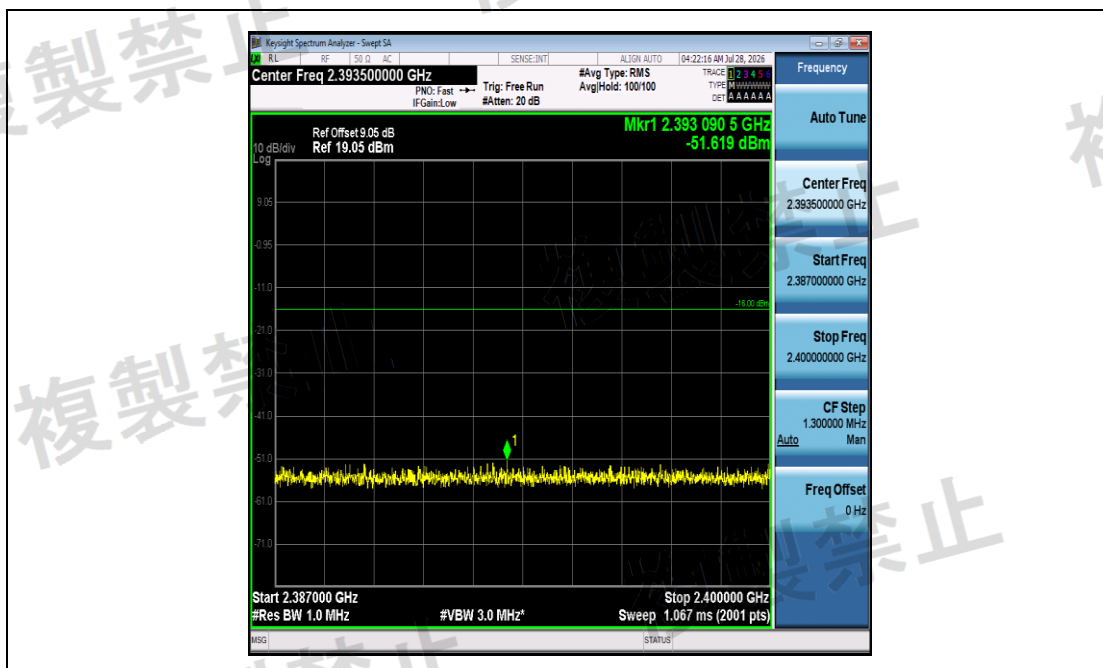

NTNV-11AX20SISO-Ant1-2472-2387~2400-PASS

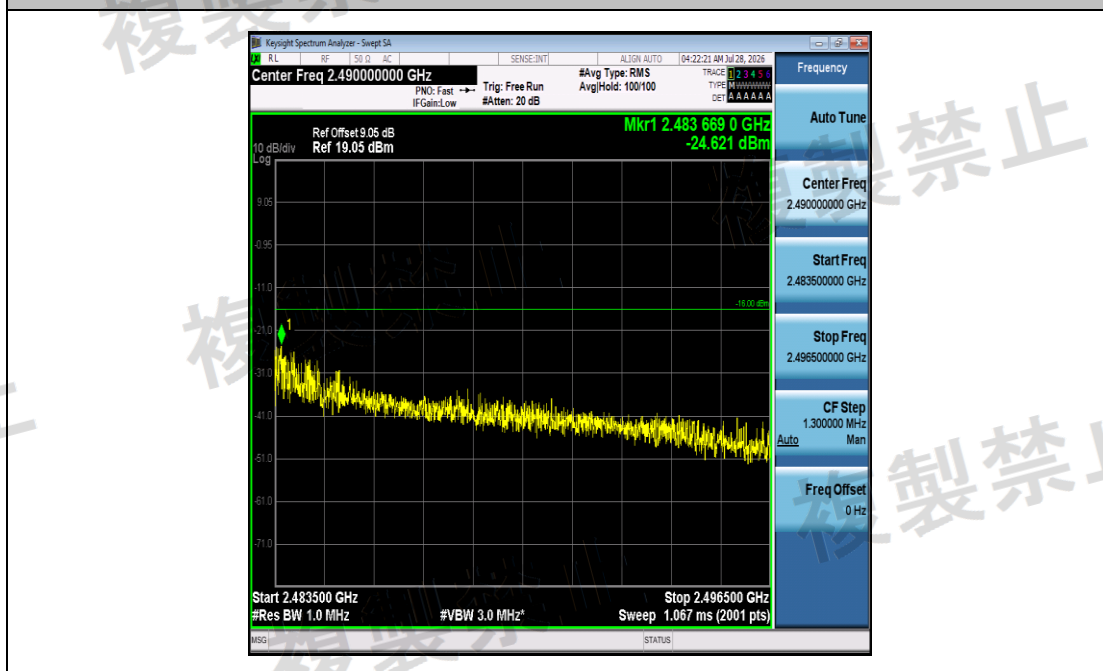

NTNV-11AX20SISO-Ant1-2472-2483.5~2496.5-PASS

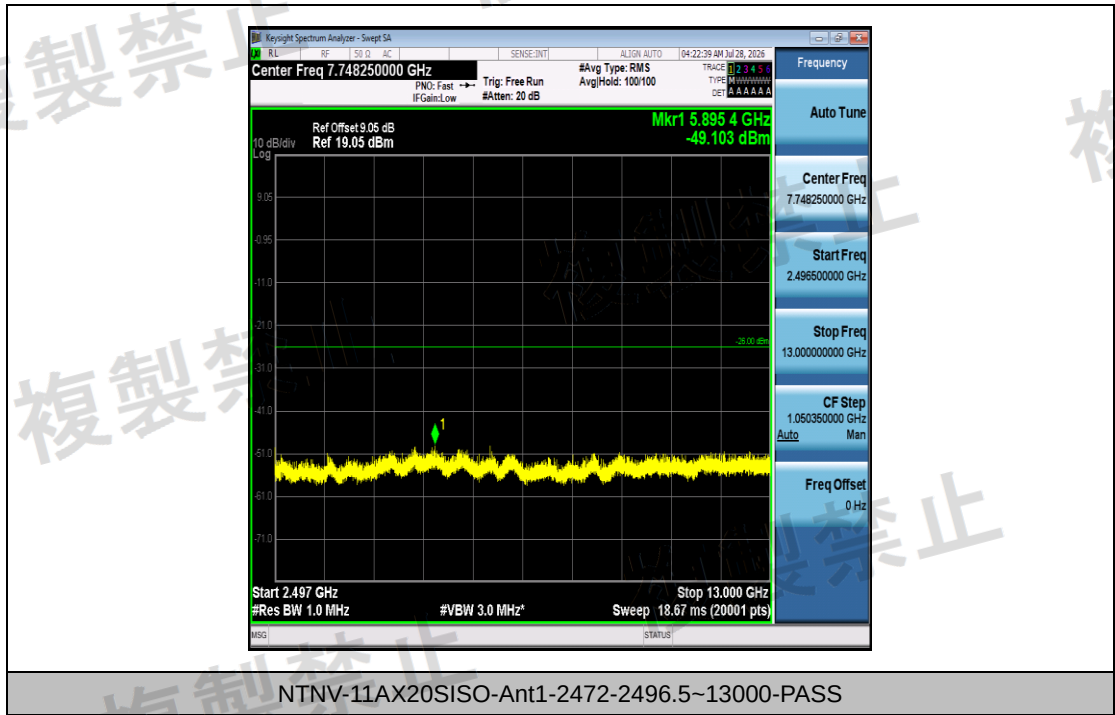


Appendix A.6: Spurious Emission of RX

Test Result


TestCondition	TestMode	Antenna	Frequency [MHz]	Freq. Range [MHz]	Result [dBm]	Limit [dBm]	Result [nW]	Limit [nW]	Verdict
NTNV	11B	Ant1	2412	30~1000	-64.86	≤-54	0.32659	≤4	PASS
NTNV	11B	Ant1	2412	1000~12500	-56.68	≤-47	2.14783	≤20	PASS
NTNV	11B	Ant1	2442	30~1000	-64.90	≤-54	0.32359	≤4	PASS
NTNV	11B	Ant1	2442	1000~12500	-56.12	≤-47	2.44343	≤20	PASS
NTNV	11B	Ant1	2472	30~1000	-64.84	≤-54	0.32810	≤4	PASS
NTNV	11B	Ant1	2472	1000~12500	-60.76	≤-47	0.83946	≤20	PASS
NTNV	11G	Ant1	2412	30~1000	-64.98	≤-54	0.31769	≤4	PASS
NTNV	11G	Ant1	2412	1000~12500	-71.87	≤-47	0.06501	≤20	PASS
NTNV	11G	Ant1	2442	30~1000	-64.88	≤-54	0.32509	≤4	PASS
NTNV	11G	Ant1	2442	1000~12500	-70.04	≤-47	0.09908	≤20	PASS
NTNV	11G	Ant1	2472	30~1000	-64.68	≤-54	0.34041	≤4	PASS
NTNV	11G	Ant1	2472	1000~12500	-62.11	≤-47	0.61518	≤20	PASS
NTNV	11N20SISO	Ant1	2412	30~1000	-64.93	≤-54	0.32137	≤4	PASS
NTNV	11N20SISO	Ant1	2412	1000~12500	-60.84	≤-47	0.82414	≤20	PASS
NTNV	11N20SISO	Ant1	2442	30~1000	-64.76	≤-54	0.33420	≤4	PASS
NTNV	11N20SISO	Ant1	2442	1000~12500	-56.95	≤-47	2.01837	≤20	PASS
NTNV	11N20SISO	Ant1	2472	30~1000	-64.76	≤-54	0.33420	≤4	PASS
NTNV	11N20SISO	Ant1	2472	1000~12500	-57.76	≤-47	1.67494	≤20	PASS
NTNV	11N40SISO	Ant1	2422	30~1000	-64.81	≤-54	0.33037	≤4	PASS
NTNV	11N40SISO	Ant1	2422	1000~12500	-63.06	≤-47	0.49431	≤20	PASS
NTNV	11N40SISO	Ant1	2442	30~1000	-64.81	≤-54	0.33037	≤4	PASS
NTNV	11N40SISO	Ant1	2442	1000~12500	-70.78	≤-47	0.08356	≤20	PASS
NTNV	11N40SISO	Ant1	2462	30~1000	-64.60	≤-54	0.34674	≤4	PASS
NTNV	11N40SISO	Ant1	2462	1000~12500	-60.29	≤-47	0.93541	≤20	PASS
NTNV	11AX20SI	Ant1	2412	30~1000	-64.71	≤-54	0.33806	≤4	PASS

	SO								
NTNV	11AX20SI SO	Ant1	2412	1000~12500	-59.67	≤-47	1.07895	≤20	PASS
NTNV	11AX20SI SO	Ant1	2442	30~1000	-64.82	≤-54	0.32961	≤4	PASS
NTNV	11AX20SI SO	Ant1	2442	1000~12500	-59.62	≤-47	1.09144	≤20	PASS
NTNV	11AX20SI SO	Ant1	2472	30~1000	-64.67	≤-54	0.34119	≤4	PASS
NTNV	11AX20SI SO	Ant1	2472	1000~12500	-60.62	≤-47	0.86696	≤20	PASS


Test Graphs

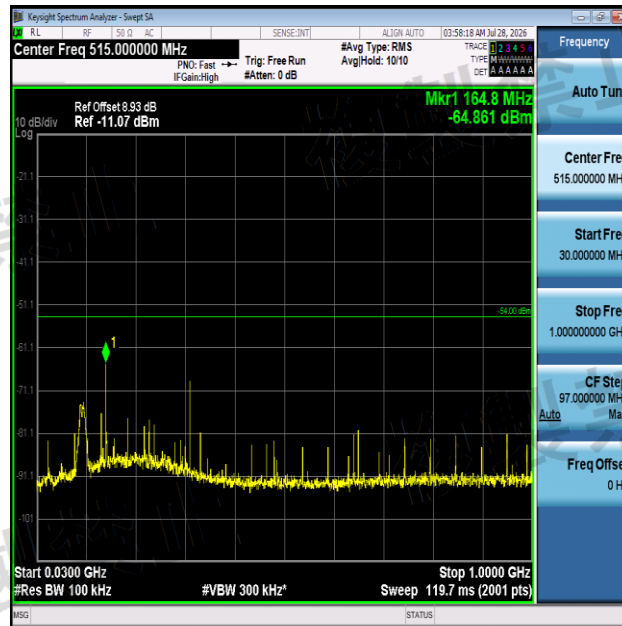


NTNV-11B-Ant1-2412-30~1000-PASS

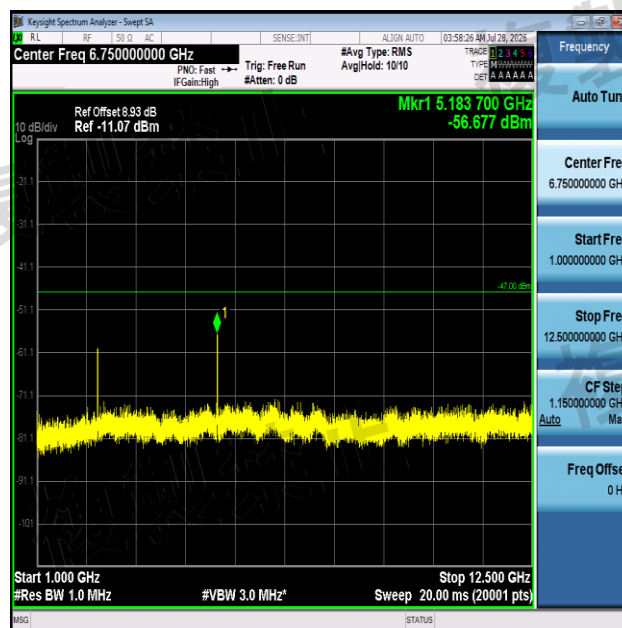


NTNV-11B-Ant1-2412-1000~12500-See table below

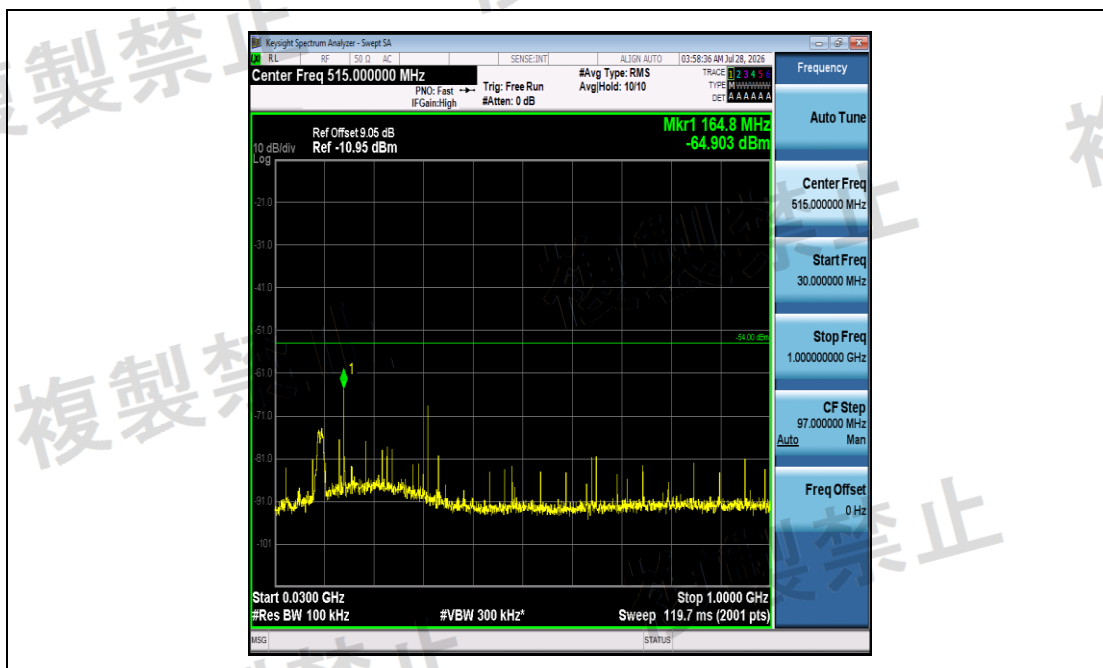


NTNV-11B-Ant1-2442-30~1000-PASS

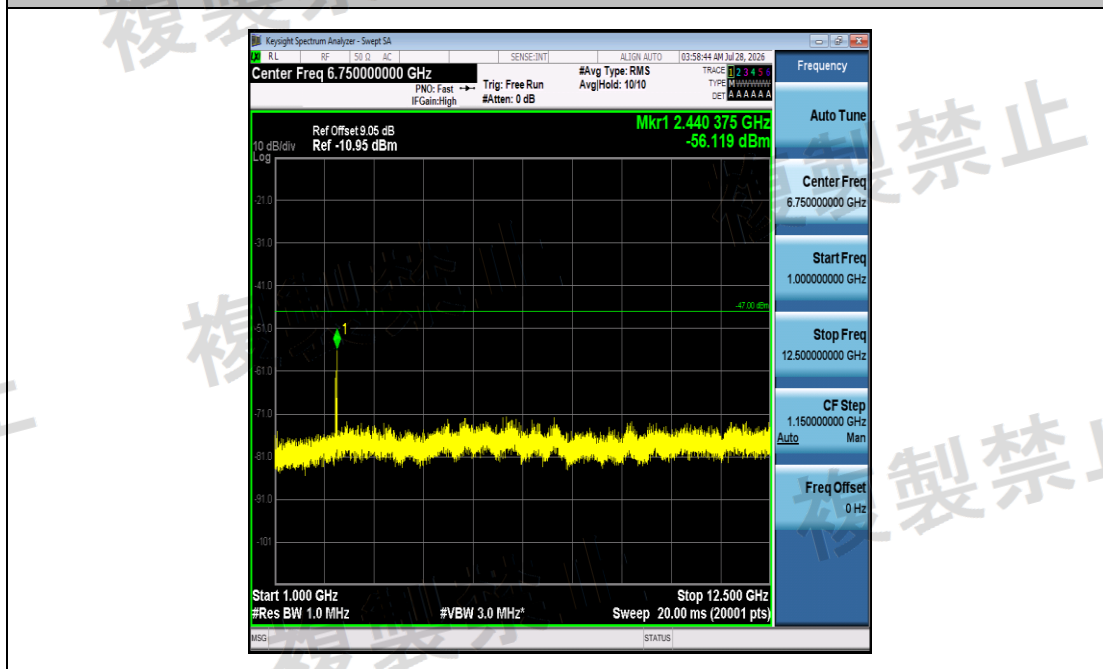


NTNV-11B-Ant1-2442-1000~12500-See table below

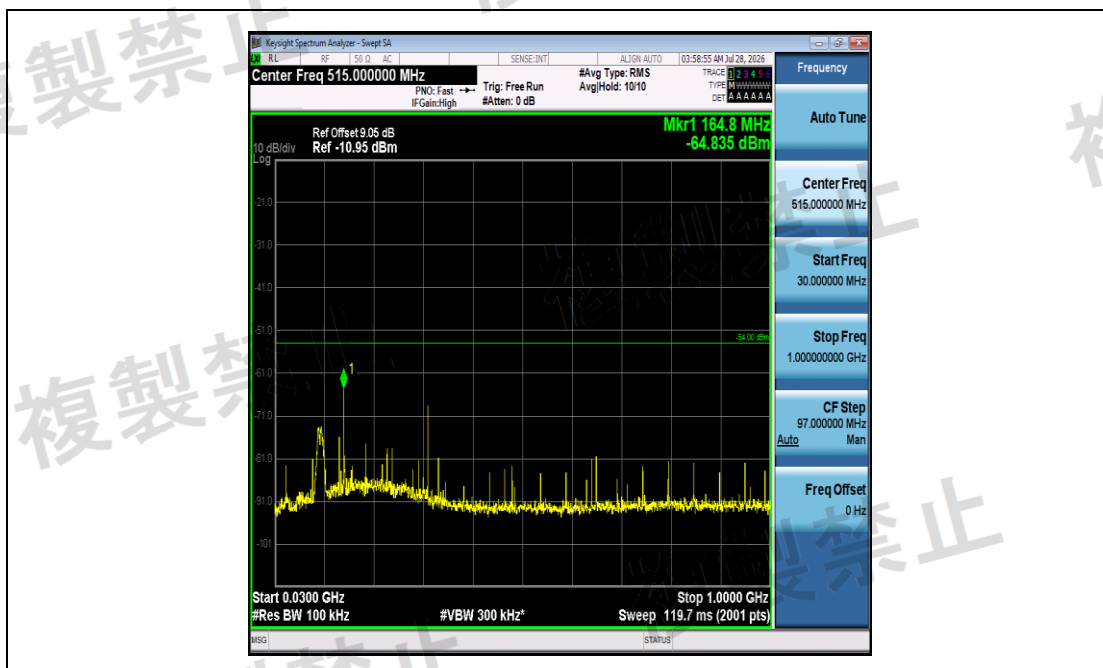


NTNV-11B-Ant1-2472-30~1000-PASS

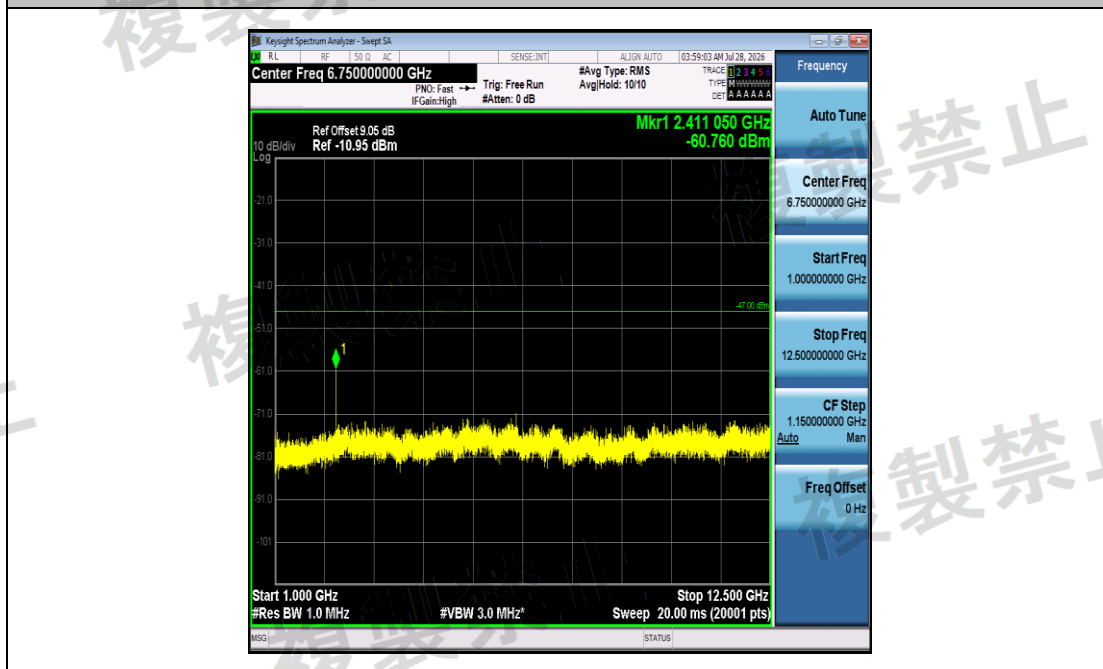


NTNV-11B-Ant1-2472-1000~12500-PASS

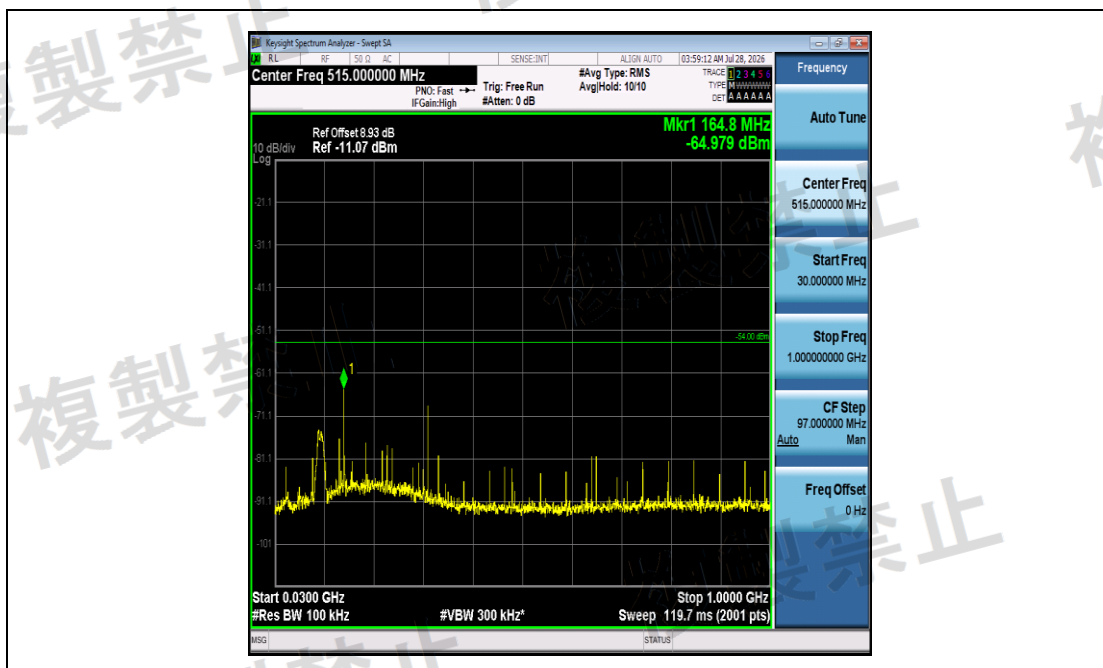


NTNV-11G-Ant1-2412-30~1000-PASS

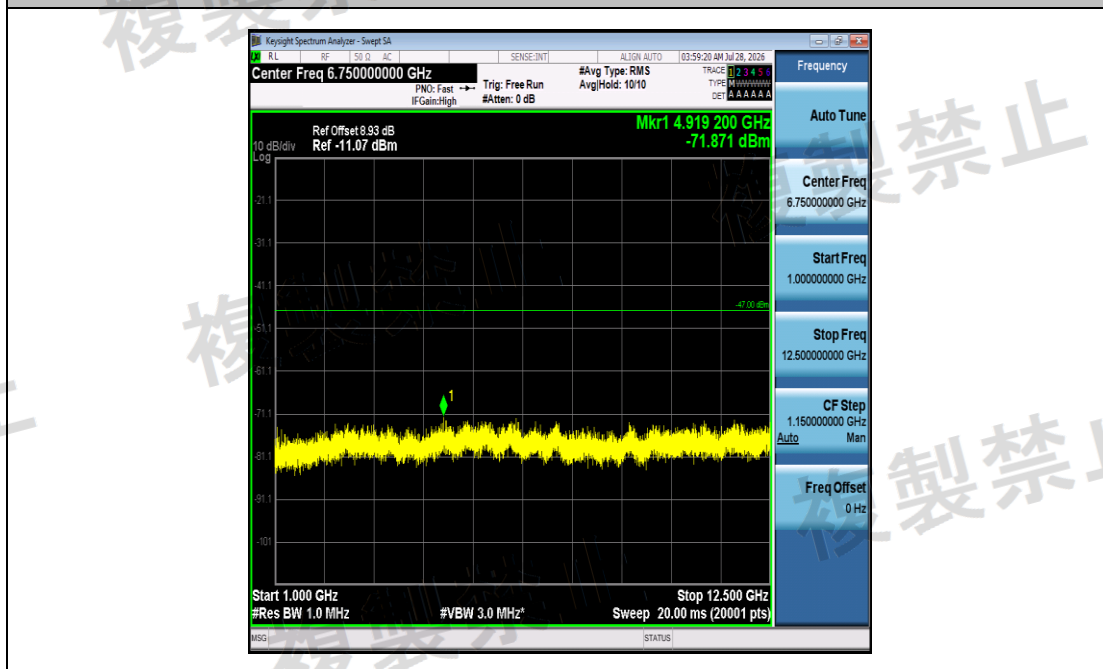


NTNV-11G-Ant1-2412-1000~12500-PASS

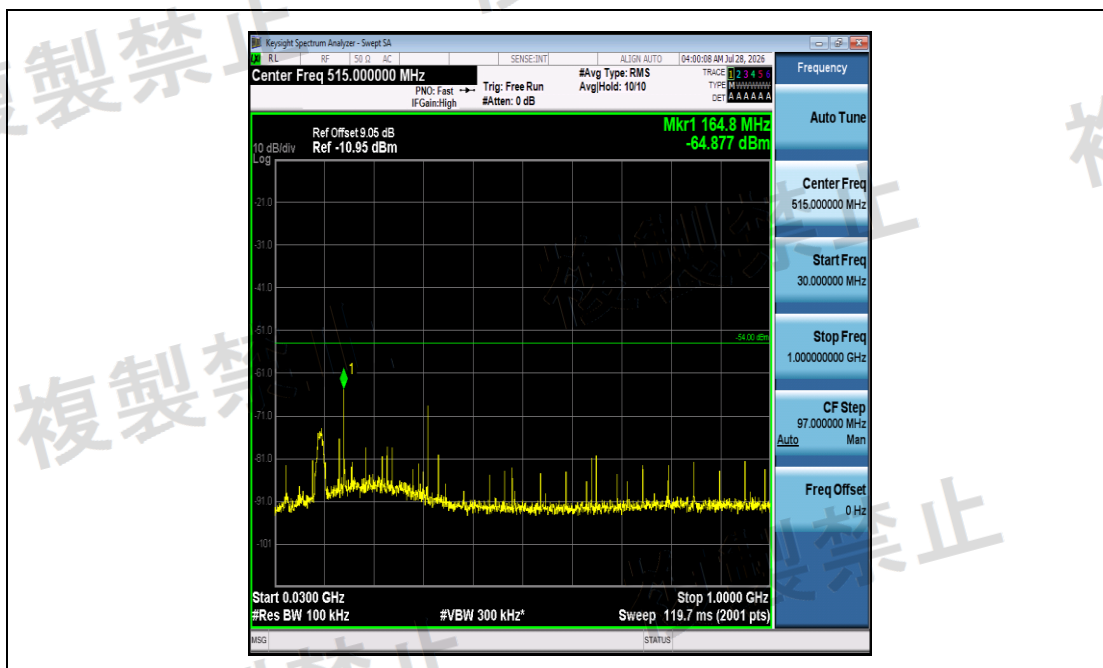


NTNV-11G-Ant1-2442-30~1000-PASS

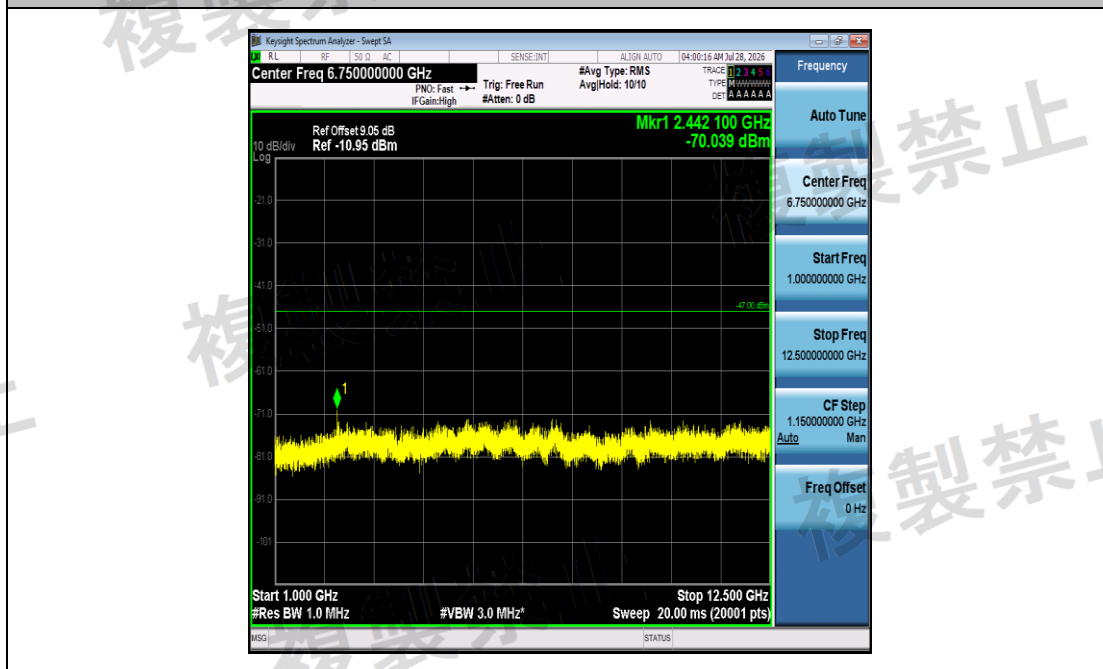


NTNV-11G-Ant1-2442-1000~12500-PASS

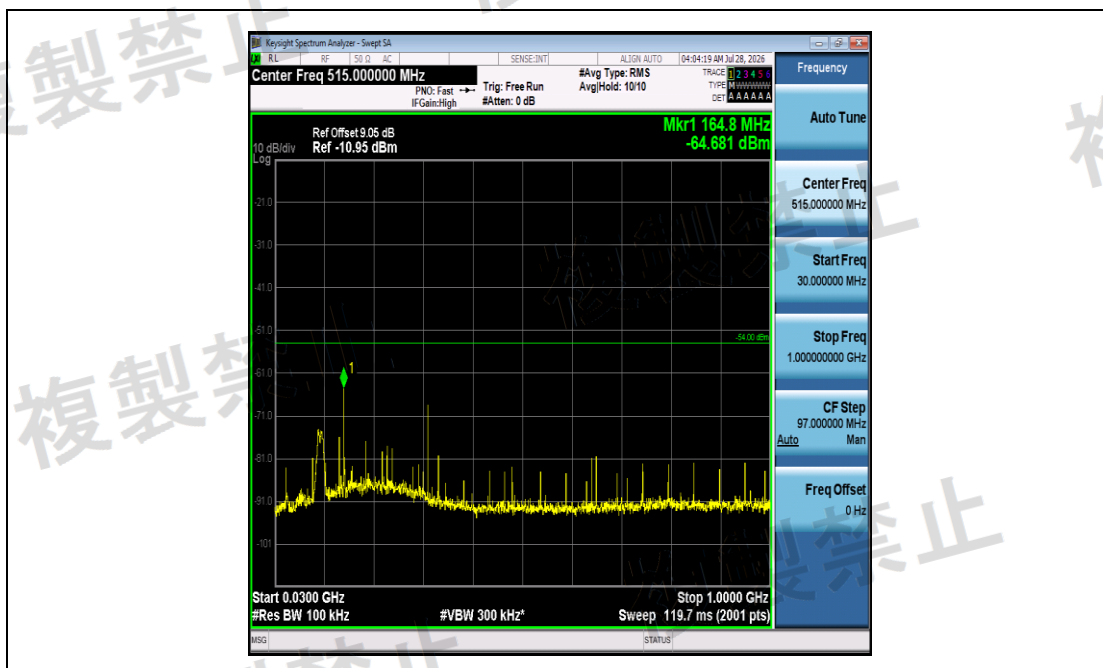


NTNV-11G-Ant1-2472-30~1000-PASS

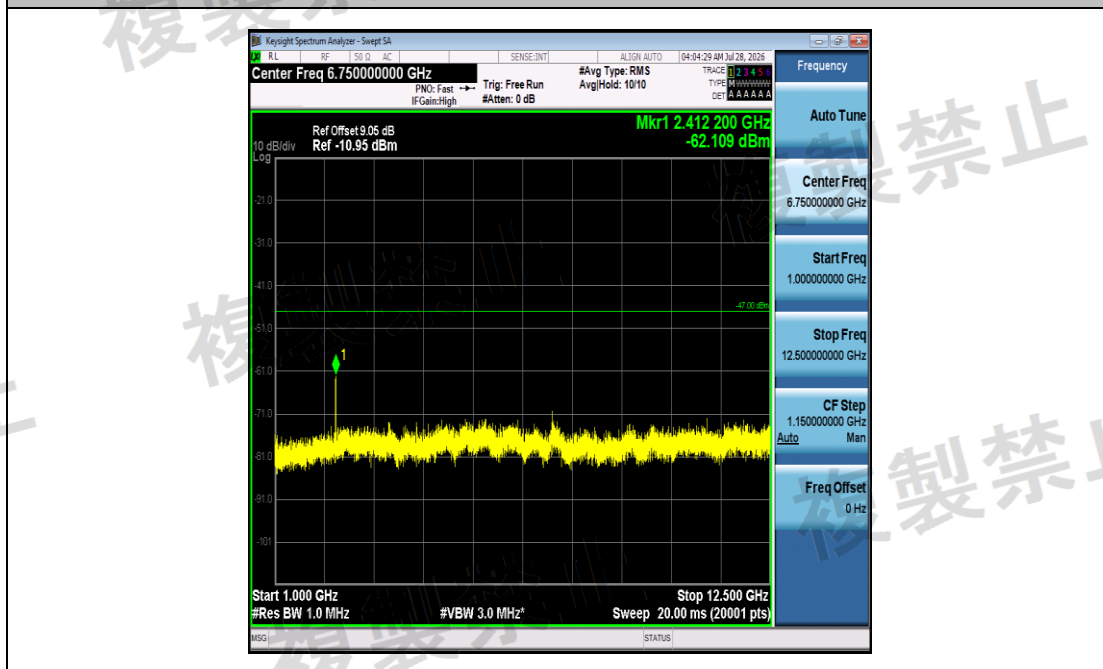


NTNV-11G-Ant1-2472-1000~12500-PASS

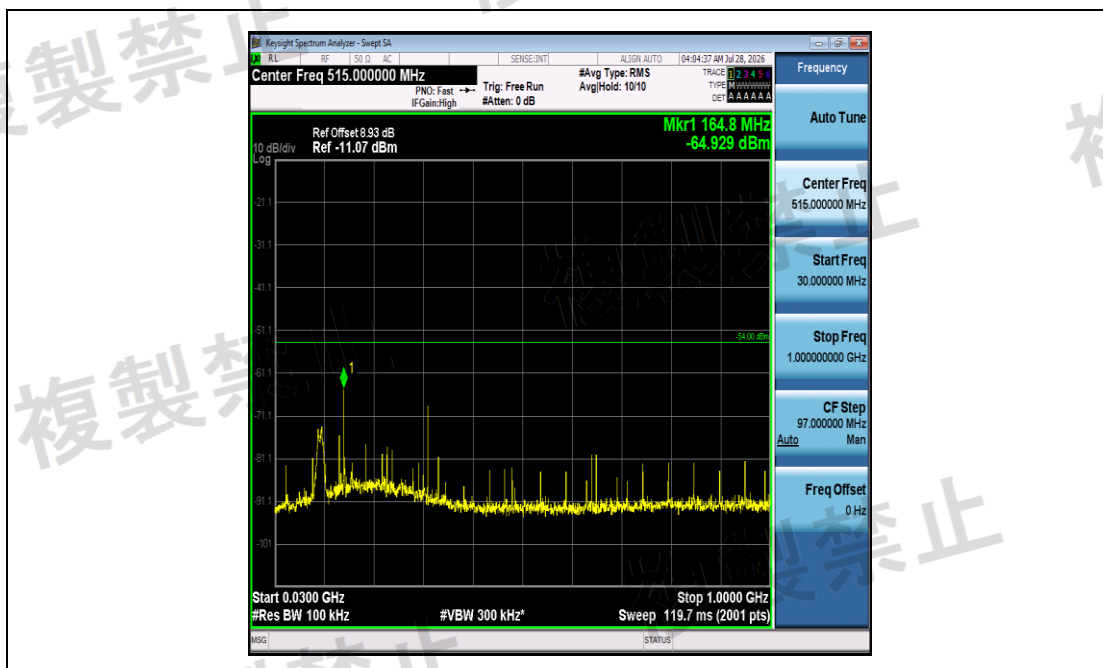


NTNV-11N20SISO-Ant1-2412-30~1000-PASS

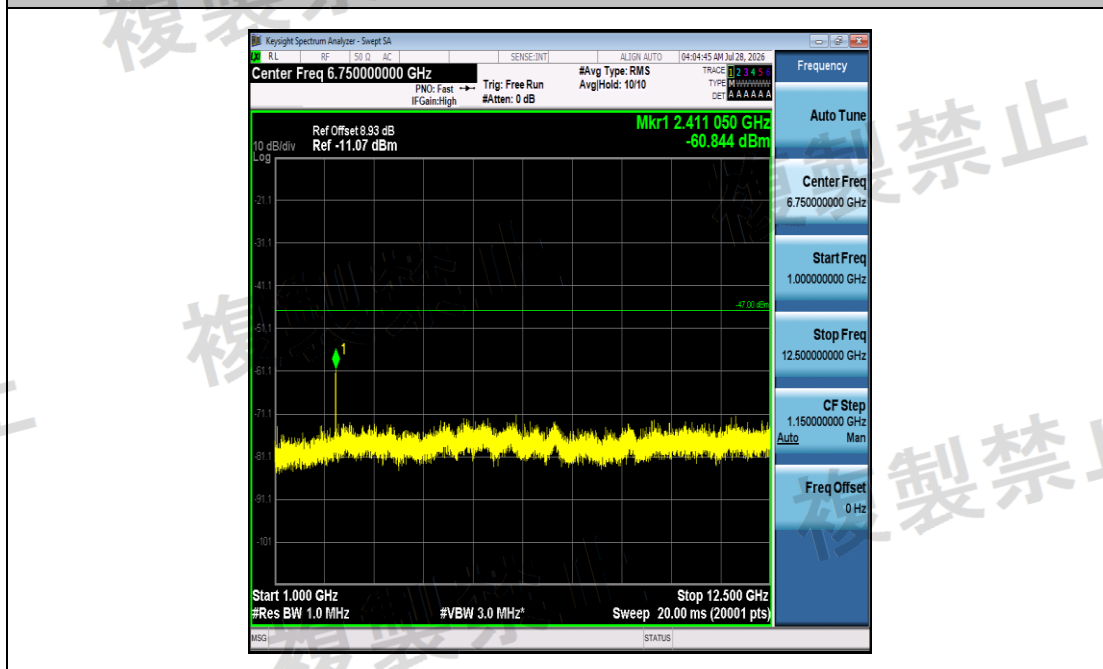


NTNV-11N20SISO-Ant1-2412-1000~12500-PASS

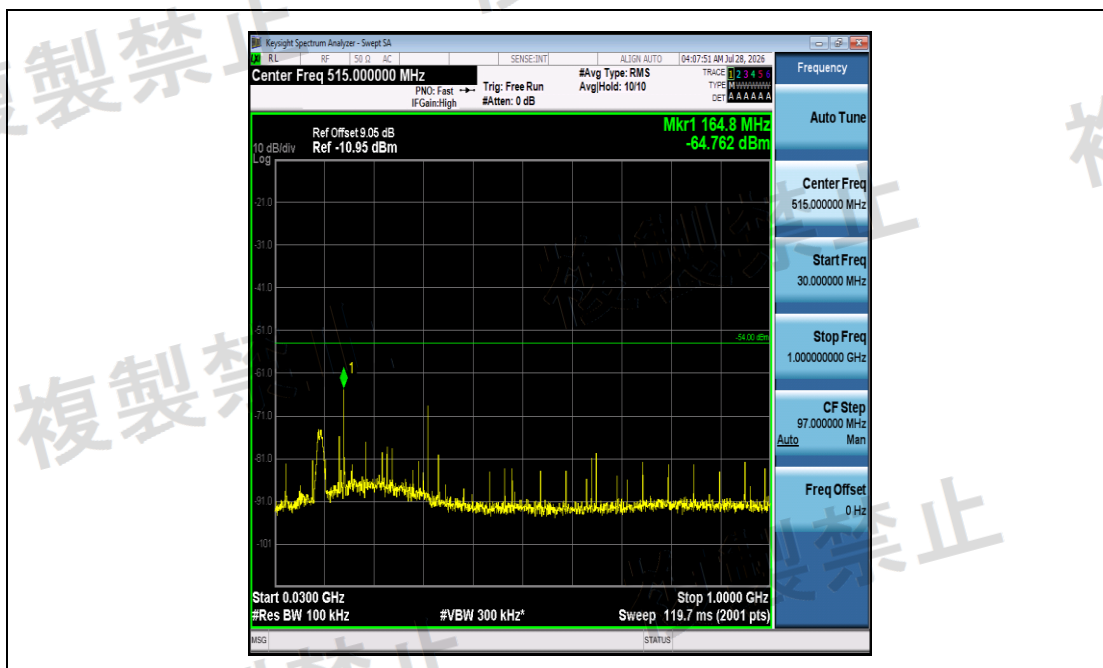


NTNV-11N20SISO-Ant1-2442-30~1000-PASS

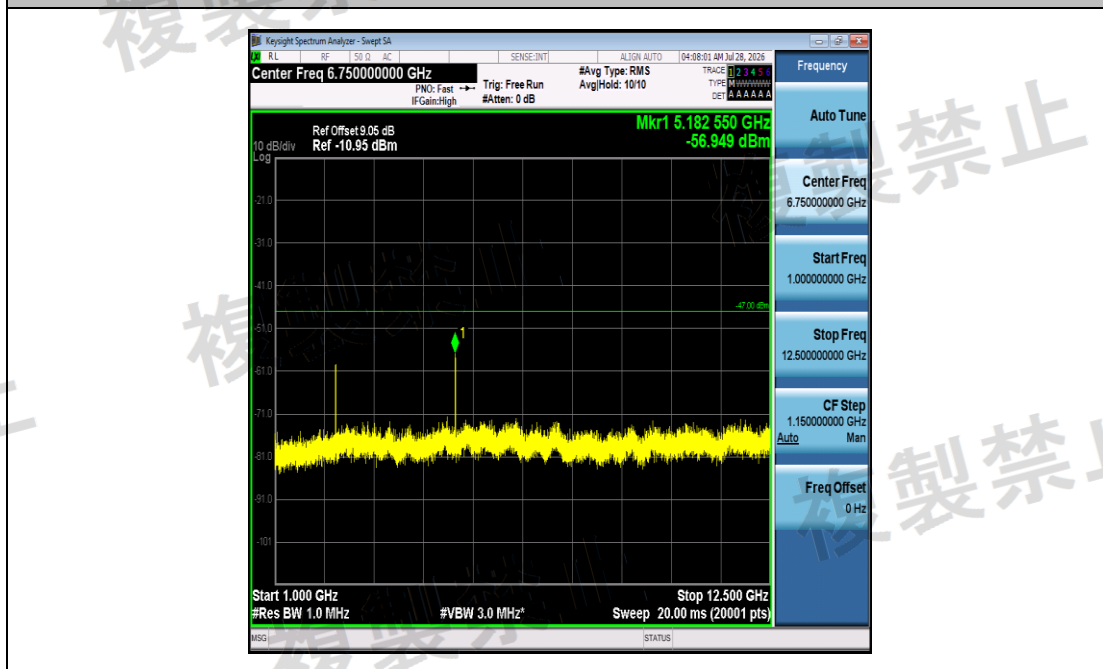


NTNV-11N20SISO-Ant1-2442-1000~12500-See table below

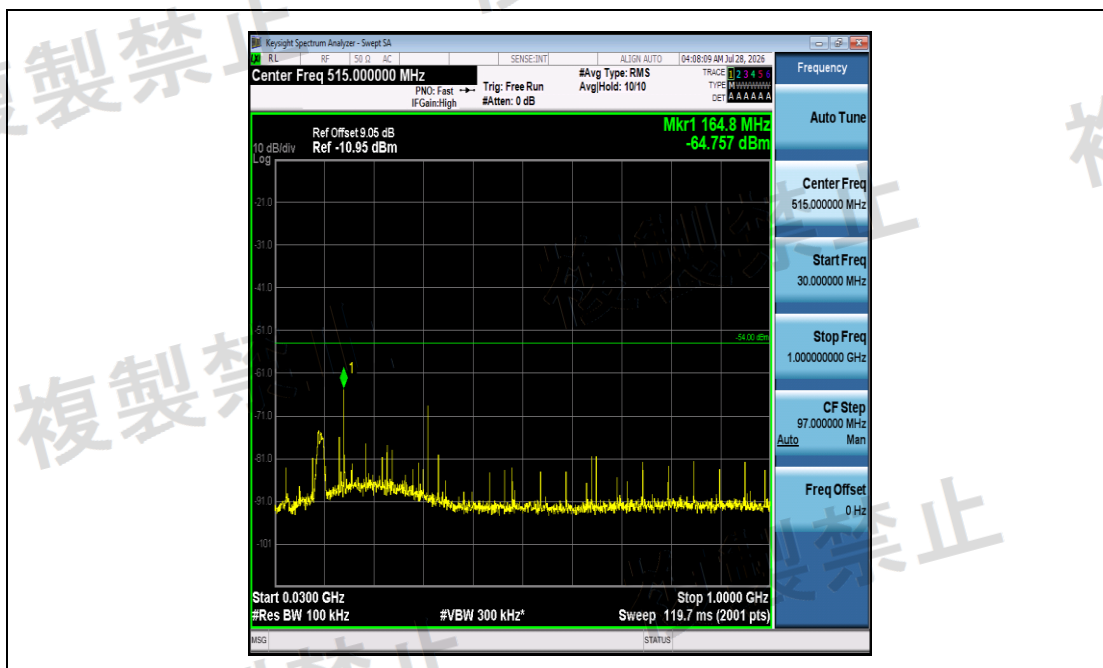


NTNV-11N20SISO-Ant1-2472-30~1000-PASS

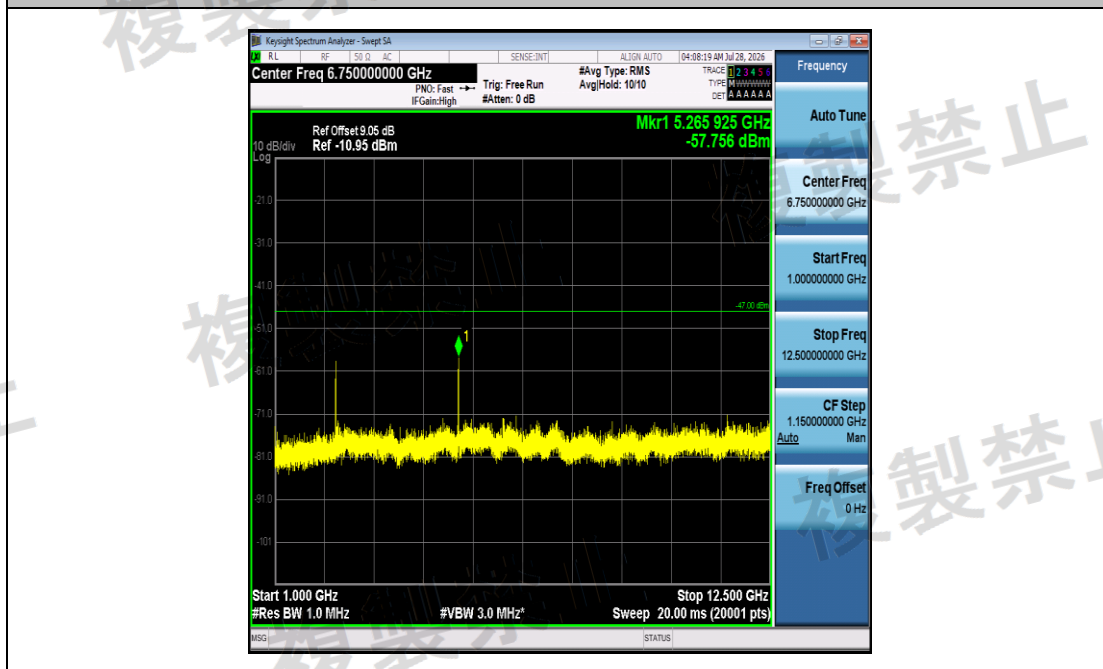


NTNV-11N20SISO-Ant1-2472-1000~12500-PASS

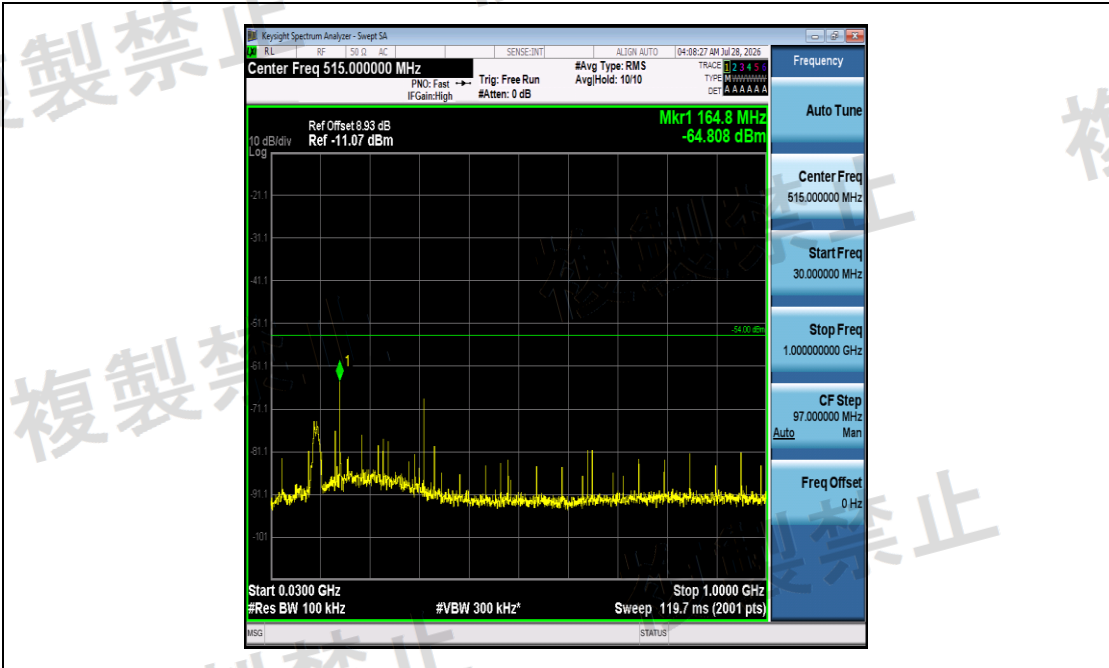


NTNV-11N40SISO-Ant1-2422-30~1000-PASS

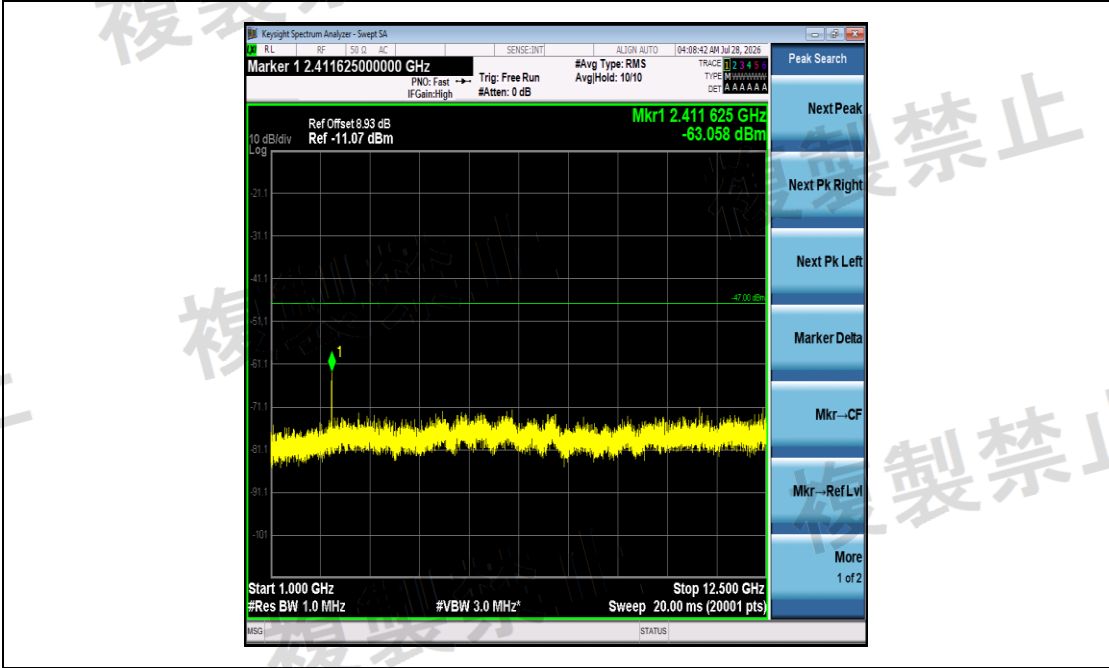


NTNV-11N40SISO-Ant1-2422-1000~12500-PASS

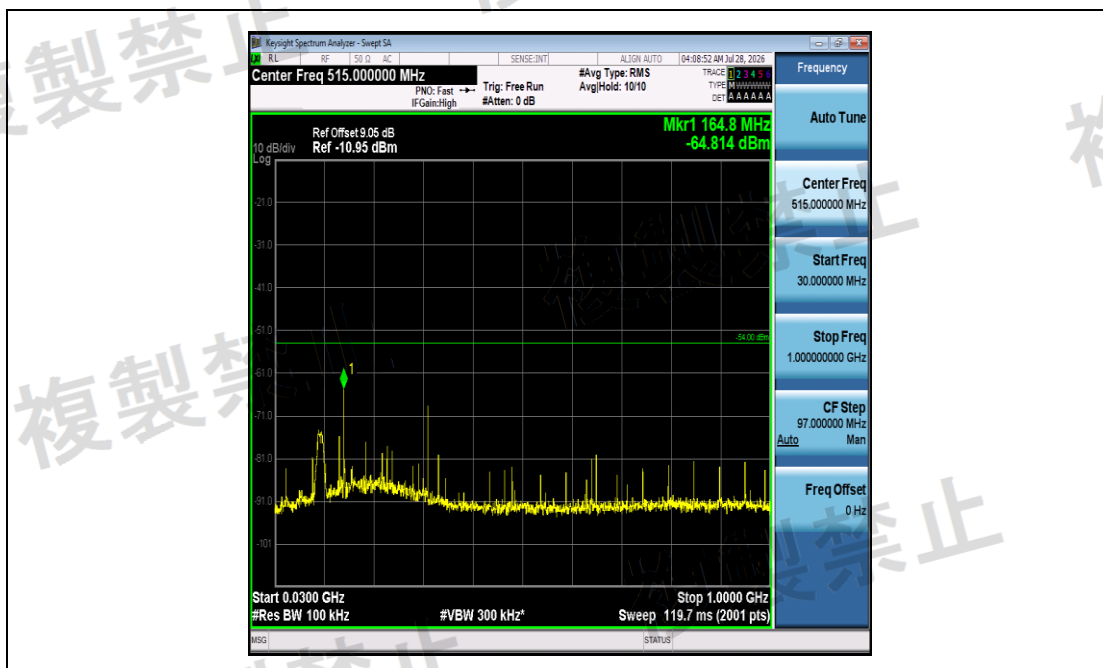


NTNV-11N40SISO-Ant1-2442-30~1000-PASS

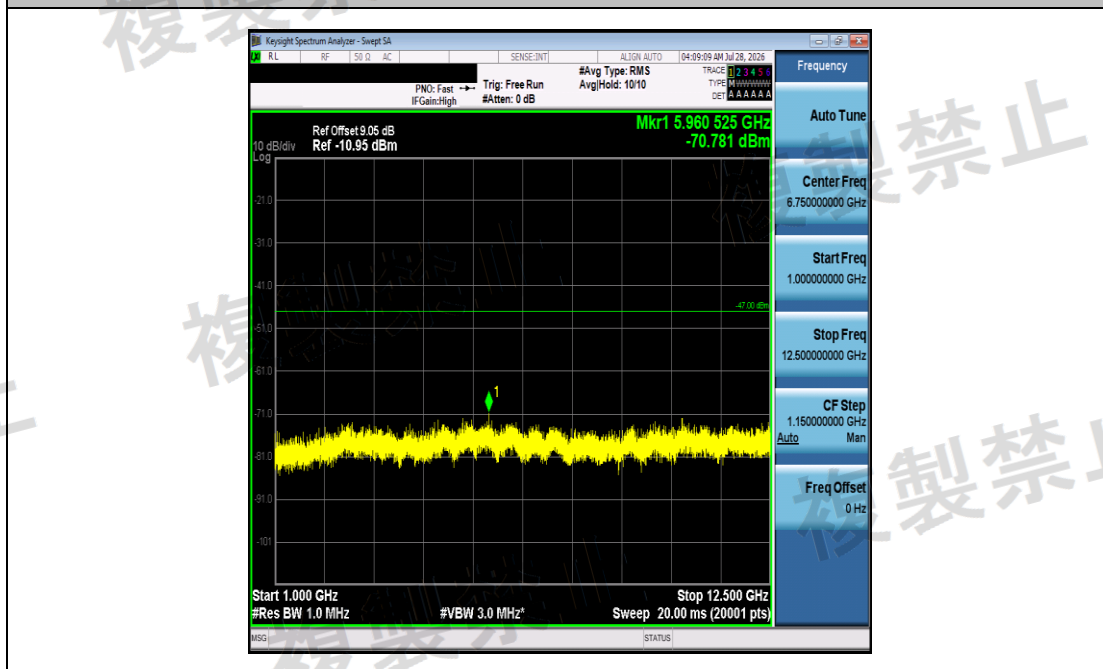


NTNV-11N40SISO-Ant1-2442-1000~12500-PASS

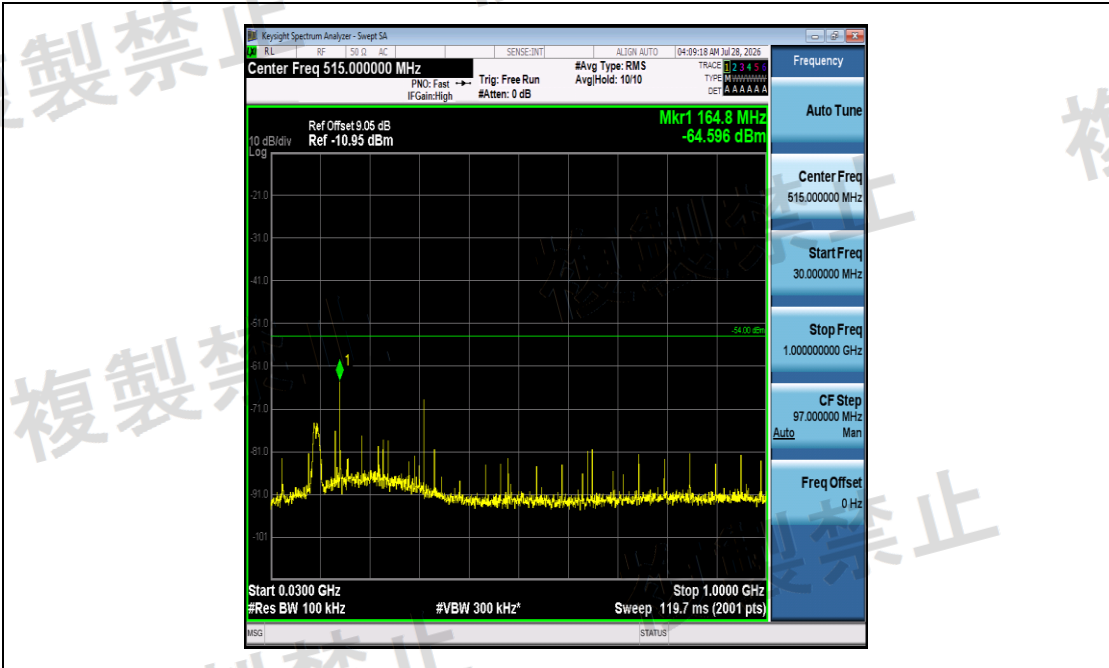


NTNV-11N40SISO-Ant1-2462-30~1000-PASS

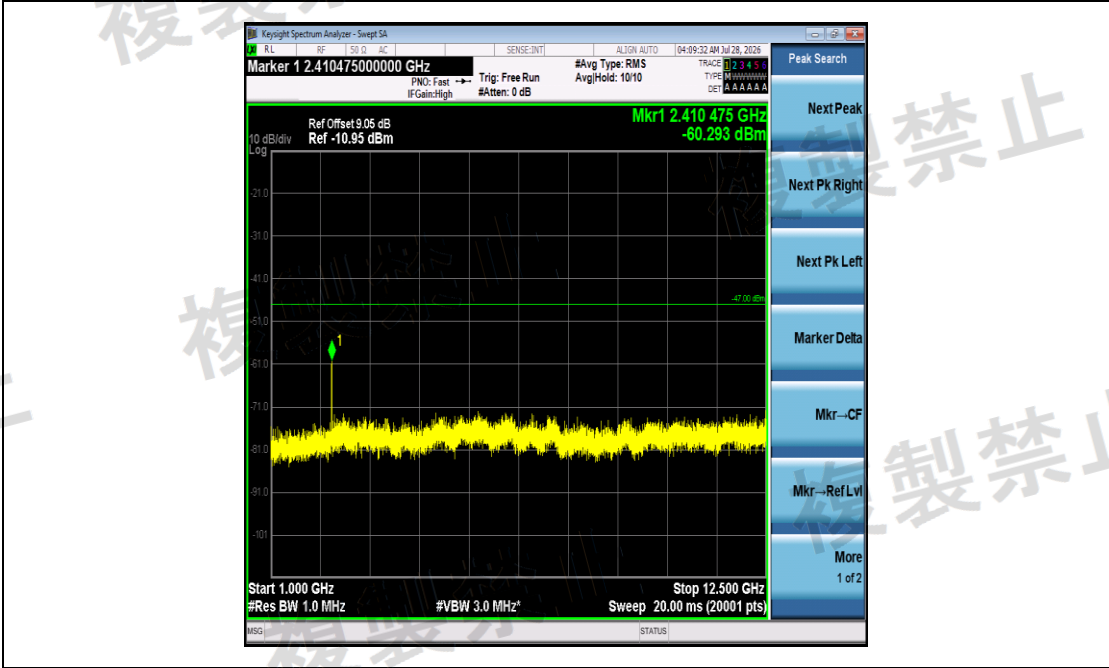


NTNV-11N40SISO-Ant1-2462-1000~12500-PASS

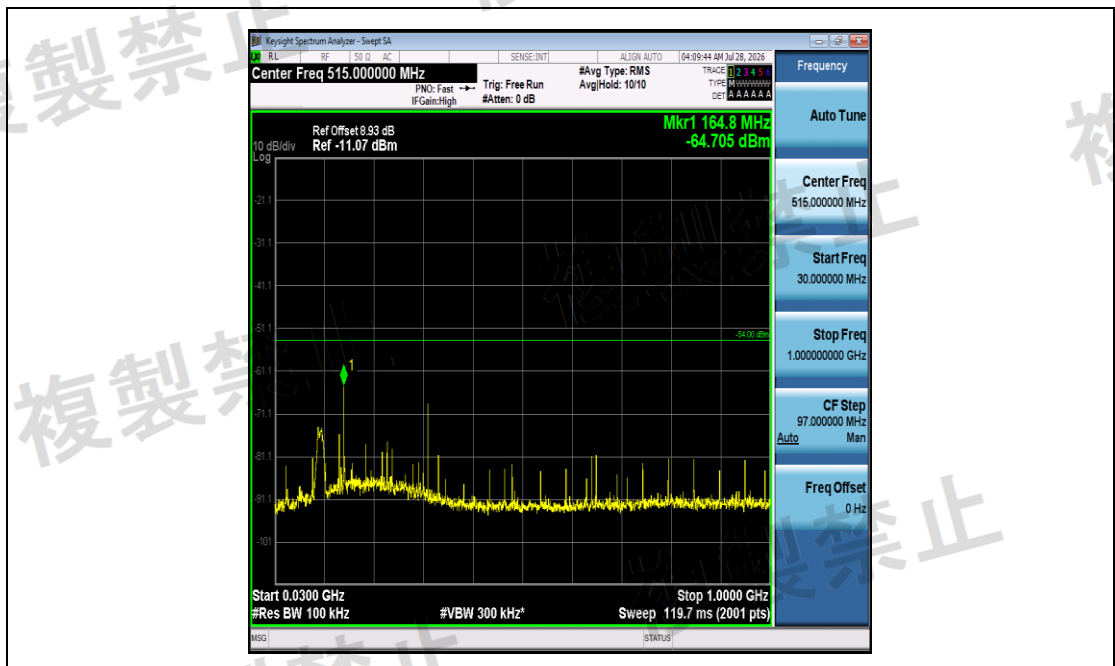


NTNV-11AX20SISO-Ant1-2412-30~1000-PASS

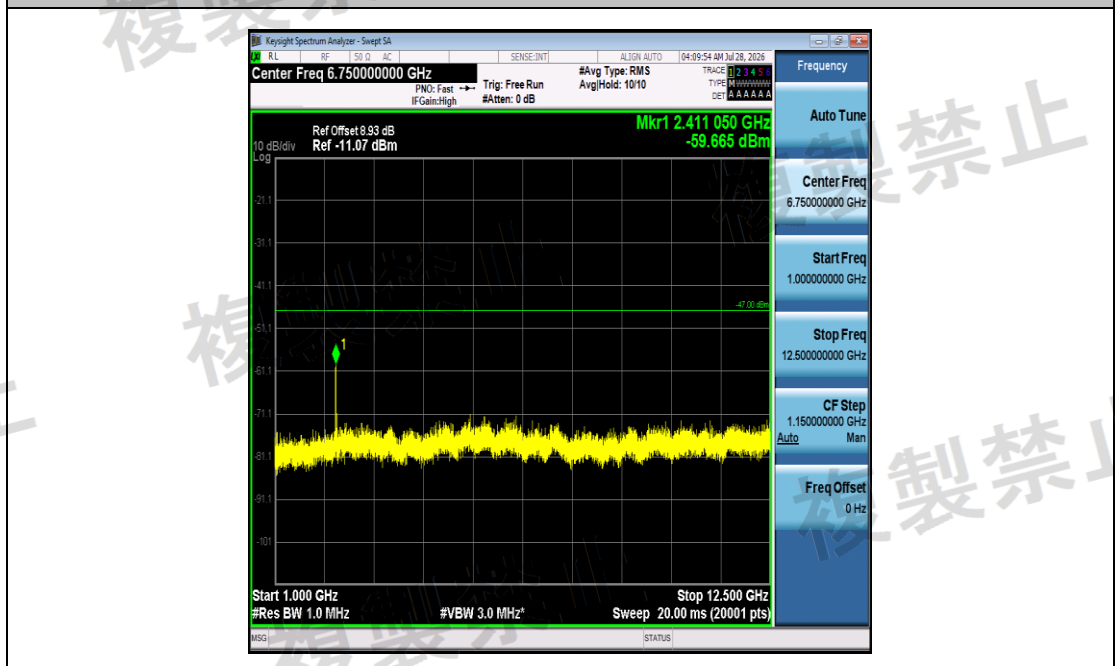


NTNV-11AX20SISO-Ant1-2412-1000~12500-PASS

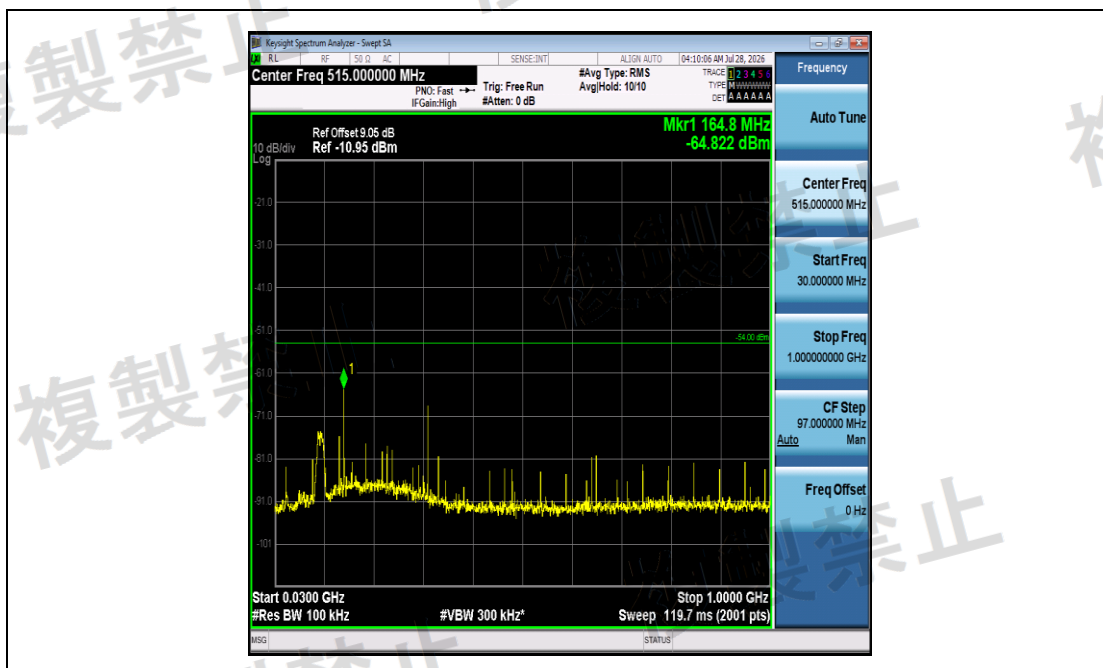


NTNV-11AX20SISO-Ant1-2442-30~1000-PASS

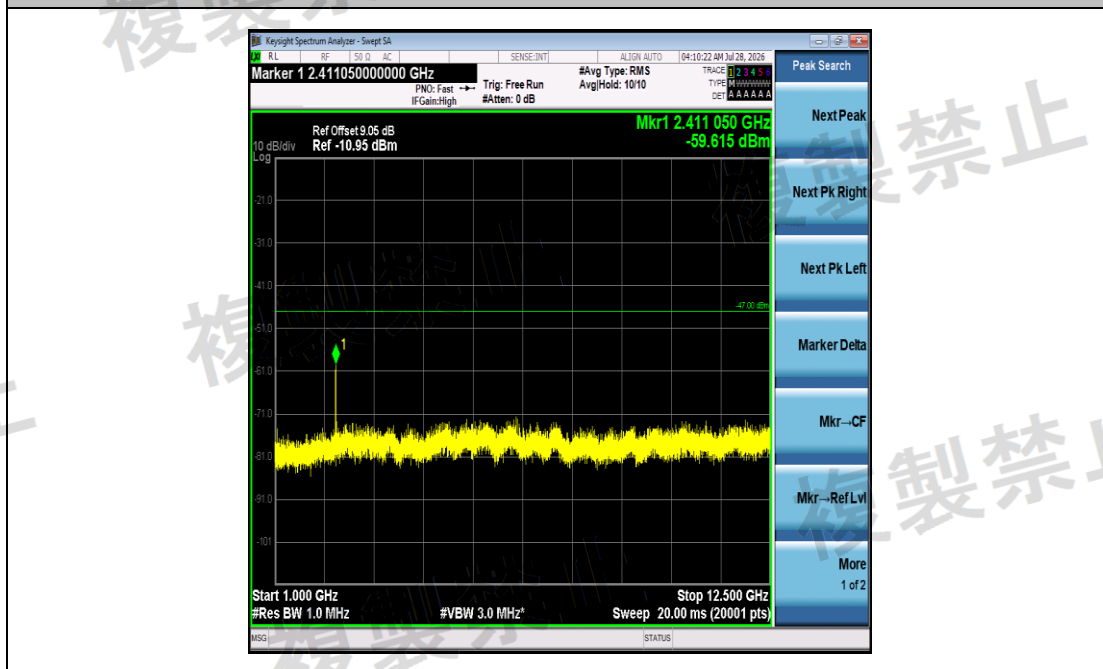

NTNV-11AX20SISO-Ant1-2442-1000~12500-PASS

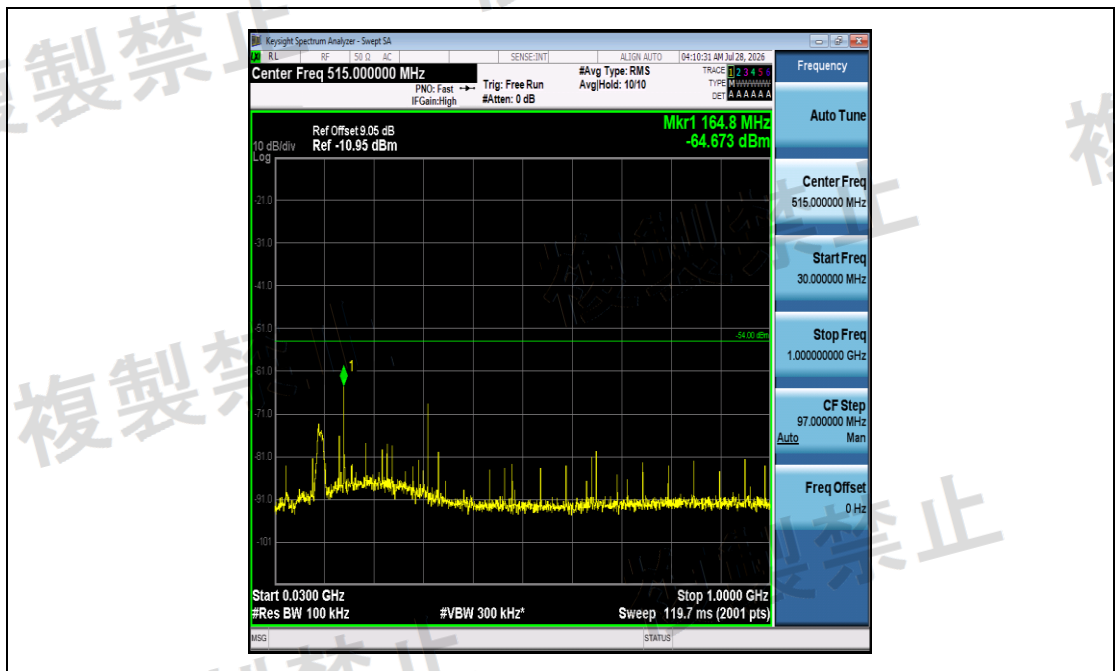

NTNV-11AX20SISO-Ant1-2472-30~1000-PASS

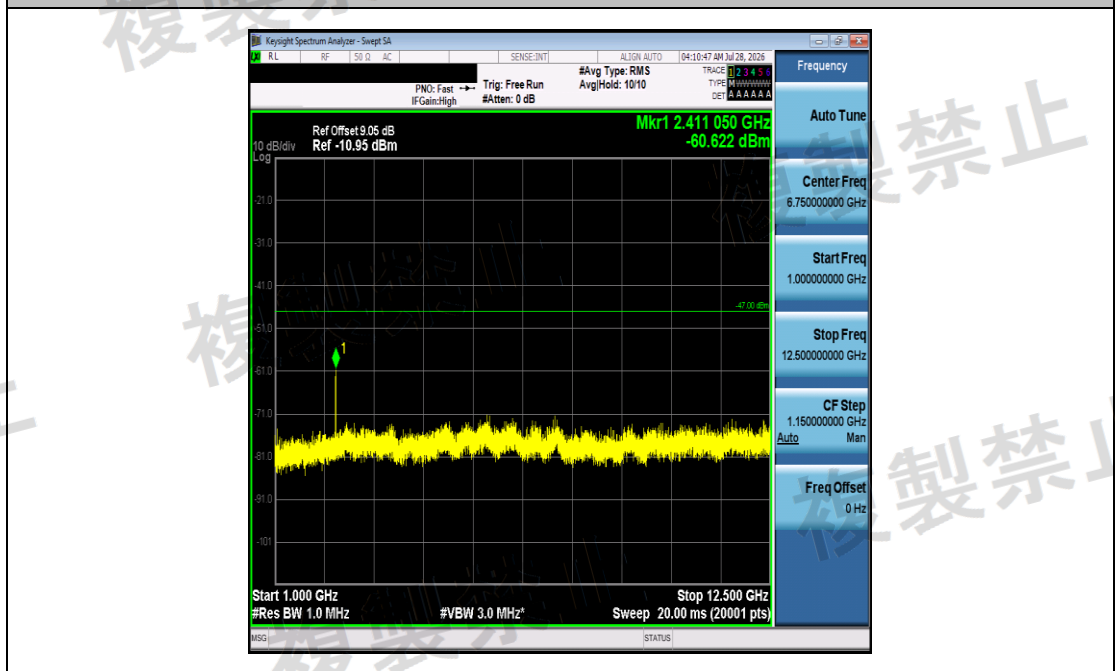

NTNV-11AX20SISO-Ant1-2472-1000~12500-PASS